

List of pages in this Trip Kit

- Trip Kit Index
- Airport Information For UKDD
- Terminal Charts For UKDD
- Revision Letter For Cycle 08-2026
- Change Notices
- Notebook

General Information

Location: DNIPRO UKR
ICAO/IATA: UKDD / DNK
Lat/Long: N48° 21.4', E035° 06.0'
Elevation: 482 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 8.0° E

Fuel Types: Jet A-1
Repair Types: Major Airframe, Major Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0139 Z
Sunset: 1745 Z

Runway Information

Runway: 08
Length x Width: 9377 ft x 144 ft
Surface Type: concrete
TDZ-Elev: 475 ft
Lighting: Edge, ALS

Runway: 26
Length x Width: 9377 ft x 144 ft
Surface Type: concrete
TDZ-Elev: 472 ft
Lighting: Edge, ALS

Communication Information

ATIS: 130.900
ATIS: 134.900 Non-English
Dnipro Tower: 118.600
Dnipro Ground: 121.800
Dnipro Approach: 132.300
Dnipro Radar ACC: 119.400 RCO
Dnipro Information: 122.700 Flight Info Service RCO

UKDD/DNK
DNIPRO

JEPPESEN

18 FEB 22

10-1P

Eff 24 Feb

DNIPRO, UKRAINE
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 130.9
134.9 (Russian)

1.2. NOISE ABATEMENT PROCEDURES

1.2.1. GENERAL

SID, STAR and Approach charts are based on minimizing the impact of aviation noise on settlements located around the aerodrome.

Minimum levels provided by an ATC when ACFT are under radar vectoring or direct routing include corrections for low temperature effect if the temperature is within the range from -28°C to -25°C inclusively.

1.2.2. NIGHT NOISE RESTRICTIONS FROM 2300-0600LT

1.2.2.1. TAXIING

Taxiing of three-engined ACFT to be done with two side engines. Power while taxiing from stands A3, A5 and A9 shall not be more than 0.6 of rated power.

1.2.2.2. RUN-UP TEST

Run-ups with take-off power are prohibited.

1.2.2.3. AUXILIARY POWER UNIT (APU)

Use limited to ± 30 minutes before departure/after landing.

1.3. LOW VISIBILITY PROCEDURES (LVP)

Criteria for the initiation and termination of LVP:

- The preparation phase will be implemented when RVR falls below 1000m;
- The operation phase will be implemented when the RVR falls to 550m;
- LVP will be terminated when RVR is greater than 550m and a continuing improvement in these conditions is anticipated;
- LVP will be apply only for departure operations;
- RWY 08/26 equipment and markings let apply departure operations under LVP conditions with RVR not below 400m;
- Pilots will be informed by ATIS or ATC when LVP are in operation;
- After receiving taxi clearance ACFT must taxi only behind Follow-me vehicle;
- Only single taxing ACFT is under control by Tower when LVP are in operation;
- Intersection take-offs are not permitted;
- ATC will designate the RWY in use according to the prevailing wind and RVR conditions.

1.4. TAXI PROCEDURES

For ground movement restrictions refer to 10-9 charts.

Taxiing on own thrust via TWY M4 is permitted only for ACFT of less than code 4C at daytime, in other cases taxiing via TWY M4 is carried out only by towing.

1.5. COMMUNICATION FAILURE

In case of communication failure light signals are emitted by Signal Light Gun.

1.6. OTHER INFORMATION

Birds in vicinity of APT.

UKDD/DNK
DNIPRO

JEPPESEN

18 FEB 22

10-1P1

Eff 24 Feb

DNIPRO, UKRAINE
AIRPORT BRIEFING

2. ARRIVAL

2.1. CONTINUOUS DESCENT OPERATIONS

CDOs can be carried out only by the ACFT that use RNAV STAR arrival procedures. CDO are authorized only when following conditions are met:

- ILS of the RWY intended for landing is in operation;
- no adverse weather conditions that may affect CDO;
- no system degradation that may affect a GNSS or ILS operation.

ATC issues instructions to descend to above FAP, including further descent instructions prior ACFT reaching 2960' (900m) above last assigned level.

It is preferable if CDO is commenced from top of descent. If it is not feasible due to traffic, CDO may be initiated from any lower level.

In accordance with appropriate ATC clearances, CDO can start from any lower level when ACFT follows the cleared RNAV STAR arrival procedure to a long downwind leg where radar vectors to final will be provided.

Distance-to-go information will be passed together with descent clearance.

Pilots who require additional track distance should inform ATC as soon as requirement is apparent.

ATC may at times instruct the ACFT to descend to level above the level depicted for FAP which would still facilitate a CDO profile. These restrictions will be lifted early enough to prevent leveling off.

CDO can also be initiated from lower levels when an ACFT proceeds direct to the cleared waypoint or via a combination of waypoints for direct routing and the horizontal trajectory is known to a pilot up to and including FAP.

Pilots should maintain MAX 220 KT at a distance of 20 track miles (37km) from touchdown.

Specified minimum levels at waypoints must be adhered unless cancelled by ATC.

3. DEPARTURE

3.1. DE-ICING

Available at D1, D3 and stand C16.

3.2. START-UP

Start-up of engine during towing is prohibited.

UKDD/DNK
DNIPRO


JEPPESSEN
18 FEB 22 **(10-1R)** **Eff 24 Feb**

DNIPRO, UKRAINE
RADAR MINIMUM ALTITUDES

DNIPRO
Radar (APP)
119.4

Apt Elev
482

Alt Set: hPa
Trans level: By ATC Trans alt: 10010
1. This chart may only be used for cross-checking of altitudes assigned while under vectoring control.
2. Minimum RADAR Vectoring Altitude are safe if the temperature at the surface is -24°C or above. For lower temperatures, corrected minimum levels will be provided by ATC.
3. Visual manoeuvring (circling) and visual approach in the sector between 280° and 045° from ARP to 11 NM below 2470 are not authorized.

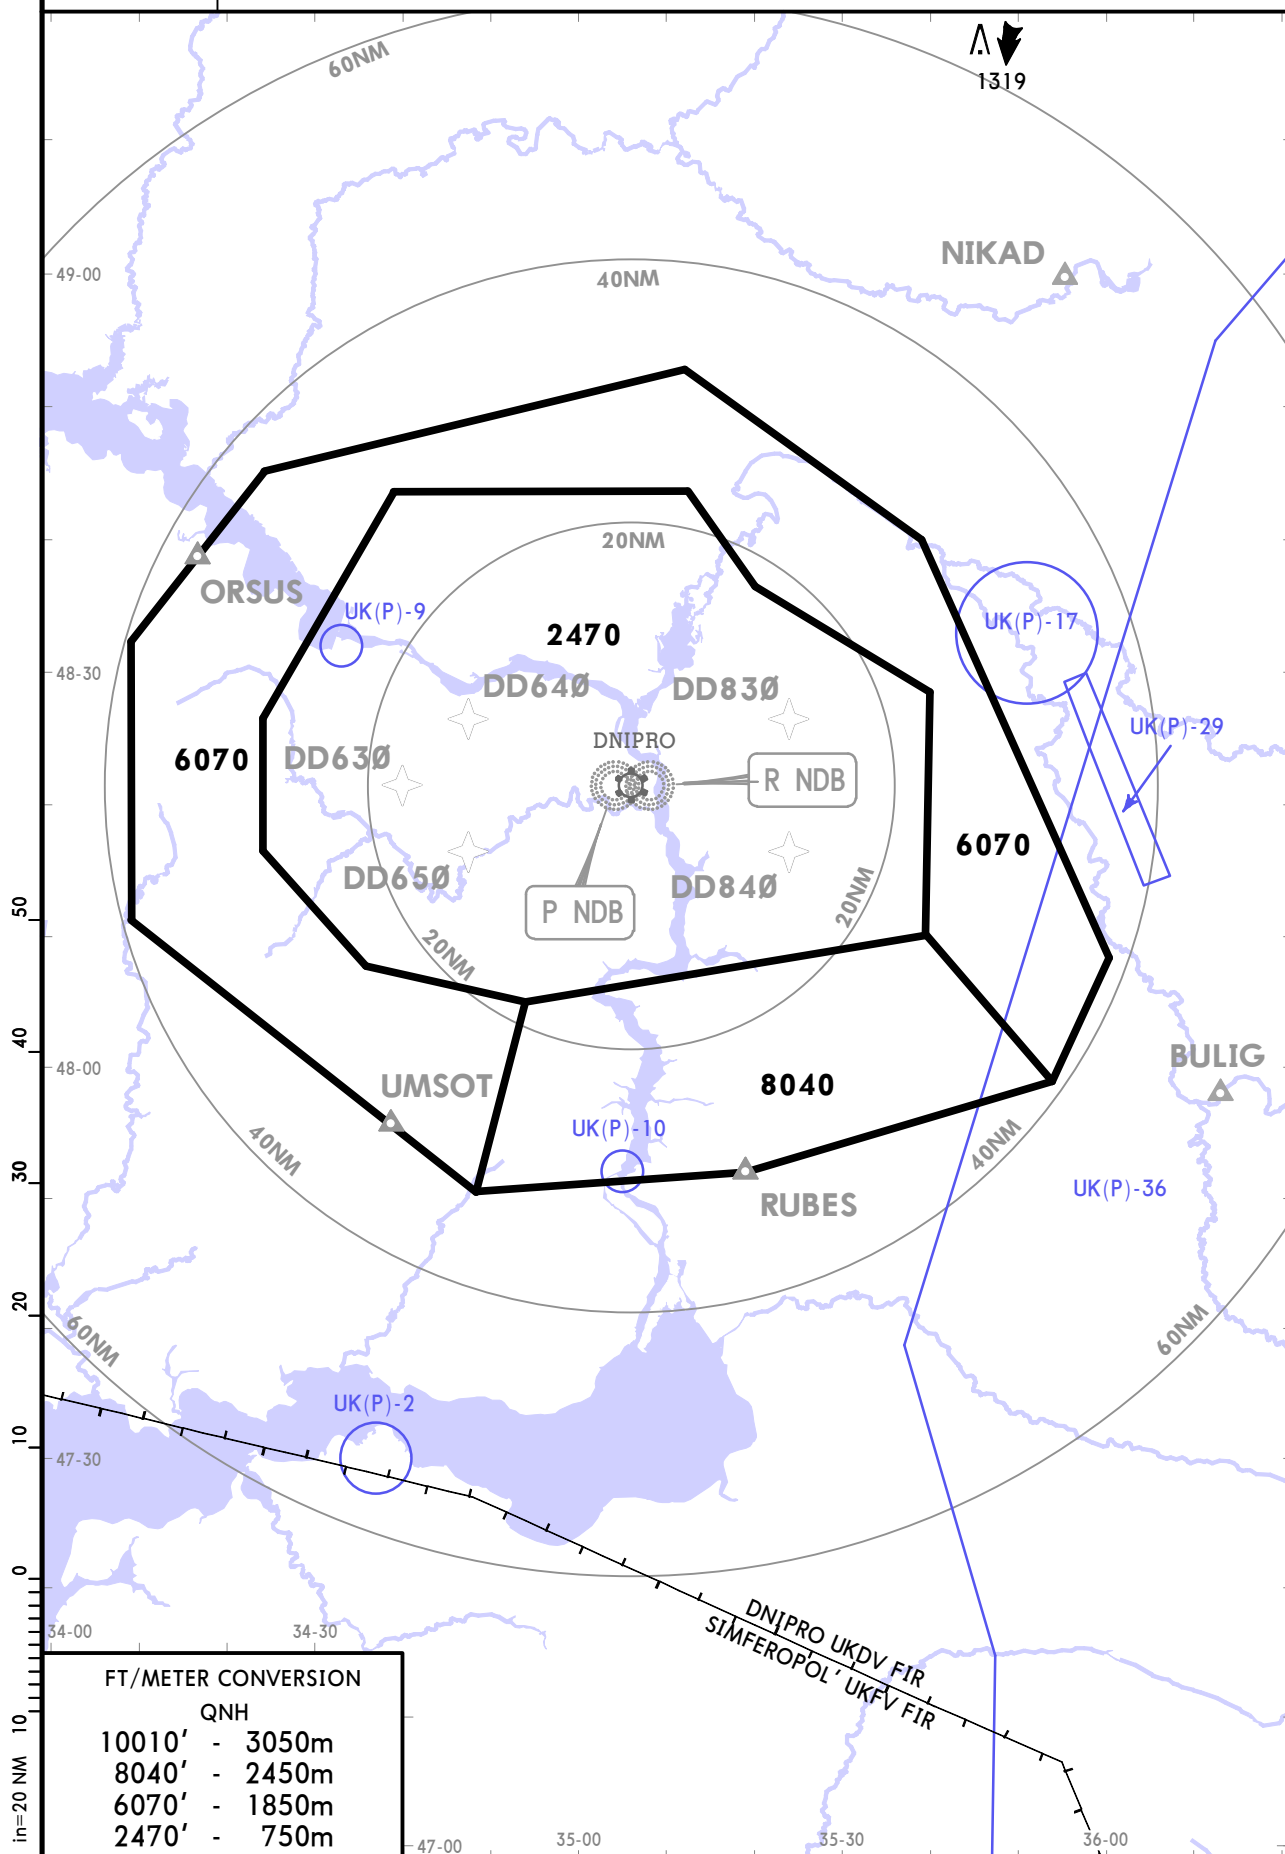


CHANGES: Sectors & general note 1 revised; general note 3 established.

© JEPPESSEN, 2011, 2022. ALL RIGHTS RESERVED.

The map shows the coastline of the Gulf of Mexico. A red line indicates the coastline. A black line segment is labeled "BULIG 12" with "2960" and "34.5" below it. Another black line segment is labeled "BULIG 8040" with "27" below it. A scale bar at the bottom indicates distances from 0 to 36 km. A north arrow is located in the bottom right corner.




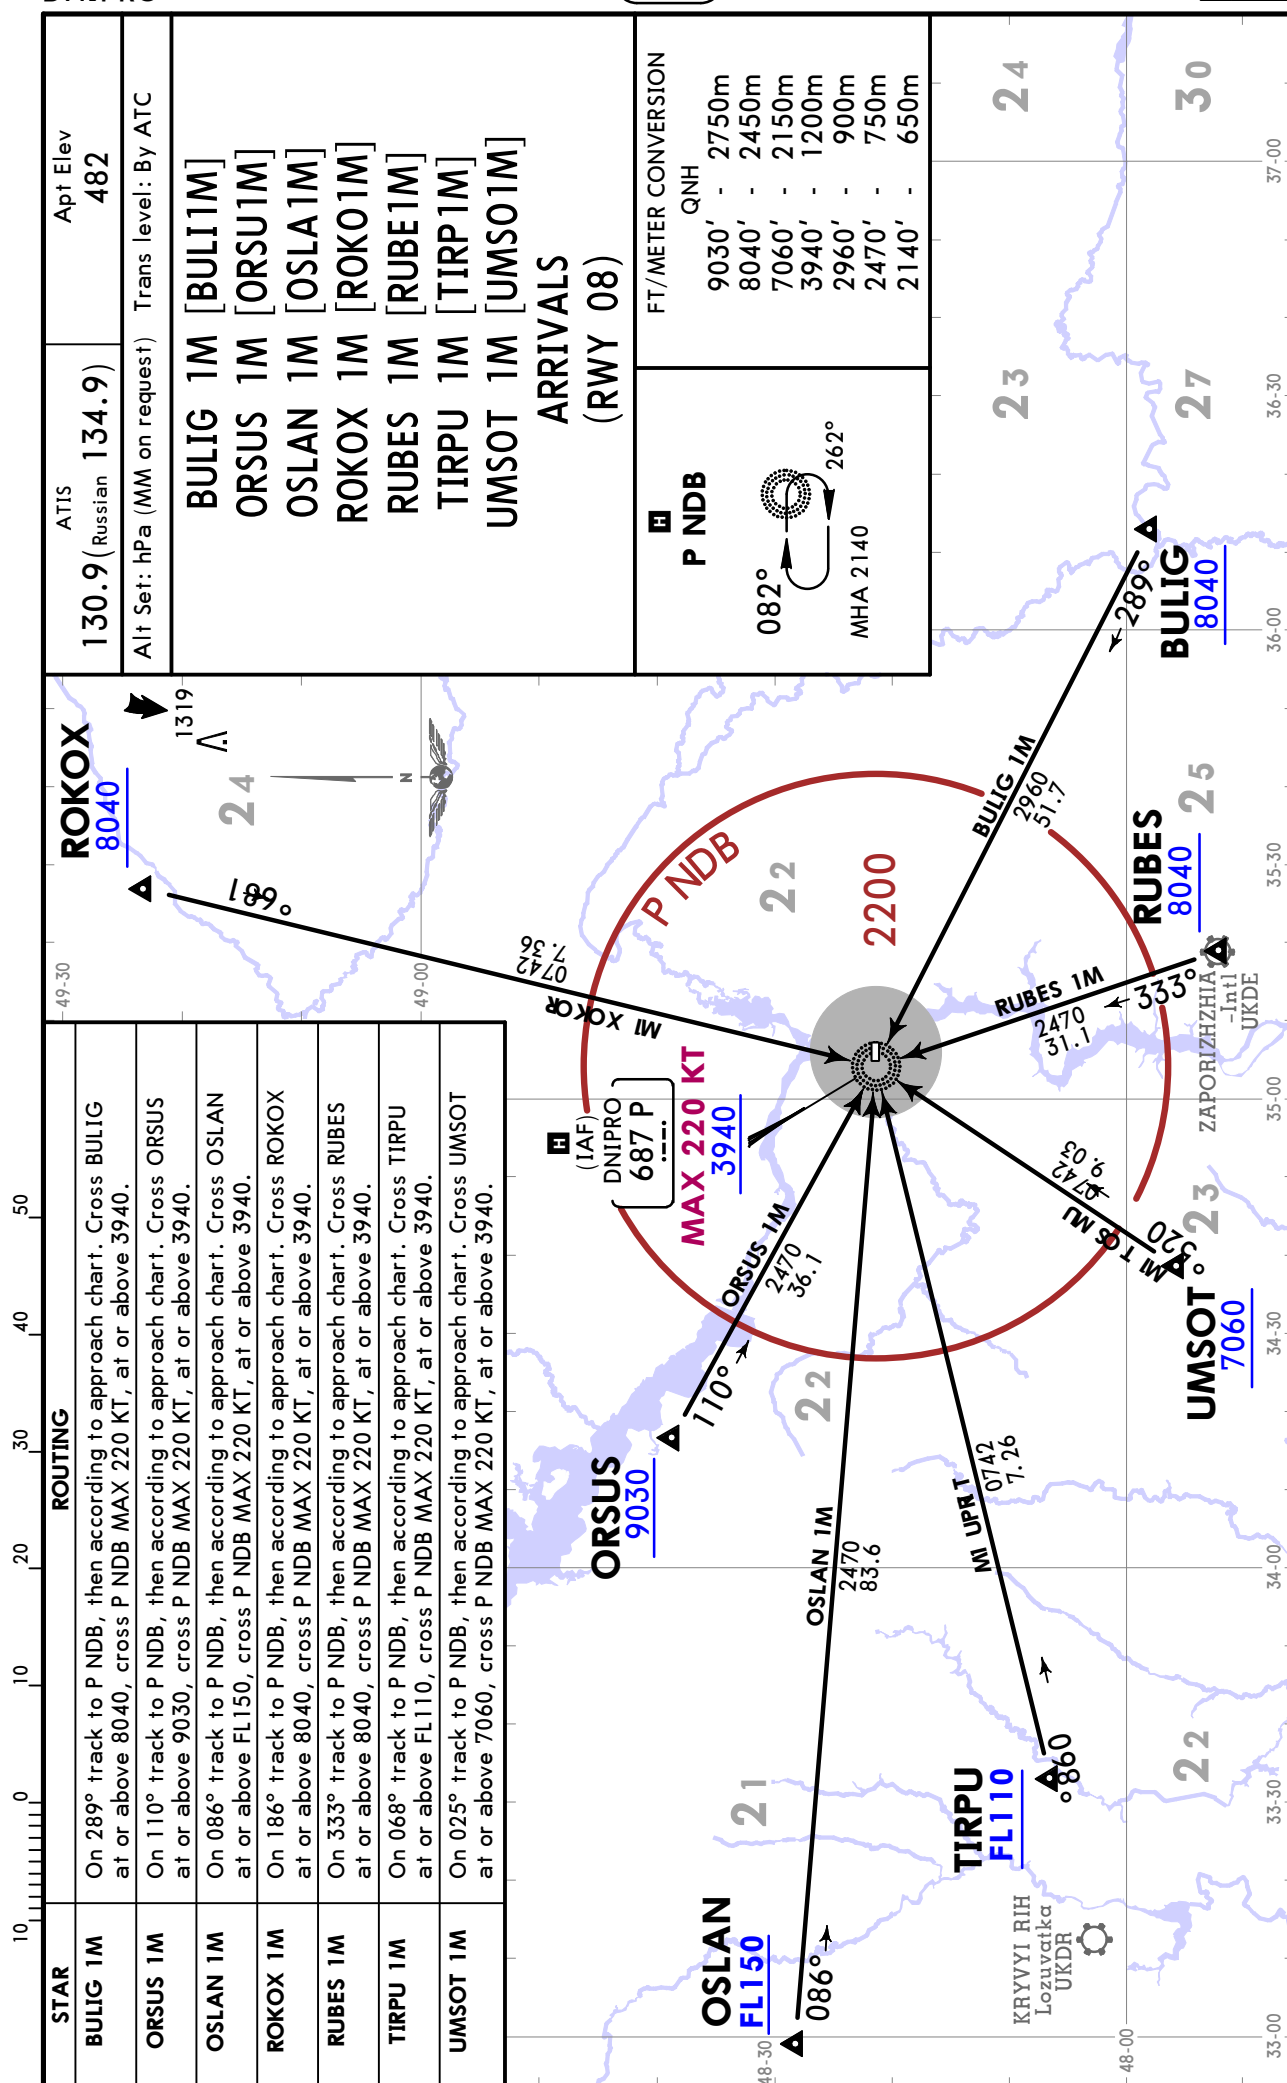



UKDD/DNK
DNIPRO


JEPPESSEN
18 FEB 22 10-2C Eff 24 Feb

DNIPRO, UKRAINE
STAR

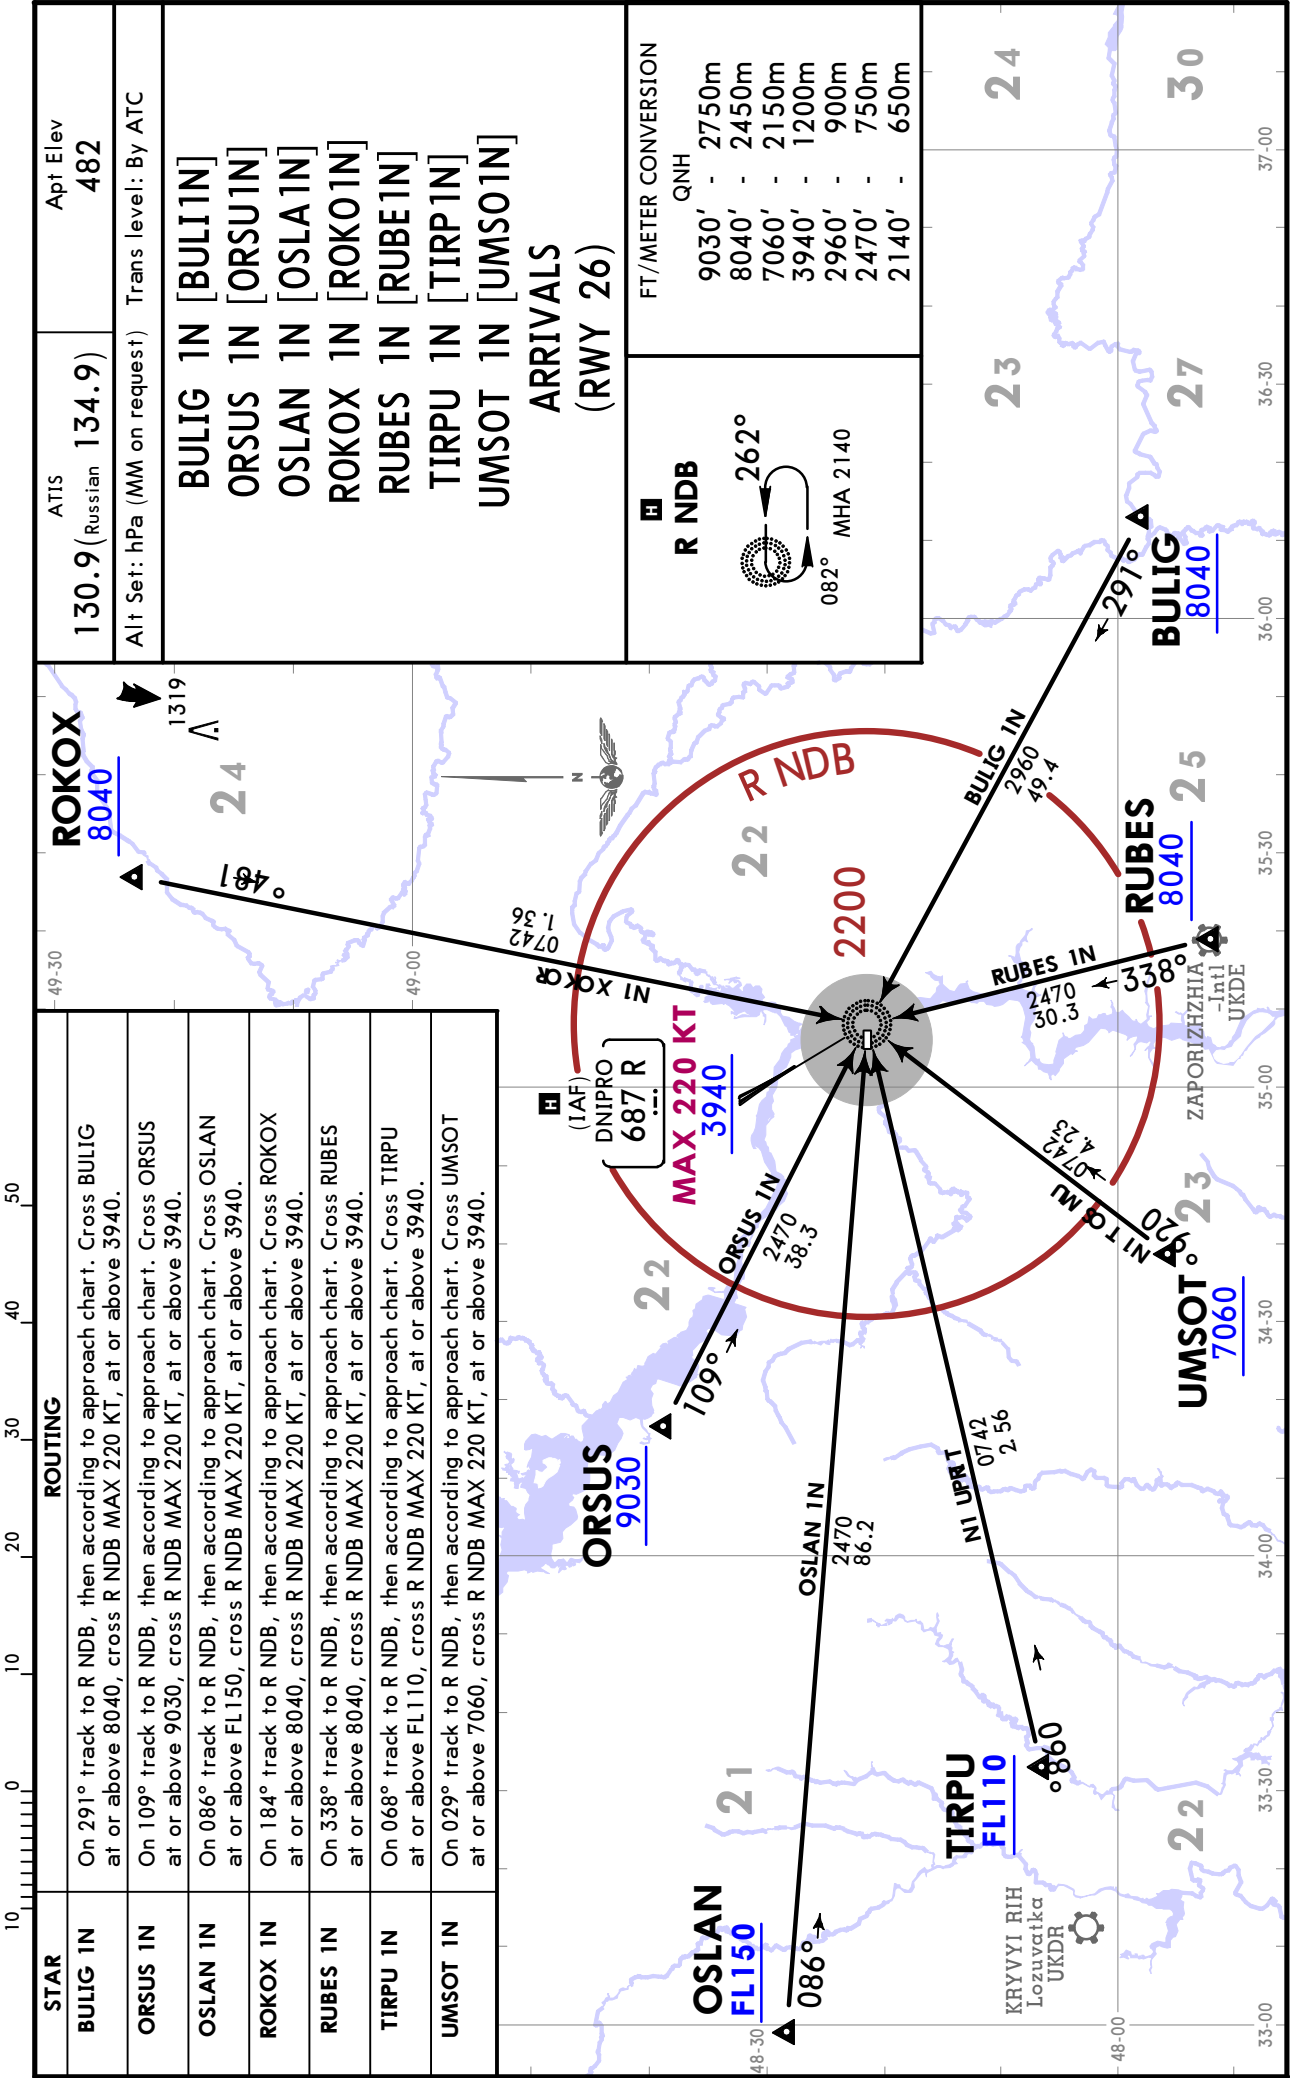

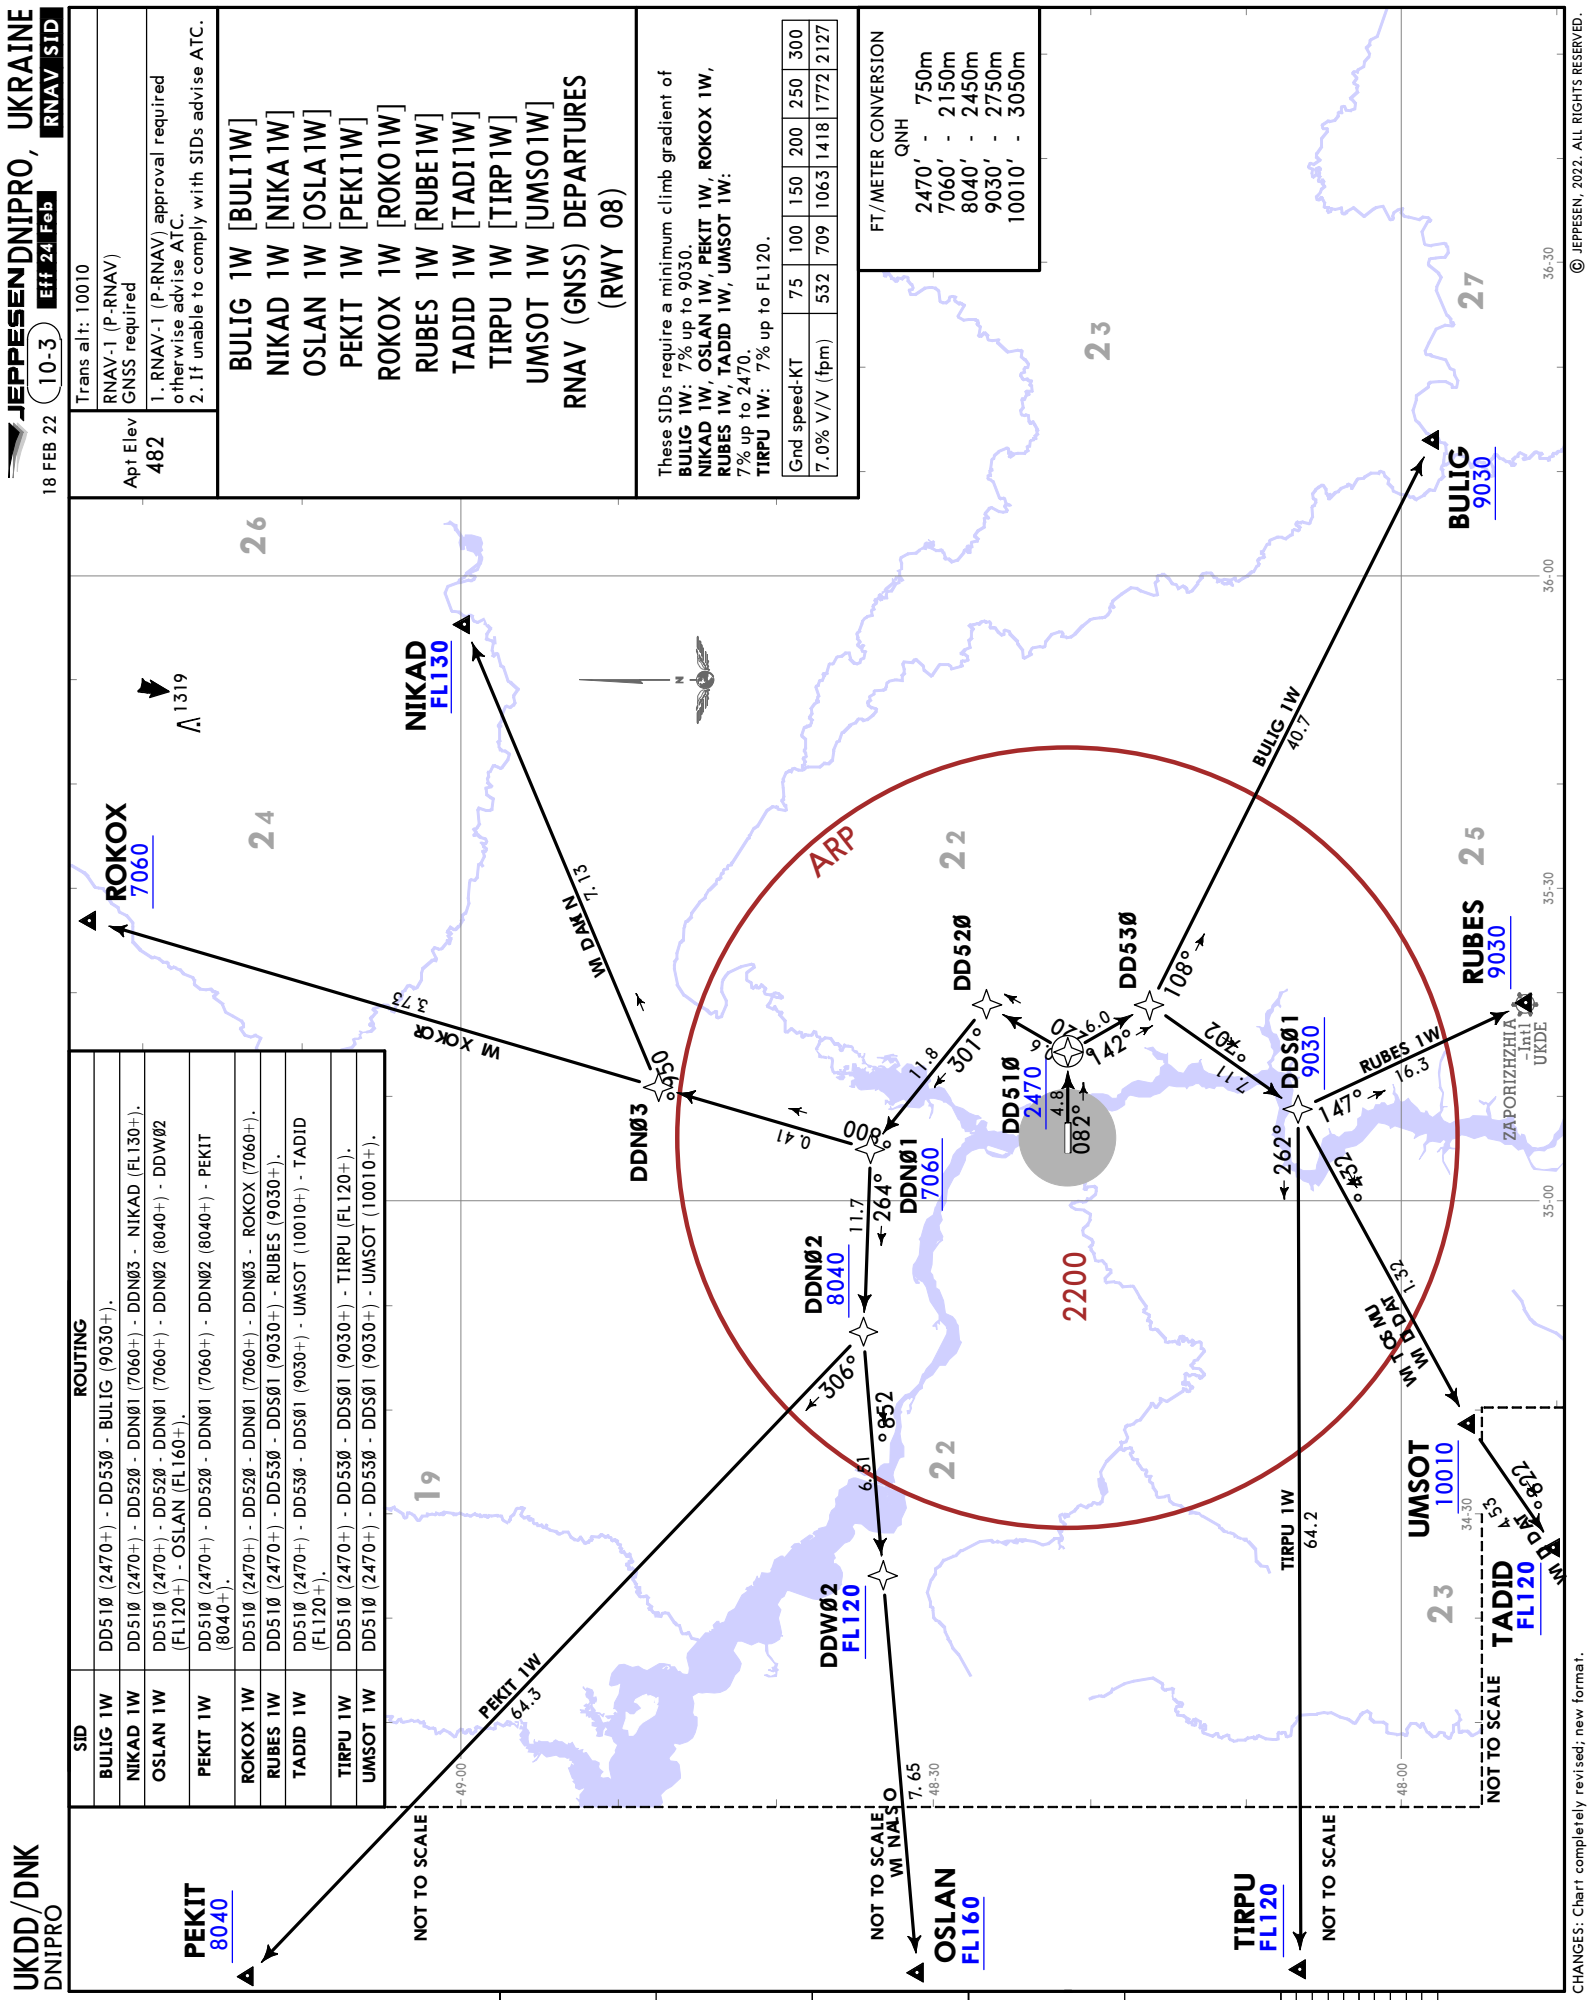



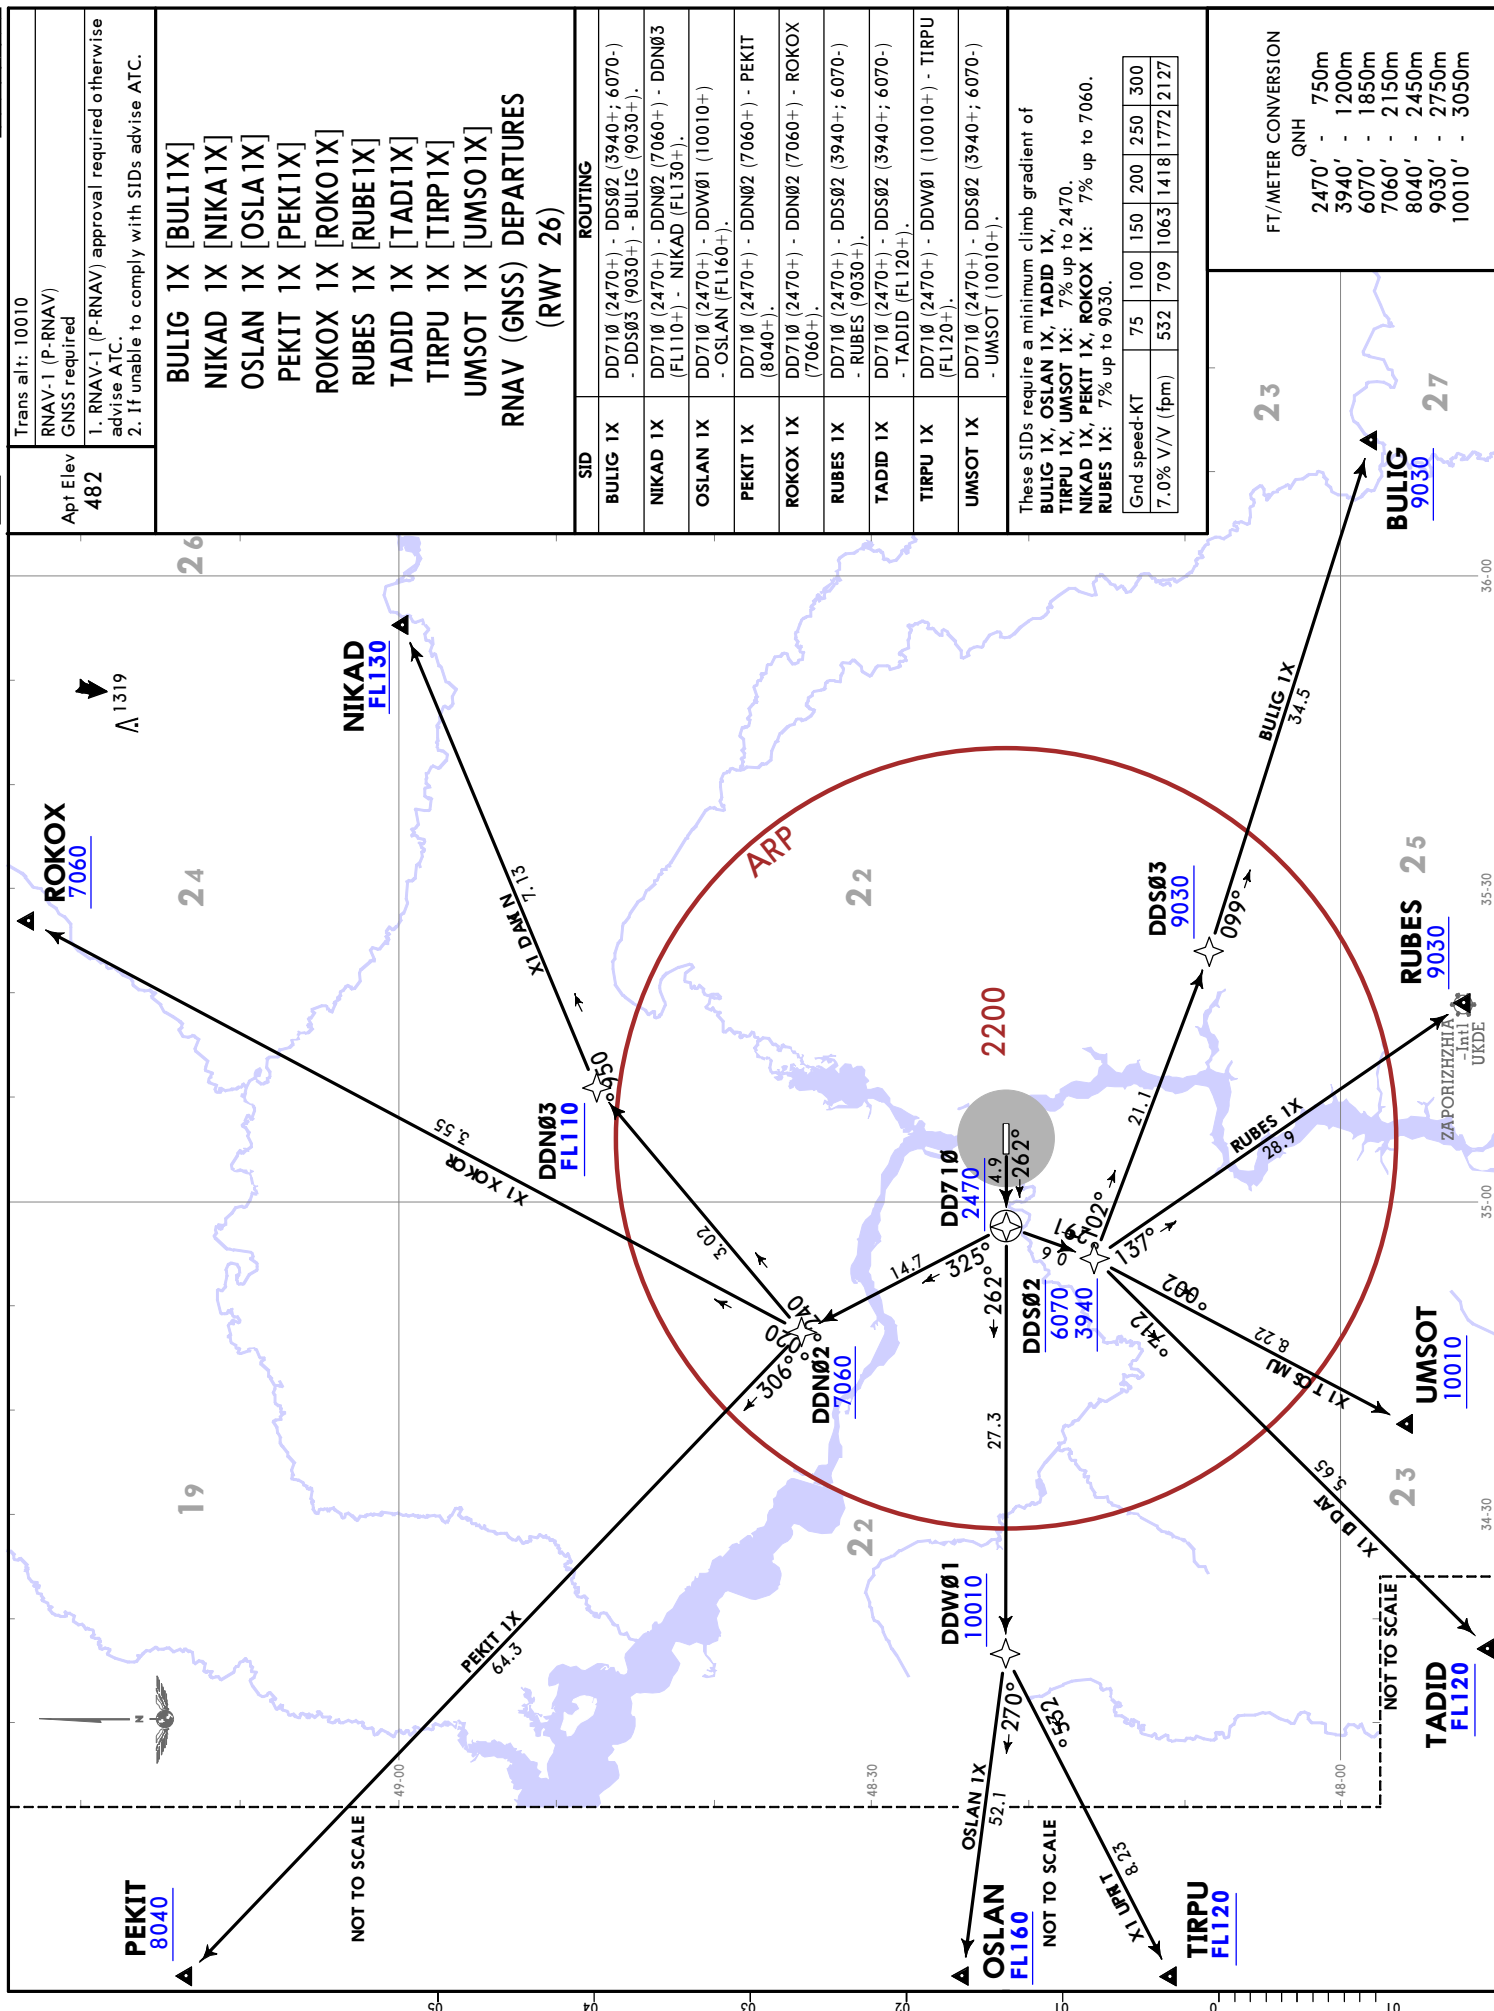


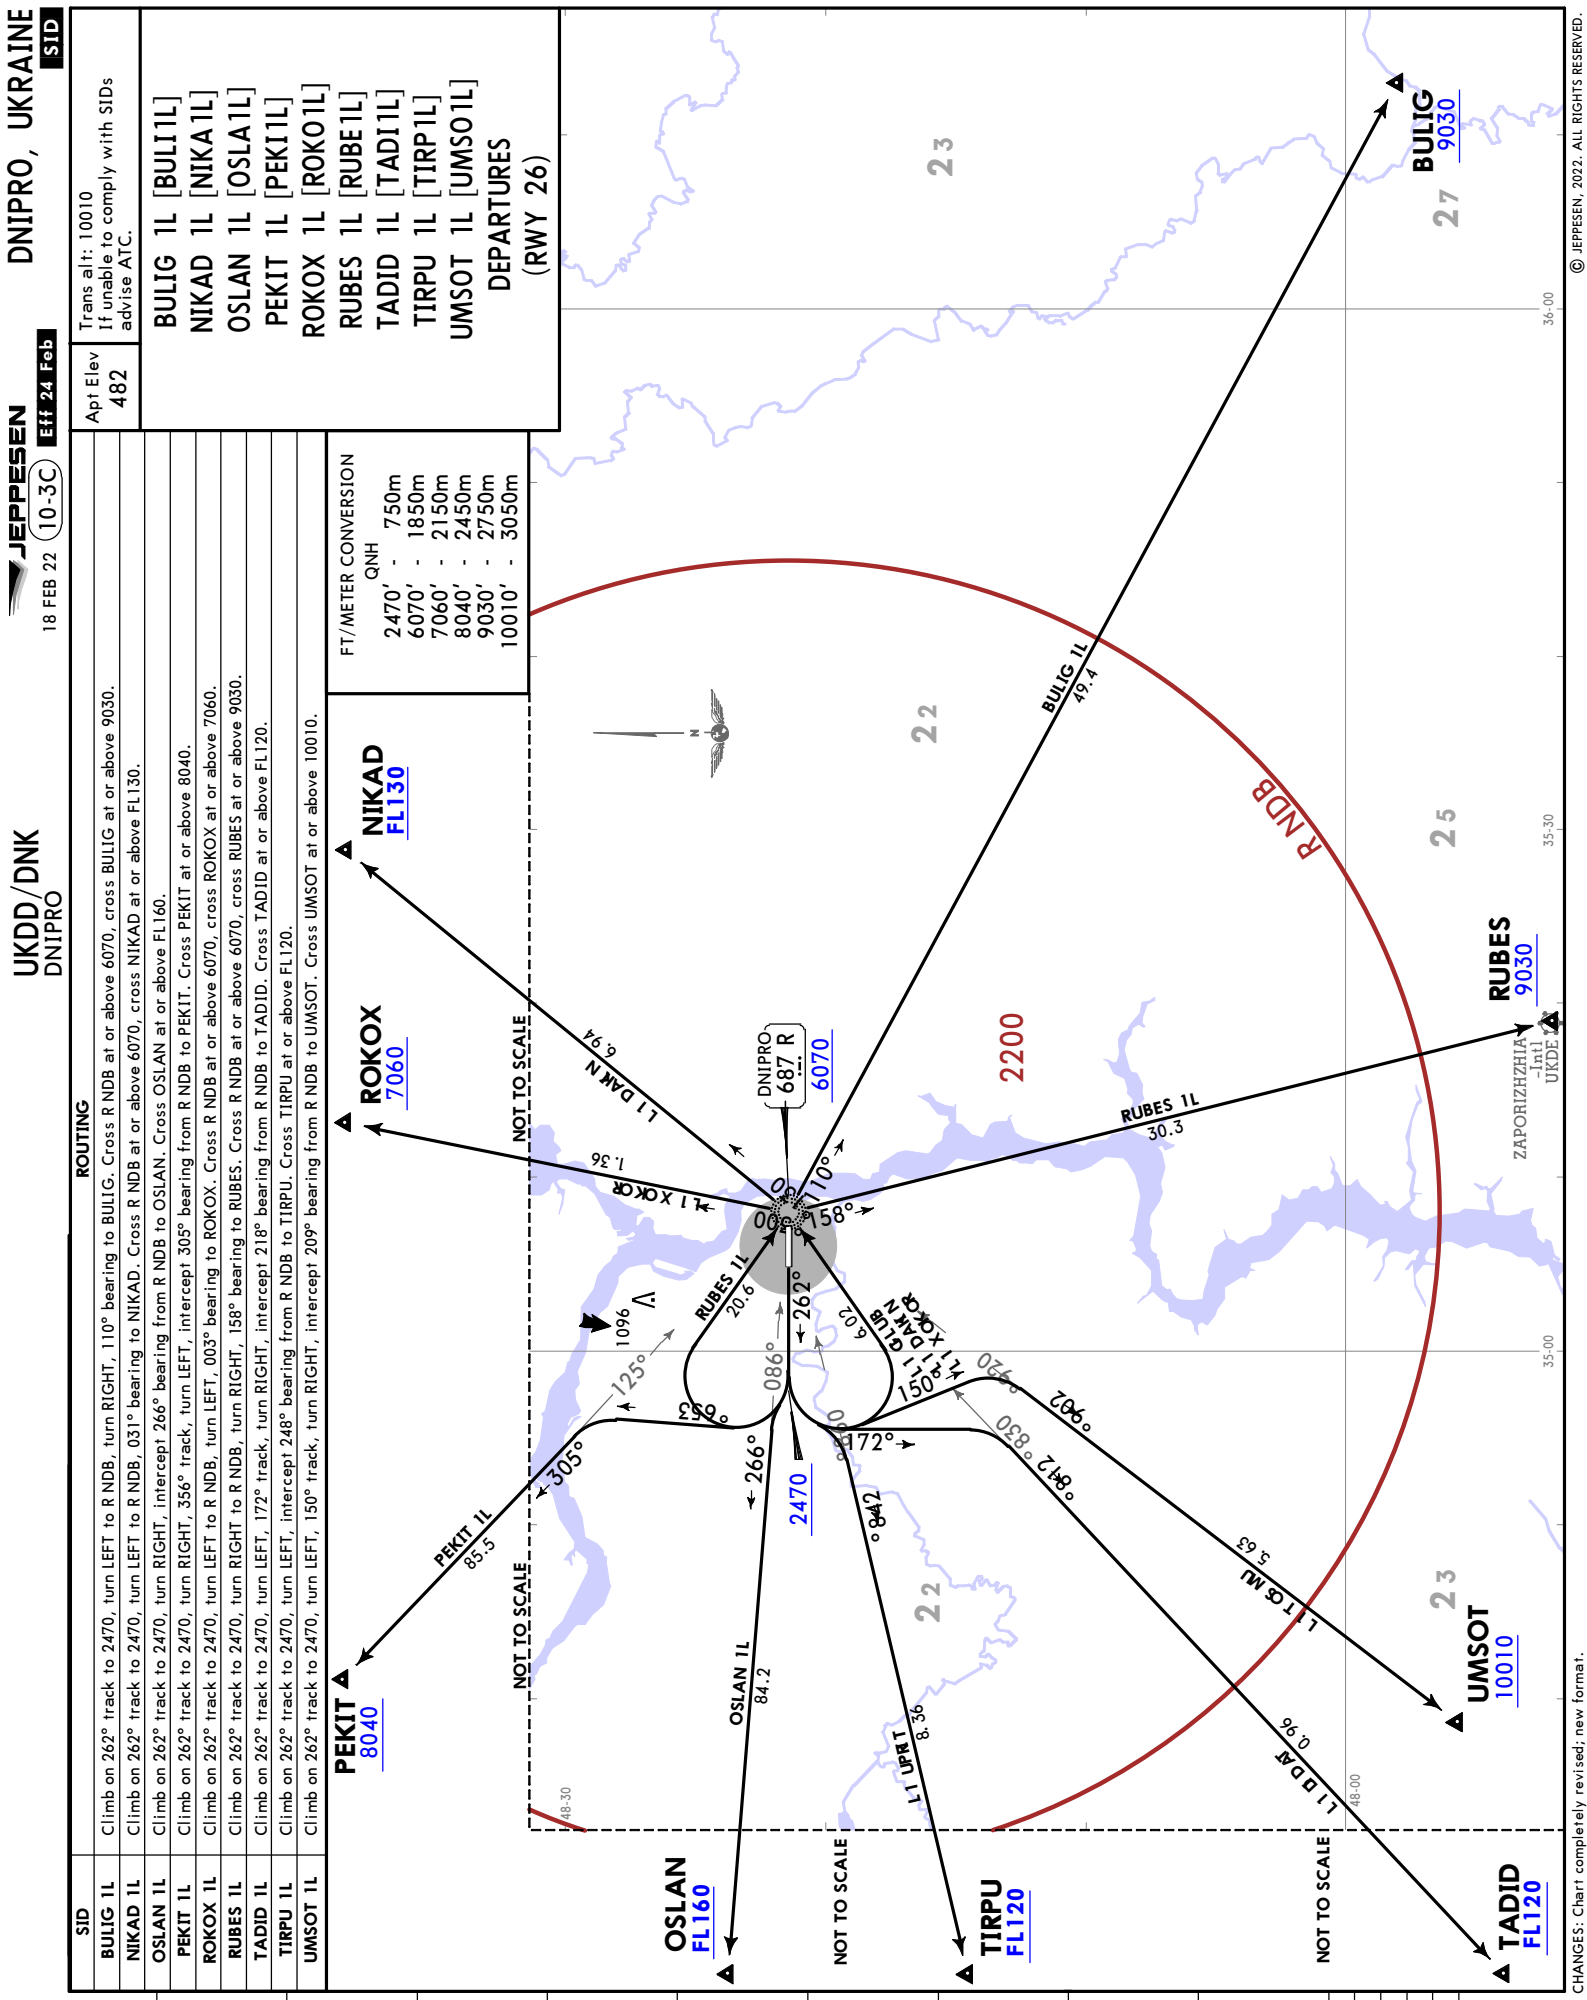

UKDD/DNK

JEPPESSEN
18 FEB 22 **10-9A** Eff 24 Feb

DNIPRO, UKRAINE
DNIPRO

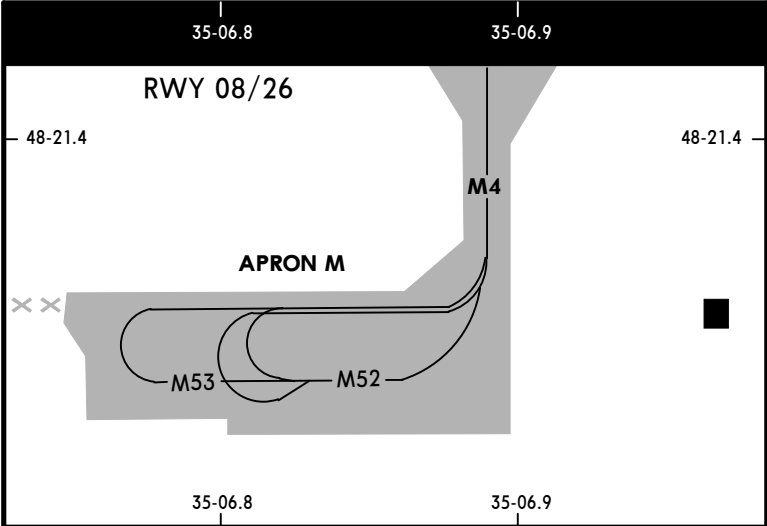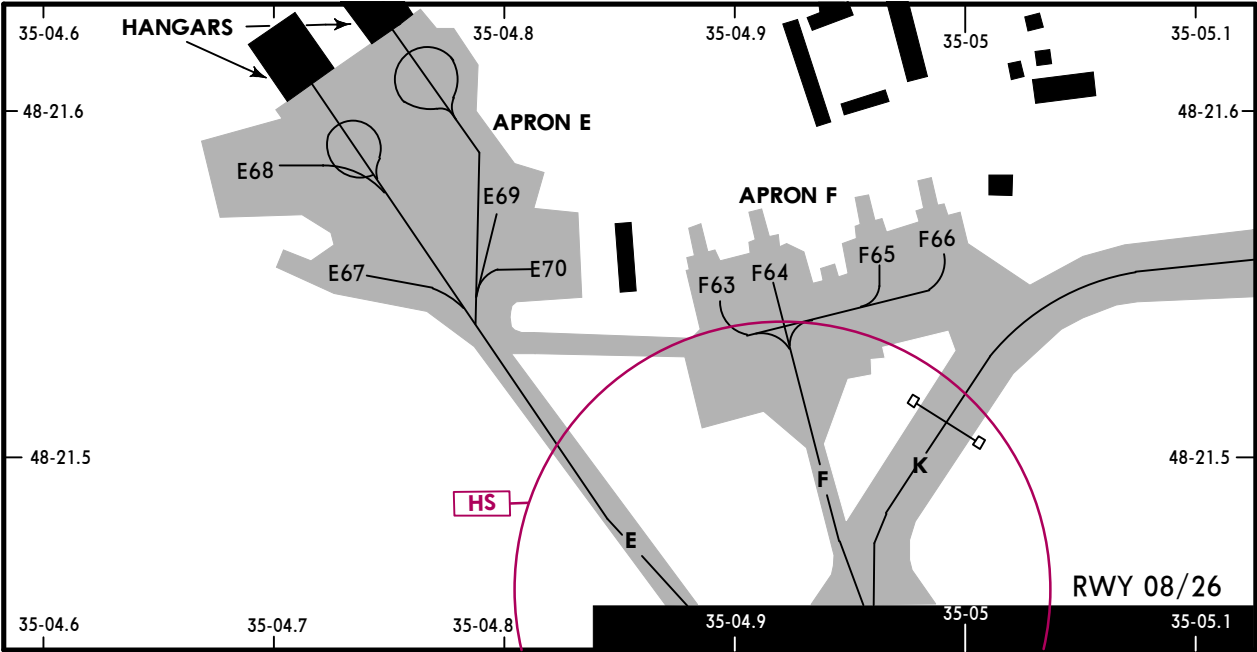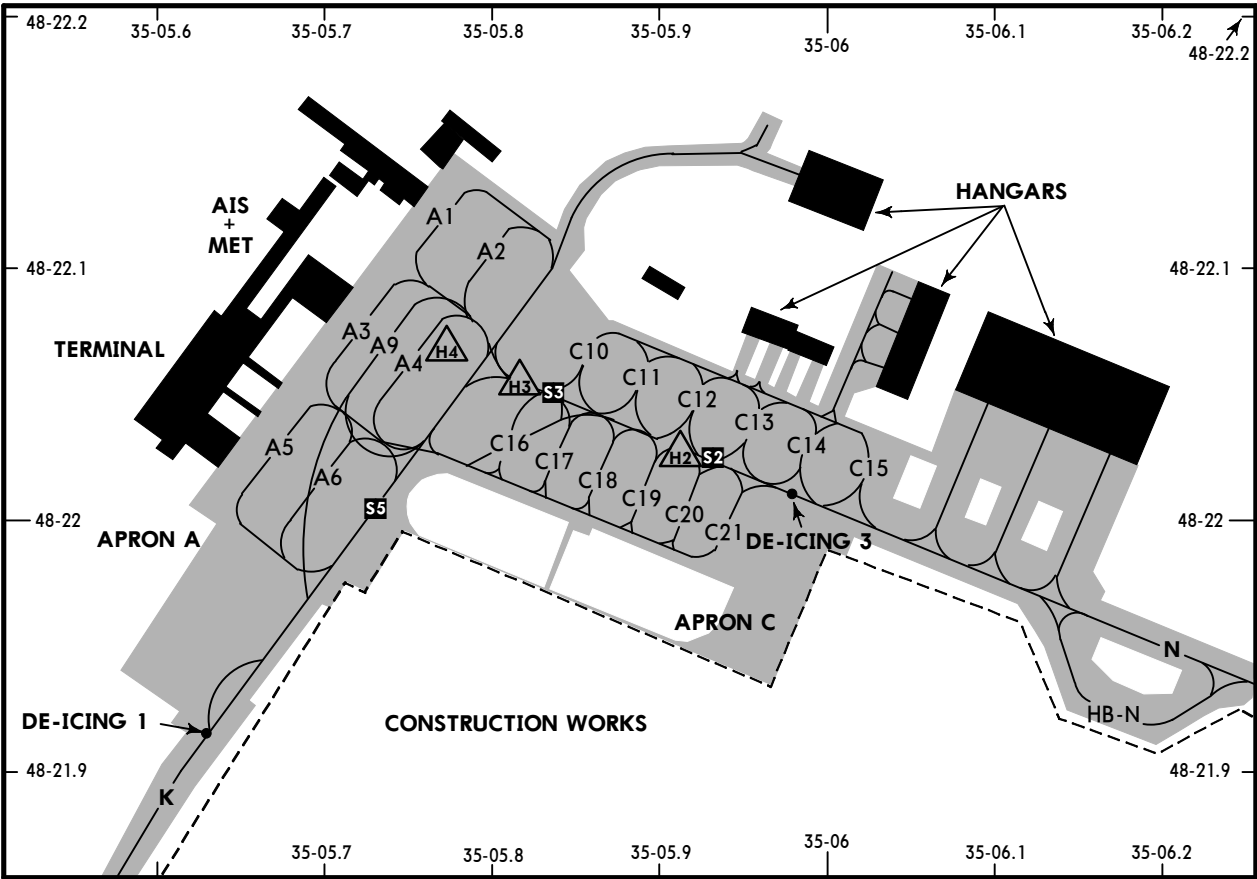

LEGEND	
E	Taxiway
A1	Parking stand
S1	Start-up point
□-□	RWY Guard lights
HS	HOT SPOT: See 10-9 for description.

Movement of an ACFT on the TWY and APRON without a "Follow me" car is prohibited, except towing.

UKDD/DNK



DNIPRO, UKRAINE
DNIPRO

INS COORDINATES			
STAND No.	COORDINATES	CABIN on	
APRON A			
A1, A 2	N48 22.1 E035 05.8	N or S	
A3	N48 22.1 E035 05.7	N or S	
A4	N48 22.0 E035 05.7	S	
A4	N48 22.1 E035 05.8	N	
A5, A6	N48 22.0 E035 05.7	N or S	
A9	N48 22.1 E035 05.7	S	
A9	N48 22.1 E035 05.8	N	
APRON C			
C10	N48 22.1 E035 05.9	N or S	
C11, C12	N48 22.0 E035 05.9	S	
C11, C12	N48 22.1 E035 05.9	N	
C13 thru C15	N48 22.0 E035 06.0	N or S	
C16 thru C17	N48 22.0 E035 05.8	N or S	
C18 thru C21	N48 22.0 E035 05.9	N or S	
APRON E			
E67	N48 21.6 E035 04.7	E or W	
E68	N48 21.6 E035 04.7	E	
E69	N48 21.6 E035 04.8	N or S	
E70	N48 21.6 E035 04.8	W	
APRON F			
F63, F64	N48 21.6 E035 04.9	N	
F63, F64	N48 21.5 E035 04.9	S	
F65, F66	N48 21.6 E035 05.0	N or S	
APRON M			
M52	N48 21.3 E035 06.8	W	
M52	N48 21.3 E035 06.9	E	
M53	N48 21.3 E035 06.8	W	
HELIPAD			
H1	N48 21.7 E035 06.5		
H2	N48 22.0 E035 05.9		
H3, H4	N48 22.1 E035 05.8		

UKDD/DNK

STRAIGHT-IN RWY	A	B	C	D
08				
ILS	653' (200')	653' (200')	653' (200')	654' (201')
FULL	① R550m	① R550m	① R550m	① R550m
ALS out	R1200m	R1200m	R1200m	R1200m
②NDB	840' (387')	840' (387')	840' (387')	840' (387')
with DP NDB	R1100m	R1100m	R1100m	R1100m
ALS out	R1500m	R1500m	R1800m	R1800m
NDB	840' (387')	840' (387')	840' (387')	840' (387')
with DP NDB	R1300m	R1300m	R1500m	R1500m
ALS out	R2000m	R2000m	R2200m	R2200m
②NDB	890' (437')	890' (437')	890' (437')	890' (437')
w/o DP NDB	R1300m	R1300m	R1300m	R1300m
ALS out	R1500m	R1500m	R2000m	R2000m
NDB	890' (437')	890' (437')	890' (437')	890' (437')
w/o DP NDB	R1500m	R1500m	R1700m	R1700m
ALS out	R2200m	R2200m	R2400m	R2400m
26				
ILS	672' (200')	672' (200')	672' (200')	672' (200')
FULL	① R550m	① R550m	① R550m	① R550m
ALS out	R1200m	R1200m	R1200m	R1200m
②NDB	830' (358')	830' (358')	830' (358')	830' (358')
with DR NDB	R900m	R900m	R900m	R900m
ALS out	R1500m	R1500m	R1600m	R1600m
NDB	830' (358')	830' (358')	830' (358')	830' (358')
with DR NDB	R1100m	R1100m	R1300m	R1300m
ALS out	R1800m	R1800m	R2000m	R2000m
②NDB	910' (438')	910' (438')	910' (438')	910' (438')
w/o DR NDB	R1300m	R1300m	R1300m	R1300m
ALS out	R1500m	R1500m	R2000m	R2000m
NDB	910' (438')	910' (438')	910' (438')	910' (438')
w/o DR NDB	R1500m	R1500m	R1700m	R1700m
ALS out	R2200m	R2200m	R2400m	R2400m

① R750m when a Flight Director or Autopilot or HUD to DA is not used.

② Continuous Descent Final Approach.

CIRCLE-TO-LAND ③	100 KT	135 KT	180 KT	205 KT
After ILS 08 & ILS 26	900' (418')	990' (508')	1210' (728')	1500' (1018')
After NDB 08 & NDB 26	930' (448')	990' (508')	1210' (728')	1500' (1018')
	④ V1500m	④ V1600m	V2400m	V3600m

③ Not authorized within 10.8 NM in sector between 280° and 045° from ARP below 2470'.

④ or higher straight-in minimums.

TAKE-OFF

Low Visibility Take-off		RL or RCLM	RL	Adequate Vis Ref	
RL & RCLM	RL				
DAY	NIGHT	DAY	NIGHT	DAY	NIGHT
R400m		R/V400m		R/V500m	NA



UKDD/DNK
DNIPRO

JEPPESSEN
18 FEB 22 (11-1) Eff 24 Feb


DNIPRO, UKRAINE
ILS Rwy 08

BRIEFING STRIP™

ATIS 130.9 (Russian 134.9)		DNIPRO Radar (APP) 119.4		DNIPRO Tower 118.6		DNIPRO Ground 121.8				
LOC IDP 109.5		Final Apch Crs 082°		No FAF		ILS DA(H) Refer to Minimums		Apt Elev 482' Rwy 453'		2200 MSA P NDB
MISSED APCH: Climb on 082° to 2470', turn RIGHT to P NDB climbing to 3940', then according to chart.										
Alt Set: hPa (MM on req)		Rwy Elev: 17 hPa		Trans level: By ATC		Trans alt: 10010'				
1. RNAV 1 required after IAF DD630, DD640, DD650 for transition to FAP. 2. Minimum altitude for racetrack 2140'.										

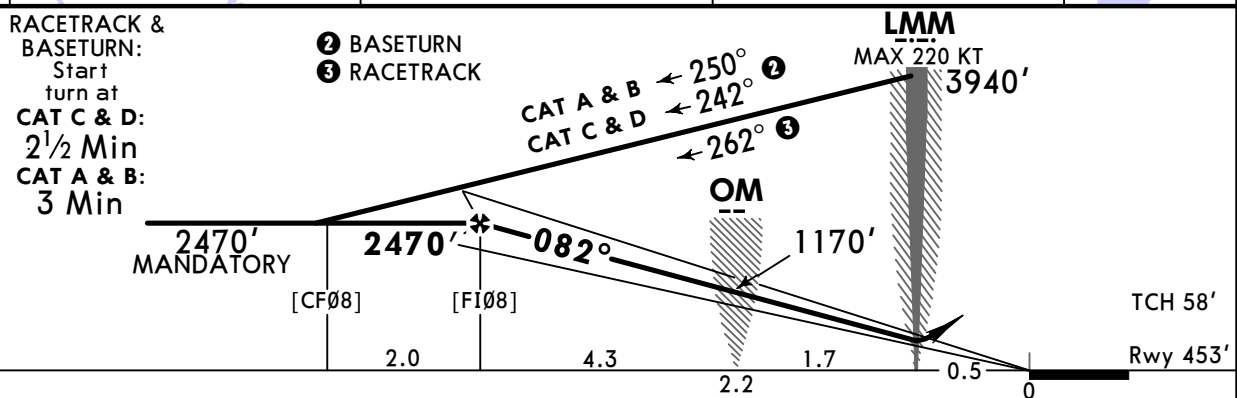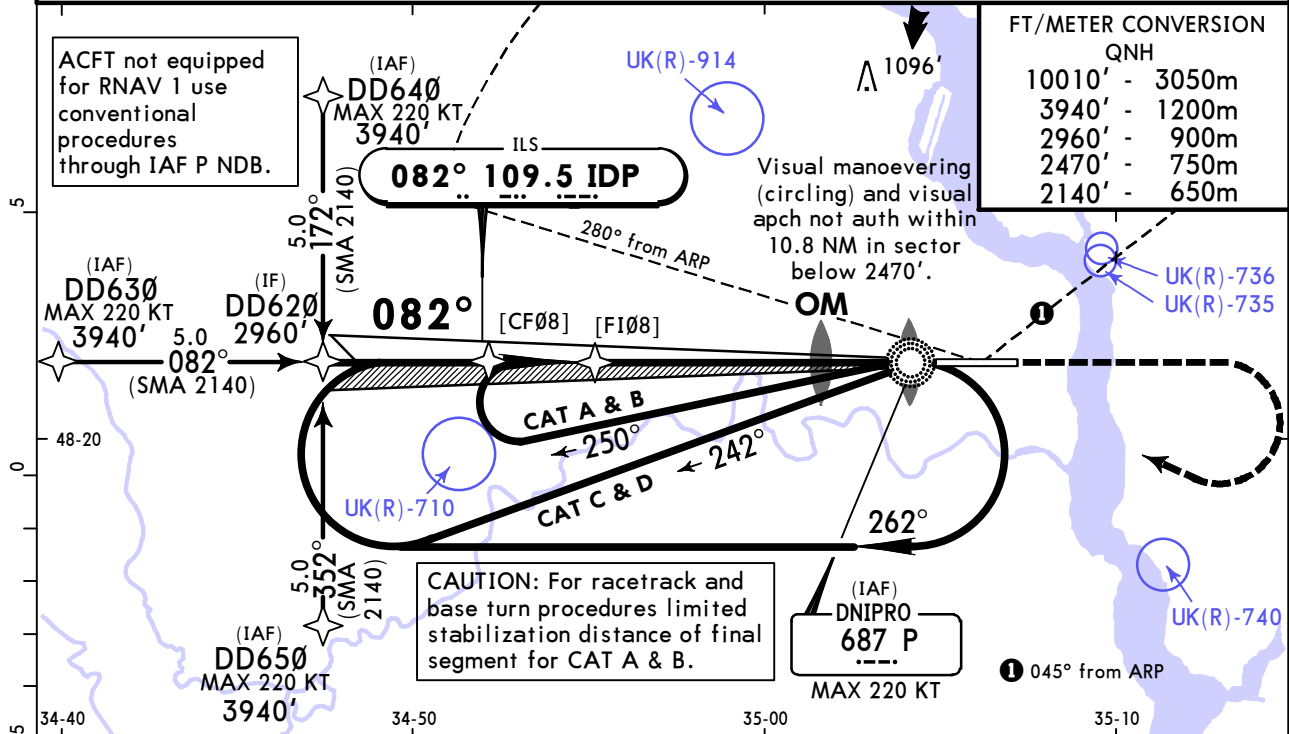

Gnd speed-Kts	70	90	100	120	140	160	
GS	2.80°	347	446	495	594	693	792



STd			STRAIGHT-IN LANDING		CIRCLE-TO-LAND		
DA(H) ABC: 653' (200') D: 654' (201')							
FULL			ALS out		Max Kts	MDA(H)	
A	R550m I		R1200m		100	900' (418')	V1500m
B					135	990' (508')	V1600m
C					180	1210' (728')	V2400m
D					205	1500' (1018')	V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.


UKDD/DNK
DNIPRO

JEPPESSEN
18 FEB 22 **11-2** Eff 24 Feb


DNIPRO, UKRAINE
ILS Rwy 26

BRIEFING STRIP

ATIS		DNIPRO Radar (APP)		DNIPRO Tower		DNIPRO Ground	
130.9 (Russian 134.9)		119.4		118.6		121.8	
LOC IDR 110.3	Final Apch Crs 262°	No FAF		ILS DA(H) 672' (200')	Apt Elev 482' Rwy 472'		2200 MSA R NDB
MISSED APCH: Climb on 262° to 2470', turn LEFT to P NDB climbing to 3940', then according to chart.							
Alt Set: hPa (MM on req)		Rwy Elev: 17 hPa		Trans level: By ATC		Trans alt: 10010'	
1. RNAV 1 required after IAF DD830, DD840 for transition to FAP. 2. ACFT not equipped for RNAV 1 use conventional procedures through IAF R NDB. 3. Minimum altitude for racetrack 2140'.							

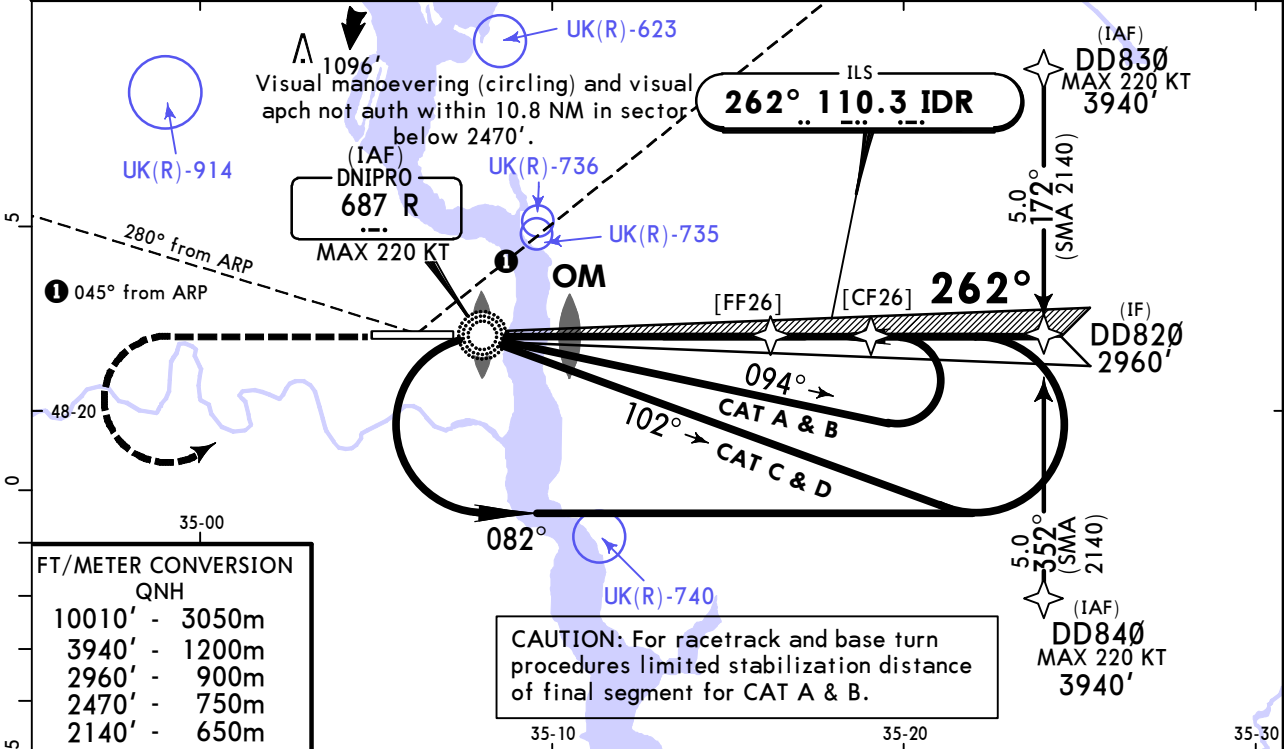

FT/METER CONVERSION	
QNH	
10010' - 3050m	
3940' - 1200m	
2960' - 900m	
2470' - 750m	
2140' - 650m	

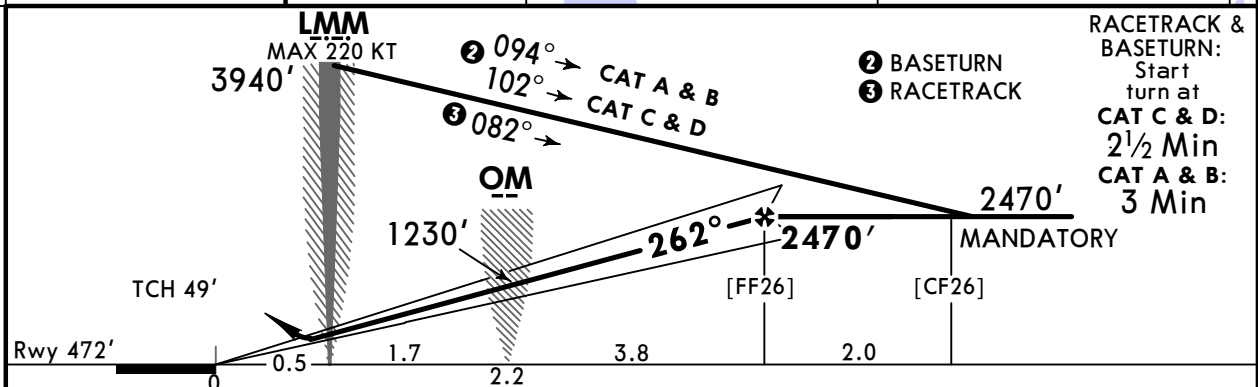

HIALS		PAPI		2470' on 262°	
-------	--	------	--	---------------	--

STRAIGHT-IN LANDING			CIRCLE-TO-LAND		
DA(H) 672' (200')					
FULL		ALS out	Max Kts	MDA(H)	
A	R550m I		100	900' (418')	V1500m
B			135	990' (508')	V1600m
C			180	1210' (728')	V2400m
D			205	1500' (1018')	V3600m



I R750m when a Flight Director or Autopilot or HUD to DA is not used.

CHANGES: Procedure revised. New AOM concept.


© JEPPESSEN, 1998, 2022. ALL RIGHTS RESERVED.

DNIPRO, UKRAINE
NDB Rwy 08

130.9 (Russian 134.9)		DNIPRO Radar (APP) 119.4		DNIPRO Tower 118.6		DNIPRO Ground 121.8	
NDB DP 335	Final Apch Crs 082°	No FAF	DA/MDA(H) (CONDITIONAL) 840' (387')	Apt Elev 482' Rwy 453'		2200 MSA P NDB	
MISSED APCH: Climb on 082° to 2470', then turn RIGHT to NDB climbing to 3940', then as directed.							
Alt Set: hPa (MM on req) Rwy Elev: 17 hPa Trans level: By ATC Trans alt: 10010' Minimum altitude for racetrack 2140'.							

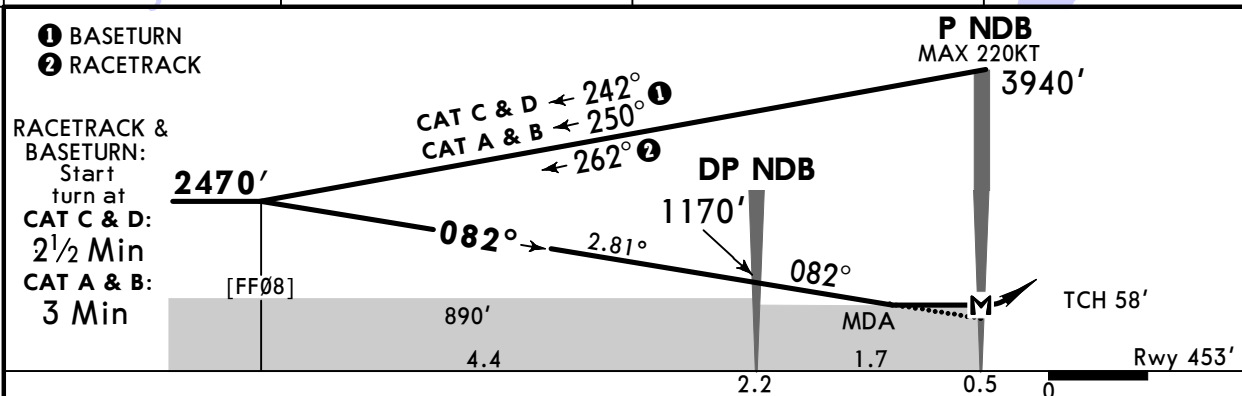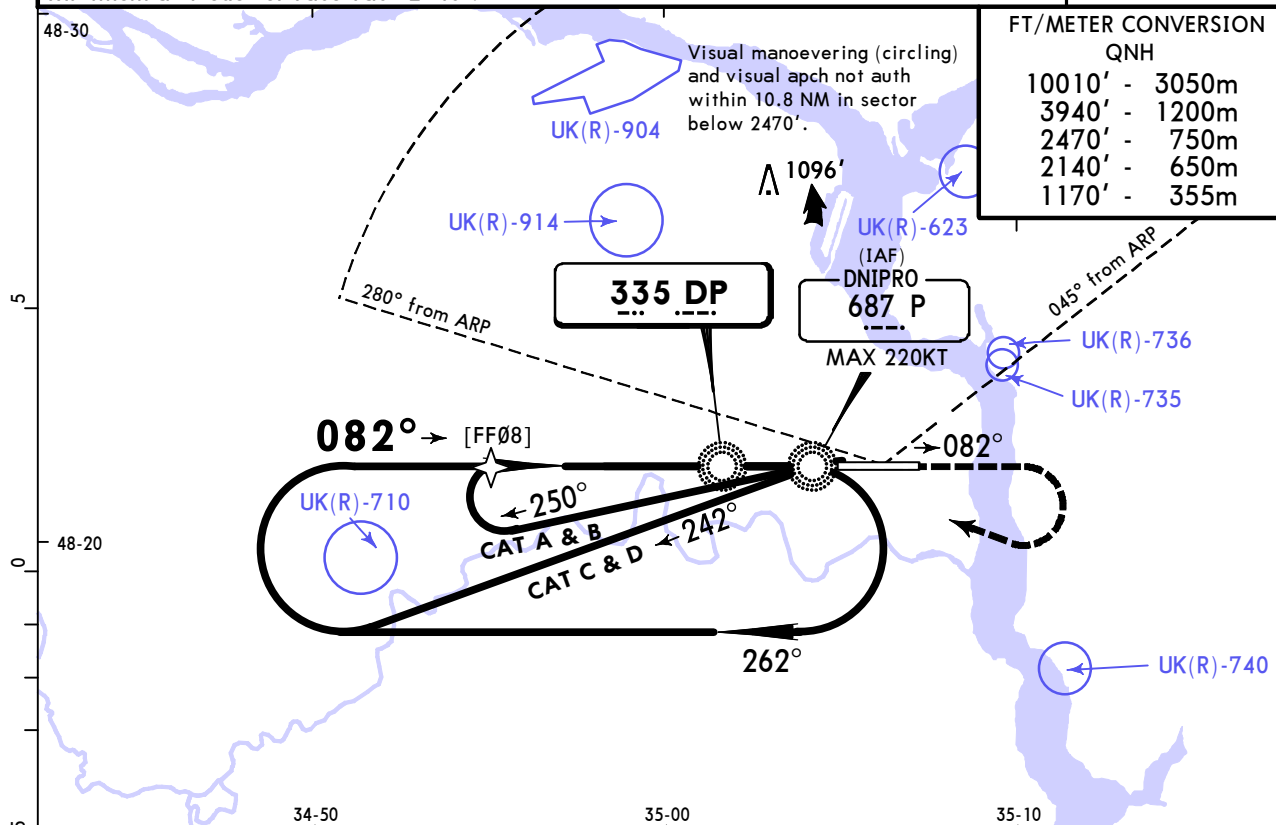

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 2.81°	348	447	497	596	696	795
MAP at P NDB						
Timing not authorized for defining the MAPt.						



Std		STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
		CDFA with DP NDB 1 DA/MDA(H) 840' (387')		CDFA w/o DP NDB 1 DA/MDA(H) 890' (437')		Max Kts	MDA(H)	
A	R1100m	R1500m	R1300m	R1500m	100	930'	(448')	V1500m
B					135	990'	(508')	V1600m
C		R1800m		R2000m	180	1210'	(728')	V2400m
D					205	1500'	(1018')	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure revised.



© JEPPESEN, 2012, 2022. ALL RIGHTS RESERVED.

UKDD/DNK
DNIPRO

JEPPESSEN
18 FEB 22 **16-2** Eff 24 Feb


DNIPRO, UKRAINE
NDB Rwy 26

BRIEFING STRIP	ATIS 130.9 (Russian 134.9)		DNIPRO Radar (APP) 119.4		DNIPRO Tower 118.6		DNIPRO Ground 121.8	
	NDB DR 335	Final Apch Crs 262°	No FAF		DA/MDA(H) CONDITIONAL 830' (358')	Apt Elev 482' Rwy 472'		2200 MSA R NDB
	MISSED APCH: Climb on 262° to 2470', then turn LEFT to NDB climbing to 3940', then according to chart.							
	Alt Set: hPa (MM on req) Rwy Elev: 17 hPa Trans level: By ATC Trans alt: 10010'							
	Minimum altitude for racetrack 2140'.							

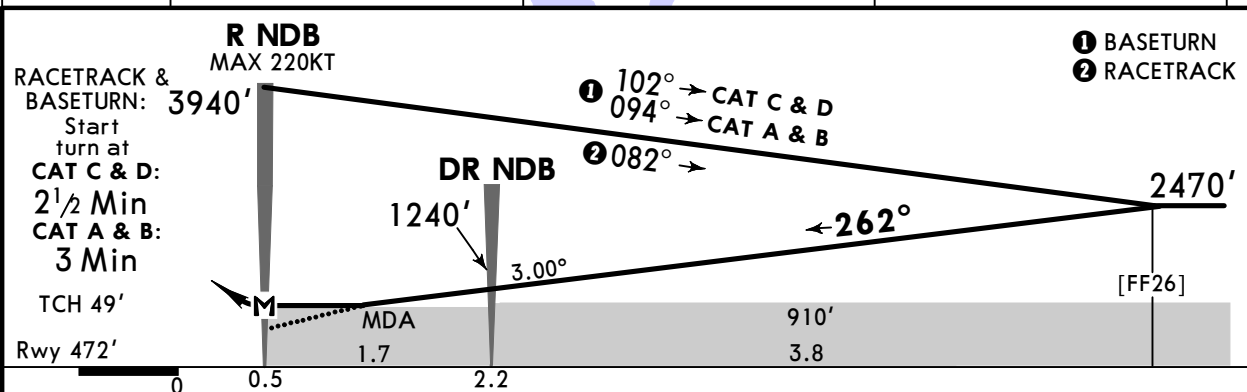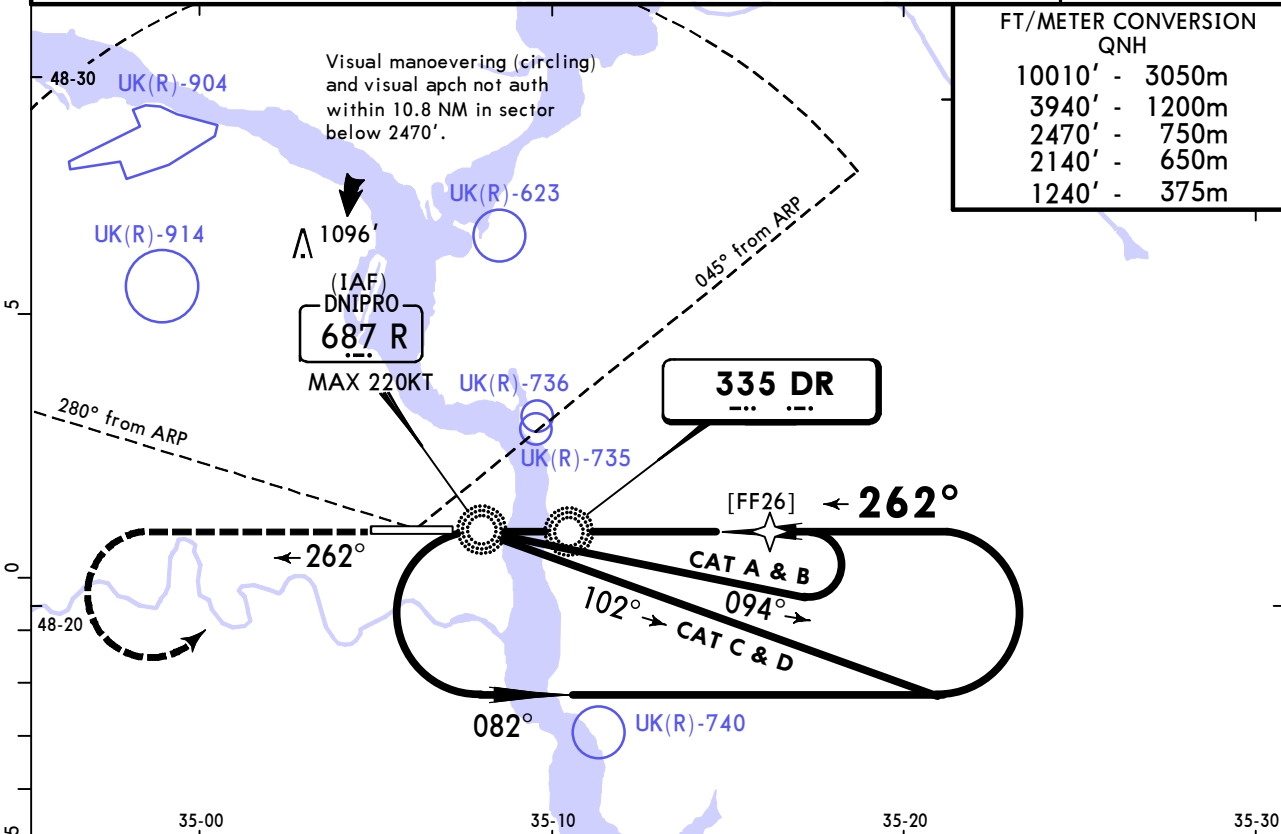

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at R NDB						

Timing not authorized for defining the MAPt.



2470' on 262°

Std		STRAIGHT-IN LANDING				CIRCLE-TO-LAND		
CDFA with DR NDB			CDFA w/o DR NDB			Max Kts	MDA(H)	
1	DA/MDA(H) 830' (358')		1	DA/MDA(H) 910' (438')				
		ALS out			ALS out			
A	R900m	R1500m	R1300m	R1500m	100	930'	(448')	V1500m
B					135	990'	(508')	V1600m
C		R1600m		R2000m	180	1210'	(728')	V2400m
D					205	1500'	(1018')	V3600m
1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.								

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Procedure revised.

© JEPPESSEN, 2012, 2022. ALL RIGHTS RESERVED.

Chart changes since cycle 07-2026

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
DNIPRO, (DNIPRO - UKDD)				

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport UKDD