

List of pages in this Trip Kit

- Trip Kit Index
- Airport Information For UKHH
- Terminal Charts For UKHH
- Revision Letter For Cycle 08-2026
- Change Notices
- Notebook

General Information

Location: KHARKIV UKR
ICAO/IATA: UKHH / HRK
Lat/Long: N49° 55.6', E036° 17.4'
Elevation: 529 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 10.0° E

Fuel Types: Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0126 Z
Sunset: 1748 Z

Runway Information

Runway: 07
Length x Width: 8202 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 495 ft
Lighting: Edge, ALS, Centerline, TDZ

Runway: 25
Length x Width: 8202 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 529 ft
Lighting: Edge, ALS, Centerline, TDZ

Communication Information

ATIS: 127.600 Non-English
ATIS: 126.750
Kharkiv Tower: 118.100
Kharkiv Ground: 133.250
Kharkiv Radar: 133.900
Kharkiv Radar: 118.800
Kharkiv Transit Operations: 131.800
Kharkiv Information: 130.700

UKHH/HRK
OSNOVAJEPPESEN
27 JAN 17 10-1PKHARKIV, UKRAINE
AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

ATIS 126.750
127.6 (Russian)

1.2. NOISE ABATEMENT PROCEDURES

Reverse thrust shall not be used between 2300-0700LT, except for flight safety reasons.

1.3. TAXI PROCEDURES

Movement of ACFT are prohibited without controller's clearance.

Taxiing on apron with Follow-me car.

Towing on TWY D only.

When VIS is 400m or lower: Follow-me car can be obtained by crew requirement or by ATC clearance to lead ACFT from stand to main TWY at night.

In order to reduce RWY Occupancy Time, pilots should leave RWY via high-speed turn-offs (A2 for RWY 25 or A3 for RWY 07).

1.4. PARKING INFORMATION

- Stands 7 (H3), H1 and H2 available for helicopter.
- Stands 1 thru 10 with nose to terminal and push-back only.
- Stands 17-21 facing East with push-back only.
- Stands 29 and 30 available for run-up.
- Stands 38 thru 58 facing North with push-back only.
- Handling on stands 39, 40, 42-54, 57 and 58 is prohibited.

1.5. OTHER INFORMATION

Birds.

2. ARRIVAL

2.1. CONTINUOUS DESCENT OPERATIONS

CDO are authorized only if there is no system degradation that may affect a GNSS or ILS operation.

After receiving a "WHEN READY DESCEND TO LEVEL" or "DESCEND TO (LEVEL) AT PILOTS DISCRETION" clearance, the pilot is free to plan/optimize the vertical profile in order to apply the CDO technique up to the FAP.

Depending on the traffic situation, the CDO can start from the top-of-descent (TOD) or from lower levels.

After receiving a "WHEN READY DESCEND TO LEVEL" or "DESCEND TO (LEVEL) AT PILOTS DISCRETION" the pilot should maintain the cruising/last assigned level until the optimum descent point/TOD, as determined by the pilot (or by FMS), and then commence descent without any additional requests unless otherwise instructed by ATC.

Due to airspace structure ATC will initially instruct pilots to descend to the level(s) above the level of FAP. In doing so, ATC will issue further descent instruction prior to the CDO flight reaching 700m (2300ft) from the last assigned level so as to prevent leveling off.

Pilots shall maintain MAX IAS 220 KT at a distance of 20 track miles from touchdown.

Specified minimum levels must be adhered to unless specifically cancelled by ATC.

UKHH/HRK
OSNOVA

JEPPESEN
27 JAN 17
10-1P1

KHARKIV, UKRAINE
AIRPORT BRIEFING

2. ARRIVAL

2.2. TAXI PROCEDURES

2.2.1. STANDARD TAXI ROUTES

RWY 07:	Stands 1 thru 15:	TWY A3, B, C1
	Stands 17 thru 28:	TWY A3, B, C2
	Stands 29 thru 35, H-2:	TWY A3, B, C2, D1
	Stands 38 thru 58:	TWY A3, B, C3
	Stands 1 thru 15:	TWY A4, B2, B, C3
	Stands 17 thru 28:	TWY A4, B2, B, C2
	Stands 29 thru 35, H-2:	TWY A4, B2, B, C2, D1
	Stands 38 thru 58:	TWY A4, B2, B, C3
RWY 25:	Stands 1 thru 15:	TWY A2, C1
	Stands 17 thru 28:	TWY A2, C2
	Stands 29 thru 35, H-2:	TWY A2, C2, D1
	Stands 38 thru 58:	TWY A2, B, C3
	Stands 1 thru 15:	TWY A1, B1, C1
	Stands 17 thru 28:	TWY A1, B1, C2
	Stands 29 thru 35, H-2:	TWY A1, B1, C2, D1
	Stands 38 thru 58:	TWY A4, B2, B, C2, D1

3. DEPARTURE

3.1. NOISE ABATEMENT PROCEDURES

Take-off Restrictions

Following take-off and initial climb procedures should be performed:

- From take-off to 600m (2000ft) with take-off power, take-off flap at V2+10 KT or considering pitch limitation.
- From 600m (2000ft) to 1200m (4000ft) reduce power to en-route flight power.
- After 1200m (4000ft) retract flaps according to Flight Manual; climb to en-route height.

3.2. START-UP & TAXI PROCEDURES

3.2.1. START-UP

Before start-up, ACFT crew monitors ATIS on FREQ 126.750 MHz (Eng) or 127.6 MHz (Rus), contact ATC on FREQ 133.250 MHz for ATC clearance.

3.2.2. TAXI PROCEDURES

RWY 07:	Stands 1 thru 10:	TWY C1, B1, A1
	Stands 11 thru 28:	TWY C2, B1, A1
	Stands 29 thru 35, H-2:	TWY D1, C2, B1, A1
	Stands 38 thru 58:	TWY C3, B, B1, A1
RWY 25:	Stands 1 thru 10:	TWY C1, B, B2, A4
	Stands 11 thru 28:	TWY C2, B, B2, A4
	Stands 29 thru 35, H-2:	TWY D1, C2, B, B2, A4
	Stands 38 thru 58:	TWY C3, B, B2, A4

UKHH/HRK
OSNOVA

JEPPESSEN
11 FEB 22 **(10-1R)**

KHARKIV, UKRAINE

Eff 24 Feb


RADAR MINIMUM ALTITUDES

Apt Elev
529

Alt Set: hPa (MM on request) Trans level: By ATC Trans alt: 10010

1. This chart may only be used for cross-checking of altitudes assigned while under vectoring control.


2. Visual manoeuvring (circling) and visual approach in NORTH direction from AD KHARKIV/Osnova not authorized.

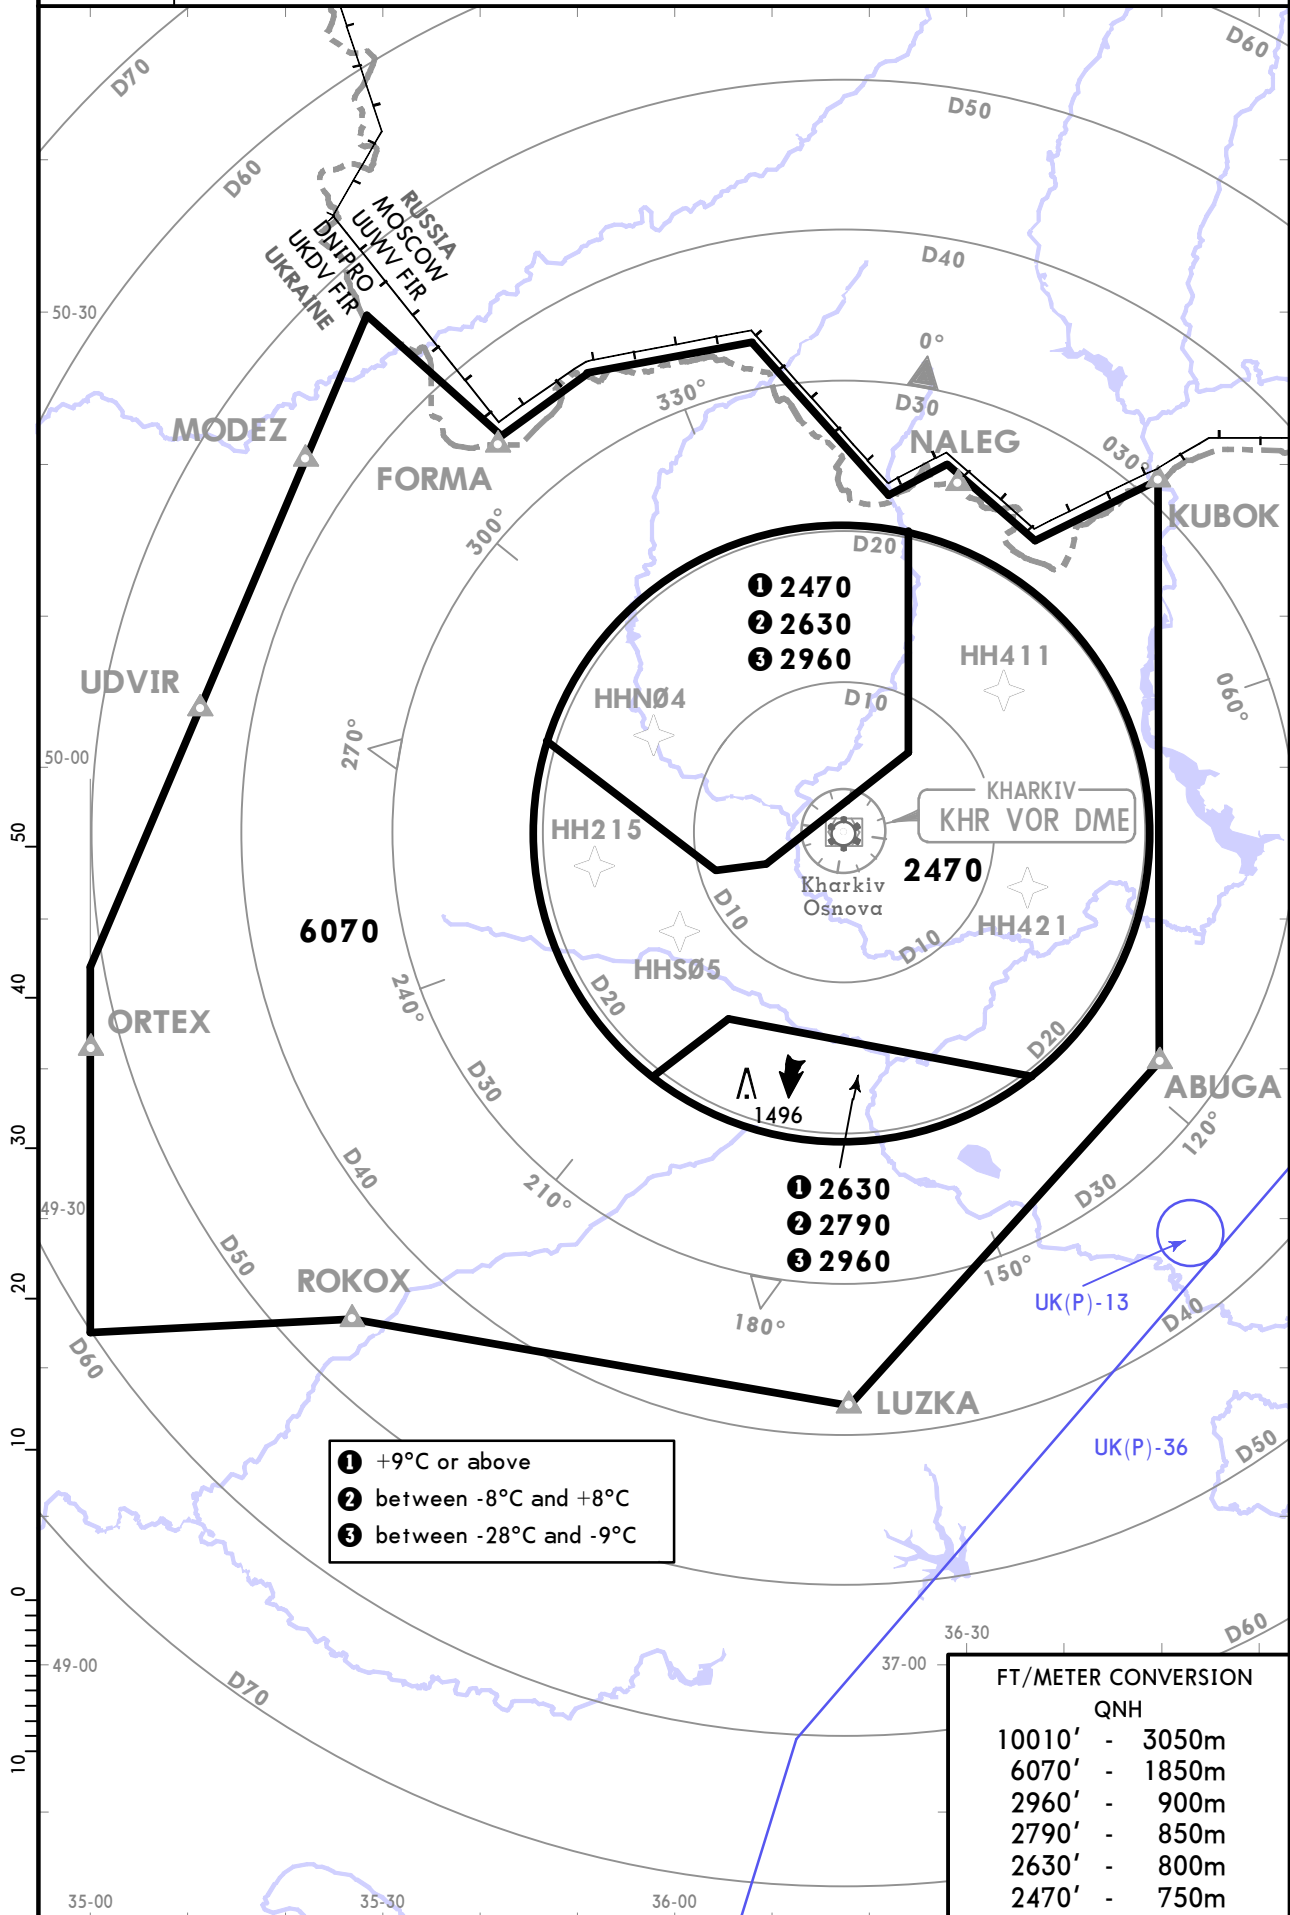

CHANGES: Sector altitudes & general notes revised.

© JEPPESSEN, 2011, 2022. ALL RIGHTS RESERVED.



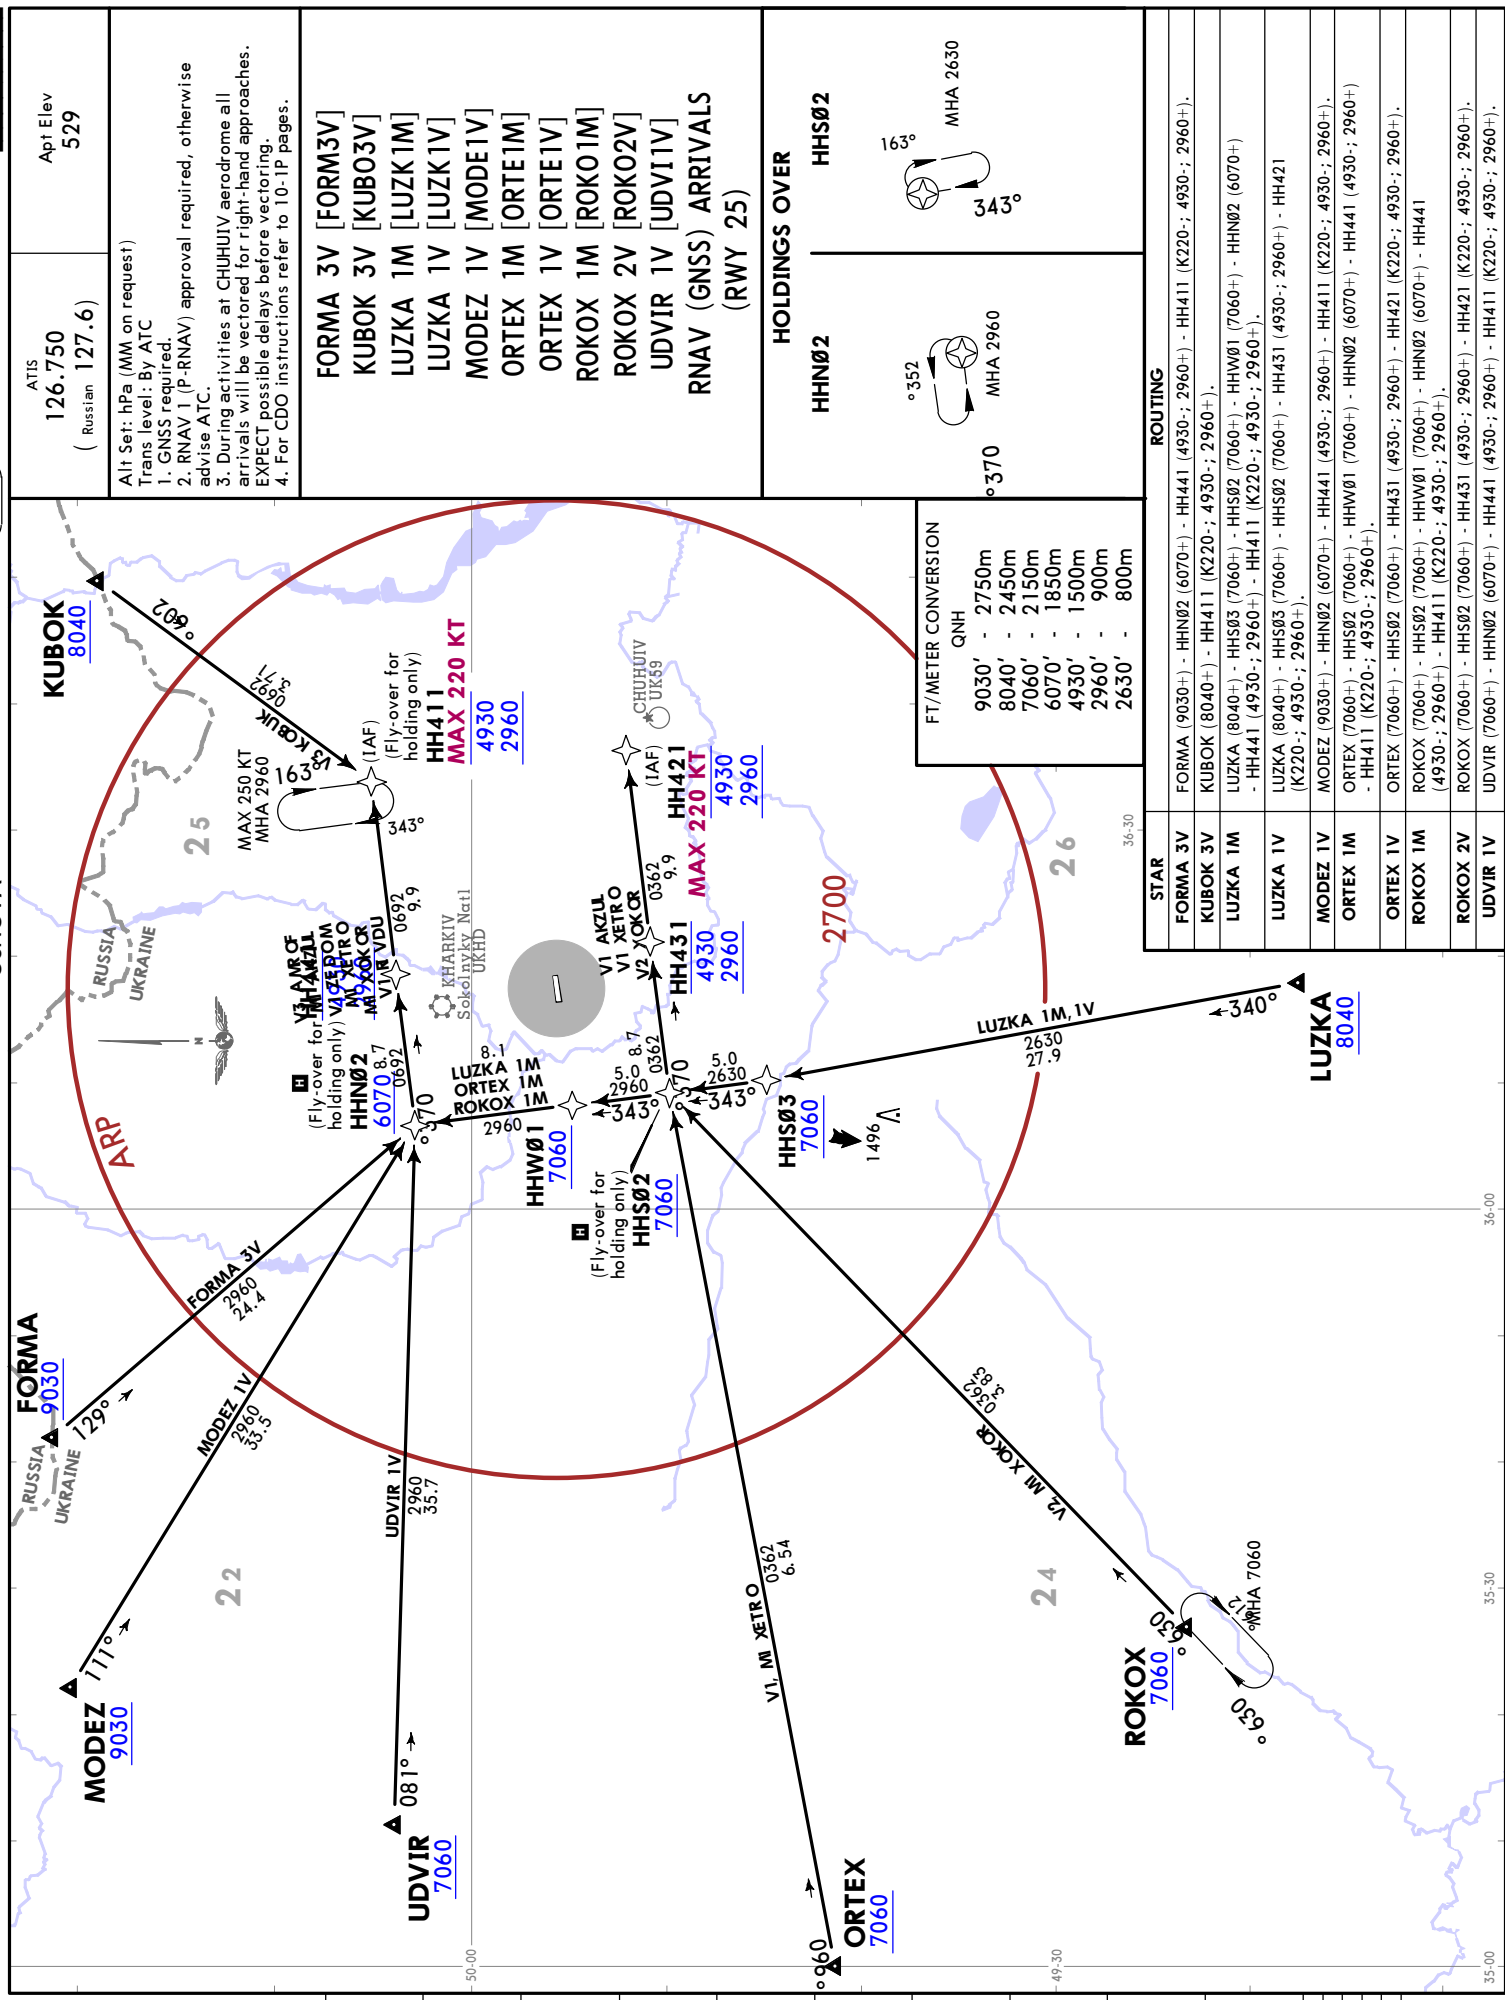

UKHH/HRK
OSNOVA

JEPPESEN
19 MAR 21 10-2B Eff 25 Mar


KHARKIV, UKRAINE
STAR

ATIS
126.750
(Russian 127.6)

Apt Elev
529

Alt Set: hPa (MM on request) Trans level: By ATC

FORMA 4G [FORM4G], KUBOK 4G [KUBO4G]
LUZKA 1G [LUZK1G], MODEZ 1G [MODE1G]
ORTEX 1G [ORTE1G], ROKOX 2G [ROK02G]
UDVIR 1G [UDVI1G]
ARRIVALS
(RWY 07)

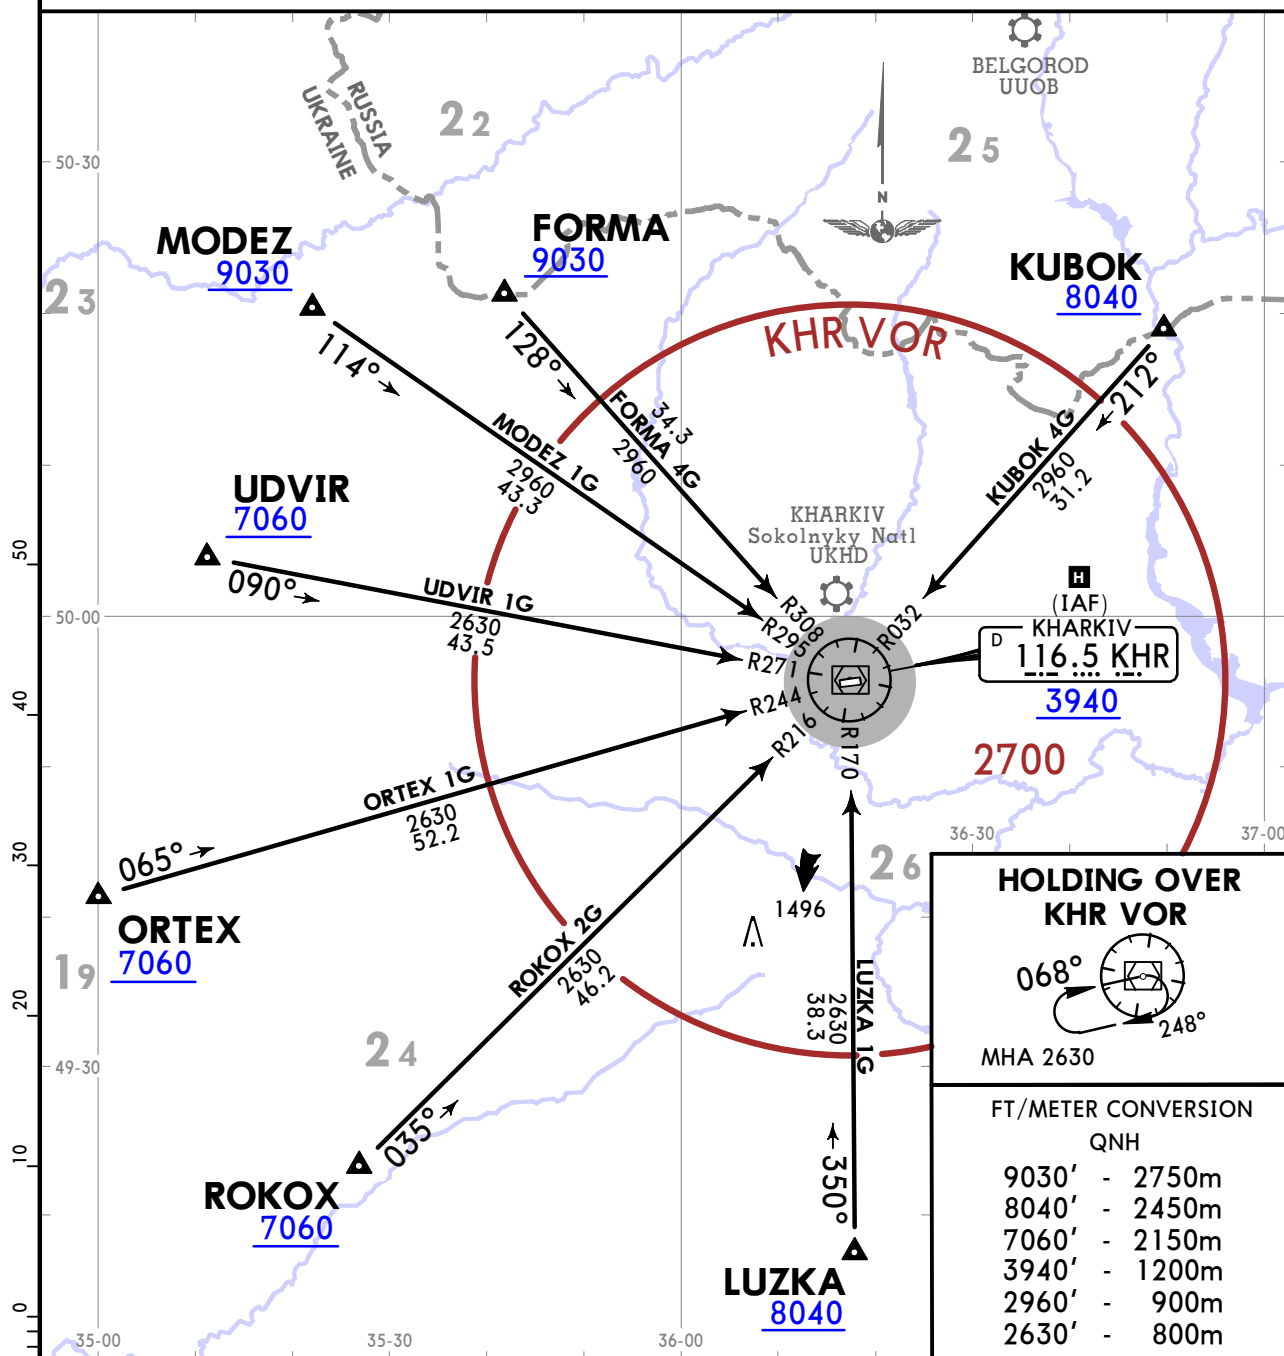

STAR

ROUTING

FORMA 4G	Intercept KHR R308 inbound to KHR VOR.
KUBOK 4G	Intercept KHR R032 inbound to KHR VOR.
LUZKA 1G	Intercept KHR R170 inbound to KHR VOR.
MODEZ 1G	Intercept KHR R295 inbound to KHR VOR.
ORTEX 1G	Intercept KHR R244 inbound to KHR VOR.
ROKOX 2G	Intercept KHR R216 inbound to KHR VOR.
UDVIR 1G	Intercept KHR R271 inbound to KHR VOR.


UKHH/HRK
OSNOVA

JEPPESEN
19 MAR 21 10-2C Eff 25 Mar


KHARKIV, UKRAINE
STAR



ATIS 126.750 (Russian 127.6)	Apt Elev 529	Alt Set: hPa (MM on request) Trans level: By ATC During activities at CHUHUIV aerodrome all arrivals will be vectored for right-hand approaches. EXPECT possible delays before vectoring.
-------------------------------------	-----------------	--

FORMA 4H [FORM4H], KUBOK 4H [KUBO4H]
LUZKA 1H [LUZK1H], MODEZ 1H [MODE1H]
ORTEX 1H [ORTE1H], ROKOX 2H [ROK02H]
UDVIR 1H [UDVI1H]
ARRIVALS
(RWY 25)

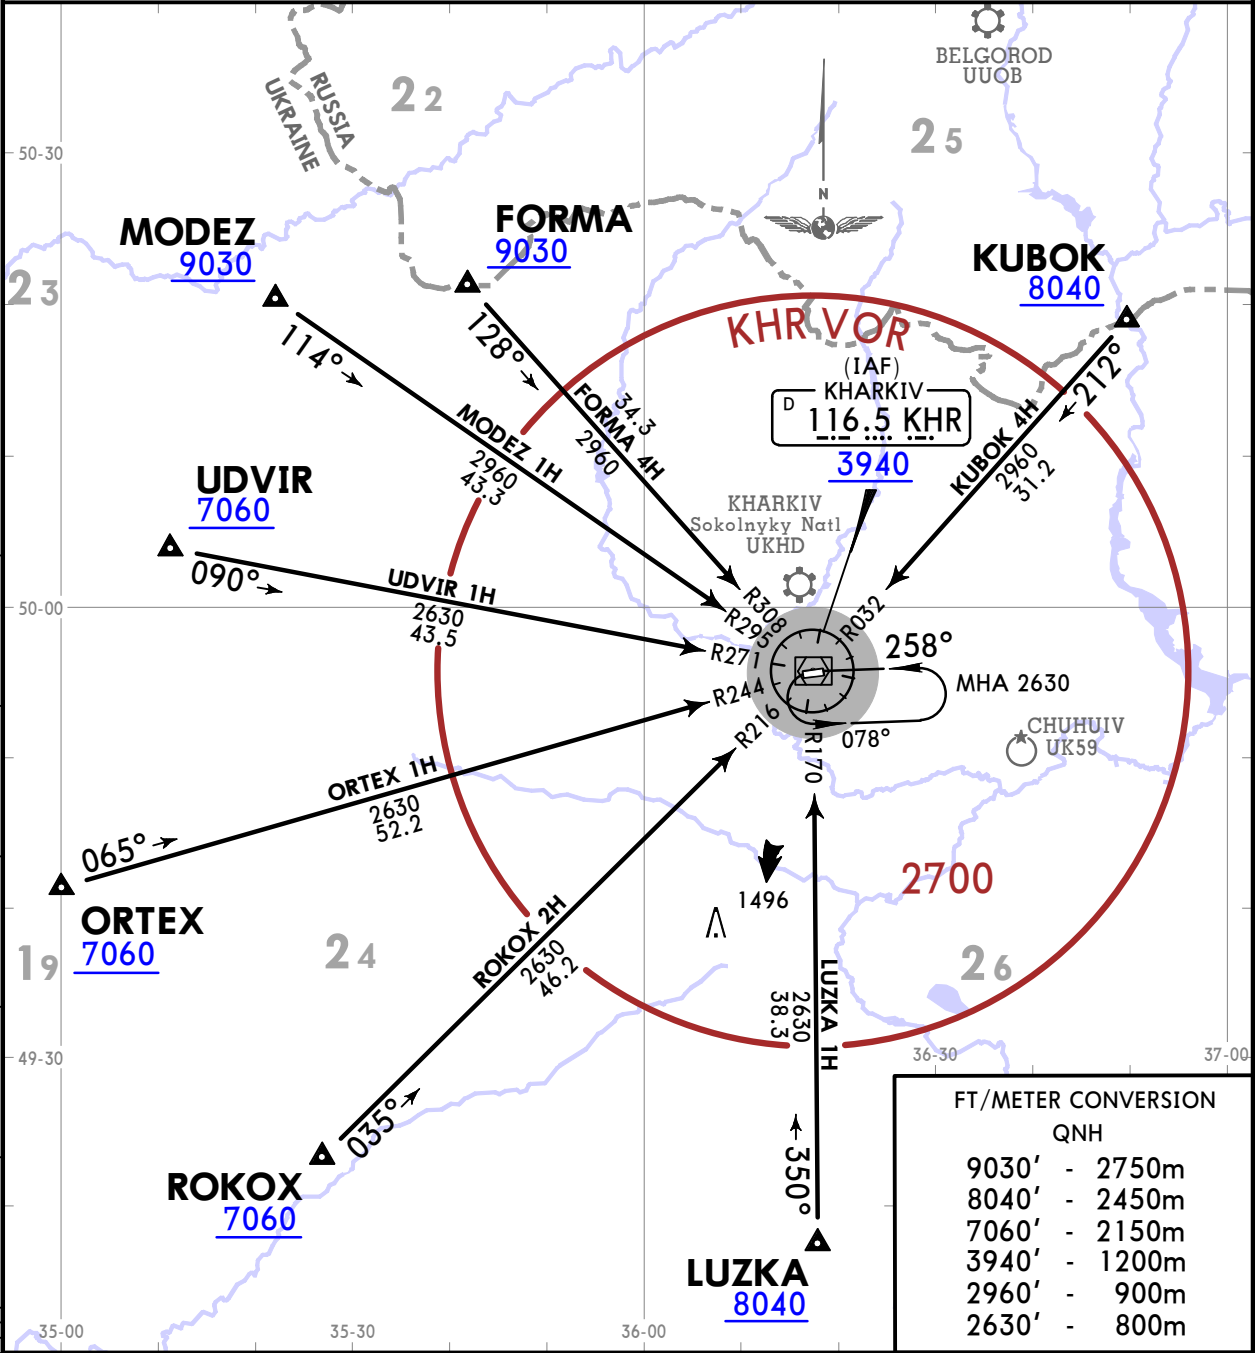

STAR	ROUTING
FORMA 4H	Intercept KHR R308 inbound to KHR VOR.
KUBOK 4H	Intercept KHR R032 inbound to KHR VOR.
LUZKA 1H	Intercept KHR R170 inbound to KHR VOR.
MODEZ 1H	Intercept KHR R295 inbound to KHR VOR.
ORTEX 1H	Intercept KHR R244 inbound to KHR VOR.
ROKOX 2H	Intercept KHR R216 inbound to KHR VOR.
UDVIR 1H	Intercept KHR R271 inbound to KHR VOR.

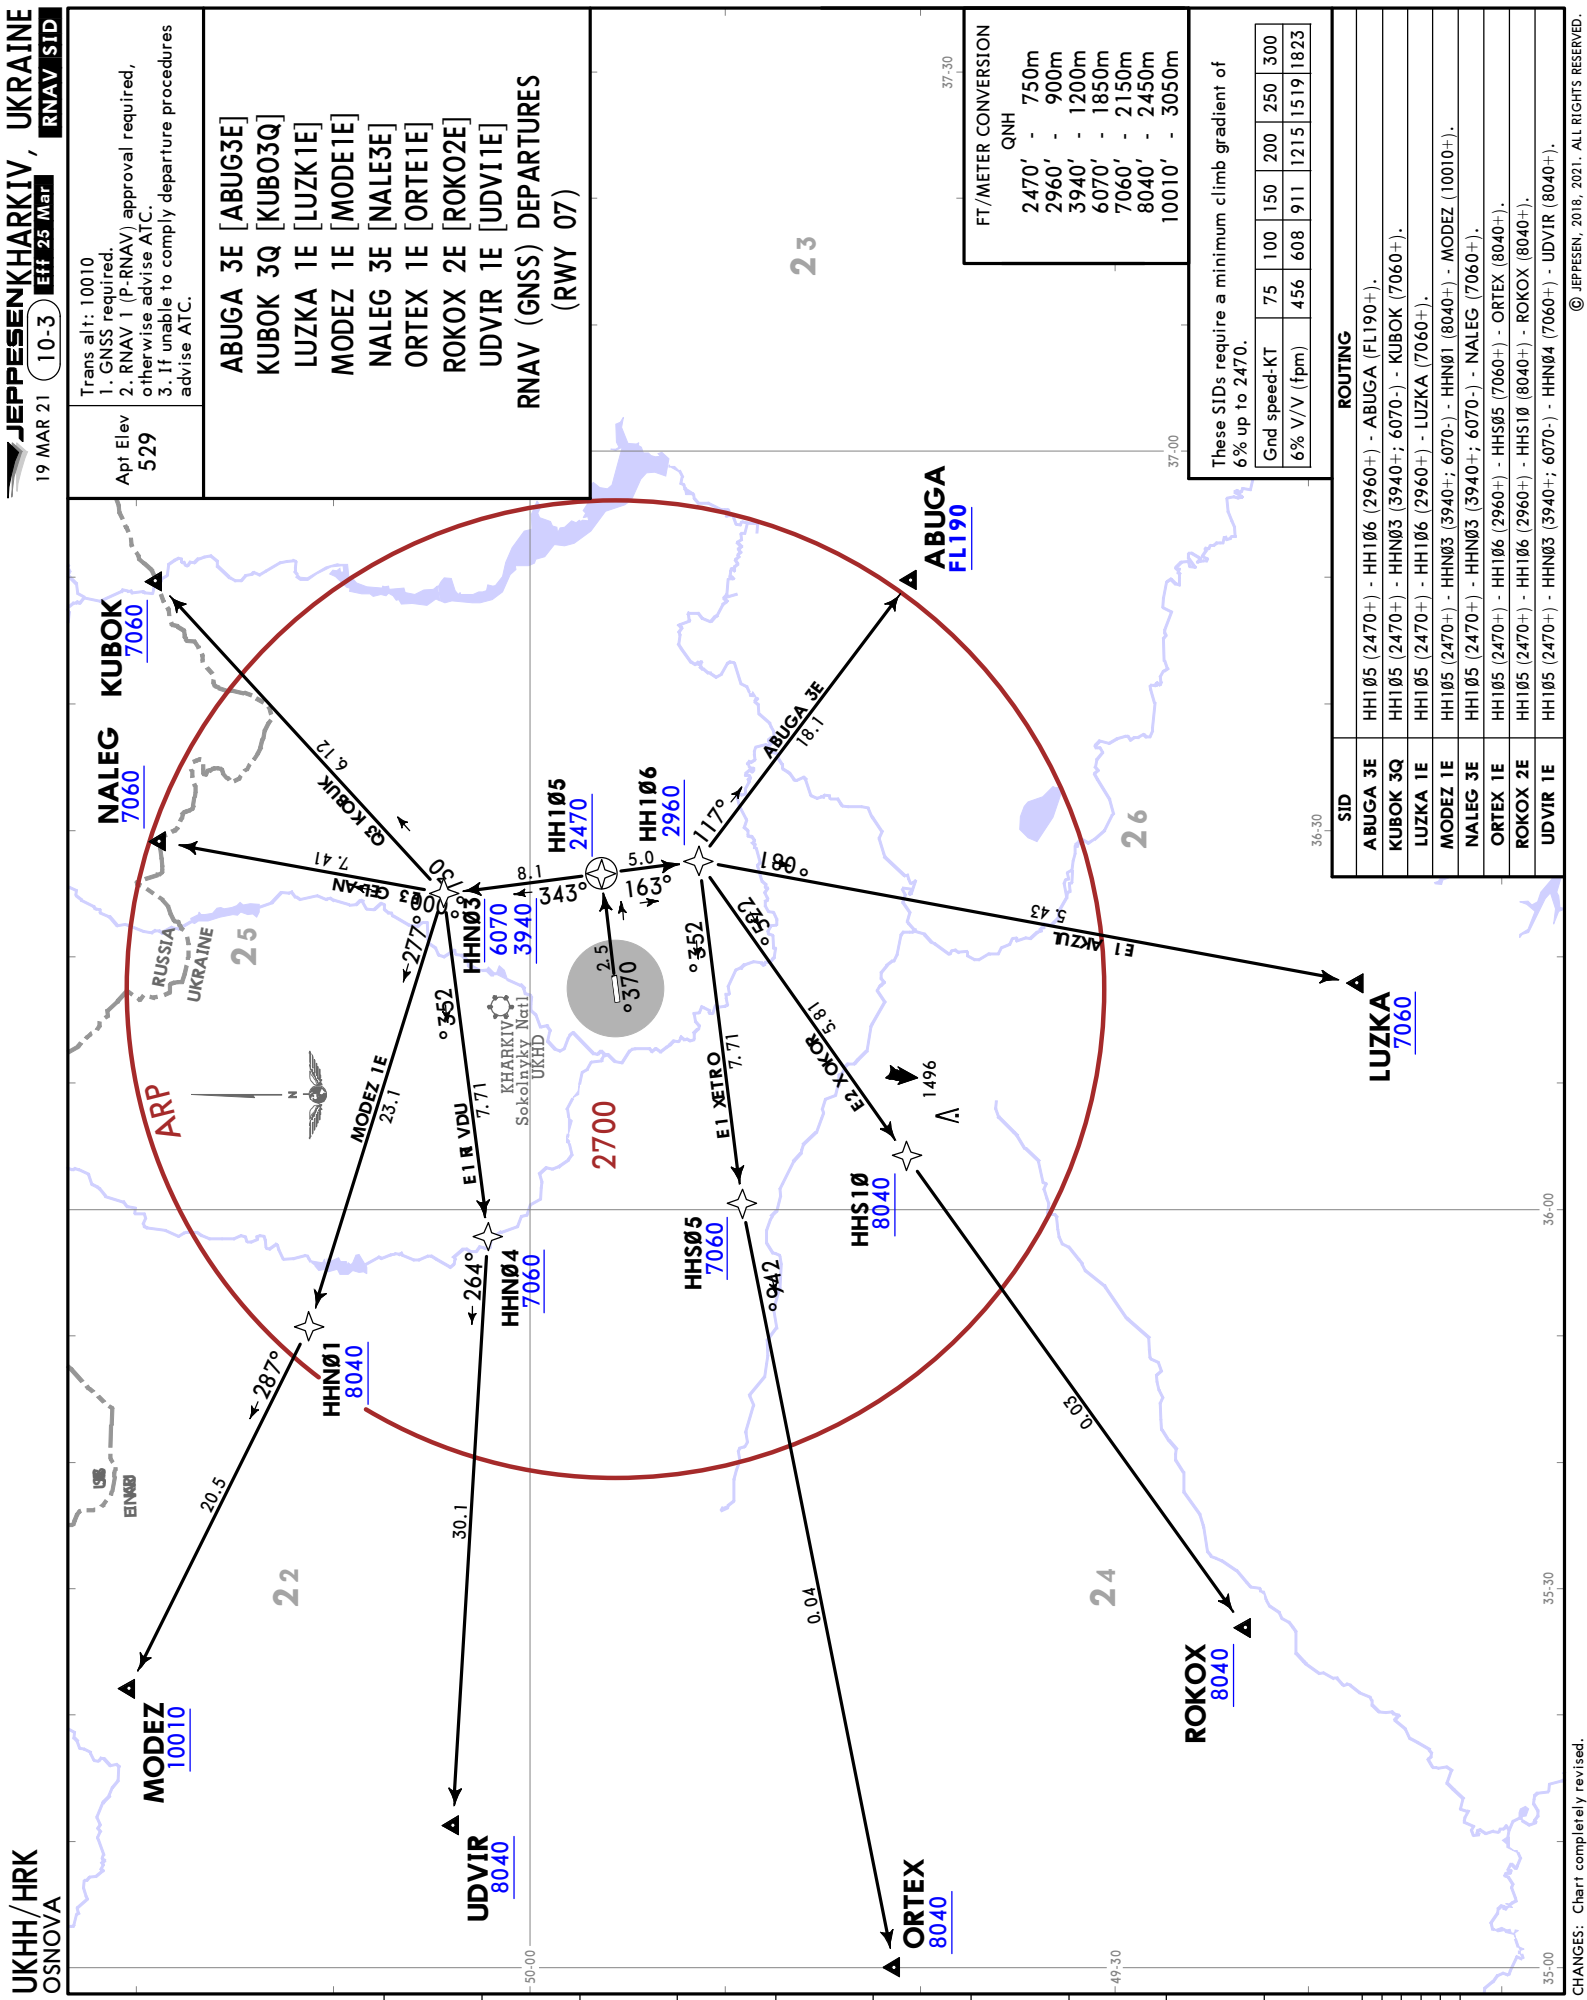

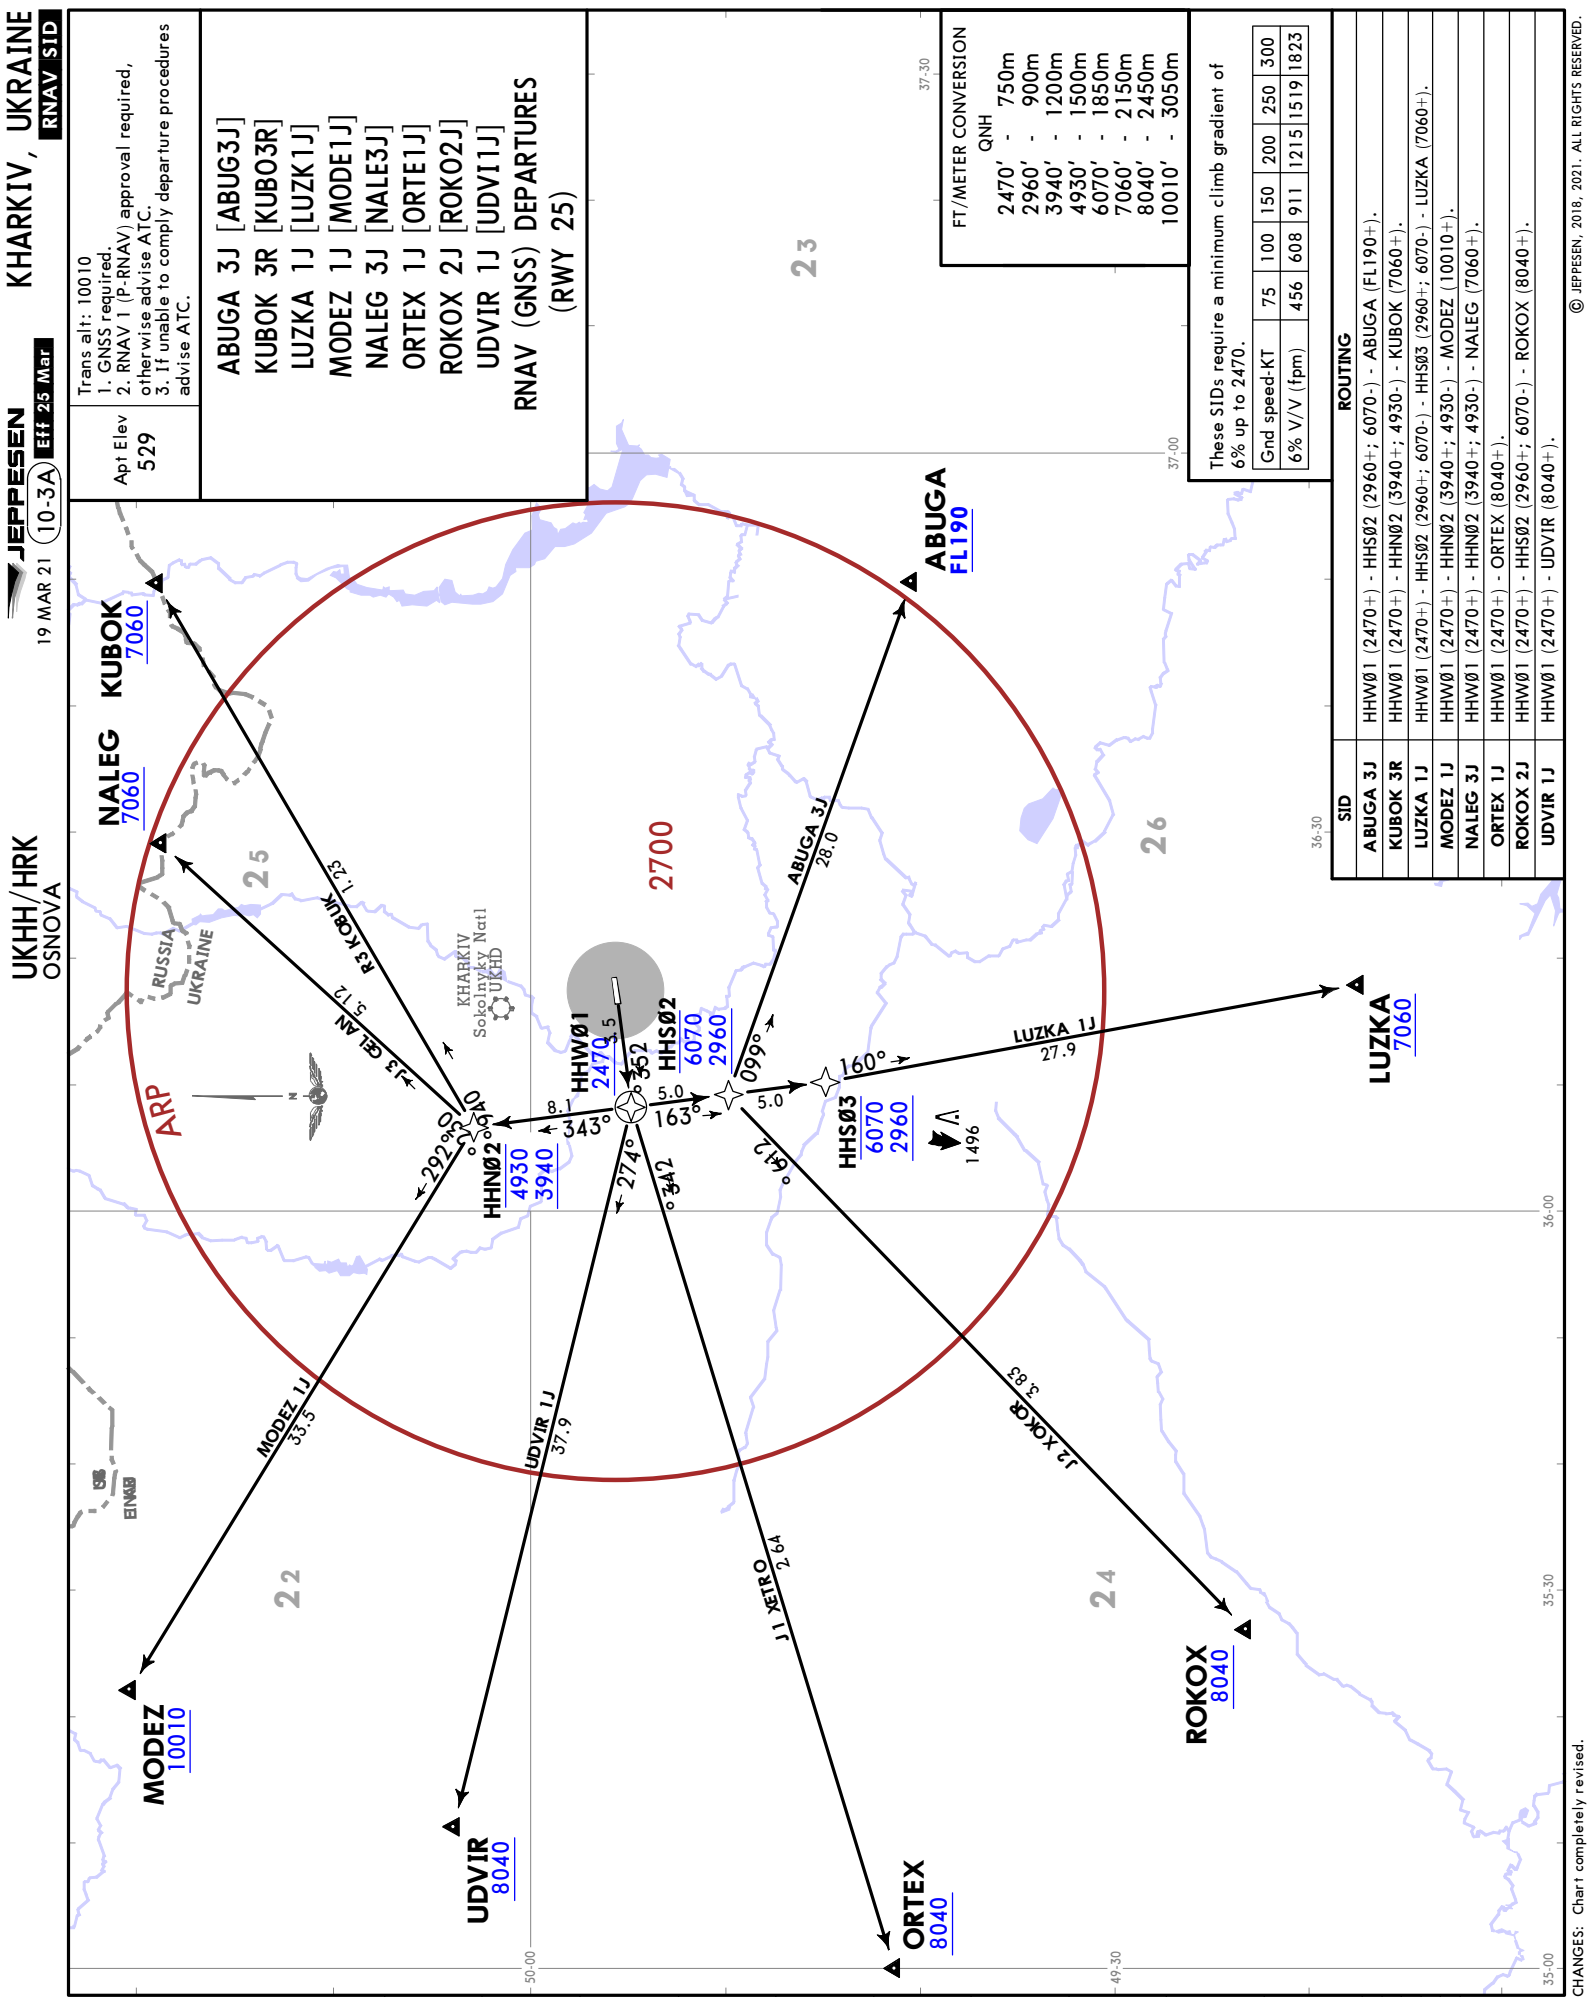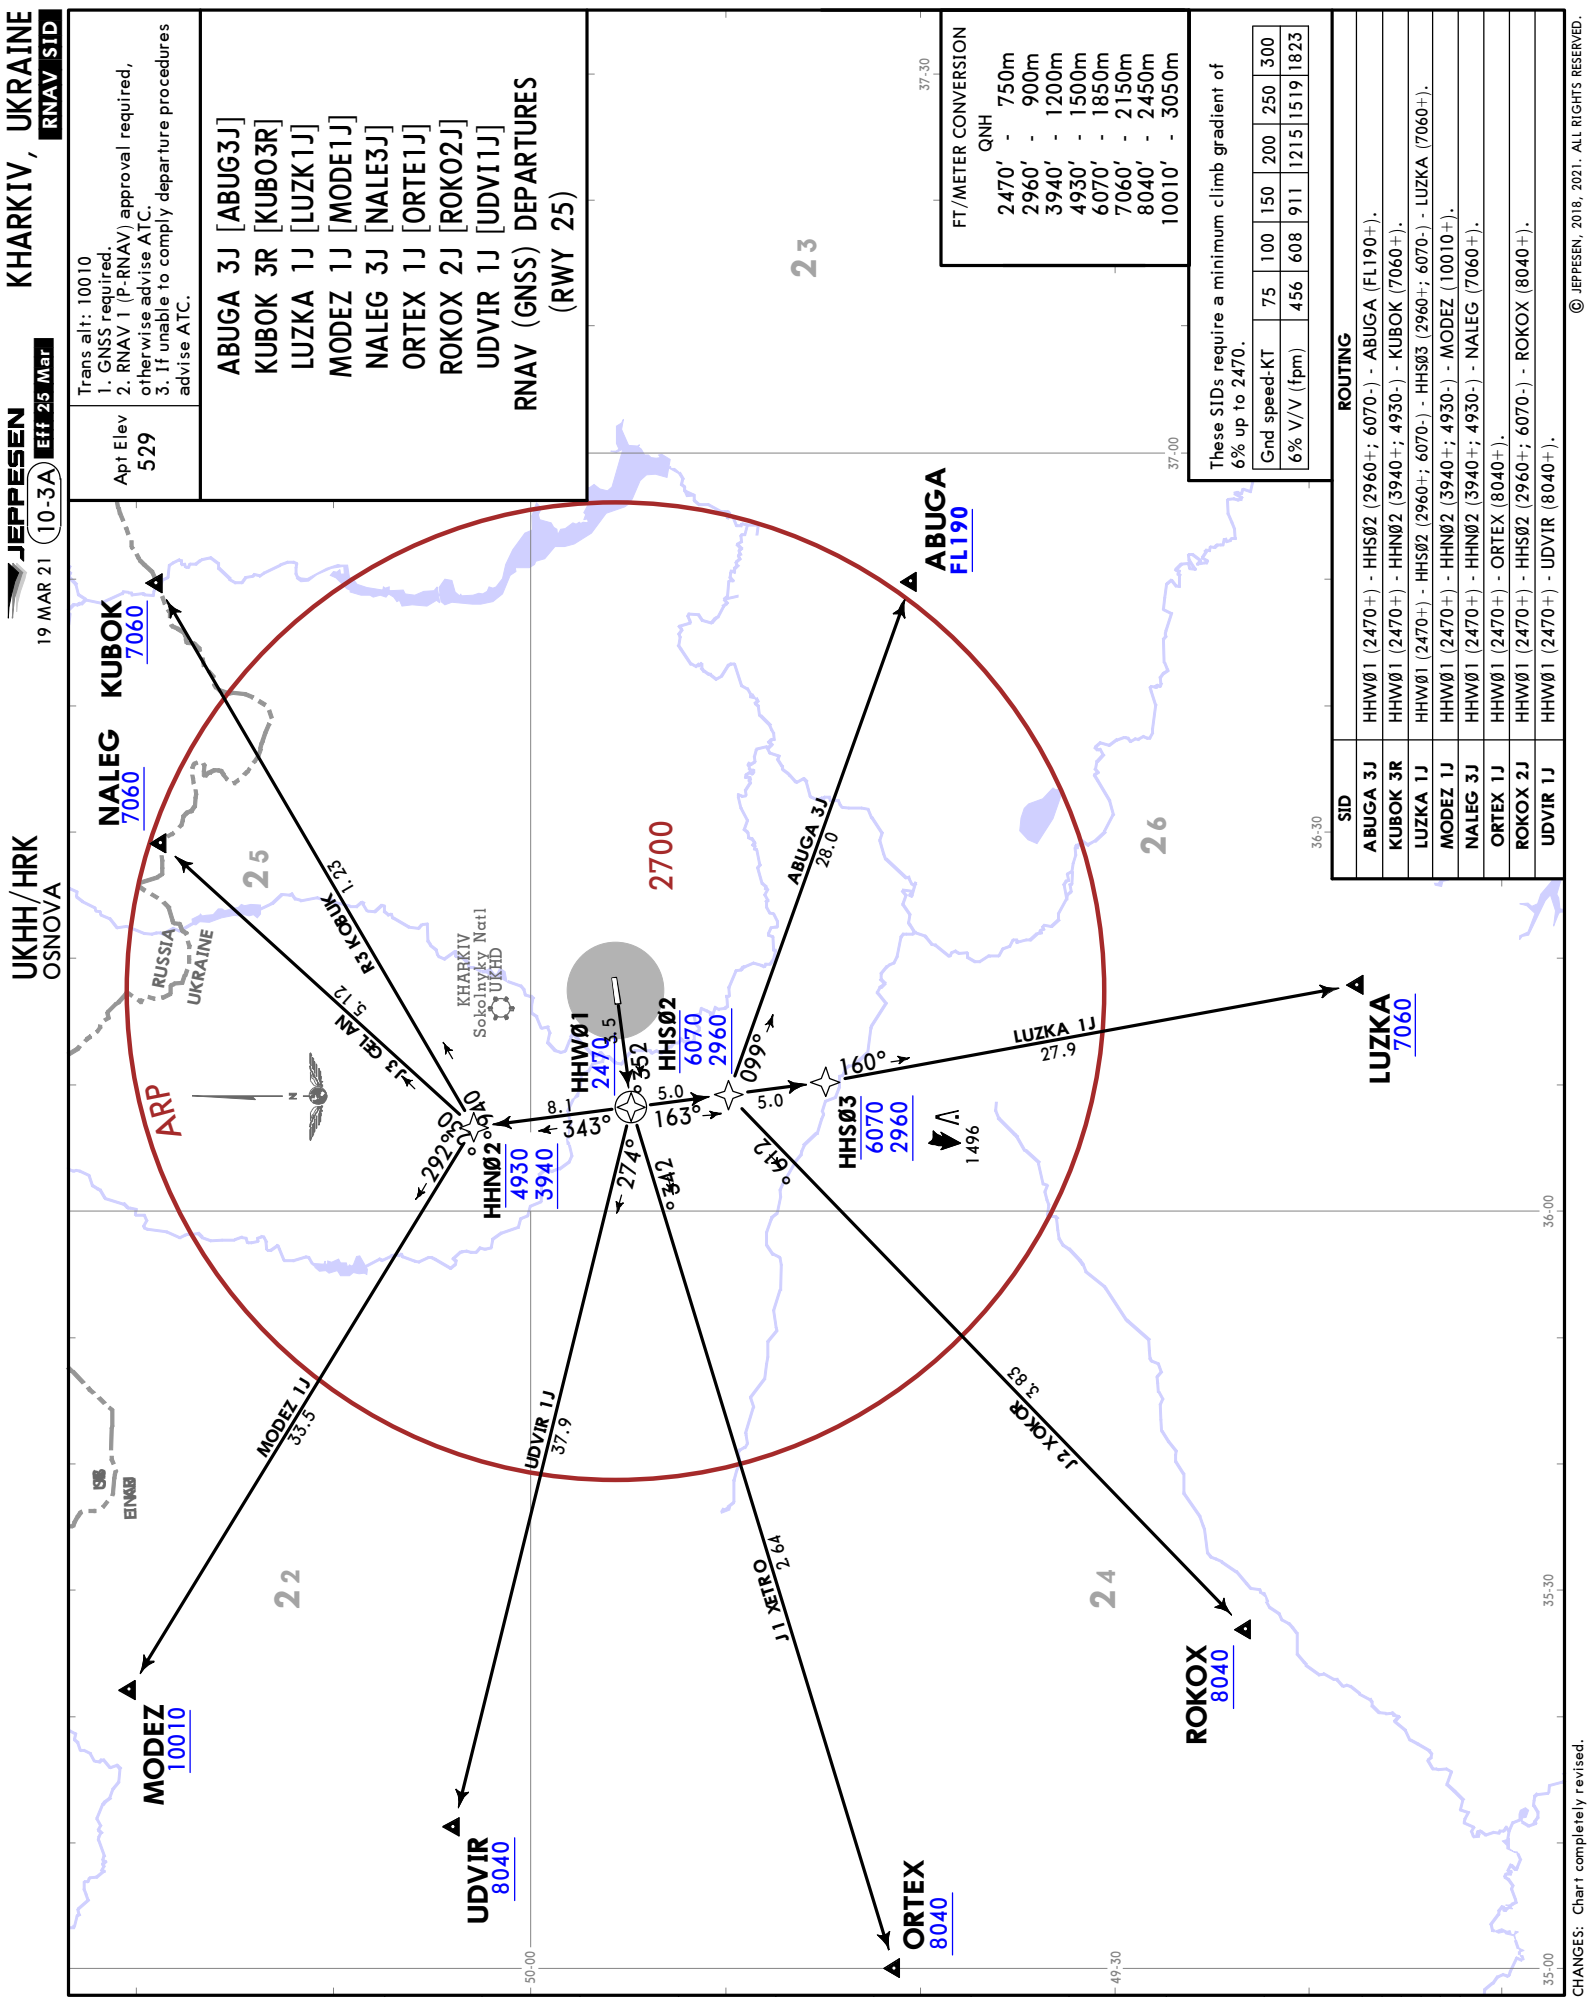





UKHH/HRK


Apt Elev **528'**
N49 55.6 E036 17.4

JEPPESSEN

13 NOV 15 **(10-9)**

KHARKIV, UKRAINE

OSNOVA

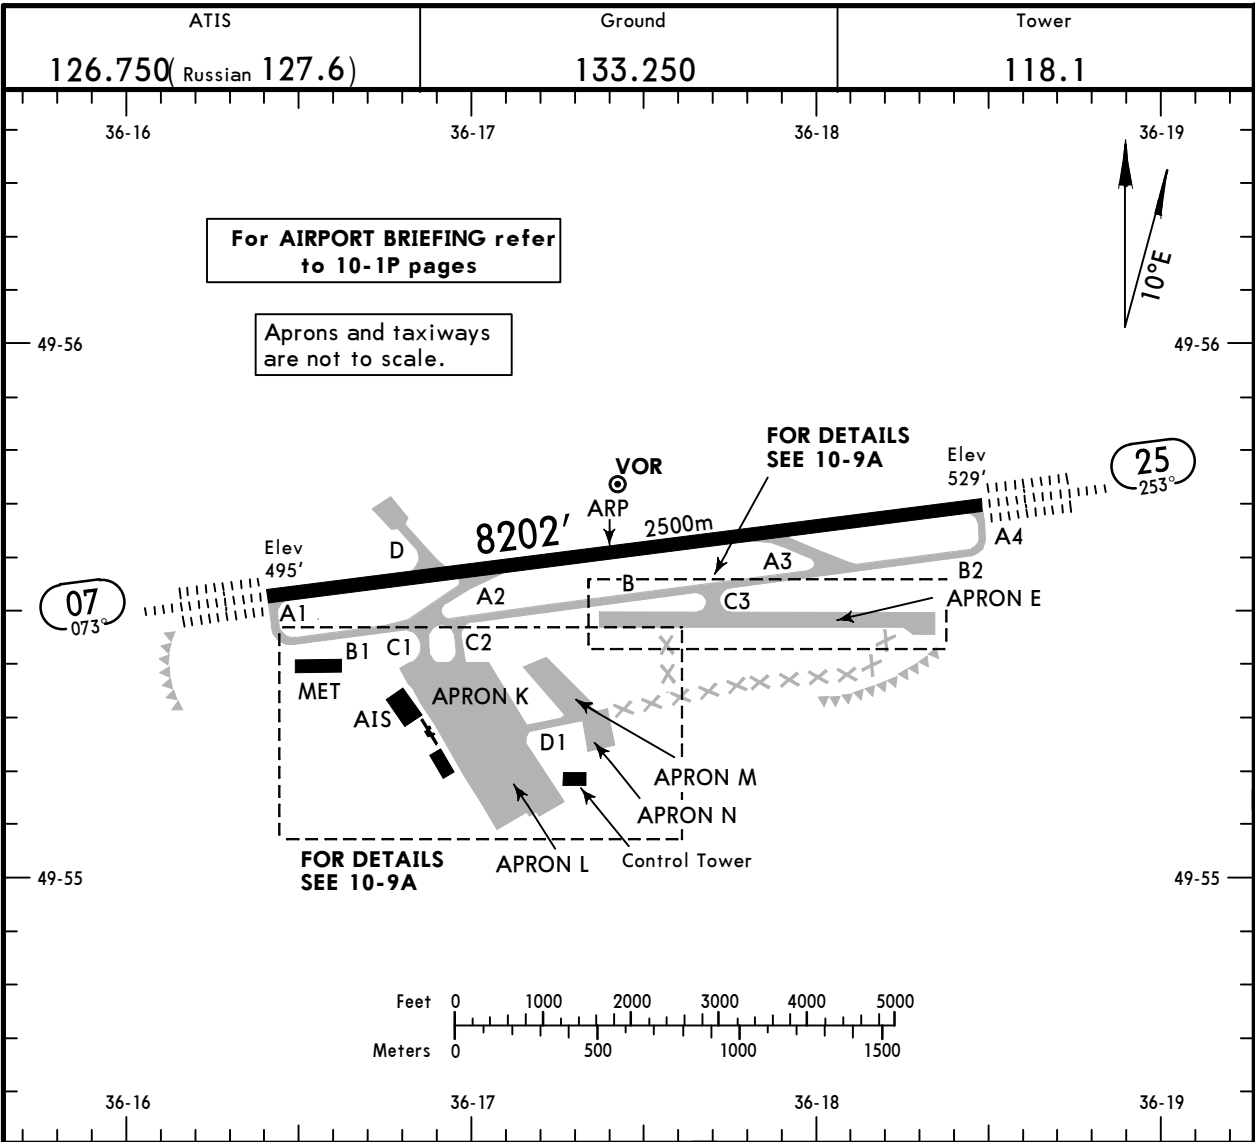

ADDITIONAL RUNWAY INFORMATION							
RWY					USABLE LENGTHS		
					LANDING BEYOND	TAKE-OFF	WIDTH
					Threshold	Glide Slope	
07	HIRL (60m) CL (15m) HIALS-II TDZ ① HST-A3 RVR					7108' 2167m	②
25	HIRL (60m) CL (15m) HIALS-II TDZ ① HST-A2 RVR					6987' 2130m	45m

- ① PAPI-L (3.0°)
- ② TAKE-OFF RUN AVAILABLE
- RWY 07:

From rwy head/twy A1 int 8202' (2500m)

twy A2 int 5249' (1600m)
- RWY 25:

From rwy head/twy A4 int 8202' (2500m)

twy A3 int 5249' (1600m)

JAR-OPS					
TAKE-OFF ①					
All Rwys					
LVP must be in force					
Approved Operators	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
HIRL, CL & mult. RVR req					
A					
B	125m	150m	200m	250m	400m
C					500m
D	150m	200m	250m	300m	
① Operators applying U.S. Ops Specs: CL required below 300m; approved HUD required below 150m.					



UKHH/HRK

 **JEPPesen**

Kharkiv, Ukraine

13 NOV 15 **10-9A**

OSNOVA

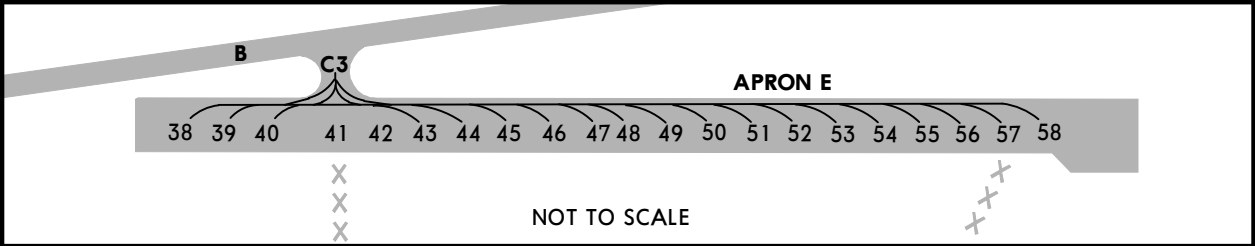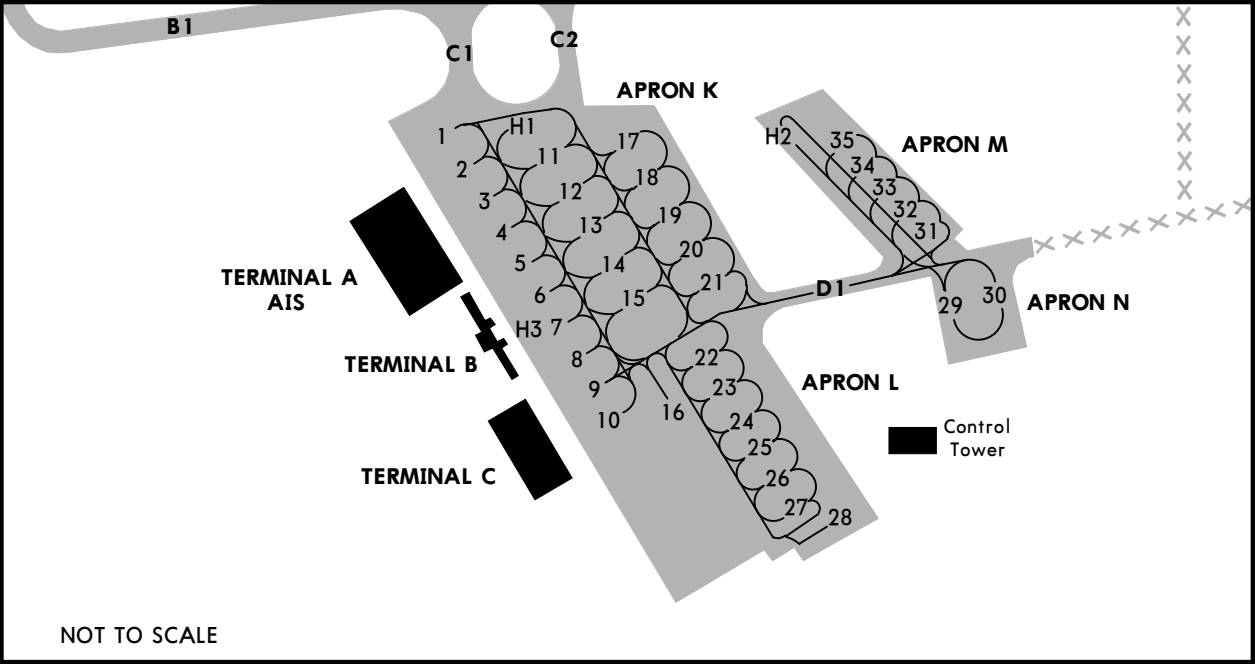

UKHH/HRK



Standard
KHARKIV, UKRAINE
OSNOVA

STRAIGHT-IN RWY		A	B	C	D
07	ILS	725'(230') R800m	735'(240') R800m	745'(250') R800m	755'(260') R800m
	ALS out	R1200m	R1200m	R1300m	R1300m
	LOC ❶	820'(325') R1100m	820'(325') R1100m	820'(325') R1100m	820'(325') R1100m
	ALS out	R1500m	R1500m	R1500m	R1500m
	VOR ❶	940'(445') R1500m	940'(445') R1500m	940'(445') R1700m	940'(445') R1700m
	ALS out	R1500m	R1500m	R2100m	R2100m
25	ILS	729'(200') R750m	729'(200') R750m	729'(200') R750m	732'(203') R750m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC ❶❷	820'(291') R900m	820'(291') R900m	820'(291') R900m	820'(291') R900m
	ALS out	R1400m	R1400m	R1400m	R1400m
	LOC ❶❸	1020'(491') R1500m	1020'(491') R1500m	1020'(491') R1800m	1020'(491') R1800m
	ALS out	R1500m	R1500m	R2300m	R2300m
	VOR ❶	1020'(491') R1500m	1020'(491') R1500m	1020'(491') R1800m	1020'(491') R1800m
	ALS out	R1500m	R1500m	R2300m	R2300m

- ❶ Continuous Descent Final Approach.
- ❷ With D1.7 IHA
- ❸ W/o D1.7 IHA

CIRCLE-TO-LAND ❹	100 KT	135 KT	180 KT	205 KT
	1090'(561') V1500m	1200'(671') V1600m	1420'(891') V2400m	1420'(891') V3600m


- ❹ Not authorized North of airport.

TAKE-OFF					
Low Visibility Take-off					
A	HIRL, CL & relevant RVR	RL, CL & relevant RVR	RL & CL	Day: RL or RCLM Night: RL or CL	Adequate vis ref (Day only)
B	TDZ, MID, RO R125m	TDZ, MID, RO R150m	R200m	R300m	400m
C					
D					

UKHH/HRK
OSNOVA

JEPPESEN
16 JUN 23 (11-1)

KHARKIV, UKRAINE
ILS or LOC Rwy 07

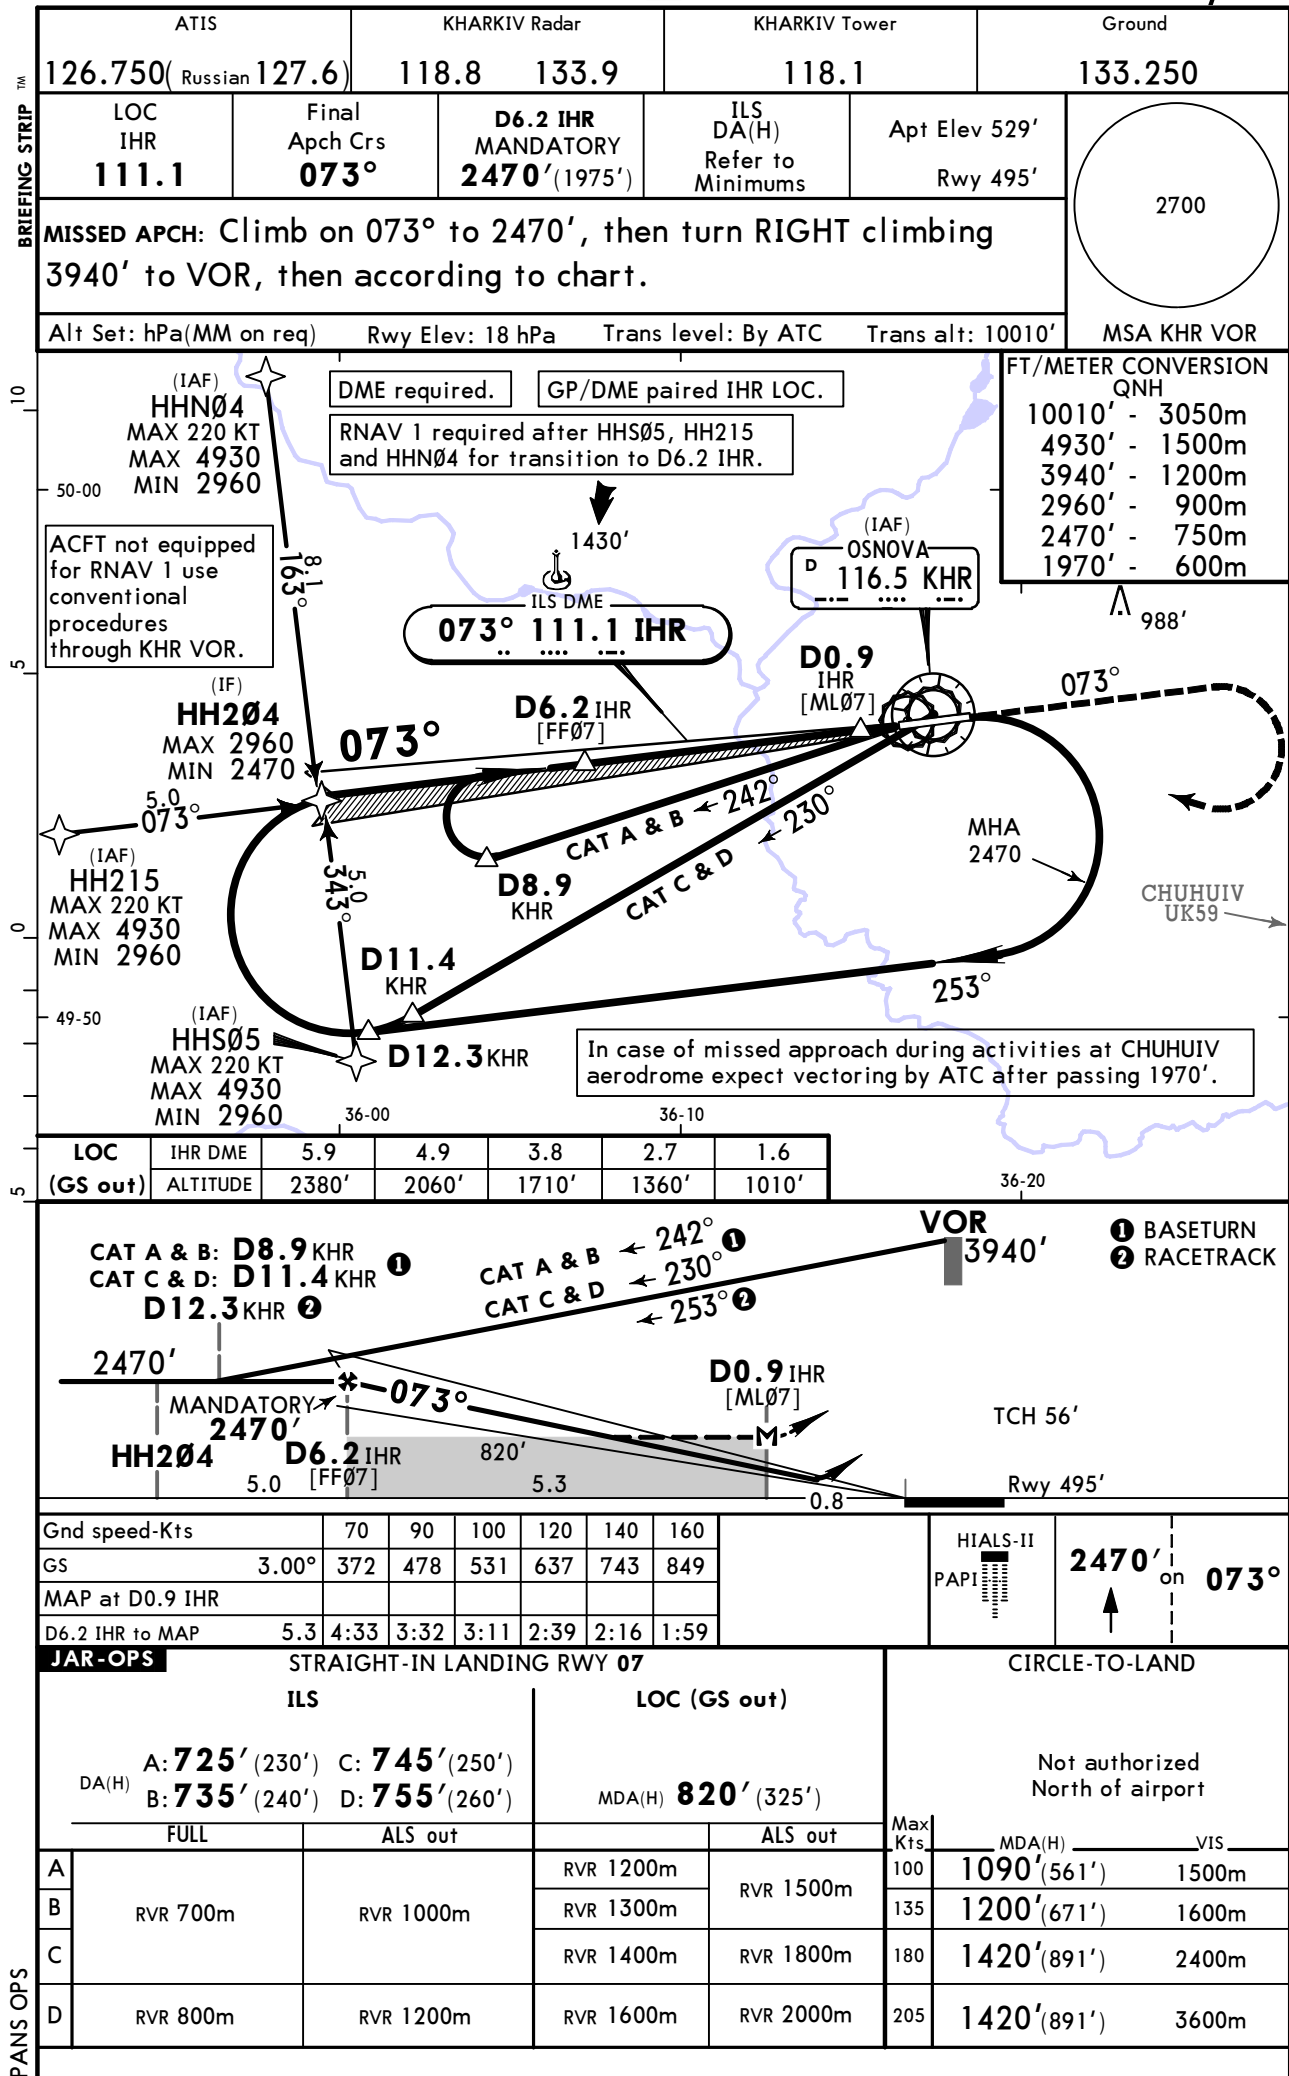

KHARKIV, UKRAINE
ILS or LOC Rwy 25

ATIS		KHARKIV Radar		KHARKIV Tower		Ground	
126.750 (Russian 127.6)		118.8 133.9		118.1		133.250	
LOC IHA 111.7	Final Apch Crs 253°	D6.2 IHA MANDATORY 2470' (1941')		ILS DA(H) Refer to Minimums	Apt Elev 529' Rwy 529'	2700 MSA KHR VOR	
MISSED APCH: Climb on 253° to 2470', then turn LEFT climbing 3940' to VOR, then according to chart.							

Alt Set: hPa(MM on req)	Rwy Elev: 19 hPa	Trans level: By ATC	Trans alt: 10010'
-------------------------	------------------	---------------------	-------------------

FT/METER CONVERSION	
QNH	
10010'	- 3050m
4930'	- 1500m
3940'	- 1200m
2960'	- 900m
2470'	- 750m
1070'	- 325m

DME required.	GP/DME paired IHA LOC.
---------------	------------------------

During activities at CHUHUIV aerodrome all arrivals will be vectored for right-hand approaches with very limited stabilization distance. EXPECT possible delays before vectoring. In case of missed approach climb on 253° to 2470' and EXPECT vectoring for right-hand approach.



MAX 250 KT
MHA 2960

(IAF)
● HH411
MAX 220 KT
MAX 4930
MIN 2960

NOT TO
SCALE
1 Fly-over
for
2 holding.

(IF)
HH402
MAX 2960
MIN 2470

RNAV 1 required after HH411 and HH421 for transition to D6.2 IHA.

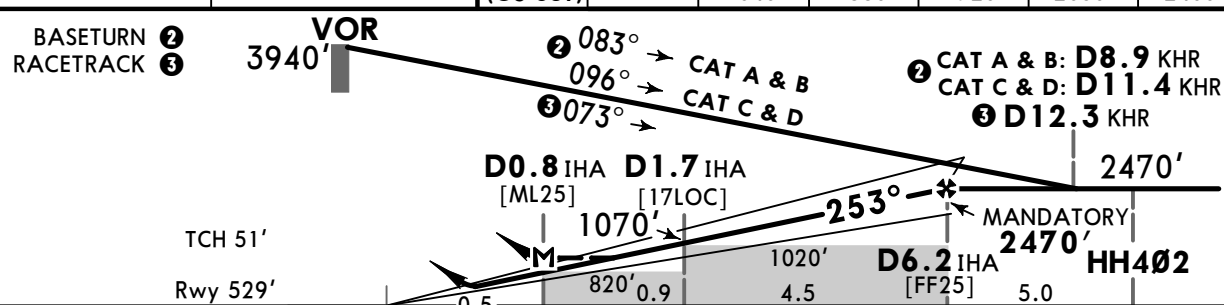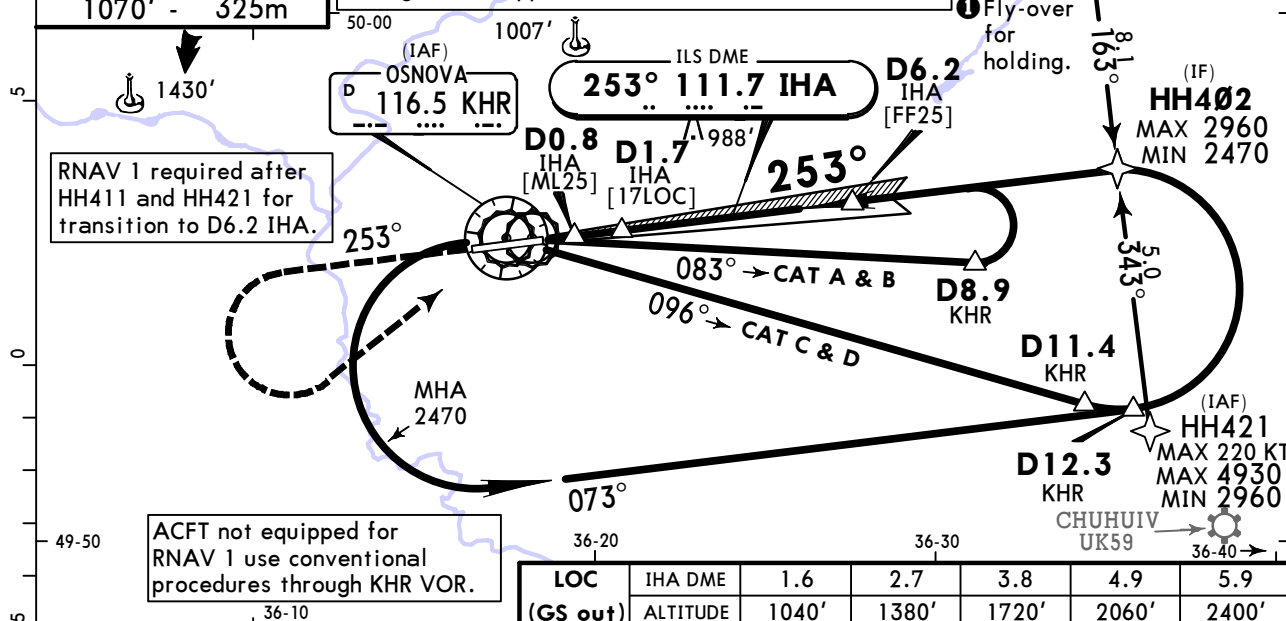

Gnd speed-Kts	70	90	100	120	140	160
ILS GS 3.00°	372	478	531	637	743	849
LOC Descent Angle 3.12°	386	497	552	662	773	883
MAP at D0.8 IHA						
D6.2 IHA to MAP 5.4	4:38	3:36	3:14	2:42	2:19	2:02

2470' on **253°**

JAR-OPS

1	4.00	5.00	5.14	2.42	2.17	2.17
STRAIGHT-IN LANDING RWY 25						


CIRCLE-TO-LAND

ILS			LOC (GS out)			CIRCLE-TO-LAND			
ABC: 729' (200')			with D1.7 IHA		w/o D1.7 IHA		Not authorized North of airport		
DA(H) D: 732' (203')			MDA(H) 820' (291')		MDA(H) 1020' (491')				
FULL		ALS out		ALS out		ALS out	Max Kts	MDA(H)	VIS
A	RVR 700m	RVR 1000m	RVR 1100m	RVR 1500m	RVR 1400m	RVR 1500m		100	1090' (561')
B			RVR 1100m		RVR 1500m		135	1200' (671')	1600m
C			RVR 1200m	RVR 1600m	RVR 1600m	RVR 2000m	180	1420' (891')	2400m
D			RVR 1400m	RVR 1800m	RVR 1800m		205	1420' (891')	3600m

UKHH/HRK
OSNOVA

JEPPESEN
19 MAR 21 (13-1) Eff 25 Mar

KHARKIV, UKRAINE
VOR Rwy 07

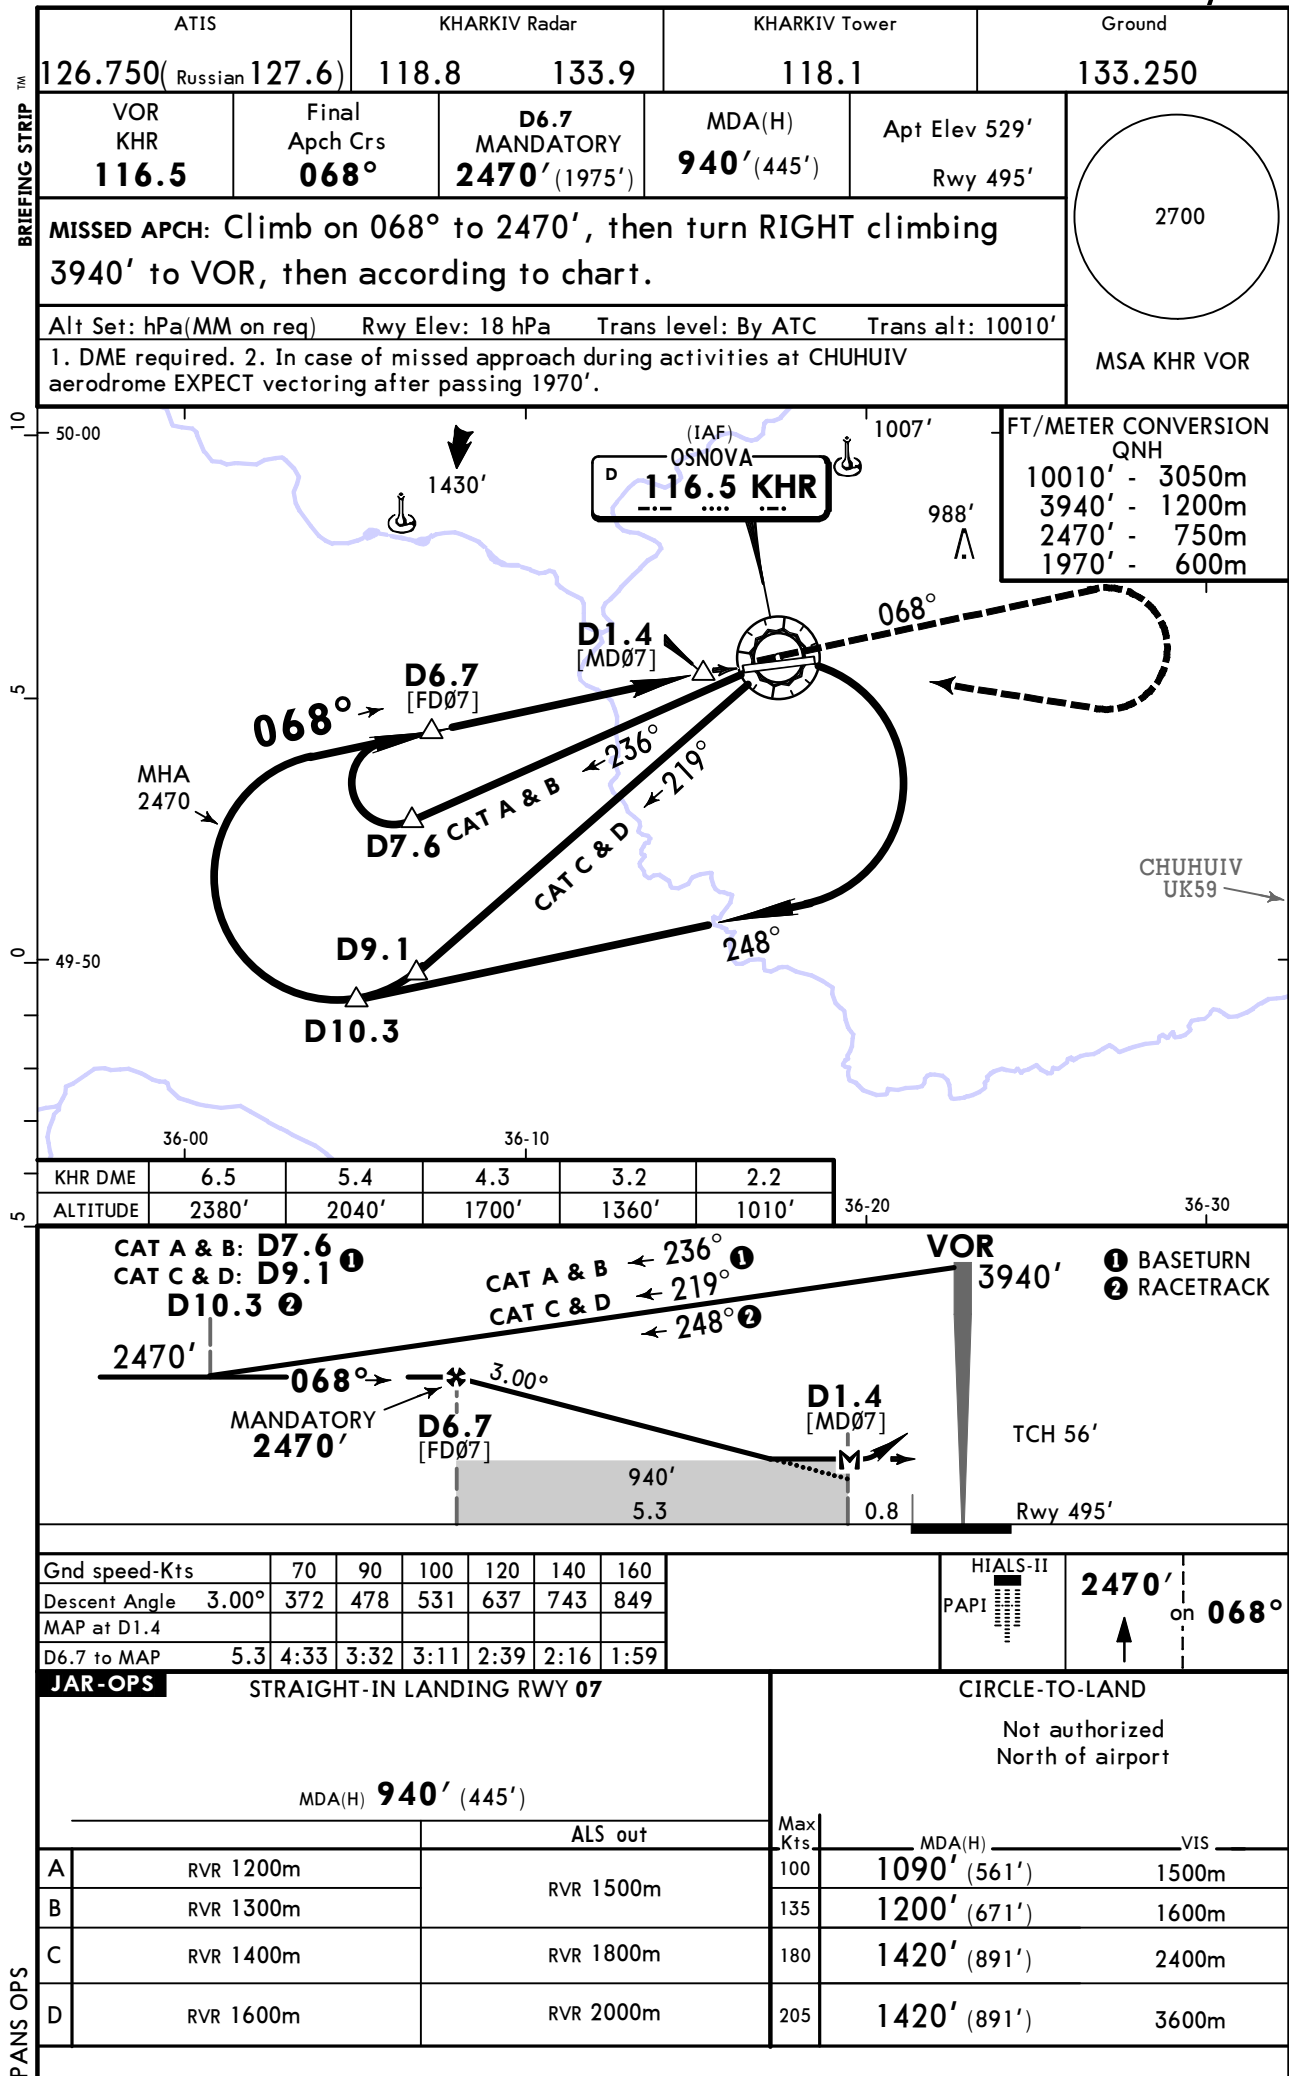



CHANGES: Procedure revised.

© JEPPESEN, 2011, 2021. ALL RIGHTS RESERVED.

KHARKIV, UKRAINE
VOR Rwy 25

ATIS		KHARKIV Radar		KHARKIV Tower		Ground	
126.750(Russian 127.6)		118.8		133.9		118.1	
VOR KHR 116.5		Final Apch Crs 258°		D6.6 MANDATORY 2470' (1941')		MDA(H) 1020' (491')	
				Apt Elev 529'		Rwy 529'	
MISSED APCH: Climb on 258° to 2470', then turn LEFT climbing 3940' to VOR, then according to chart.							
Alt Set: hPa(MM on req) Rwy Elev: 19 hPa Trans level: By ATC Trans alt: 10010'							
1. DME required. 2. During activities at CHUHUIV aerodrome all arrivals will be vectored for right-hand approaches with very limited stabilization distance. EXPECT possible delays before vectoring. In case of missed approach climb on track 258° to 2470' and EXPECT vectoring for right-hand approach.							
MSA KHR VOR							

FT/METER CONVERSION
QNH
10010' - 3050m
3940' - 1200m
2470' - 750m

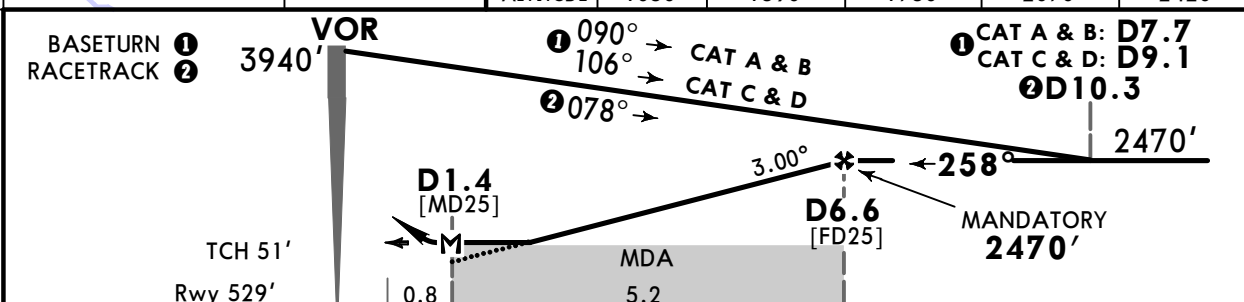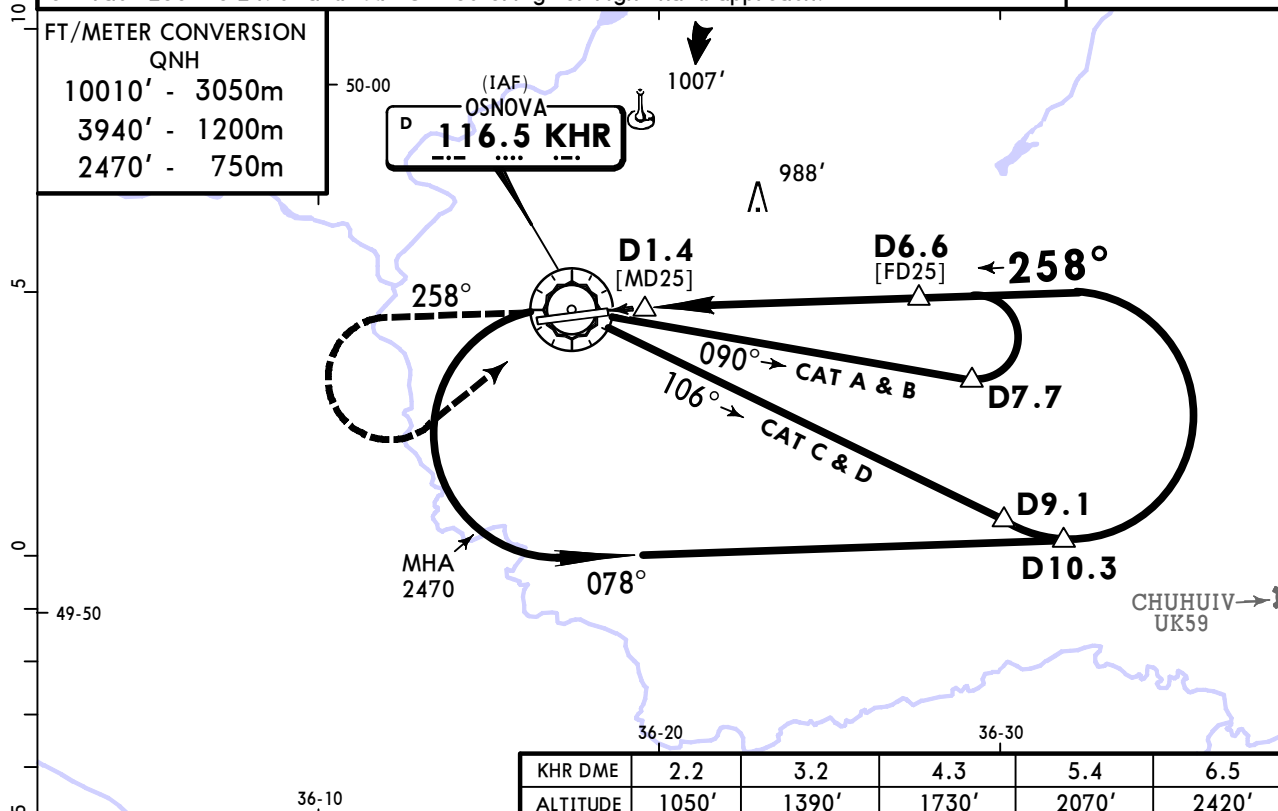

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D1.4						
D6.6 to MAP 5.2	4:27	3:28	3:07	2:36	2:14	1:57

JAR-OPS		STRAIGHT-IN LANDING RWY 25		CIRCLE-TO-LAND	
				Not authorized North of airport	
MDA(H) 1020' (491')		ALS out		Max Kts	MDA(H) VIS
A	RVR 1400m	RVR 1500m		100	1090' (561') 1500m
B	RVR 1500m			135	1200' (671') 1600m
C	RVR 1600m	RVR 2000m		180	1420' (891') 2400m
D	RVR 1800m			205	1420' (891') 3600m

Chart changes since cycle 07-2026

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE
KHARKIV, (OSNOVA - UKHH)				

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport UKHH