

List of pages in this Trip Kit

- Trip Kit Index
- Airport Information For UKOO
- Terminal Charts For UKOO
- Revision Letter For Cycle 08-2026
- Change Notices
- Notebook

General Information

Location: ODESA UKR
ICAO/IATA: UKOO / ODS
Lat/Long: N46° 25.6', E030° 40.4'
Elevation: 174 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 7.0° E

Fuel Types: 115-145 Octane, Jet A-1
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0205 Z
Sunset: 1754 Z

Runway Information

Runway: 16
Length x Width: 9186 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 174 ft
Lighting: Edge, ALS, Centerline

Runway: 34
Length x Width: 9186 ft x 148 ft
Surface Type: concrete
TDZ-Elev: 164 ft
Lighting: Edge, ALS, Centerline, TDZ

Communication Information

ATIS: 124.800 Non-English
ATIS: 133.100
Odesa Tower: 125.500
Odesa Ground: 127.700
Odesa Radar ACC: 120.900 RCO
Odesa Information: 134.500 Flight Info Service RCO

UK00/ODS
ODESA

JEPPESEN

9 JUL 21

10-1P

Eff 15 Jul

ODESA, UKRAINE
AIRPORT BRIEFING**1. GENERAL****1.1. ATIS**

ATIS 133.1
124.8 (Russian)

1.2. NOISE ABATEMENT PROCEDURES

SIDs and approaches for Odesa aerodrome are based on minimizing the impact for aviation noise on settlements located around the aerodrome.

Crews should strictly adhere to entry/exit patterns.

Minimum levels provided by an ATC when ACFT is under radar vectoring or direct routing include corrections for low temperature effect if the temperature is within the range from -25°C to -10°C inclusively.

1.3. LOW VISIBILITY PROCEDURES (LVP)**1.3.1. CRITERIA FOR LVP**

- When RVR is less than 550m (TDZ, MID or END); and/or
- height of cloud base or ceiling of significant or overcast clouds is less than 197'/60m;
- all preparatory activities are complete and the aerodrome is protected.

1.3.2. START-UP, TAXING AND HOLDING

Pilots shall indicate stand number when requesting for start-up clearance.

Pilots should taxi using the minimum engine power under Follow-me vehicle guidance to the intermediate holding position on TWY C3 (from aprons K, L, M, N) or to TWY C3 centerline lights (from apron S) and then continue to taxi on its own to RWY-holding position on TWY A1.

Only one ACFT is allowed to move on aerodrome.

For ACFT code D with OMGWS 30'/9m or more 180° turn at the end of RWY 16 is not allowed.

1.3.3. DETAILS OF HOLDING POSITIONS TO BE USED.

Pilots should report at holding position. It is prohibited to cross holding position line (ILS critical area).

1.3.4. VISUAL DEPARTURE

To execute a visual departure, ACFT take-off performance shall allow them to make an early turn after take-off. Visual departure procedure is allowed when cloud base is not less than 1970'/600m.

Pilot shall be responsible for maintaining obstacle clearance until the altitude, specified in ATC clearance.

The following phraseology is used for visual departure:

- Request for a visual departure: REQUEST VISUAL DEPARTURE [DIRECT] TO/UNTIL (navaid, waypoint, altitude).
- ATS initiated visual departure: ADVISE ABLE TO ACCEPT VISUAL DEPARTURE [DIRECT] TO/UNTIL (navaid, waypoint/altitude).
- Clearance for visual departure: VISUAL DEPARTURE RWY (number) APPROVED, TURN LEFT/RIGHT [DIRECT] TO (navaid, heading, waypoint) [MAINTAIN VISUAL REFERENCE UNTIL (altitude)].
- Read-back of visual departure clearance: VISUAL DEPARTURE TO/UNTIL (navaid, waypoint/altitude).

Visual departure not authorized in sector R-005 to R-135, distance from ODA VOR/DME to D4.3 ODA below altitude 3940'/1200m.

UK00/ODS
ODESA

9 JUL 21

JEPPESEN

10-1P1

Eff 15 Jul

ODESA, UKRAINE
AIRPORT BRIEFING

1. GENERAL

1.4. TAXI PROCEDURES

For taxi and wingspan restrictions refer to 10-9 charts.

Taxiing ACFT under Follow-me car instructions:

- via aprons K, L, M, N - DAY and NIGHT;
- Main TWY, TWY 5, TWY Link 1 - at NIGHT;
- in other case - on crew request.

After ACFT landing on RWY 34 vacation is allowed via TWY A1 through RWY end.

After ACFT code D landing on RWY 16 - 180° turn is allowed for RWY vacation at abeam TWY A5.

For the ACFT code E can be used TWY A1, TWY C3, apron S.

Taxiing to stands on apron M - via free adjacent stand. Taxiing to stands on apron N - via one of free stands (38, 39, 40 or 41).

Taxiing ACFT via intersection TWY 2 - Main TWY - TWY 6 at NIGHT and in low visibility conditions only under Follow-me car instructions.

TWY 1 can be used for taxiing ACFT from/to TWY C3 only.

TWY 2 can be used for taxiing helicopter to/from landing area H1 only.

ACFT maneuvering between taxi routes T2 and T5 on apron K according to additional taxiing tracks.

1.4.1. TAXIING ROUTES

Route T1 - for ACFT taxiing from/to Main TWY to/from stands 1 thru 3 on apron K.

Route T2 - for ACFT taxiing from/to Main TWY to/from stands on apron K and L (in case of stands 1 thru 5 are not occupied).

Route T3 - for ACFT taxiing from/to TWY 1 to/from stands on apron K and L (simultaneous usage with routes T2 or T5 is NOT ALLOWED).

Route T4 - for ACFT taxiing from/to TWY 6 to/from stands on apron N, L and K.

Route T5 - for ACFT taxiing from/to TWY 1 to/from stands on apron K and L.

Route T6 - for ACFT taxiing from/to TWY C3 to/from apron S.

1.5. PARKING INFORMATION

Specially equipped area for engine tests.

ACFT stands available for helicopters.

Stand S9 can be used when stands S7 and S8 are free.

1.6. OTHER INFORMATION

Maneuvering area of aerodrome located south of ARP is not visible from Tower.

Birds.

UK00/ODS
ODESA

JEPPESEN

9 JUL 21

10-1P2

Eff 15 Jul

ODESA, UKRAINE
AIRPORT BRIEFING

2. ARRIVAL

2.1. COMMUNICATION FAILURE PROCEDURES

In case of RCF light gun signals are used by control tower.

2.2. CONTINUOUS DESCENT OPERATIONS (CDO)

Authorized when ILS available.

Not available during adverse weather or system degradation affecting GNSS or ILS operations.

After receiving a "WHEN READY DESCEND TO (LEVEL)" or "DESCEND TO (LEVEL) AT PILOTS DISCRETION" clearance, the pilot is free to plan/optimize the vertical profile in order to apply CDO technique up to the FAP.

Depending on the traffic situation, the CDO can start from the top-of-descent (TOD) or from lower levels.

When cleared "WHEN READY DESCEND TO (LEVEL)" or "DESCEND TO (LEVEL) AT PILOTS DISCRETION", the pilot should maintain the cruising/last assigned level until the optimum descent point/TOD, as determined by the pilot (or by FMS), and then commence descent without any additional request unless otherwise instructed by ATC.

Due to airspace structure, ATC will initially instruct pilots to descend to the level(s) above the level of FAP. In doing so, ATC will issue further descent instruction prior to the CDO flight reaching 900m (3000') from the last assigned level so as to prevent leveling off.

Pilots shall maintain MAX IAS 220 KT at a distance of 20 track miles from touchdown.

Specified minimum levels at waypoints must be adhered unless cancelled by ATC.

If the CDO flight becomes impossible due to an emergency, weather conditions, or traffic situation, pilots are informed by ATC and an alternate instruction is issued: "CONTINUOUS DESCENT NOT POSSIBLE DUE TO (REASON FOR CDO SUSPENDING)".

2.3. CAT II/III OPERATIONS

RWY 34 is approved for CAT II/III operations.

UK00/ODS
ODESA

JEPPESSEN
9 JUL 21 **10-1R** Eff 15 Jul

ODESA, UKRAINE

ODESA Radar
120.9

Apt Elev
174

Alt Set: hPa (MM on request)

Trans level: By ATC Trans alt: 10010

1. Chart only to be used for cross-checking of altitudes assigned while under vectoring control.
2. MRVA are safe if the temperature at the surface is -9° or above. For lower temperatures, corrected minimum levels will be provided by ATC.

FT/METER CONVERSION


QNH


10010' - 3050m


6070' - 1850m

2140' - 650m

1970' - 600m

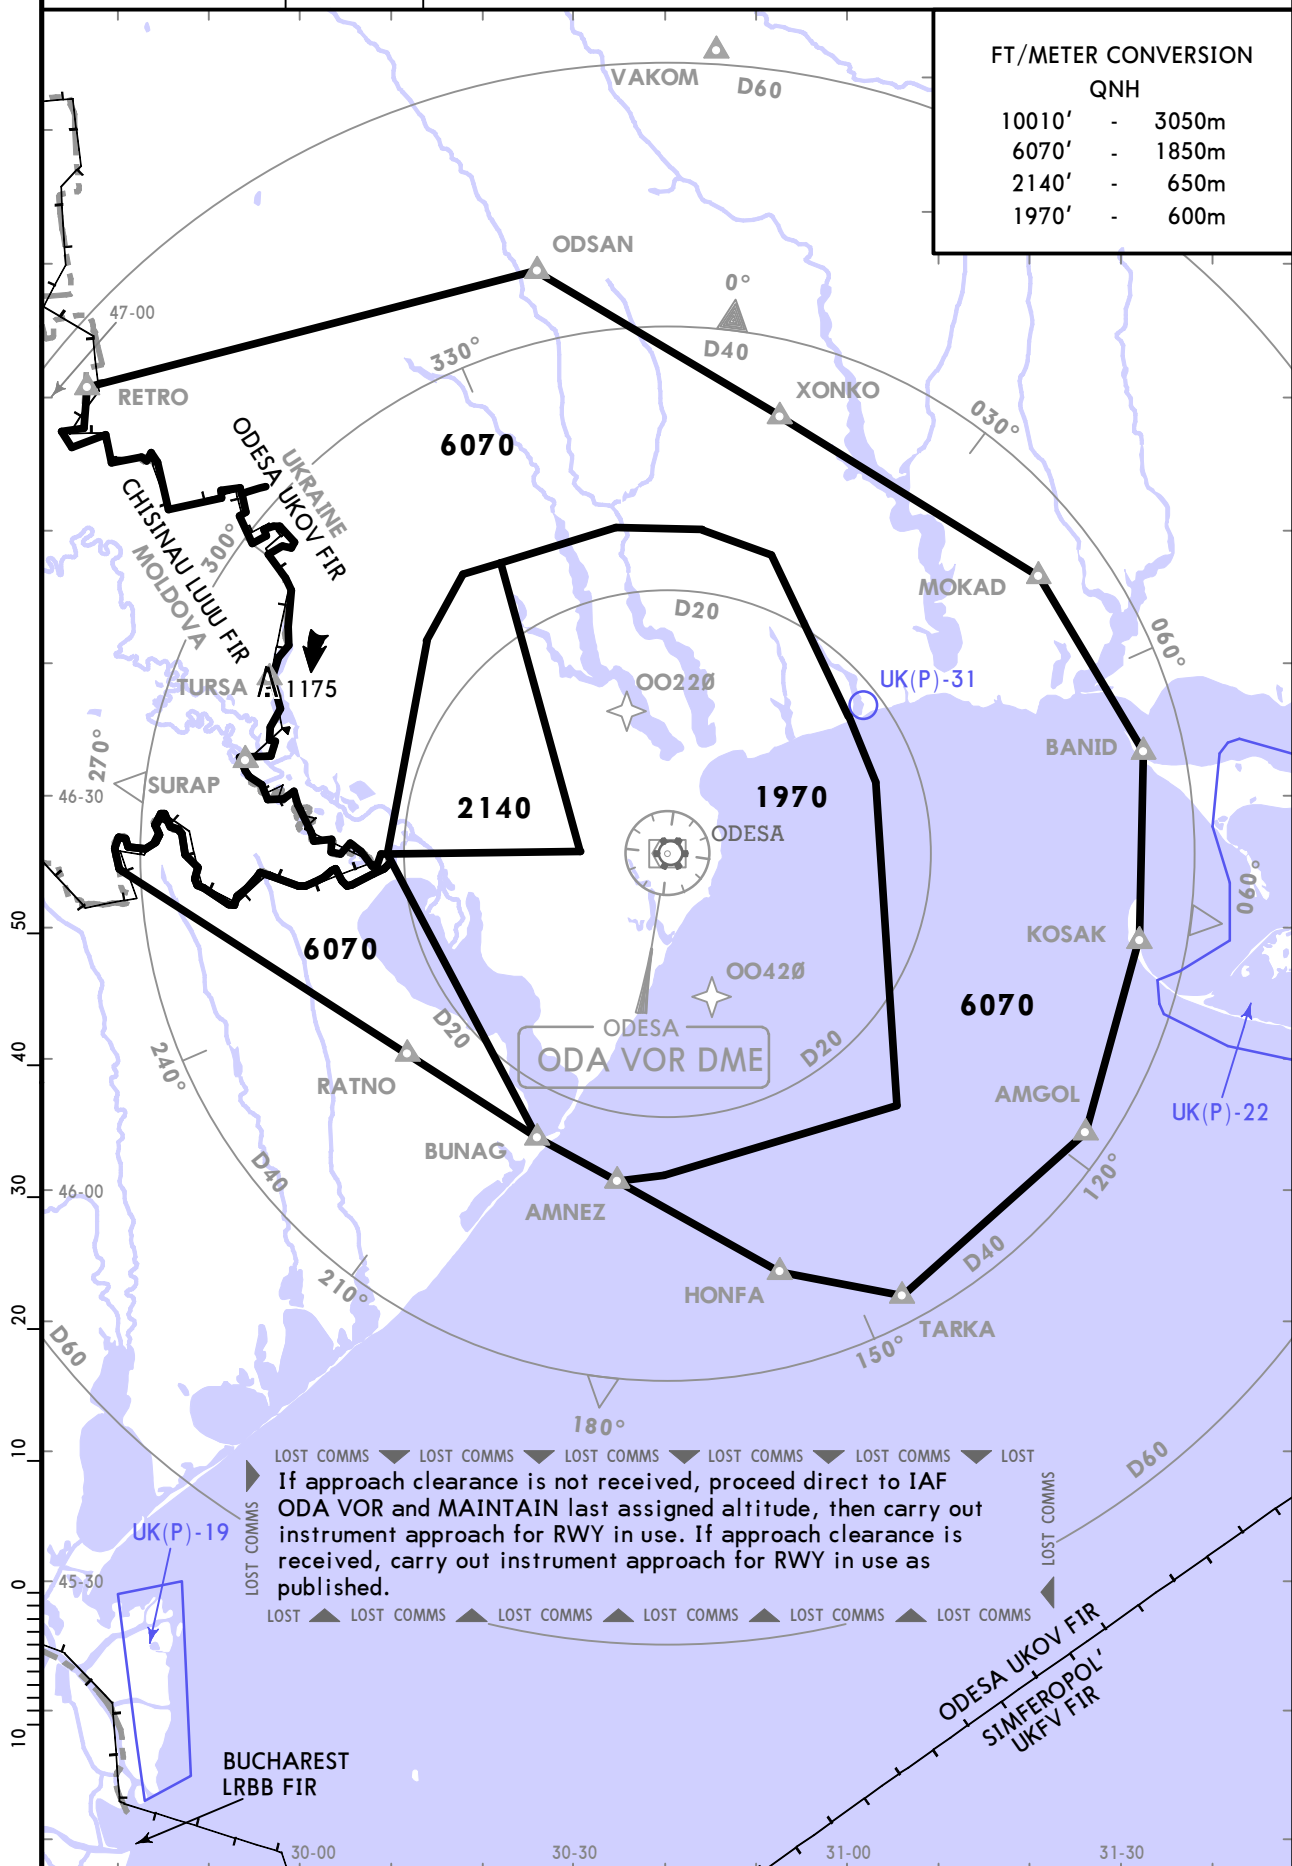

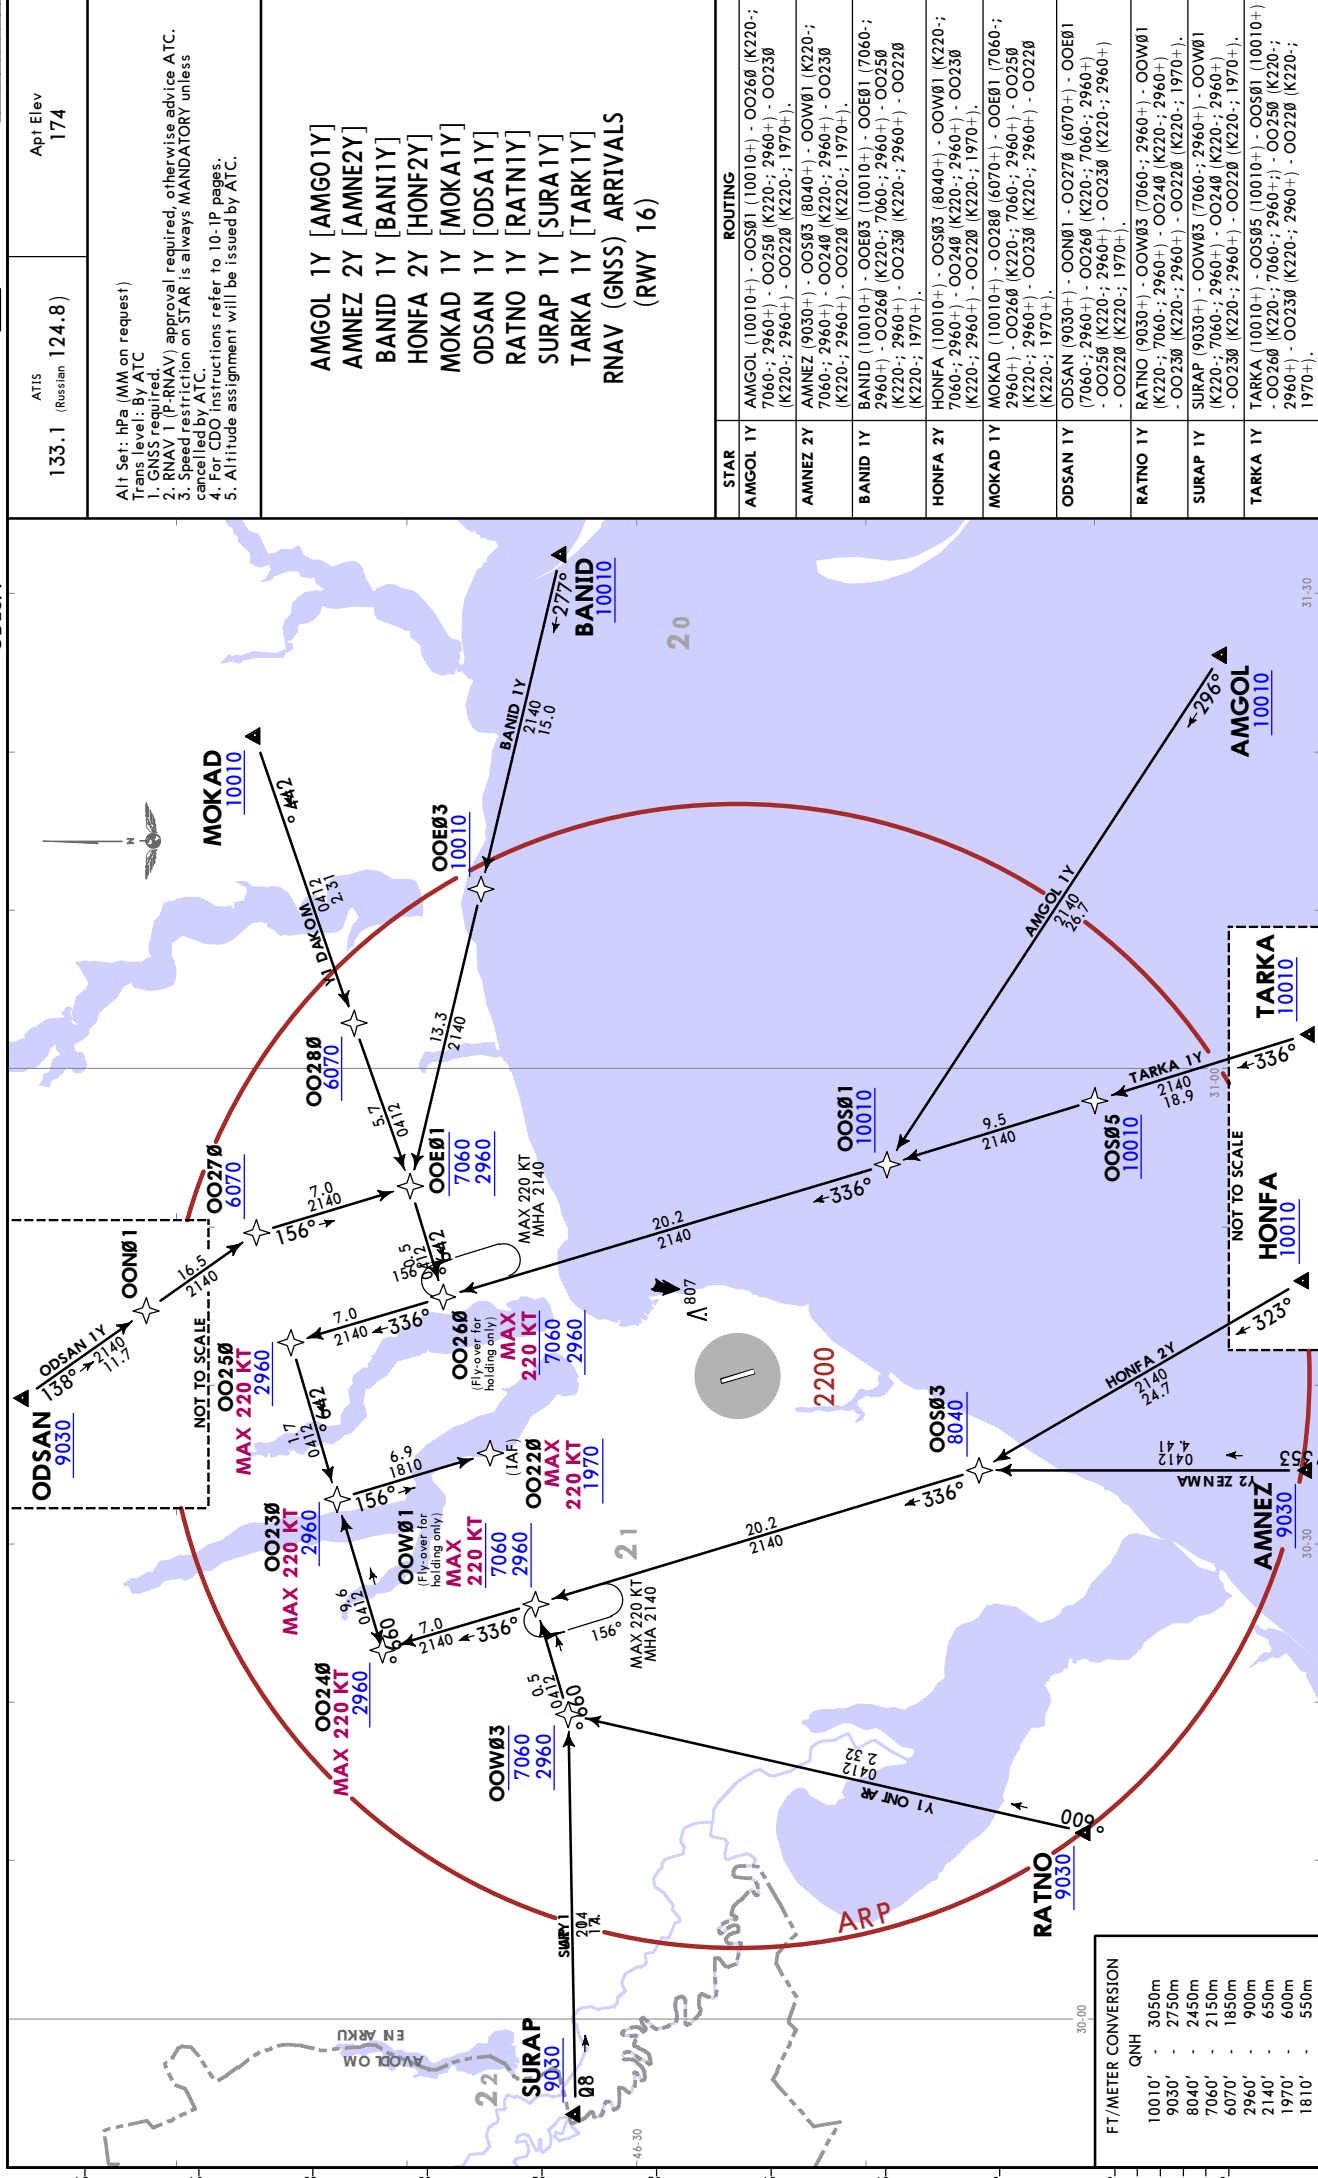




UK00/ODS
ODESA

JEPPESSEN
9 JUL 21 (10-2B) Eff 15 Jul

ODESA, UKRAINE
STAR

ATIS 133.1 (Russian 124.8)	Apt Elev 174	Alt Set: hPa (MM on request) Trans level: By ATC
----------------------------------	-----------------	---

AMGOL 1G [AMG01G], AMNEZ 2G [AMNE2G]
BANID 1G [BANI1G], HONFA 2G [HONF2G]
MOKAD 1G [MOKA1G], ODSAN 1G [ODSA1G]
RATNO 1G [RATN1G], SURAP 1G [SURA1G]
TARKA 1G [TARK1G]
ARRIVALS
(RWY 16)

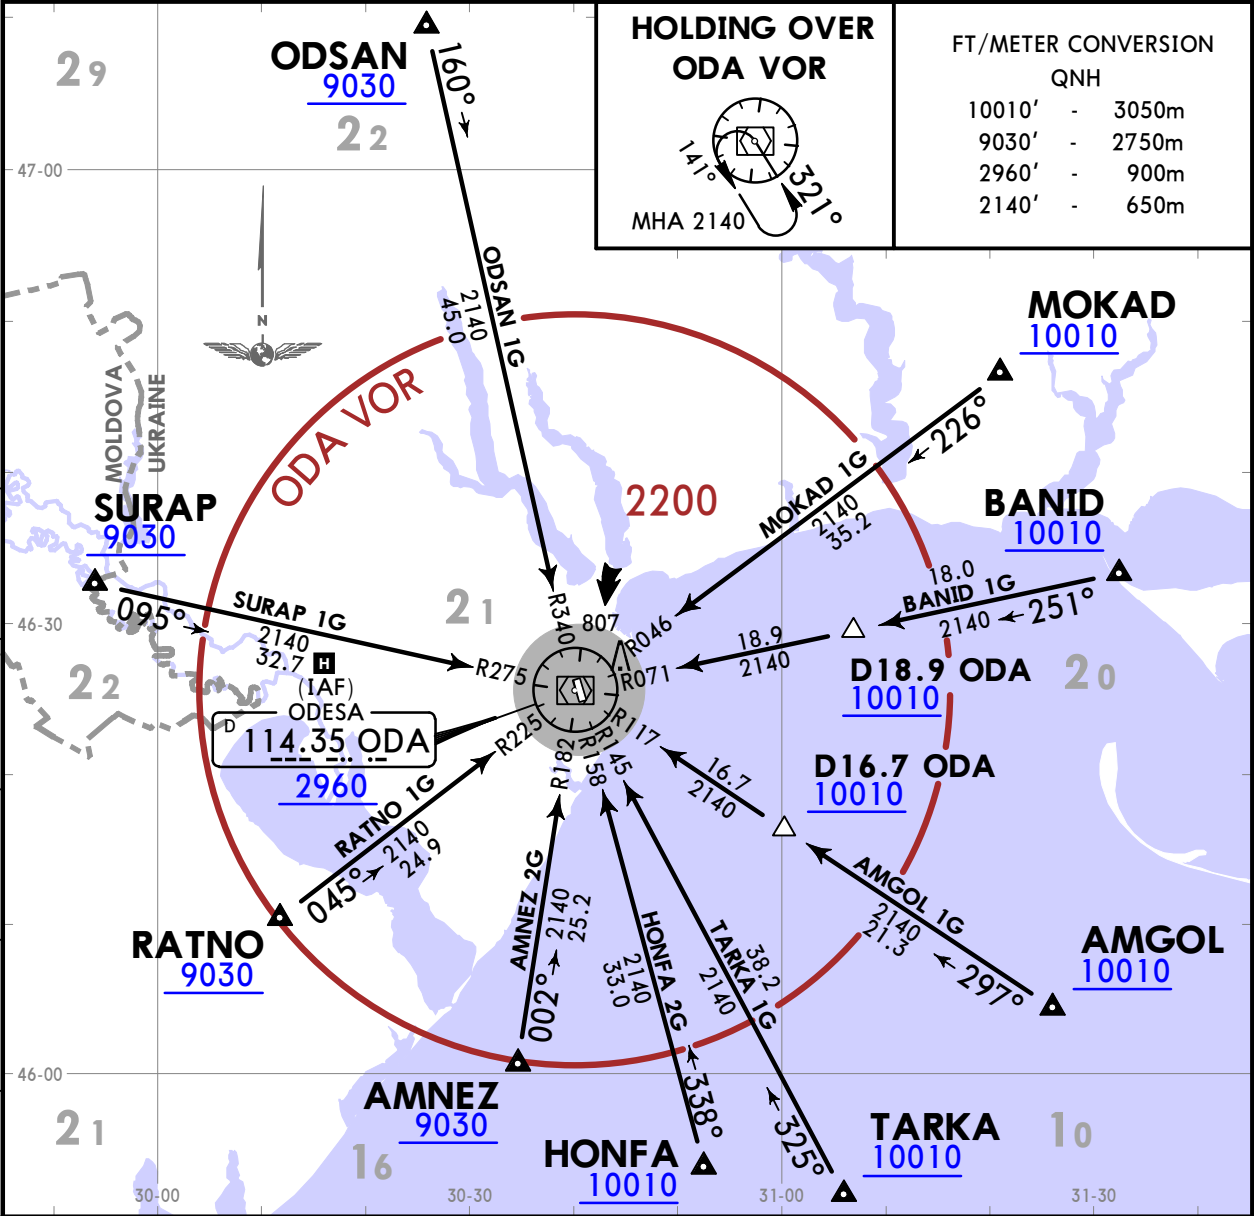

STAR	ROUTING
AMGOL 1G	Intercept ODA R117 inbound to ODA VOR.
AMNEZ 2G	Intercept ODA R182 inbound to ODA VOR.
BANID 1G	Intercept ODA R071 inbound to ODA VOR.
HONFA 2G	Intercept ODA R158 inbound to ODA VOR.
MOKAD 1G	Intercept ODA R046 inbound to ODA VOR.
ODSAN 1G	Intercept ODA R340 inbound to ODA VOR.
RATNO 1G	Intercept ODA R225 inbound to ODA VOR.
SURAP 1G	Intercept ODA R275 inbound to ODA VOR.
TARKA 1G	Intercept ODA R145 inbound to ODA VOR.


UK00/ODS
ODESA

JEPPESSEN
9 JUL 21 10-2C Eff 15 Jul

ODESA, UKRAINE
STAR

ATIS 133.1 (Russian 124.8)	Apt Elev 174	Alt Set: hPa (MM on request) Trans level: By ATC
----------------------------------	-----------------	---


AMGOL 1H [AMG01H], AMNEZ 2H [AMNE2H]
BANID 1H [BANI1H], HONFA 2H [HONF2H]
MOKAD 1H [MOKA1H], ODSAN 1H [ODSA1H]
RATNO 1H [RATN1H], SURAP 1H [SURA1H]
TARKA 1H [TARK1H]
ARRIVALS
(RWY 34)

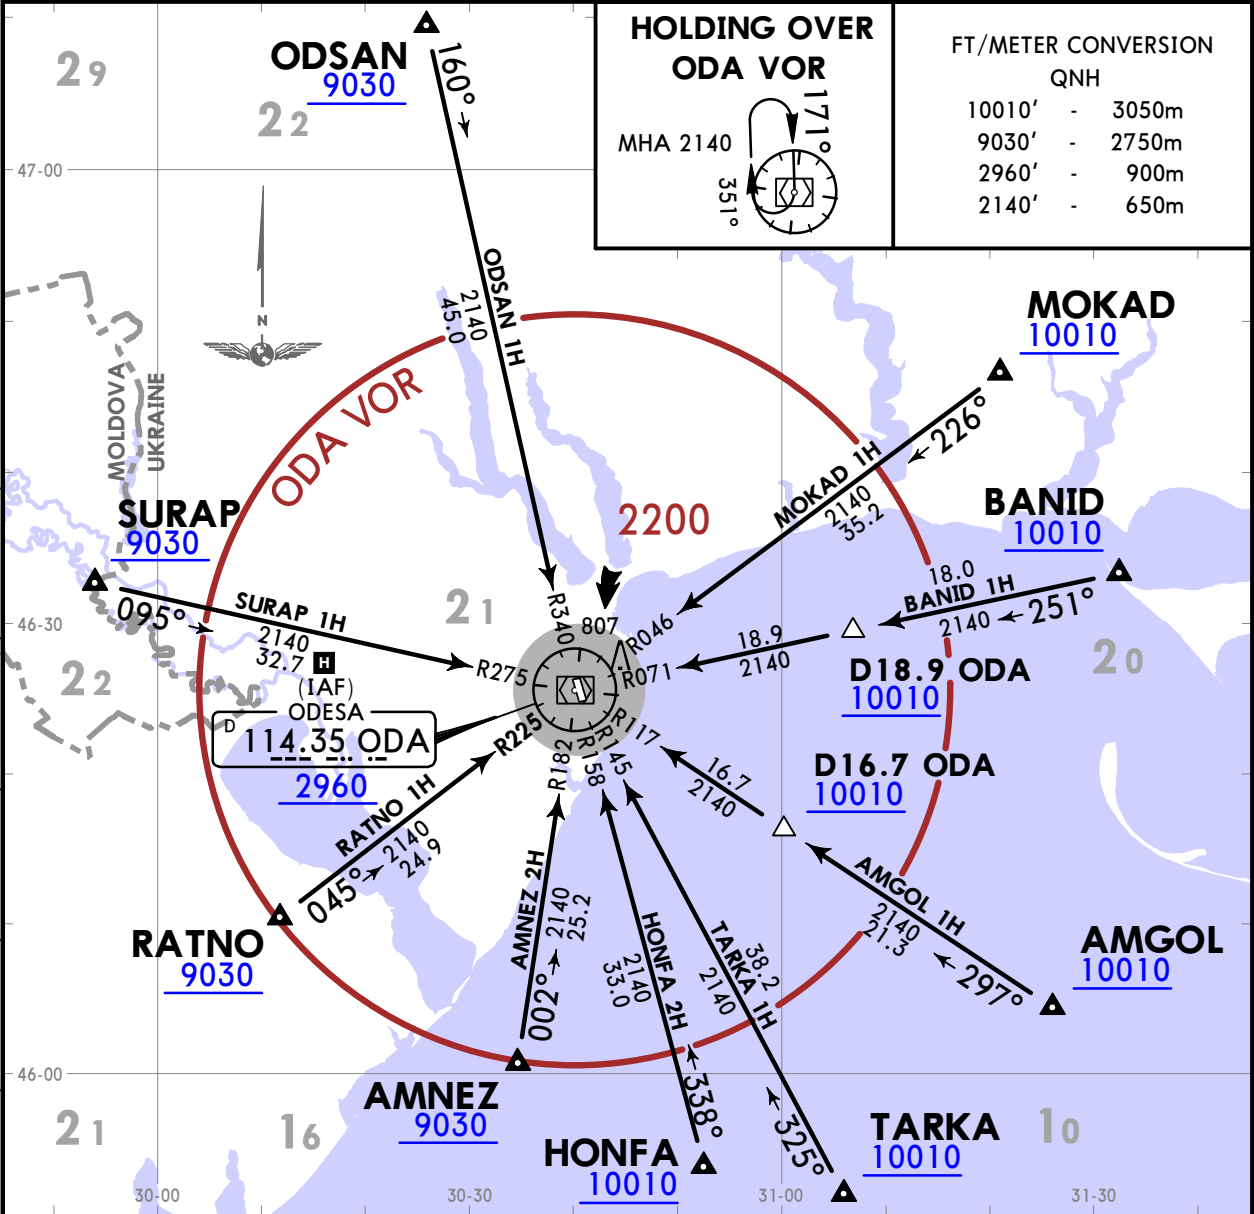

STAR	ROUTING
AMGOL 1H	Intercept ODA R117 inbound to ODA VOR.
AMNEZ 2H	Intercept ODA R182 inbound to ODA VOR.
BANID 1H	Intercept ODA R071 inbound to ODA VOR.
HONFA 2H	Intercept ODA R158 inbound to ODA VOR.
MOKAD 1H	Intercept ODA R046 inbound to ODA VOR.
ODSAN 1H	Intercept ODA R340 inbound to ODA VOR.
RATNO 1H	Intercept ODA R225 inbound to ODA VOR.
SURAP 1H	Intercept ODA R275 inbound to ODA VOR.
TARKA 1H	Intercept ODA R145 inbound to ODA VOR.

Trans alt: 10010
1. GNSS required.
2. RNAV 1 (P-RNAV) approval required, otherwise advise ATC.
3. If unable to comply departure procedures advise ATC.

Apt Elev
174

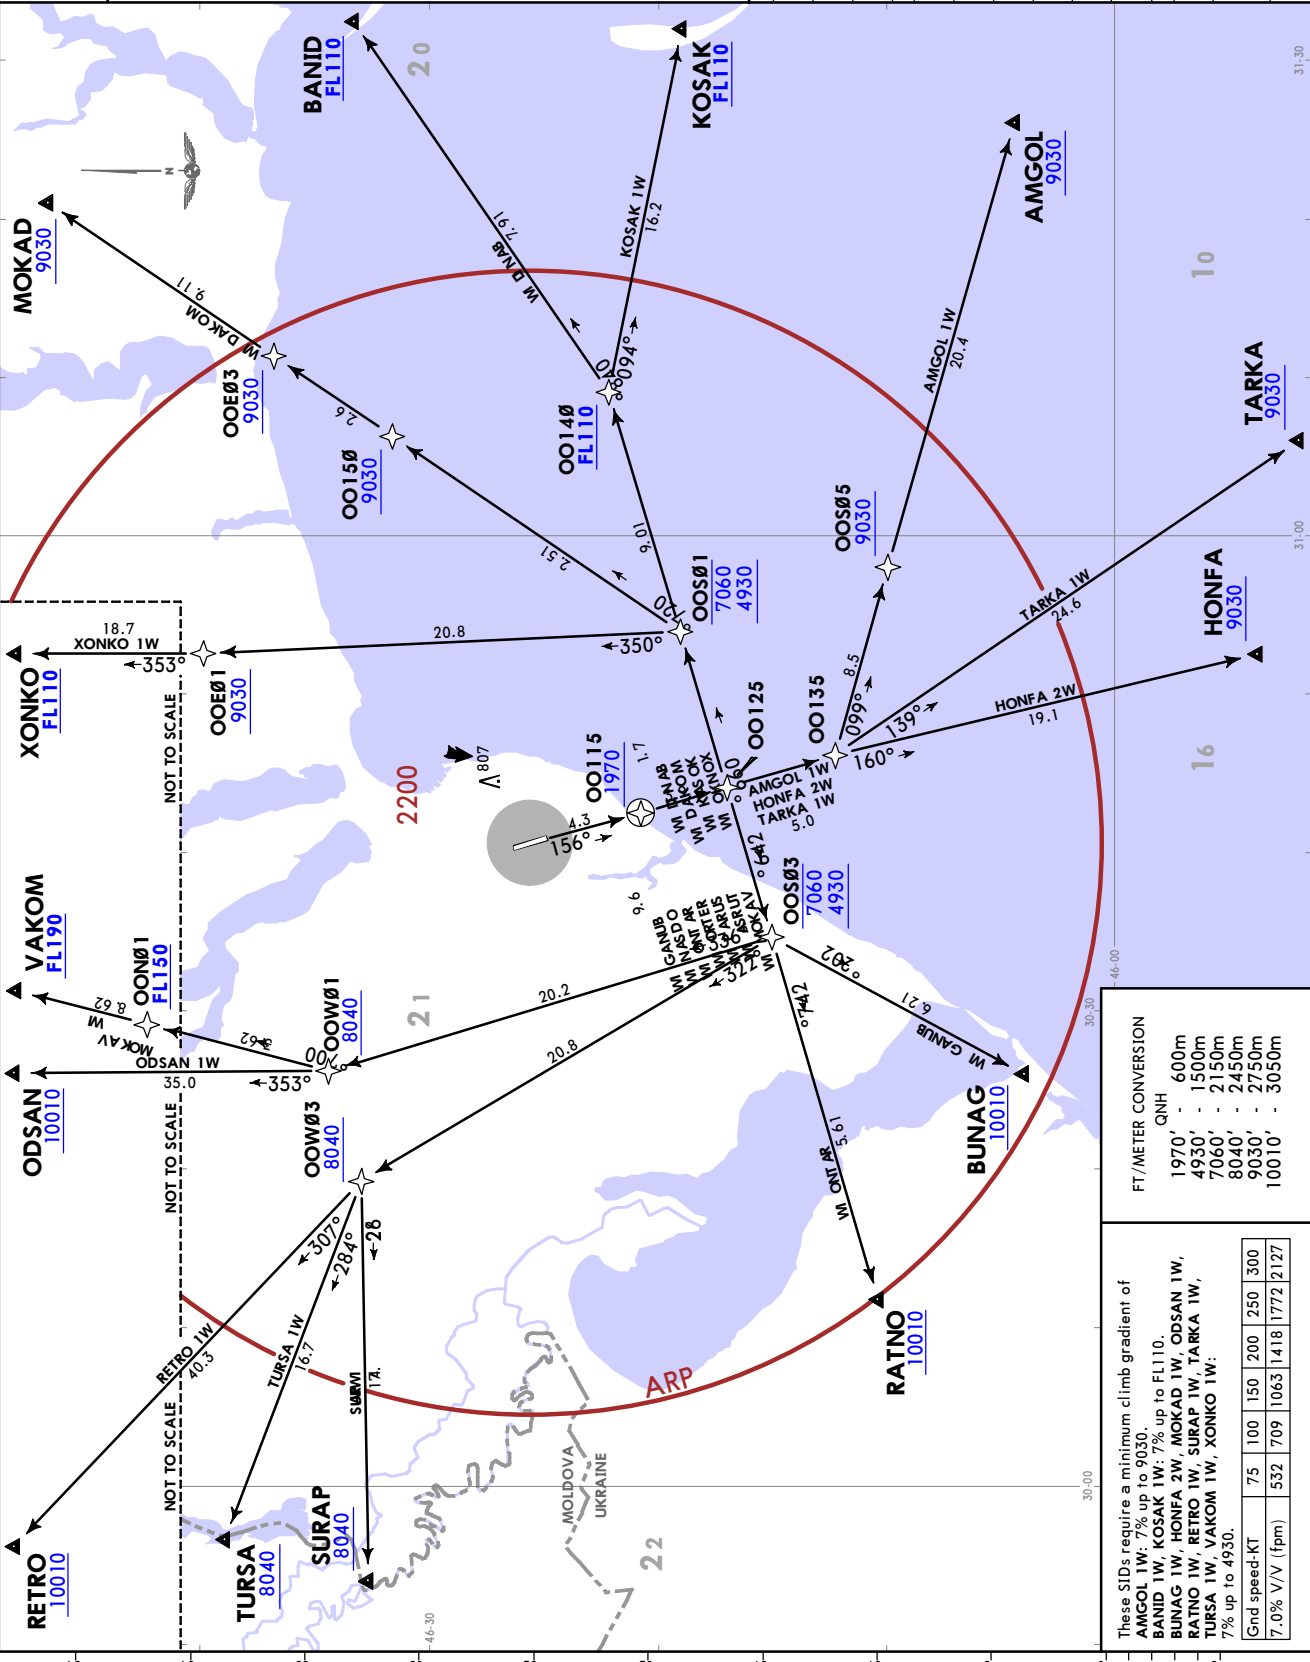

AMGOL 1W [AMGO1W]
BANID 1W [BANI1W]
BUNAG 1W [BUNA1W]
HONFA 2W [HONF2W]
KOSAK 1W [KOSA1W]
MOKAD 1W [MOKA1W]
ODSAN 1W [ODSA1W]
RATNO 1W [RATN1W]
RETRO 1W [RETR1W]
SURAP 1W [SURA1W]
TARKA 1W [TARK1W]
TURSA 1W [TURS1W]
VAKOM 1W [VAKO1W]
XONKO 1W [XONK1W]
RNAV (GNSS) DEPARTURES
(RWY 16)

SID	ROUTING
AMGOL 1W	OO115 (1970+) - OO125 - OO135 - OOS05 (9030+) - AMGOL (9030+)
BANID 1W	OO115 (1970+) - OO125 - OOS01 (4930+) - 7060 - OO140 (FL110+) - BANID (FL110+)
BUNAG 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - BUNAG (10010+)
HONFA 2W	OO115 (1970+) - OO125 - OO135 - HONFA (9030+)
KOSAK 1W	OO115 (1970+) - OO125 - OOS01 (4930+) - 7060 - OO140 (FL110+) - KOSAK (FL110+)
MOKAD 1W	OO115 (1970+) - OO125 - OOS01 (4930+) - 7060 - OO150 (9030+) - OOS03 (9030+) - MOKAD (9030+)
ODSAN 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - OOW01 (8040+) - ODSAN (10010+)
RATNO 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - RATNO (10010+)
RETRO 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - OOW03 (8040+) - RETRO (10010+)
SURAP 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - OOW03 (8040+) - SURAP (8040+)
TARKA 1W	OO115 (1970+) - OO125 - OO135 - TARKA (9030+)
TURSA 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - OOW03 (8040+) - TURSA (8040+)
VAKOM 1W	OO115 (1970+) - OO125 - OOS03 (4930+) - 7060 - OOW01 (8040+) - OON01 (FL150+) - VAKOM (FL190+)
XONKO 1W	OO115 (1970+) - OO125 - OOS01 (4930+) - 7060 - OOE01 (9030+) - XONKO (FL110+)

FT/METER CONVERSION					
QNH					
1970'	-	600m			
4930'	-	1500m			
7060'	-	2150m			
8040'	-	2450m			
9030'	-	2750m			
10010'	-	3050m			

These SIDs require a minimum climb gradient of					
AMGOL 1W:	7%	up to 9030.			
BANID 1W, KOSAK 1W:	7%	up to FL110.			
BUNAG 1W, HONFA 2W, MOKAD 1W, ODSAN 1W, RATNO 1W, RETRO 1W, SURAP 1W, TARKA 1W, TURSA 1W, VAKOM 1W, XONKO 1W:	7%	up to 4930.			
End speed-KT	75	100	150	200	250
7.0% V/V (fpm)	532	709	1063	1418	1772

UKOO/ODS
ODESA

9 JUL 21 10-3A Eff 15 Jul

Transalt: 10010


1. GNSS required.
2. RNAV 1 (P-RNAV) approval required, otherwise advise ATC.
3. If unable to comply departure procedures advise ATC.

Apt Elev

AMGOL 1X [AMG01X]
BANID 1X [BAN11X]
BUNAG 1X [BUN11X]
HONFA 2X [HONF2X]
KOSAK 1X [KOSA1X]
MOKAD 1X [MOKA1X]
ODSAN 1X [ODSA1X]
RATNO 1X [RATN1X]
RETRO 1X [RETR1X]
SURAP 1X [SURA1X]
TARKA 1X [TARK1X]
TURSA 1X [TURS1X]
VAKOM 1X [VAKO1X]
XONKO 1X [XONK1X]
RNAV (GNSS) DEPARTURR
(RWY 34)

RNAV (GNSS) DEPARTURES
(RWY 34)

SID	ROUTING
AMGOL 1X	OO315 (1970+) - OO325 - OONB4 (4930+; 7060-) - OOE84 (9030+) - AMGOL (9030+)
BANID 1X	OO315 (1970+) - OO325 - OONB4 (4930+; 7060-) - OOE86 (FL110+) - BANID (FL110+)
BUNAG 1X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - OOW04 (10010+) - BUNAG (10010+)
HONFA 2X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - OOW02 (9030+) - HONFA (9030+)
KOSAK 1X	OO315 (1970+) - OO325 - OONB4 (4930+; 7060-) - OOE86 (FL110+) - KOSAK (FL110+)
MOKAD 1X	OO315 (1970+) - OO325 - OONB4 (4930+; 7060-) - OO330 (7060+) - MOKAD (9030+)
ODSAN 1X	OO315 (1970+) - OO325 - ODSAN (10010+)
RATNO 1X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - RATNO (10010+)
RETRO 1X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - RETRO (10010+)
SURAP 1X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - SURAP (8040+)
TARKA 1X	OO315 (1970+) - OO325 - OONB4 (4930+; 7060-) - OOE82 (9030+) - TARKA (9030+)
TURSA 1X	OO315 (1970+) - OO325 - OON02 (4930+; 7060-) - TURSA (8040+)
VAKOM 1X	OO315 (1970+) - OO325 - VAKOM (FL190+)
XONKO 1X	OO315 (1970+) - OO325 - XONKO (FL110+)

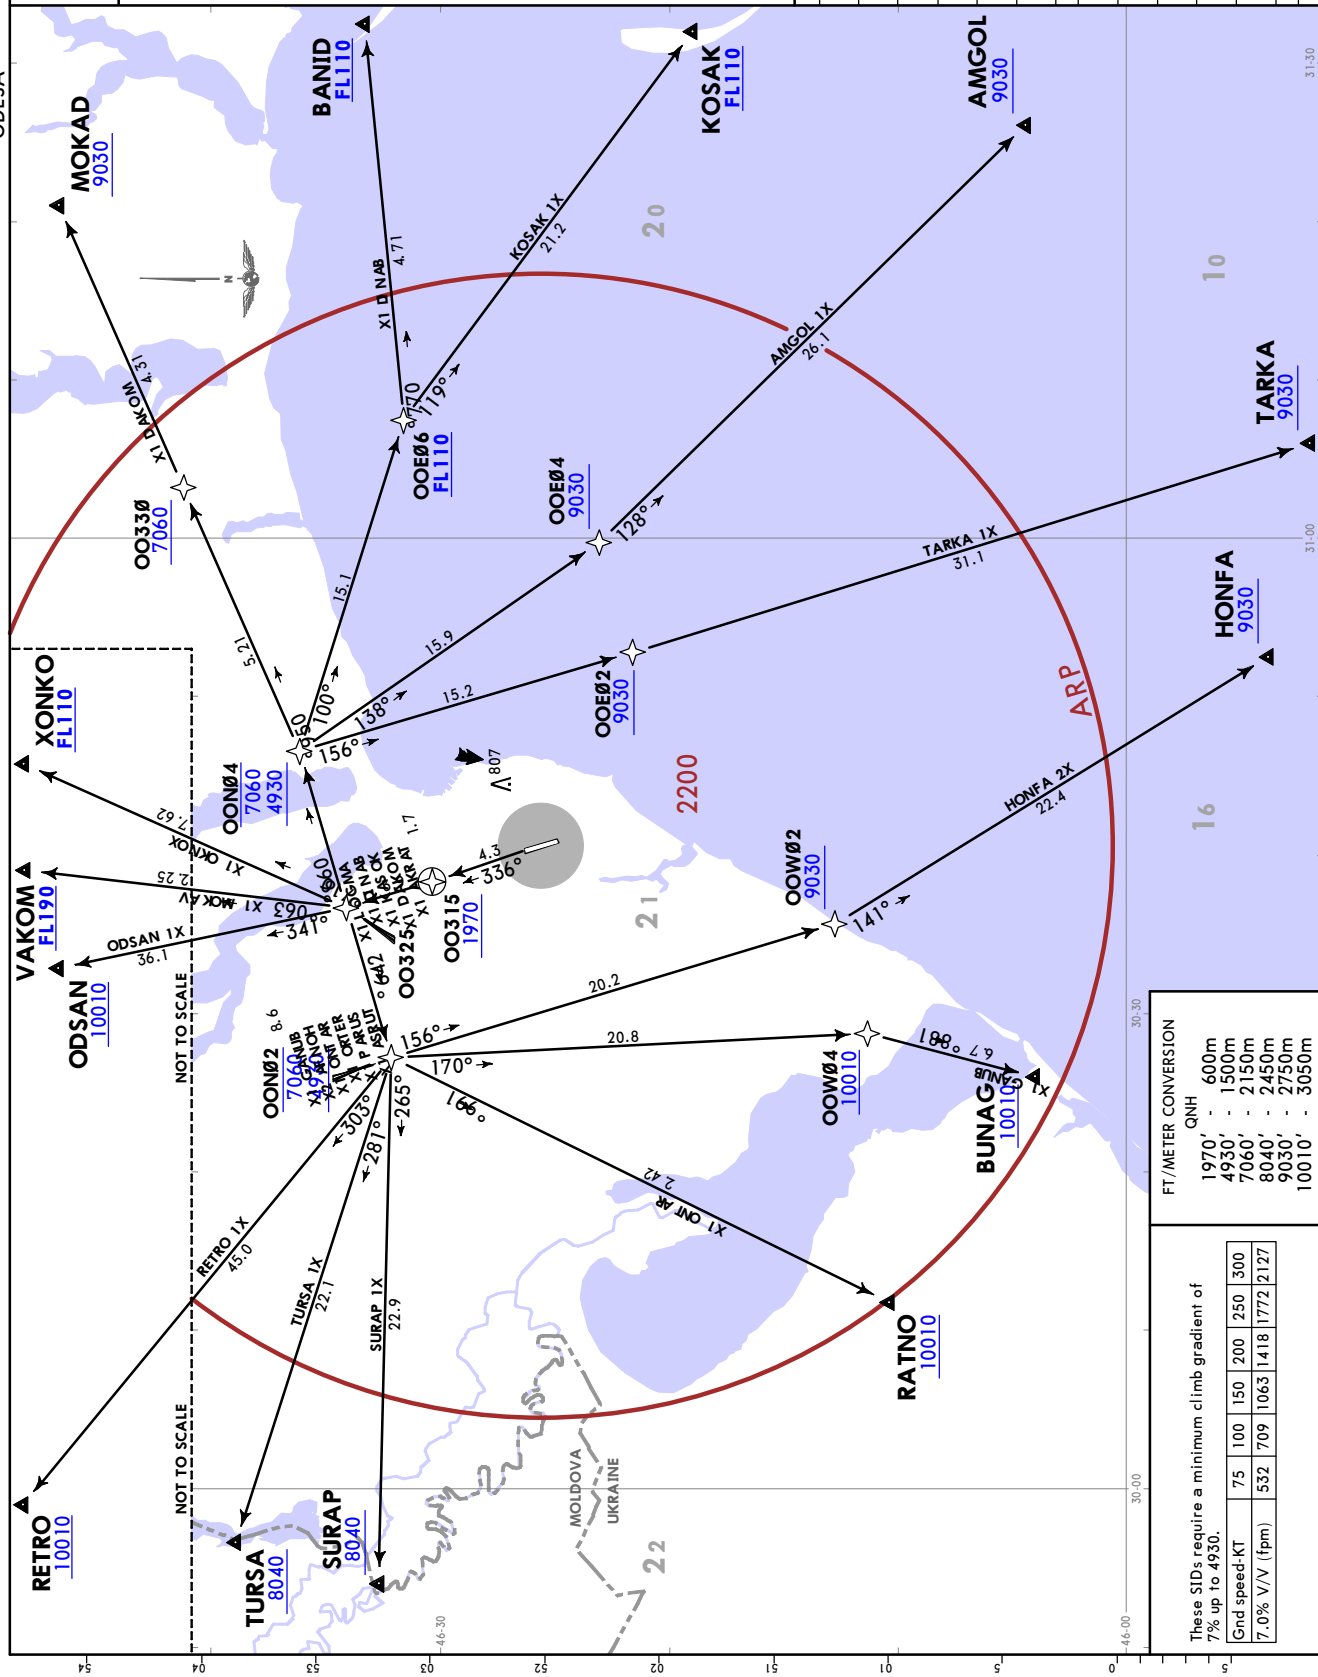

These SIDs require a minimum climb gradient of

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

FEET/METER CONVERSION


QNH

1970'	-	600m
4930'	-	1500m
7060'	-	2150m
8040'	-	2450m
9030'	-	2750m
10010'	-	3050m

CHANGES: Chart reindexed (procedures transferred); RNAV SIDs renumbered & revised, PERED 2X withdrawn, HONFA 2X established.

UK00/ODS
ODESA

JEPPESEN ODESA, UKRAINE
9 JUL 21 10-3B Eff 15 Jul

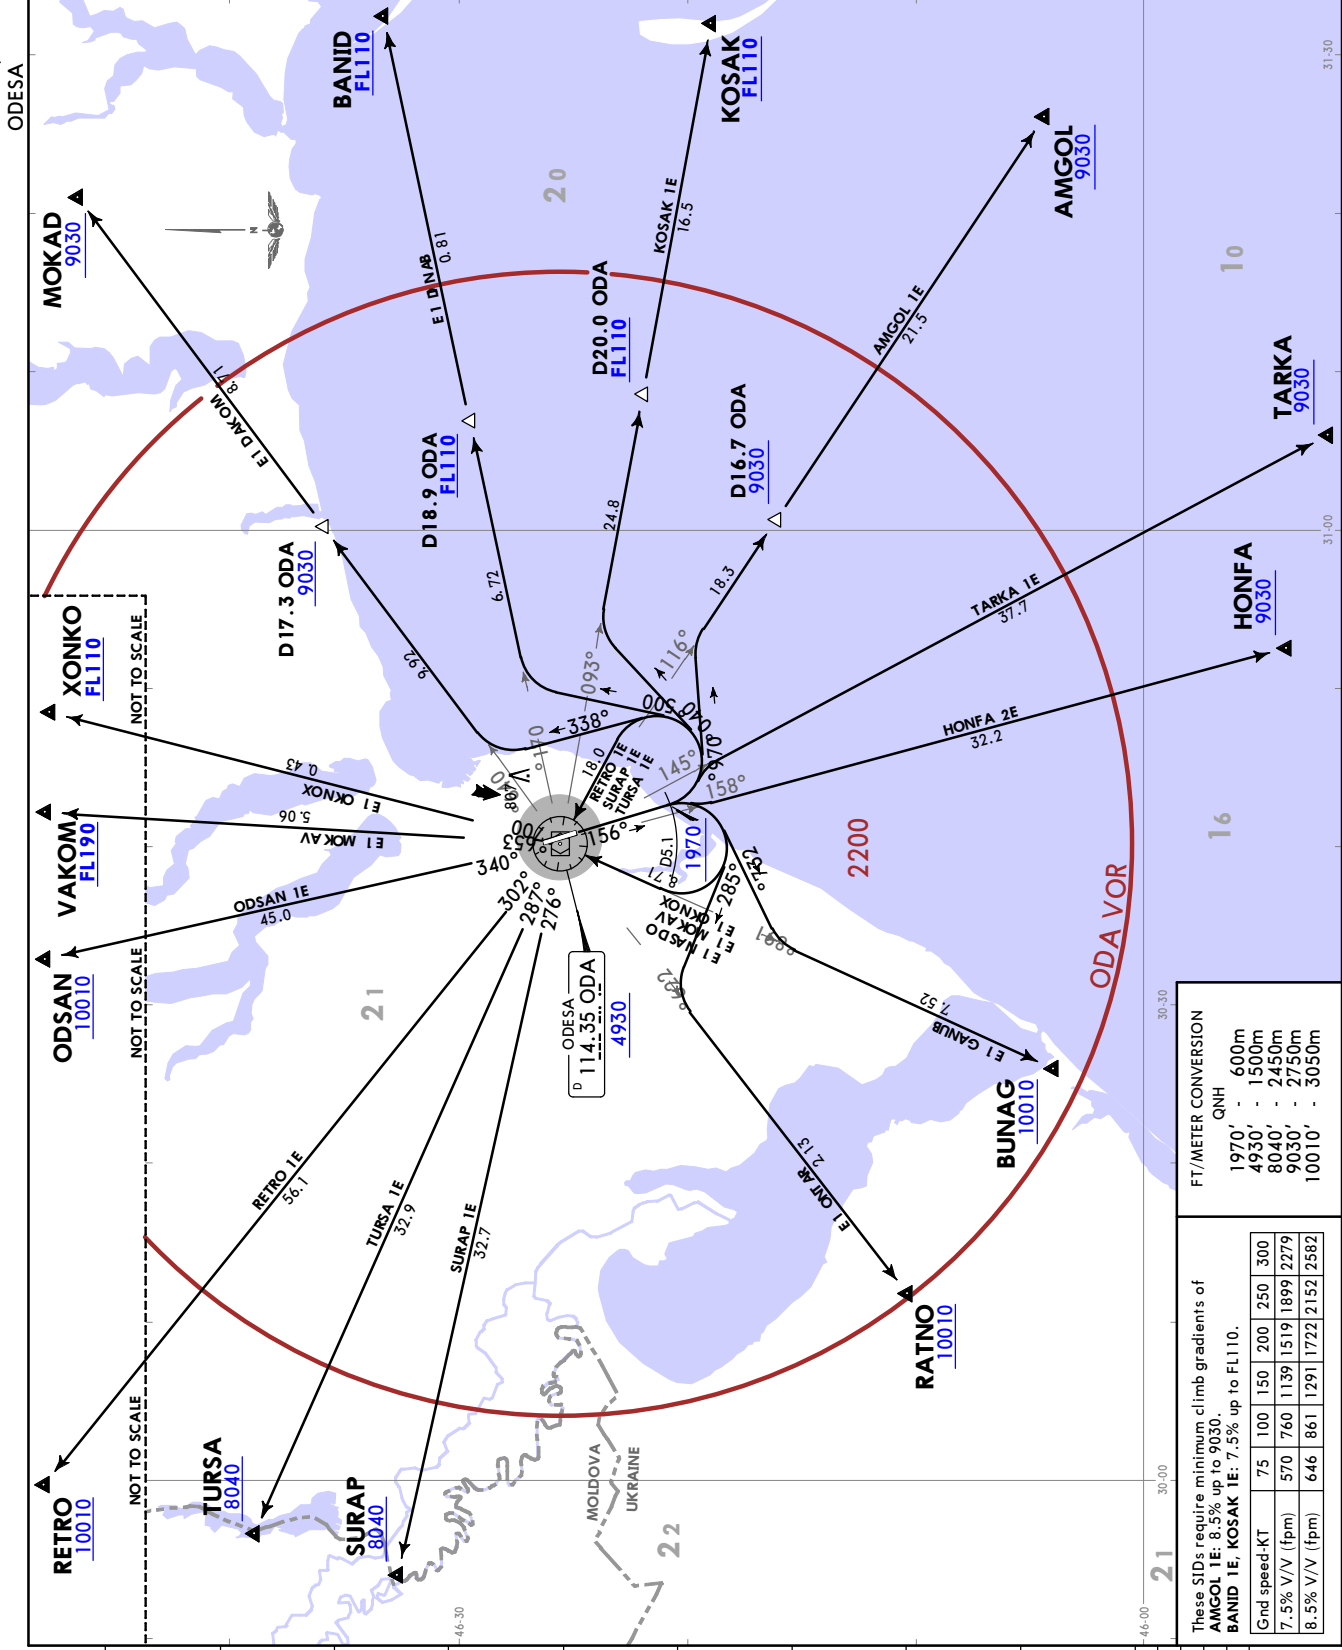

Apt Elev
174

Trans alt: 10010
If unable to comply departure procedures advise ATC.

AMGOL 1E [AMG01E]
BANID 1E [BAN1E]
BUNAG 1E [BUN1E]
HONFA 2E [HONF2E]
KOSAK 1E [KOSA1E]
MOKAD 1E [MOKA1E]
ODSAN 1E [ODSA1E]
RATNO 1E [RATN1E]
RETRO 1E [RETR1E]
SURAP 1E [SURAT1E]
TARKA 1E [TARK1E]
TURSA 1E [TURS1E]
VAKOM 1E [VAKO1E]
XONKO 1E [XONK1E]

DEPARTURES
(RWY 16)

SID	ROUTING
AMGOL 1E	On 156° track to D5.1 ODA, turn LEFT, 079° track, turn RIGHT, intercept ODA R116 to AMGOL.
BANID 1E	On 156° track to D5.1 ODA, turn LEFT, 005° track, turn RIGHT, intercept ODA R071 to BANID.
BUNAG 1E	On 156° track to D5.1 ODA, turn RIGHT, 237° track, turn LEFT, intercept ODA R198 to BUNAG.
HONFA 2E	On 156° track to D5.1 ODA, turn RIGHT, intercept ODA R158 to HONFA.
KOSAK 1E	On 156° track to D5.1 ODA, turn LEFT, 040° track, turn RIGHT, intercept ODA R093 to KOSAK.
MOKAD 1E	On 156° track to D5.1 ODA, turn LEFT, 338° track, turn RIGHT, intercept ODA R046 to MOKAD.
ODSAN 1E	On 156° track to D5.1 ODA, turn RIGHT to ODA VOR, ODA R340 to ODSAN.
RATNO 1E	On 156° track to D5.1 ODA, turn RIGHT, 285° track, turn LEFT, intercept ODA R226 to RATNO.
RETRO 1E	On 156° track to D5.1 ODA, turn LEFT to ODA VOR, ODA R302 to RETRO.
SURAP 1E	On 156° track to D5.1 ODA, turn LEFT to ODA VOR, ODA R276 to SURAP.
TARKA 1E	On 156° track to D5.1 ODA, turn LEFT, intercept ODA R145 to TARKA.
TURSA 1E	On 156° track to D5.1 ODA, turn LEFT to ODA VOR, ODA R287 to TURSA.
VAKOM 1E	On 156° track to D5.1 ODA, turn RIGHT to ODA VOR, ODA R356 to VAKOM.
XONKO 1E	On 156° track to D5.1 ODA, turn RIGHT to ODA VOR, ODA R007 to XONKO.

These SIDs require minimum climb gradients of		FT/METER CONVERSION				
AMGOL 1E: 8.5% up to 9030.		QNH				
BANID 1E, KOSAK 1E: 7.5% up to FL110.		1970'	600m			
		4930'	1500m			
		8040'	2450m			
		9030'	2750m			
		10010'	3050m			
Grnd speed-KT	75	100	150	200	250	300
7.5% V/V (fpm)	570	760	1139	1519	1899	2279
8.5% V/V (fpm)	646	861	1291	1722	2152	2582

UK00/ODS


Apt Elev **174'**
N46 25.6 E030 40.4

JEPPesen

12 NOV 21 **(10-9)**

ODESA, UKRAINE

ODESA

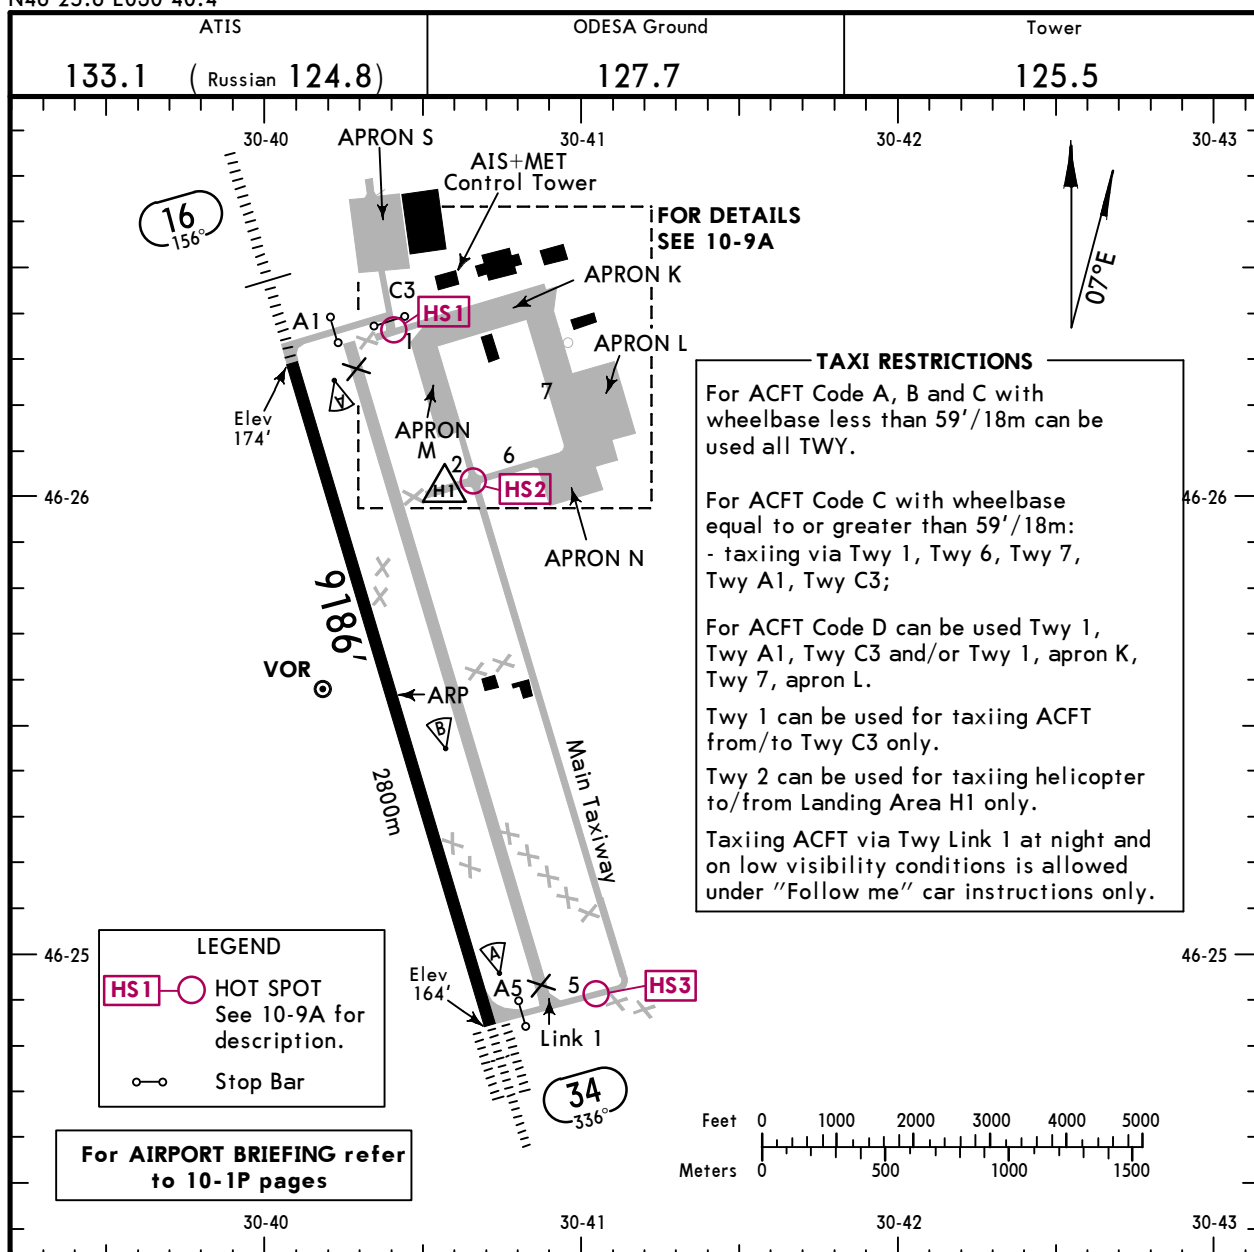

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS			
		LANDING BEYOND		TAKE-OFF	WIDTH
		Threshold	Glide Slope		
16	HIRL (60m) CL (15m) HIALS PAPI-L ① RVR		8214' 2504m		148'
34	HIRL (60m) CL (15m) HIALS TDZ PAPI-L ① RVR		8275' 2522m		45m

① (angle 3.00°)

Std	TAKE-OFF							
	HIRL & CL (spacing 15m or less) & relevant RVR	RL & CL & relevant RVR	RL & CL	RL & RCLM	RL or CL	RL or RCLM	Adequate Vis Ref	
				DAY	NIGHT	DAY	DAY	NIGHT
TDZ R125m Mid R125m Rollout R125m	TDZ R150m Mid R150m Rollout R150m	R200m	R300m		R400m	R/V500m	NA	


CHANGES: CL added. Take-off minimums.

© JEPPESEN, 2000, 2021. ALL RIGHTS RESERVED.

UK00/ODS

12 NOV 21 **10-9A**
ODESA, UKRAINE

ODESA

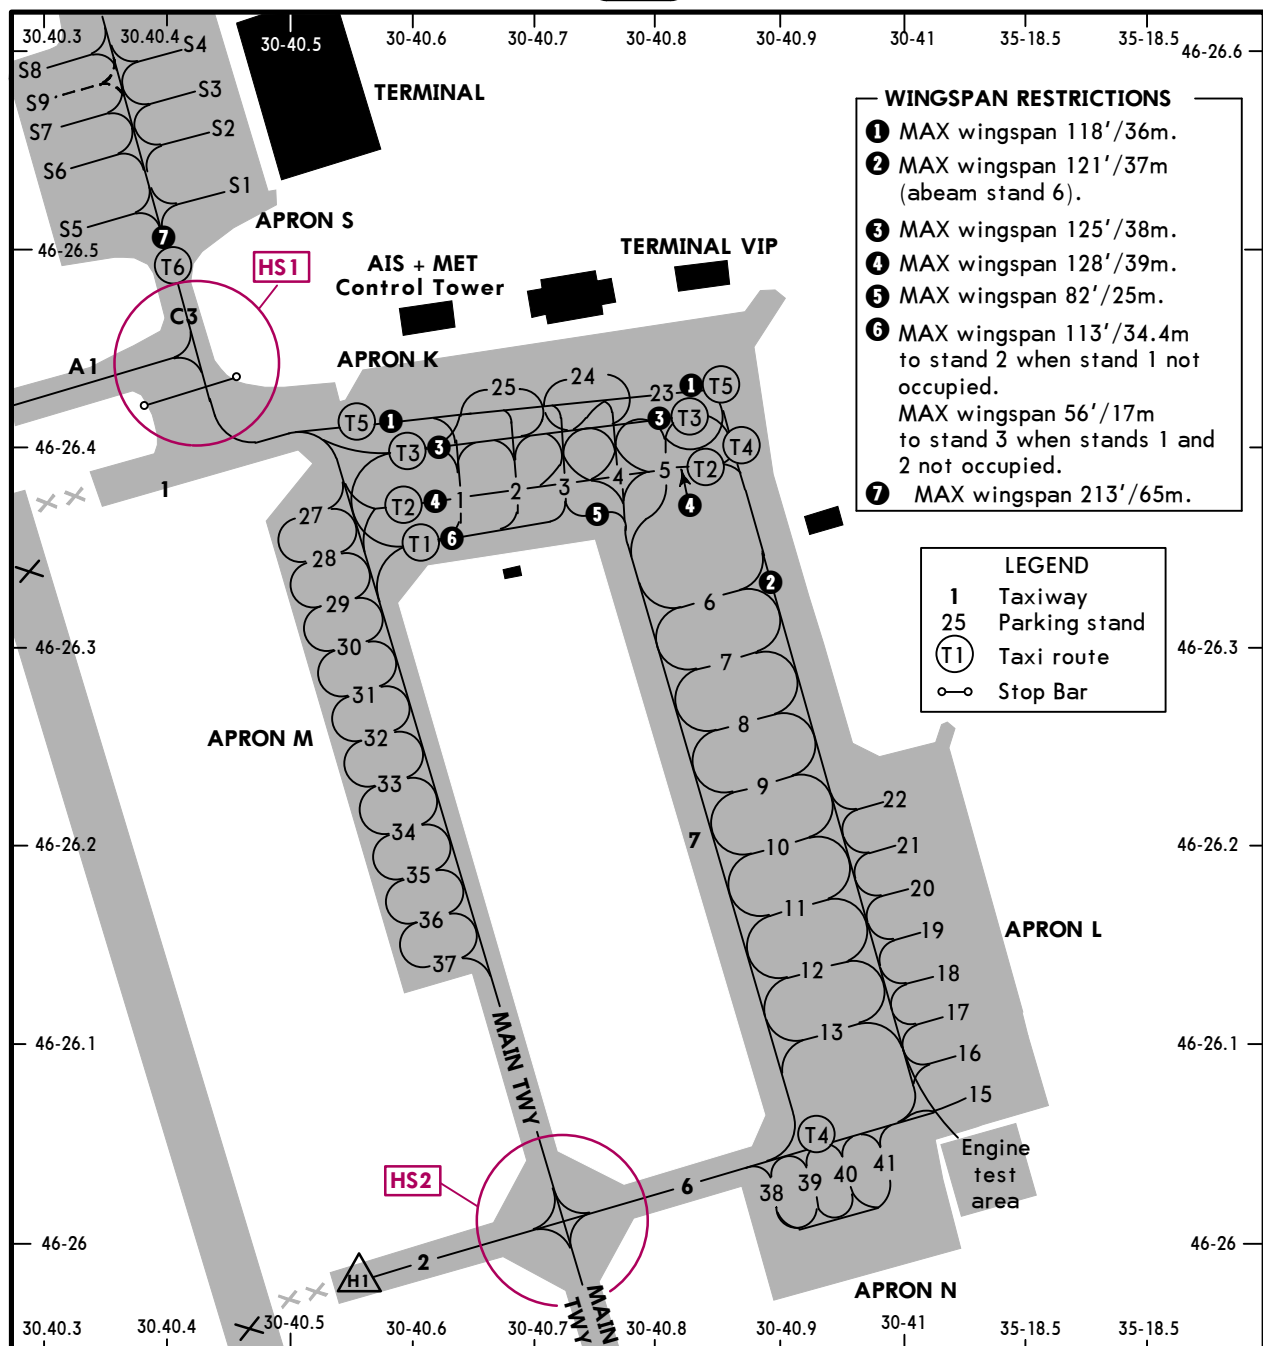

HOT SPOTS

(For information only, not to be construed as ATC instructions.)

- HS1** (A1-C3-1) Taxi with caution. Listen carefully to ATC taxi instruction.
- HS2** (2-MAIN TWY-6) Taxi with caution when crossing or turning on Main Twy.
- HS3** Twy 5. Taxi with caution. Intersection Twy 5/military Twy not in sight from the Tower.

TAXI RESTRICTIONS

For ACFT Code A, B and C with wheelbase less than 59'/18m can be used all Twy.

For ACFT Code C with wheelbase equal to or greater than 59'/18m:

- taxiing via Twy 1, Twy 6 and Twy 7, Twy A1, Twy C3;

For ACFT Code D can be used Twy 1, Twy A1, Twy C3 and/or Twy 1, apron K, Twy 7, apron L.

Twy 1 can be used for taxiing ACFT from/to Twy C3 only.

Twy 2 can be used for taxiing helicopter to/from Landing Area H1 only.

Taxiing ACFT via Twy Link 1 at night and on low visibility conditions is allowed under "Follow me" car instructions only.

UK00/ODS



JEPPesen

ODESA, UKRAINE

9 JUL 21

10-9B

Eff 15 Jul

ODESA

PARKING STAND COORDINATES			
STAND No.	COORDINATES	CABIN on	
Apron K			
1	N46 26.3 E030 40.5	N	
1	N46 26.3 E030 40.6	S	
2	N46 26.4 E030 40.6	N	
2	N46 26.3 E030 40.6	S	
3	N46 26.4 E030 40.6	N	
3	N46 26.3 E030 40.6	S	
4	N46 26.4 E030 40.7	N	
4	N46 26.3 E030 40.7	S	
5	N46 26.4 E030 40.7	N	
5	N46 26.3 E030 40.7	S	
23	N46 26.4 E030 40.7	E or W	
24, 25	N46 26.4 E030 40.6	E or W	
Apron L			
6 thru 8	N46 26.3 E030 40.7	E or W	
9	N46 26.2 E030 40.8	E	
9	N46 26.2 E030 40.7	W	
10	N46 26.2 E030 40.8	E	
10	N46 26.2 E030 40.7	W	
11	N46 26.2 E030 40.8	E	
11	N46 26.2 E030 40.7	W	
12	N46 26.2 E030 40.8	E or W	
13	N46 26.1 E030 40.8	E or W	
15, 16	N46 26.1 E030 40.9	W	
17	N46 26.2 E030 40.9	E	
17	N46 26.2 E030 40.8	W	
18	N46 26.2 E030 40.8	E or W	
19 thru 22	N46 26.2 E030 40.8	E	
Apron M			
27	N46 26.3 E030 40.5	E	
28 thru 35	N46 26.3 E030 40.5	E or W	
36	N46 26.2 E030 40.6	E	
36	N46 26.2 E030 40.5	W	
37	N46 26.2 E030 40.6	E	
37	N46 26.2 E030 40.5	W	
Apron N			
38	N46 26.1 E030 40.7	N	
38	N46 26.0 E030 40.8	S	
39 thru 41	N46 26.1 E030 40.8	N or S	
Apron S			
S1 thru S3	N46 26.5 E030 40.4	E	
S4	N46 26.6 E030 40.4	E	
S5 thru S7	N46 26.5 E030 40.3	W	
S8	N46 26.6 E030 40.3	W	
S9	N46 26.5 E030 40.3	W	

UK00/ODS



EASA AIR OPS
ODESA, UKRAINE
ODESA

STRAIGHT-IN RWY		A	B	C	D
16	ILS	374'(200')	381'(207')	391'(217')	401'(227')
	FULL	① R550m	① R550m	① R550m	① R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	② LOC	560'(386')	560'(386')	560'(386')	560'(386')
	with D2.5 IOD	R1100m	R1100m	R1100m	R1100m
34	ALS out	R1500m	R1500m	R1800m	R1800m
	② LOC	610'(436')	610'(436')	610'(436')	610'(436')
	w/o D2.5 IOD	R1300m	R1300m	R1300m	R1300m
	ALS out	R1500m	R1500m	R2000m	R2000m
	② VOR	660'(486')	660'(486')	660'(486')	660'(486')
	ALS out	R1500m	R1500m	R2300m	R2300m
	CAT 3A ILS	RA50'R200m	RA50'R200m	RA50'R200m	RA50'R200m
	CAT 2 ILS	264'(100')	276'(112')	289'(125')	302'(138')
		RA113'R300m	RA128'R300m	RA144'R400m	RA162'R400m
	ILS	364'(200')	364'(200')	368'(204')	378'(214')
	FULL	R750m	R750m	R750m	R800m
	ALS out	R1200m	R1200m	R1200m	R1200m
	② LOC	500'(336')	500'(336')	500'(336')	500'(336')
		R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1500m	R1500m
	② VOR	680'(516')	680'(516')	680'(516')	680'(516')
		R1500m	R1500m	R1900m	R1900m
	ALS out	R1500m	R1500m	R2400m	R2400m

- ① R750m when a Flight Director or Autopilot or HUD to DA is not used.
② Continuous Descent Final Approach.

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
Not authorized below 3940' in sector from 0.8 DME Arc ODA to 4.3 DME Arc ODA and from R-010 ODA VOR to R-130 ODA VOR.	770'(596') V1500m	820'(646') V1600m	1230'(1056') V2400m	1230'(1056') V3600m

TAKE-OFF

Low Visibility Take-off					RL or RCLM	RL or CL	Adequate Vis Ref	
HIRL & CL (spacing 15m or less) & relevant RVR	RL & CL & relevant RVR	RL & CL	RL & RCLM	RL or CL				
			DAY	NIGHT	DAY	NIGHT	DAY	NIGHT
TDZ R125m Mid R125m Rollout R125m	TDZ R150m Mid R150m Rollout R150m	R200m	R300m		R/V400m		R/V500m	NA

UK00/ODS
ODESA


JEPPESSEN

9 JUL 21

(11-1)

Eff 15 Jul


ODESA, UKRAINE
ILS or LOC Rwy 16

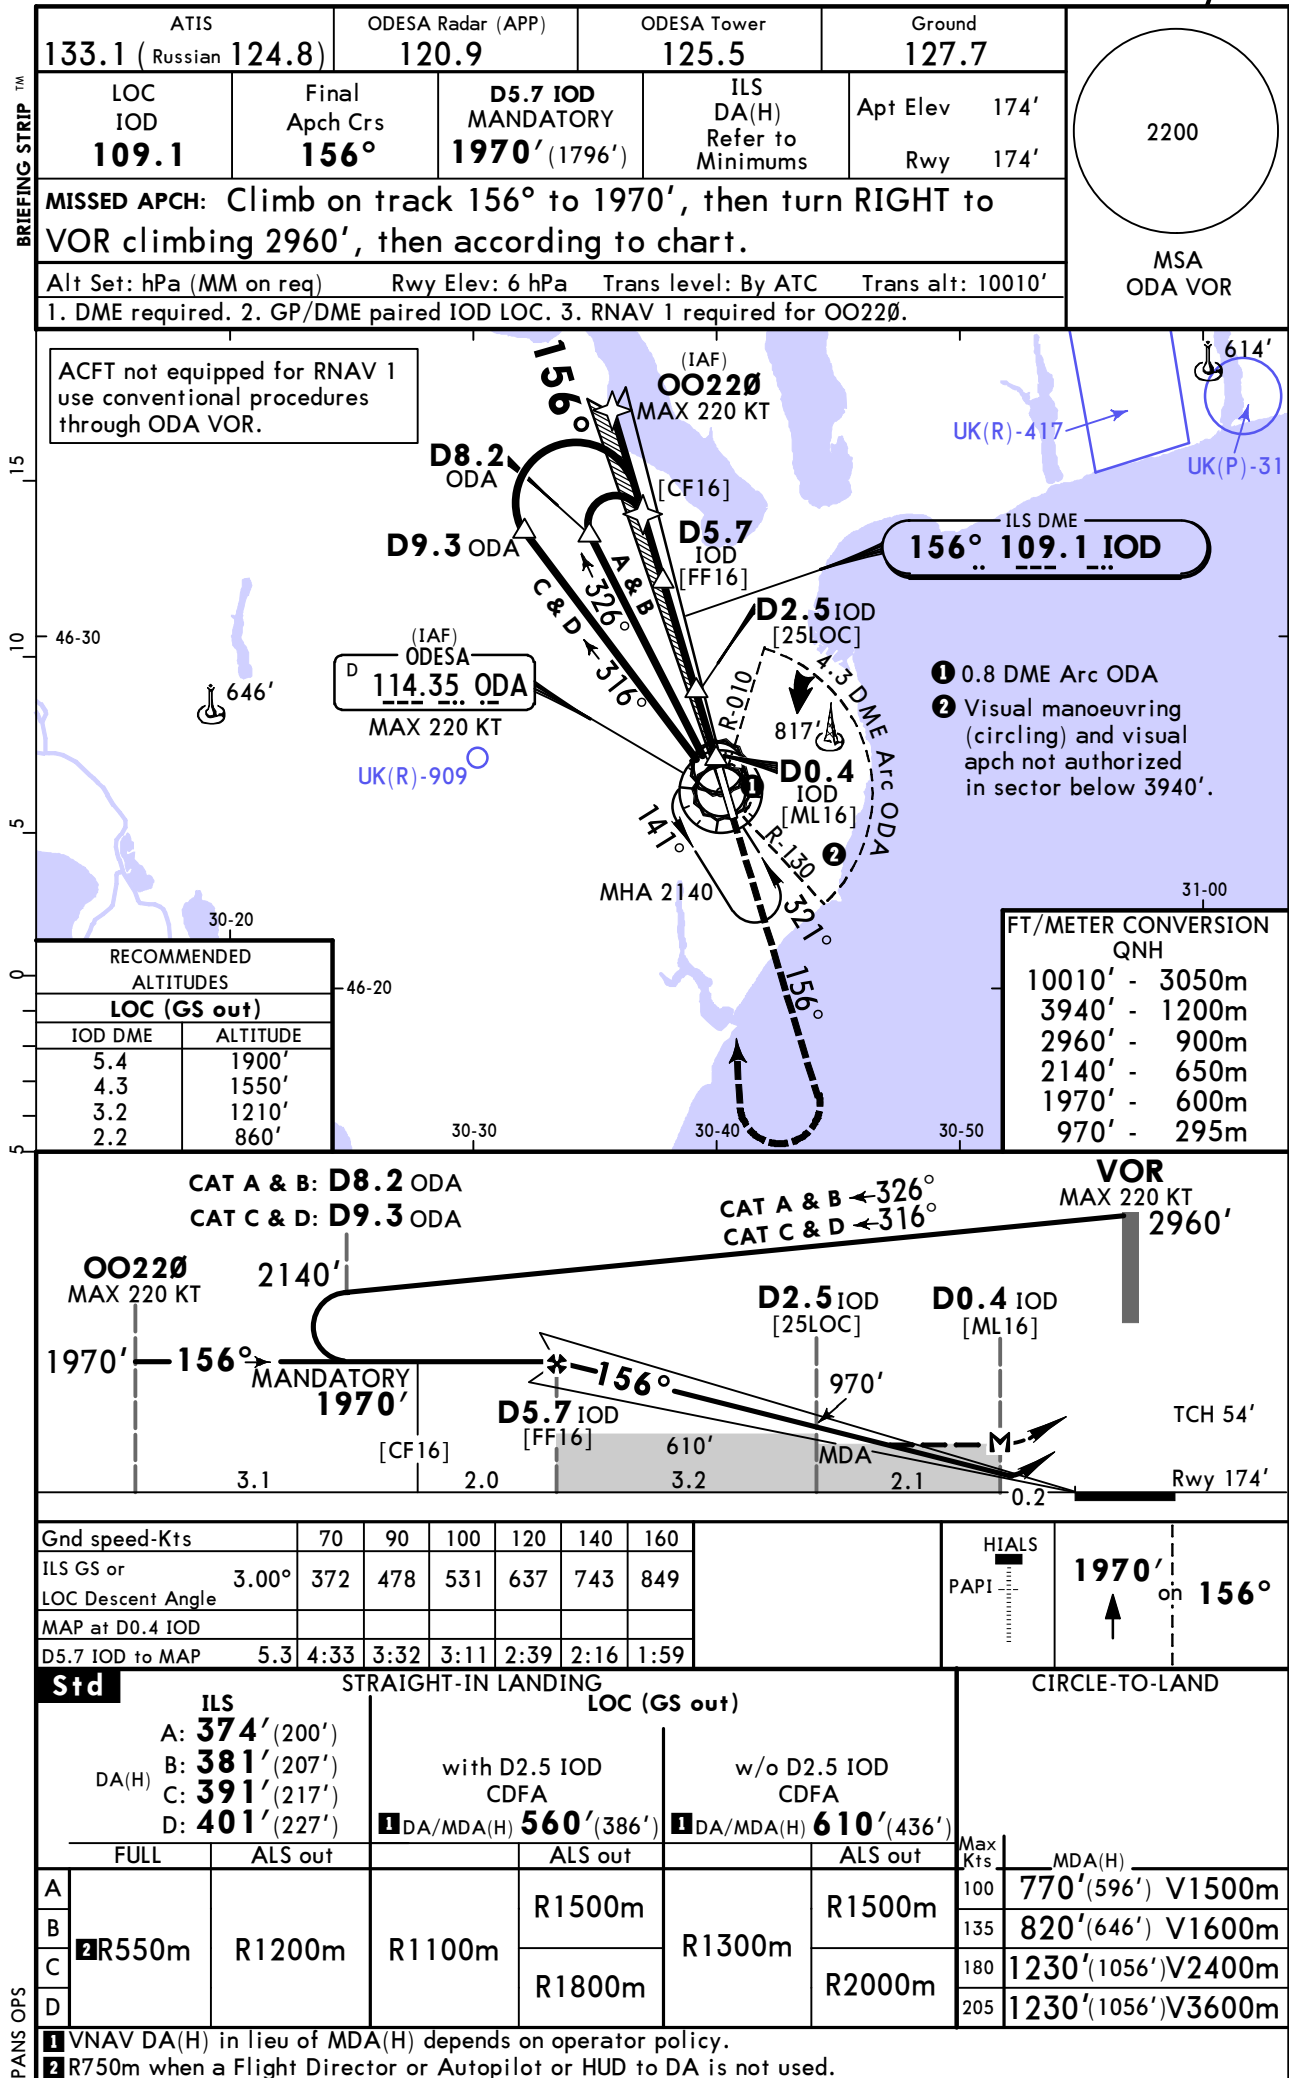

UK00/ODS
ODESA

JEPPESSEN
9 JUL 21 **(11-2)** **Eff 15 Jul**

ODESA, UKRAINE
ILS or LOC Rwy 34

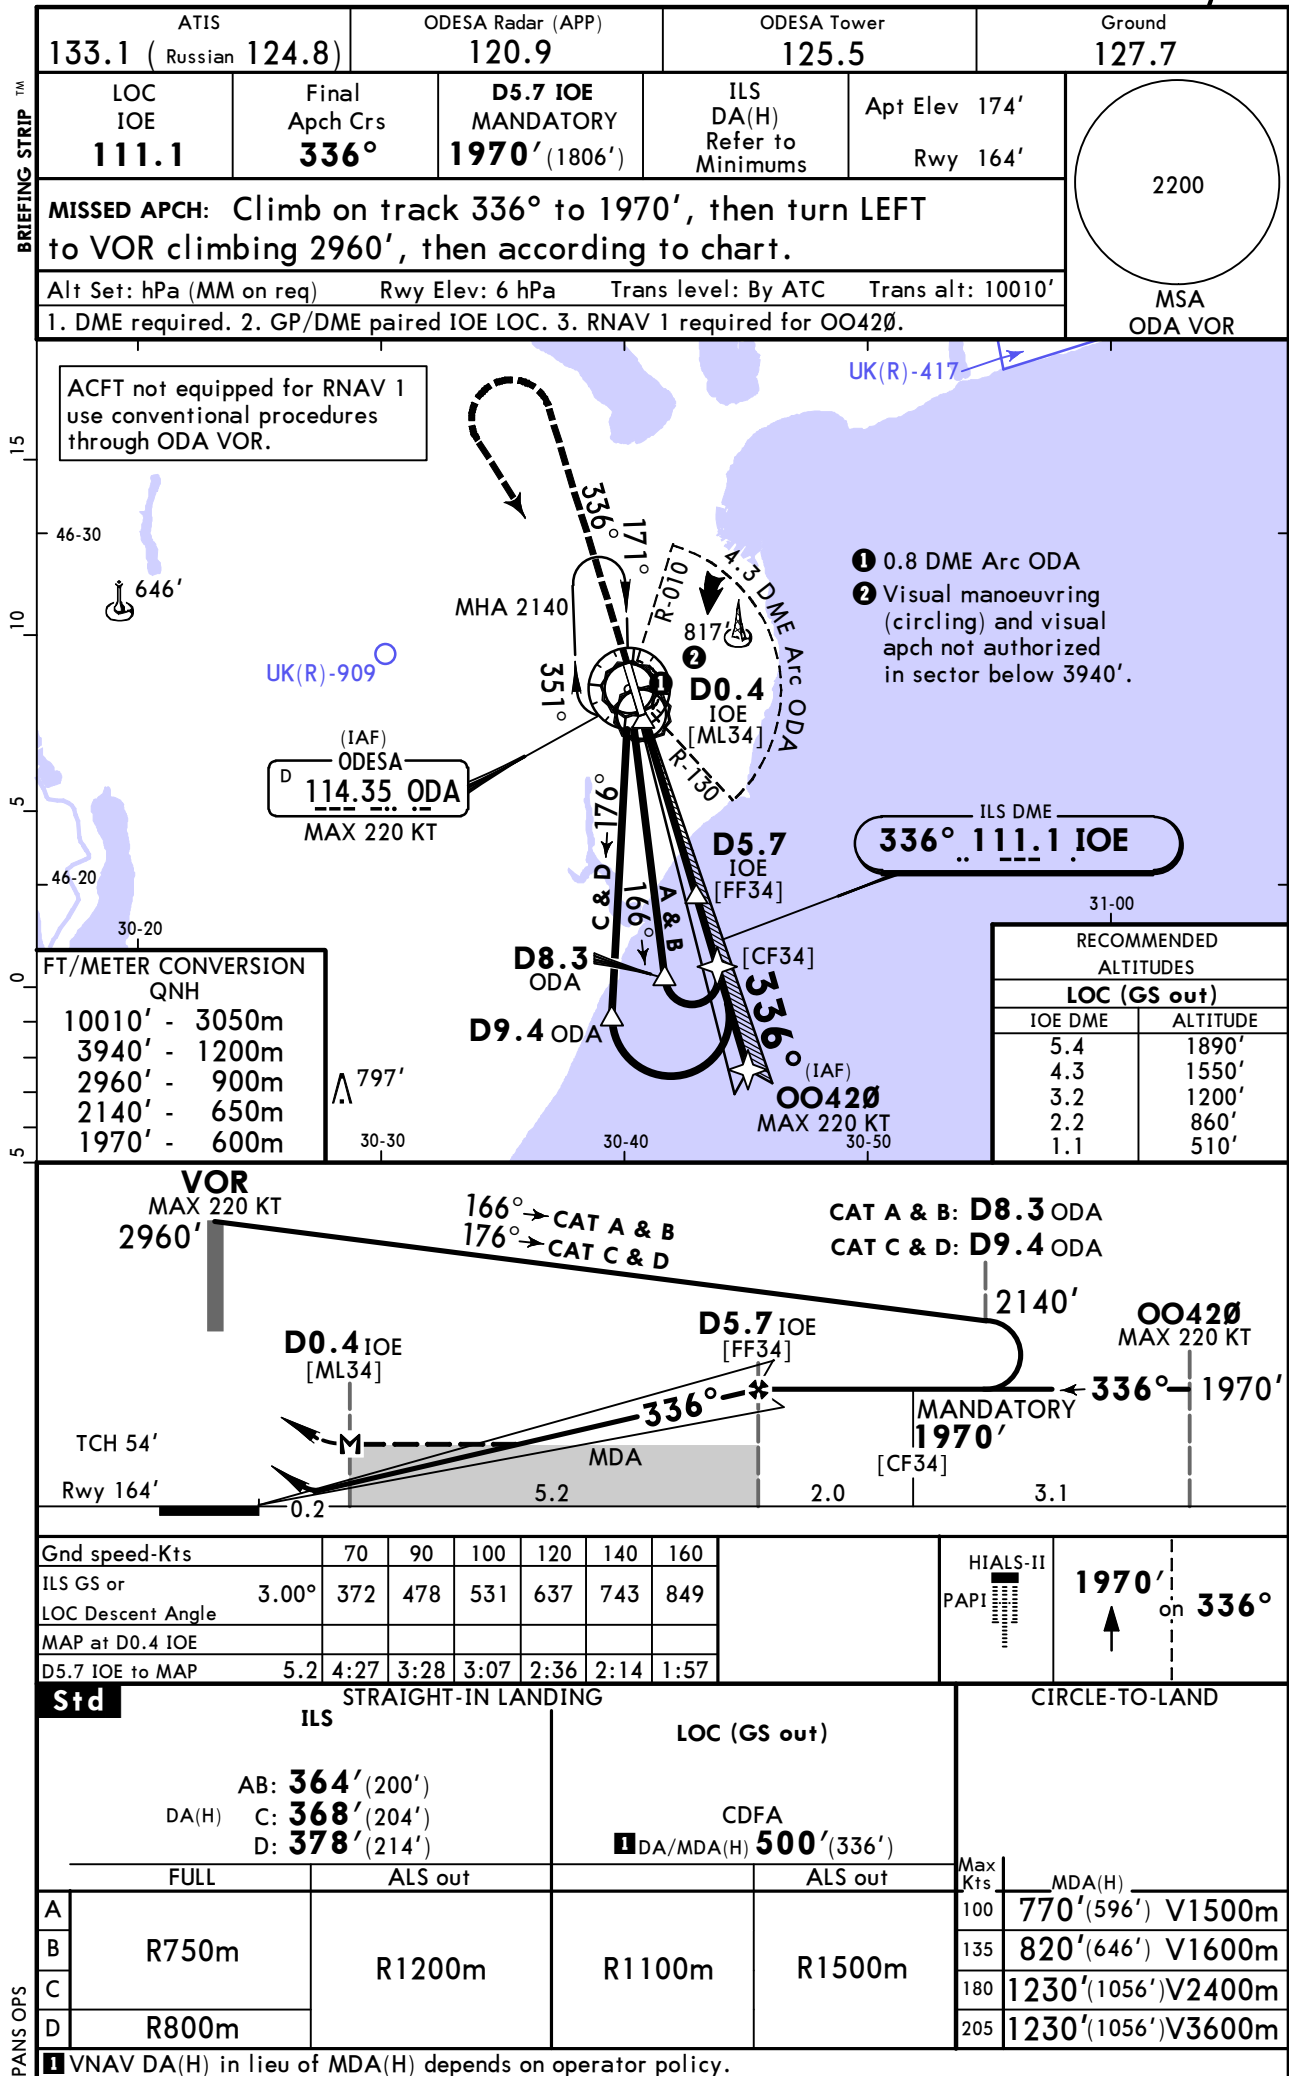

UK00/ODS
ODESA


JEPPesen

9 JUL 21

(11-2A)

Eff 15 Jul

ODESA, UKRAINE
CAT II/III ILS Rwy 34

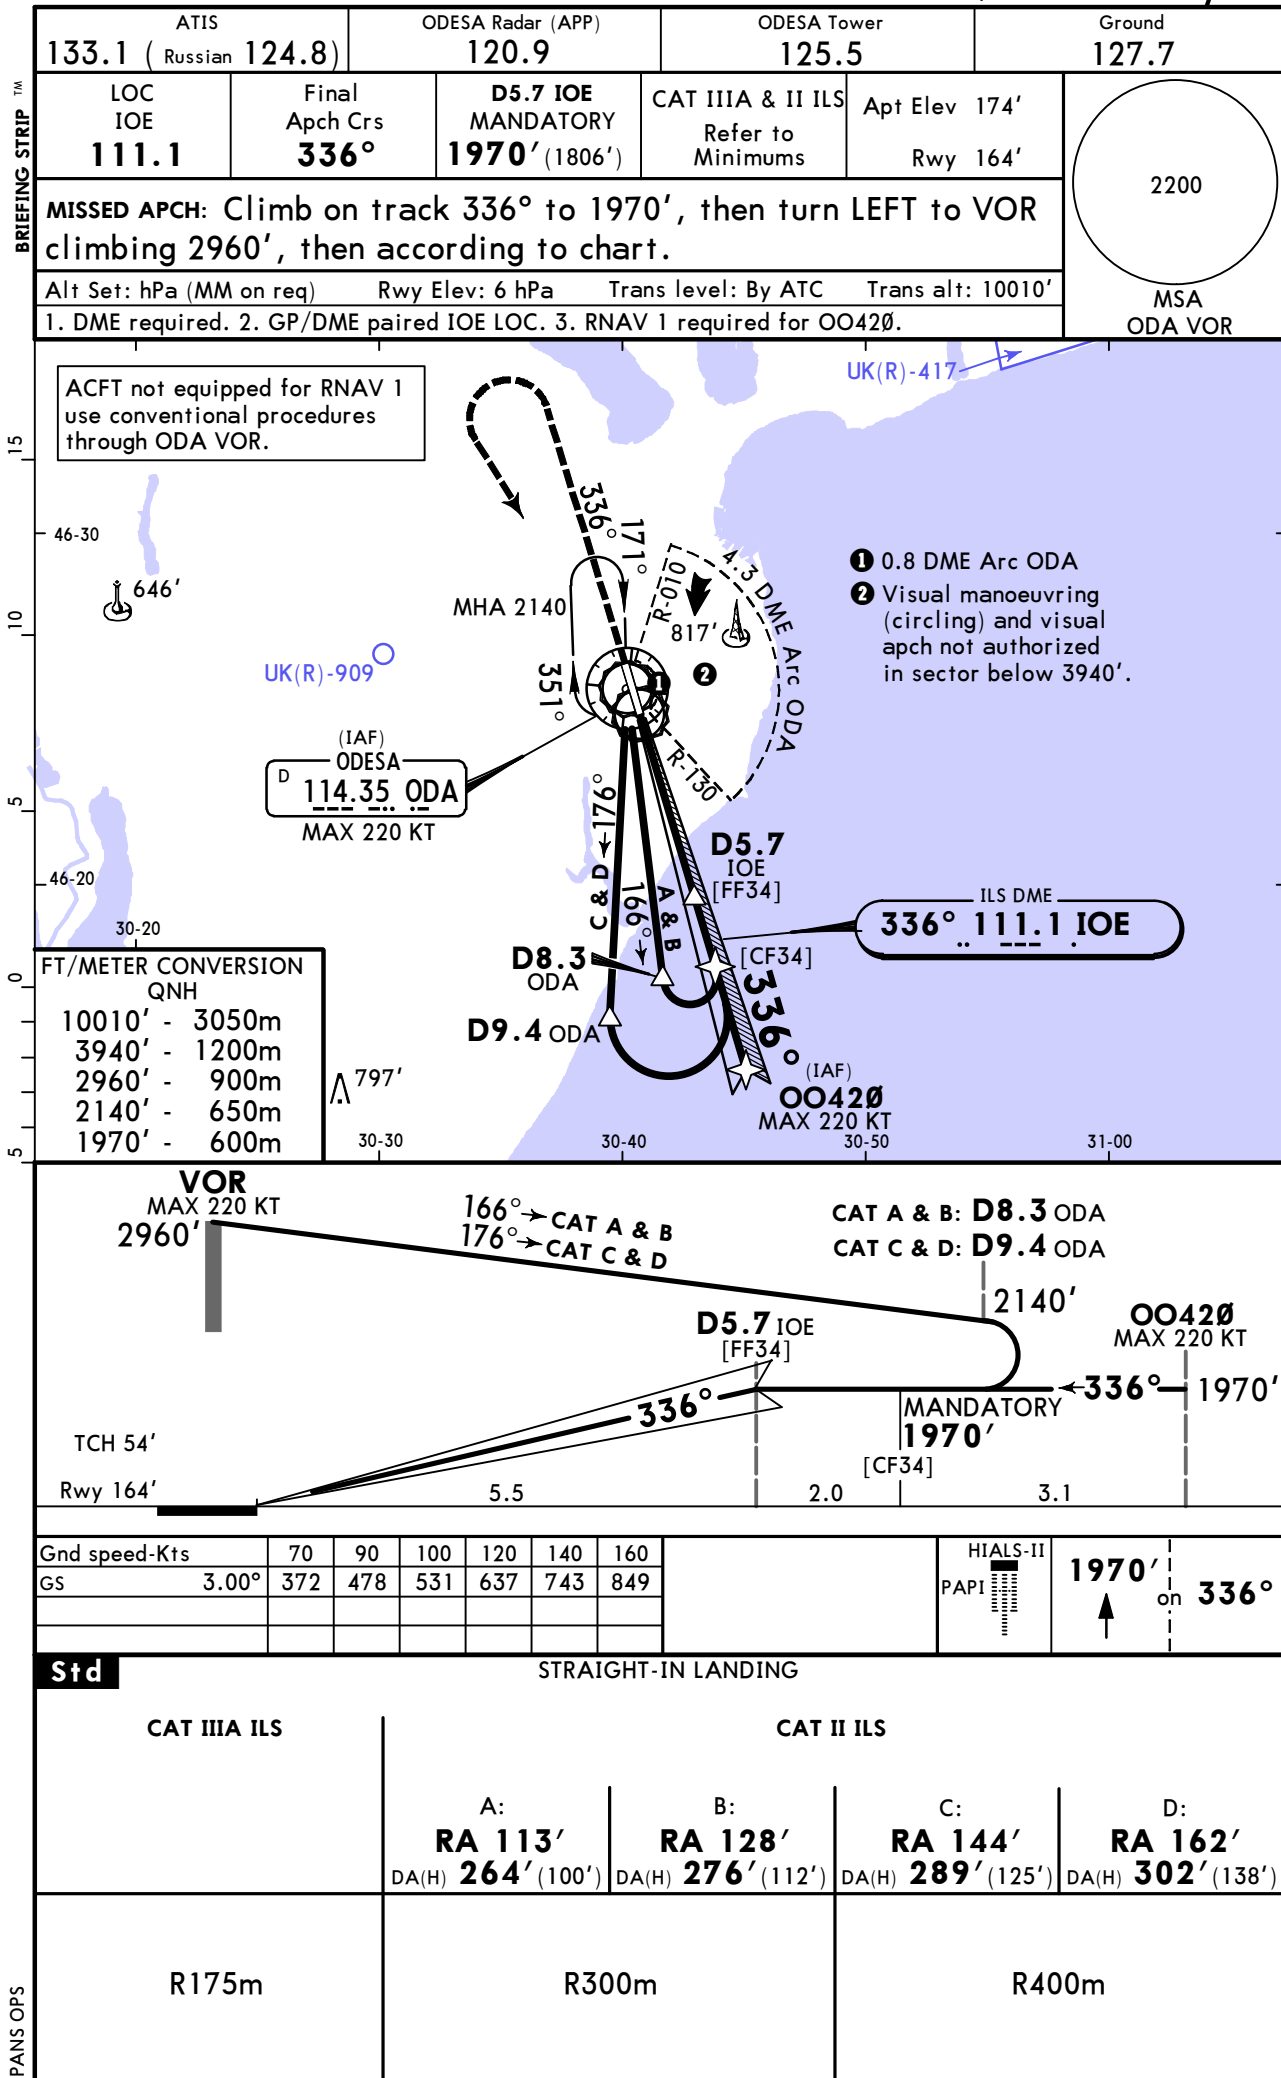


UK00/ODS
ODESA

JEPPESSEN
9 JUL 21 13-1 Eff 15 Jul

ODESA, UKRAINE
VOR Rwy 16


ATIS		ODESA Radar (APP)		ODESA Tower		Ground	
133.1 (Russian 124.8)		120.9		125.5		127.7	
VOR ODA 114.35	Final Apch Crs 161°	D6.3 MANDATORY 1970' (1796')	DA/MDA(H) 660' (486')	Apt Elev	174'	2200 MSA ODA VOR	
MISSED APCH: Climb on track 161° to 1970', then turn RIGHT climbing 2960' to VOR, then according to chart.							
Alt Set: hPa (MM on req) Apt Elev: 6 hPa Trans level: By ATC Trans alt: 10010'							
DME required.							

FT/METER CONVERSION QNH	
10010'	3050m
3940'	1200m
2960'	900m
2140'	650m
1970'	600m

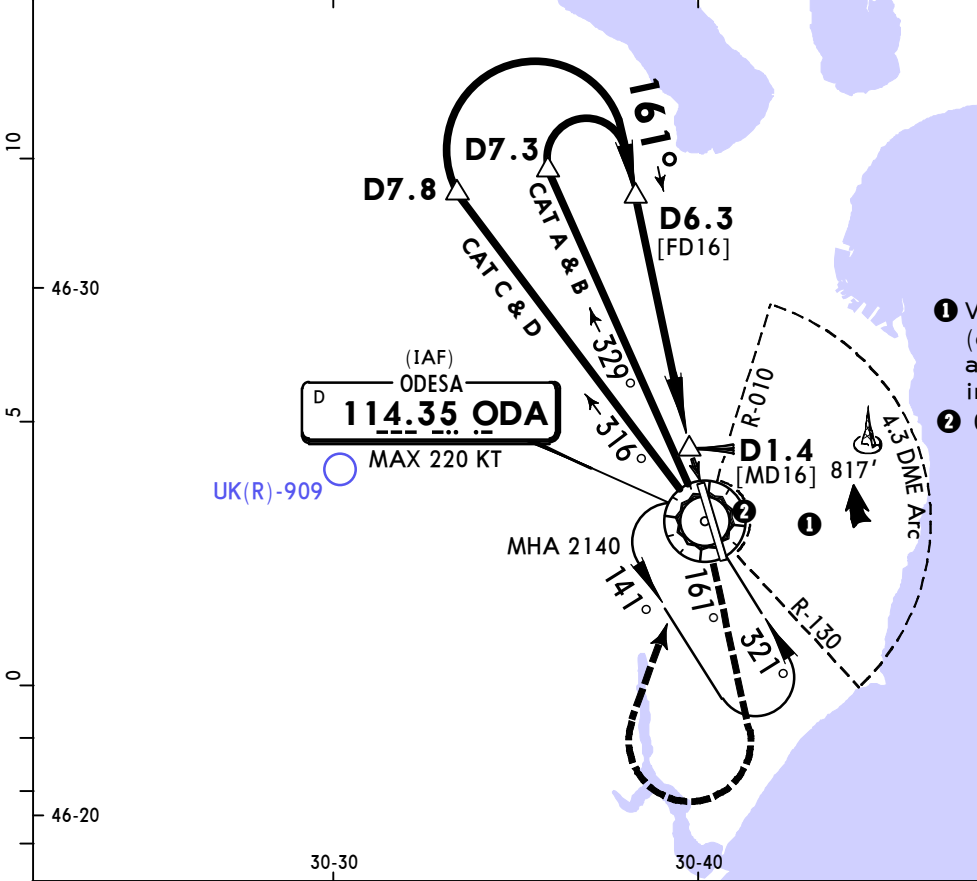

- 1 Visual manoeuvring (circling) and visual apch not authorized in sector below 3940'.
- 2 0.8 DME Arc

ODA DME	5.4	4.3	3.2	2.2
ALTITUDE	1710'	1370'	1030'	690'

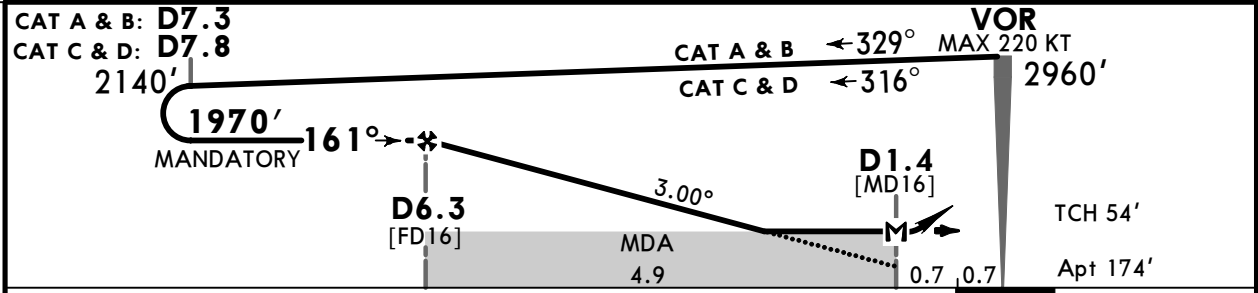

Gnd speed-Kts	70	90	100	120	140	160	HIALS PAPI	1970' on 161°
Descent Angle 3.00°	372	478	531	637	743	849		
MAP at D1.4								
D6.3 to MAP	4.9	4:12	3:16	2:56	2:27	2:06		

STRAIGHT-IN LANDING				CIRCLE-TO-LAND			
CDFA							
DA/MDA(H) 660' (486')							
				Max Kts	MDA(H)		
A	R1500m			100	770' (596')	V1500m	
B				135	820' (646')	V1600m	
C				180	1230' (1056')	V2400m	
D				205	1230' (1056')	V3600m	

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.


CHANGES: New procedure.

© JEPPESSEN, 2021. ALL RIGHTS RESERVED.

UK00/ODS
ODESA

JEPPESEN
9 JUL 21 13-2 Eff 15 Jul

ODESA, UKRAINE
VOR Rwy 34

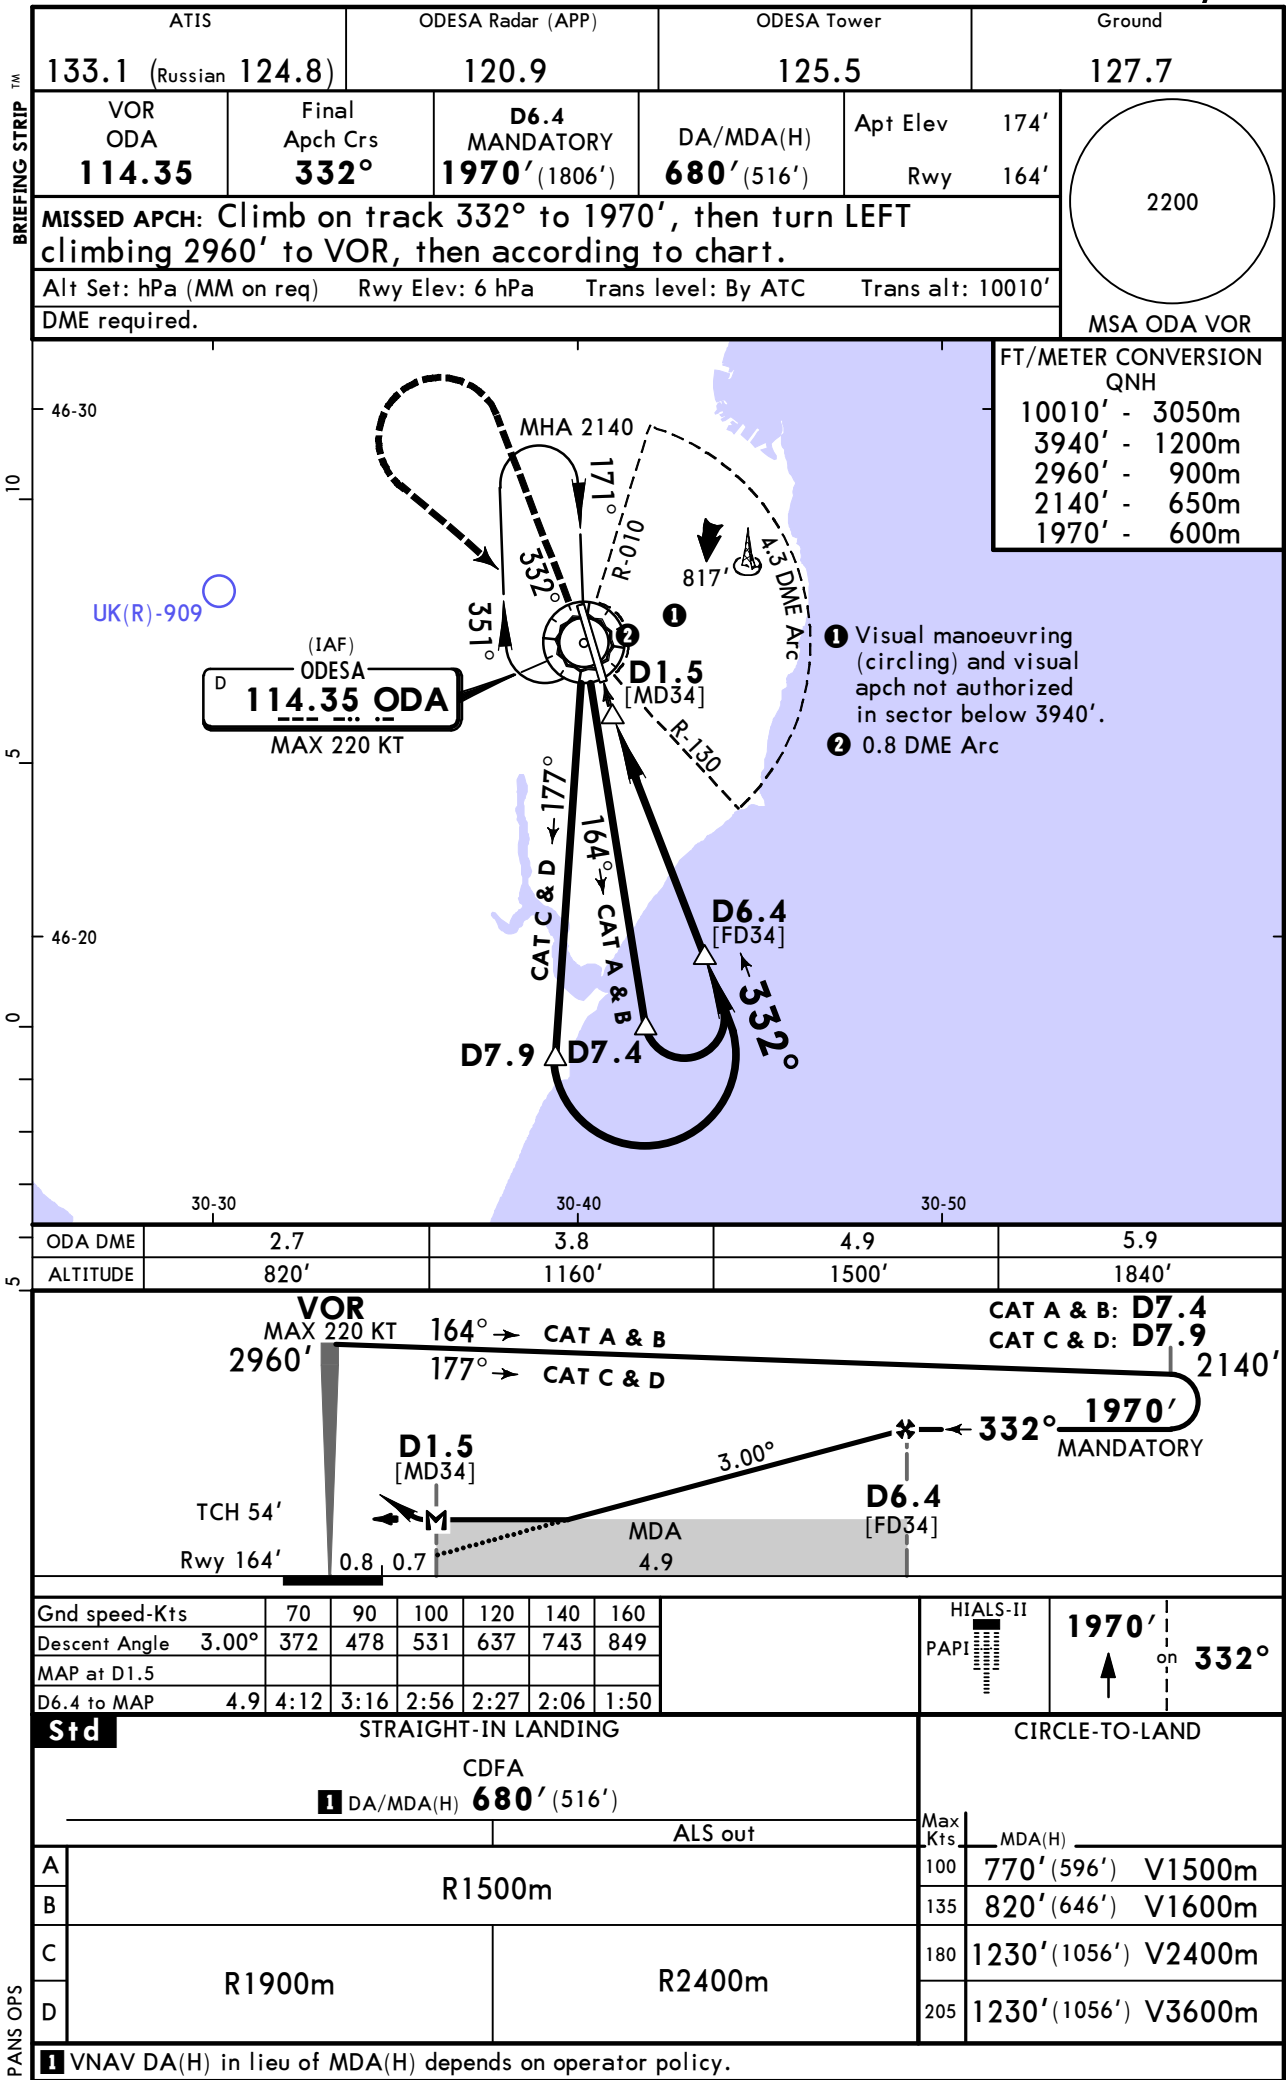

ODESA, (ODESA - UKOO)

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport UKOO