



Digit

Manufacturing | Distribution | Logistics


Digit is a commercially deployed, general-purpose humanoid designed to work the way you do. Autonomous, adaptable, and reliable, it navigates spaces built for people—handling material movement tasks in warehouses and manufacturing facilities to connect islands of automation across facility floors.

Features

- Autonomous operation with recharging
- 16 kg (35 lb) payload capacity
- 0–1.67 m (5.5 ft) vertical reach
- Changeable end-effectors
- Heavy-duty hardware built for industry
- Integration with existing automation systems
- Industry-standard safety compliance
- Enterprise security




Solution overview

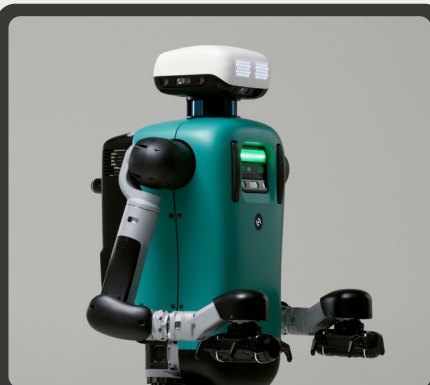

Digit

Built to navigate our world and augment your team, Digit can walk into existing facilities and address the hardest-to-automate portions of your workflows.

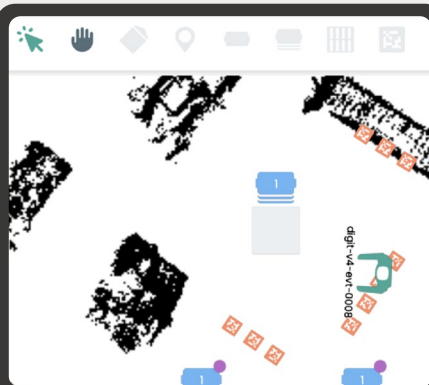

Arc

Our cloud-based automation platform simplifies the deployment and management of Digit fleets, letting you build workflows, view metrics, and integrate with your existing automation systems.



Service & support

Our solution goes beyond standard deployment to include robot training, change management support, and operational adoption strategies to maximize success.

Humanoid specifications

Width	660 mm (2.2 ft)
Depth (standing)	370 mm (1.2 ft)
Maximum height	1750 mm (5.7 ft)
Mass/weight	93 kg (205 lbs)
Maximum payload	16 kg (35.3 lbs)
Vertical reach	0–1670 mm (5.5 ft)
Maximum walking speed	1.2 m/s
Minimum turn radius	600 mm (2 ft)
Horizontal field of view	360 degrees
Range: Depth cameras	6 m (19.7 ft)
Range: Lidar	100 m (328 ft)
Collision avoidance	Maintains set distance from obstacles
WiFi connectivity	2.4GHz / 5GHz
Radio connectivity	700 MHz connection to Entry Monitoring System (EMS)
Operating temperature	0°C to 35°C (32°F to 95°F)
Storage temperature	0°C to 45°C (32°F to 113°F)

Battery specifications

Nominal voltage	51.1 V
Nominal capacity	59 Ah
Nominal energy	3.0 kWh
Mass/weight	15.4 kg (34 lbs)
Average run time (30°C)	Up to 4 hrs
Average charge time (30°C)	Approximately 2 hrs

Safety features

- CAT1 stop
- Safety PLC
- Workcell
- On-robot eStop
- FSoE

Charging dock specifications

Length	1080 mm (42.5 in)
Width	400 mm (15.7 in)
Height	1350 mm (53.1 in)
Power input	208/240VAC, 25A, single-phase, 50/60 Hz
Power output	48VDC, 30A
Mounting	4 x 14 mm holes (4 x 0.55 in)
Connectivity	Ethernet
Compliance	NFPA79, UL508A

Compliance

- ANSI B11.0: Safety of Machinery
- ISO 12100: Safety of Machinery — General principles for design — Risk assessment and risk reduction
- ISO 13849: Safety of Machinery — Safety-related parts of control systems
- ANSI B11.19: Safeguarding and Machinery Risk Reduction
- ISO 10218: Robotics — Safety requirements
- ANSI/RIA R15.08: Industrial Mobile Robots — Safety requirements
- FCC Part 15B
- Radio equipment: Incorporates a FCC Part 15C certified radio system
- Laser product class 1 eye-safe

About Agility

Agility's commercially deployed humanoids operate alongside teams in warehouses, manufacturing facilities, and distribution centers—tackling physically demanding and repetitive tasks while enabling workers to focus on higher-value work.

With industry-leading safety standards and years of proven deployment data, we're pioneering a new era of automation that enhances human potential.