

# McPhail Trap Main Board v1.0

Collect, analyze, and report back the environmental data.

This is an attempt to reproduce the work of identifying fruit flies from the following papers:

- 2017: [Automated Surveillance of Fruit Flies](#)
- 2015: [Insect Biometrics: Optoacoustic Signal Processing and its Applications to Remote Monitoring](#)
- 2014: [The Electronic McPhail Trap](#)
- 1979: [Optical Tachometer for Measurement of Wingbeat Frequency of Free-Flying Insects](#)

Parallels the European [ENTOMATIC](#) project.

## Hardware Version Notes

- v1.x, proof of concept, collect data on SD card and over USB Fona breakout board supports texting
- v2.x, switch to ARM MSP430 or other ADC-specific chip, collect data on SD card
- v3.x, integrate mesh net or other networking, possibly more sophisticated offboard analysis

## Design Notes

### Physical Housing

Putting the electronics in acrylic separate from the insects so the ultrasonic isn't bothering them. An acrylic housing placed on top of the trap provides protection from the elements as well as protects the insects from any electronics noise.

If all circuitry is on the board at the top, the IR emitters and photodiode detectors can be the only items in the trap with the insects and be connected by a minimum of cabling.

### Security and Connectivity Platforms for reference

- Particle
- Electric Imp

### v1 FON808 GSM+GPS MODULE

- PS is power status. Check this after toggling KEY. Pin is low when module is off, and high when module is on.
- NS is network status. It pulses to signal current module status
- RST is hard reset to be used only when module is really stuck.
- RX/TX are pins capable of Software Serial. They are auto-baud so whatever baud you send "AT" after reset or boot is the baud rate the module will use.
- RTS is hardware flow control. Optional. Turn it on in module if you want to use it.
- RI is the ring indicator output. Use it as an interrupt. Default high. Pin will pulse low for 120ms when a call or SMS is received.

The GPS is accessible on the Rx/Tx lines so you can query using AT commands and get the values back. No additional pins are necessary.

### Microcontroller

Atmel AVR chips aren't going to have the ADC resolution we want. The paper calls for a 14-bit ADC.

Solution 1: Switch to the \$6 MSP432 or a similar chip, could pick up a \$14 dev board as well. This is a TI chip that requires CodeComposer Studio, newest version is CCSv6. It's Linux-compatible and I have a Windows machine just in case it's not.

The downside of the MSP432 is the \$45 additional programmer we need to buy, getting set up with a new dev environment, etc. That's all doable but may not be necessary.

Solution 2: Use a \$6 16-bit ADS1115 which receives on two differential or four single channels (we could use the four) and outputs the result over I2C to the Atmega32u4.

### ADC and Noise Notes

I need to review their timing – seems like my back-of-envelope has 32ms, not 16ms as from their paper.

We may need need a 4-layer board, which doubles board cost. It's unclear if these guys are actually getting and using all 14 bits. Turning off everything but the ADC when sampling.

[Discussion of cheap 16-bit ADC](#)

## RTC

The DS1307 real time clock is out of date, replaced it with a MCP7940N. Needs some adjustment to the circuitry and crystal to minimize ppm (frequency tolerance) to minimize time slipping, which could be up to a few minutes per month in the worst case.

TODO: quantify this deviation, discuss mitigation

## Temperature

TODO: find out how hot a plastic bottle hanging in the sun in Arizona in August could get.

## Capacitors

Mostly ceramic capacitors were chosen for cost and size, with C0G/NP0 and X7R temperature coefficients. Aluminum electrolytic capacitors were chosen where ceramics were cost-prohibitive or where specifically indicated in datasheets.

The temperature coefficients:

X7R means a capacitor is a temperature-stable (EIA Class 2) cap which only varies up to  $\pm 15\%$  from  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . [ref](#)

C0G/NP0 means a capacitor is temperature-compensating (EIA Class 1) which varies less than  $\pm 0.3\%$  C from  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . Capacitance drift or hysteresis is less than  $\pm 0.05\%$ . [ref](#)

## Detector/Receiver Board

Interestingly, the receiver part number [TEMD5080X01](#) does not have the same package as in the photos of the McPhail trap. These are \$1.31 each at 25 and the design calls for ten of them.

They are good from  $-40^{\circ}\text{C}$  to  $100^{\circ}\text{C}$  and are 5mm x 4.24mm. Ten of them would require a board about 3 inches long and about half an inch wide, or about \$7 for a set of three from OSH Park.

This is a \$20 board. The stencil costs \$5 from OSH Stencils.

## Emitter Board

Emitters are in the \$2 range and the board will probably be the same size as the detector board.

The diffuser needs more investigation.

This is also likely a \$20 board. The stencil costs \$5 from OSH Stencils.

## Main Board Assembly Information

The following layout is only to get a rough idea of how much area the parts would require if they were all on one side of one board. The area is 3 inches x 3 inches, or 9 square inches, and a set of three bare boards would cost \$48.20 for three with a manufacturing turnaround of about ten days.

Rough cost of parts for a single board is about \$50.


The stencil from OSH Stencils costs \$16.90. A tube of solder paste in the same package costs \$14.


Stencils are 3mil-thick polyamide (orange) film which is reusable.

Total cost for one complete stack of three boards: \$129

Assembling a further one complete stack of three boards: \$93

Item	Cost
Emitter Board PCB	\$3
Emitter Parts	\$13
Emitter Stencil	\$5
Detector Board PCB	\$3
Detector Parts	\$13
Detector Stencil	\$5
Main Board PCB	\$16
Main Board Parts	\$45
Main Board Stencil	\$17
Leaded Solder	\$14

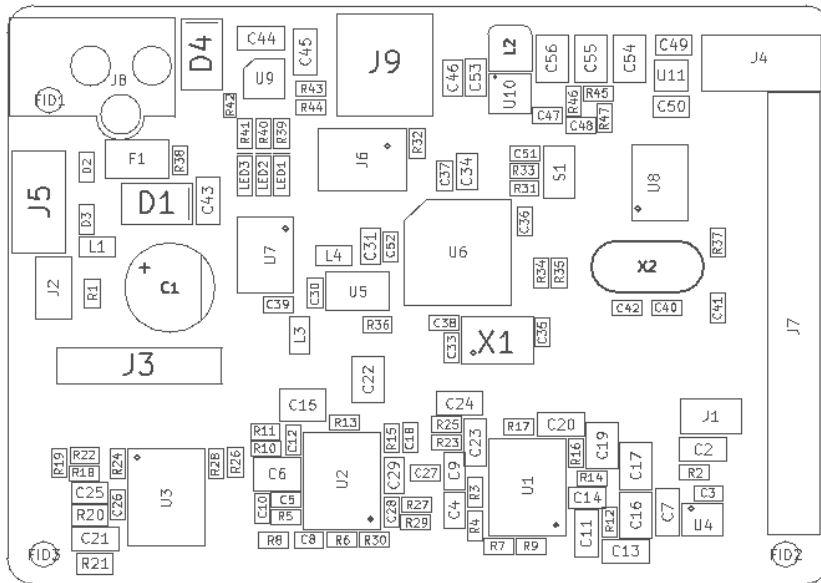

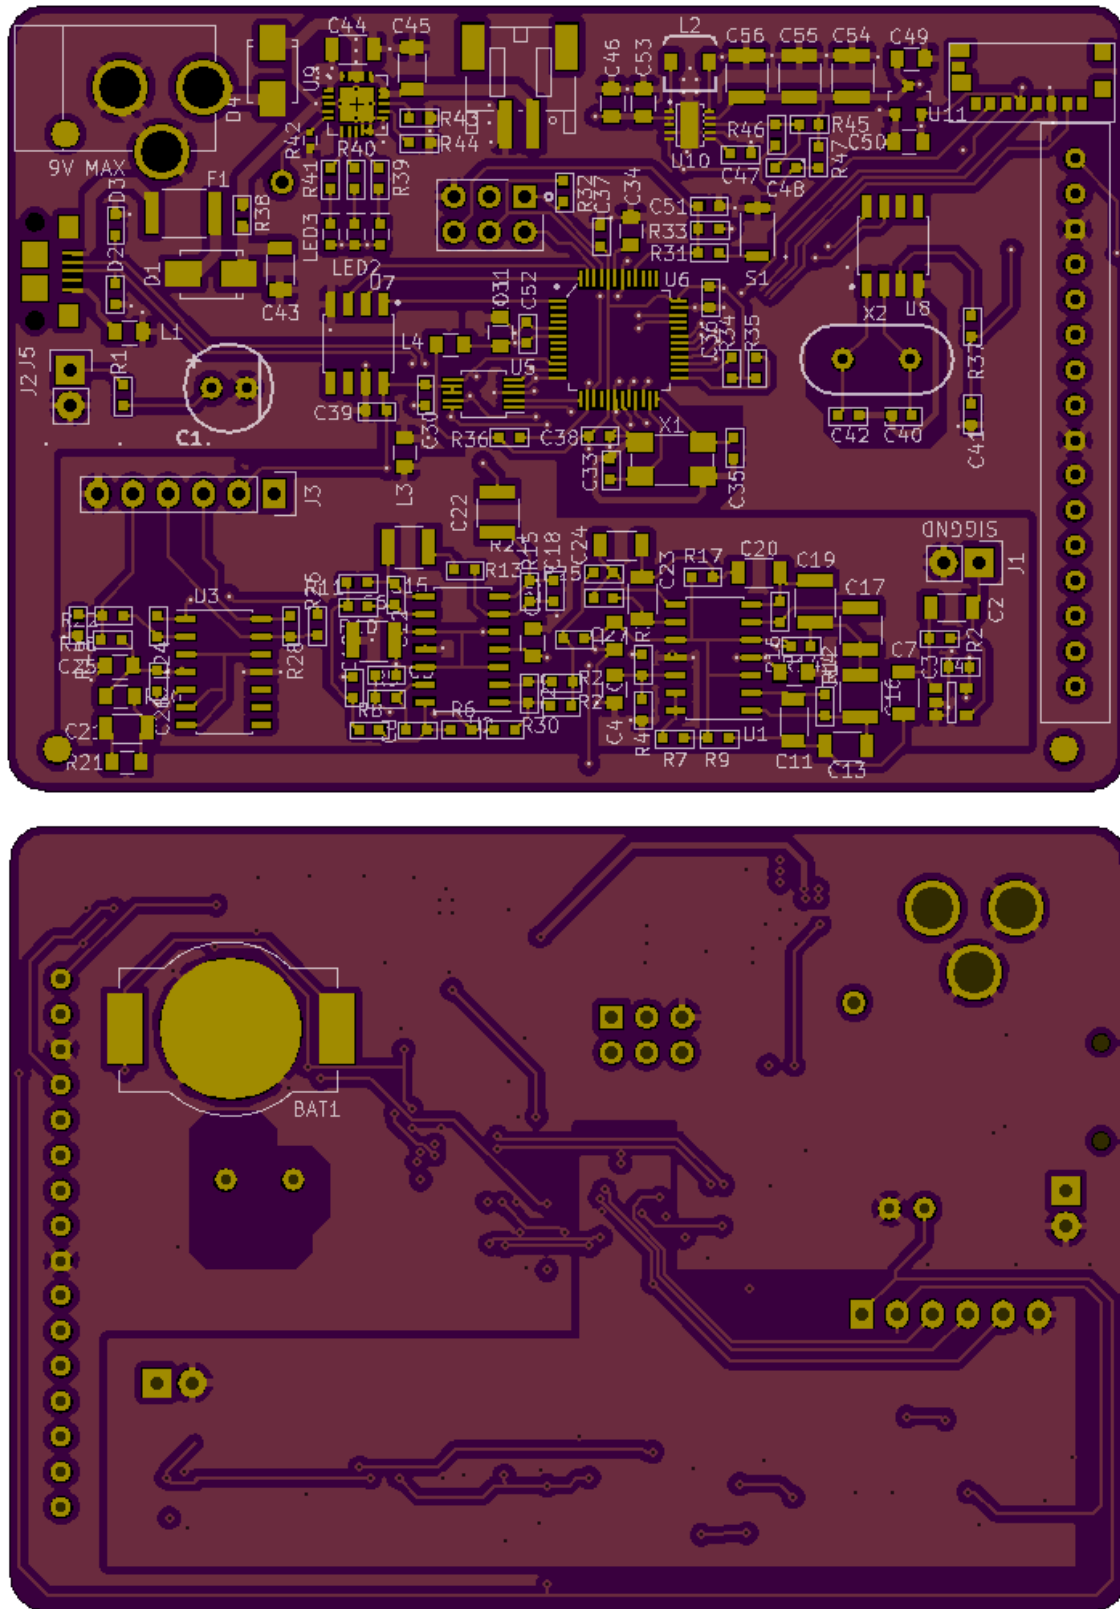

**Bill of Materials**

Ref	Qty	Description	Digikey PN
BAT1	1	CR1220 BATTERY HOLDER SMT FLATPIN	BK-916- CT-ND
C1	1	CAP ALUM 330UF 20% 16V RADIAL	732-8798- 1-ND
C10	1	CAP CER 0.27UF 16V X7R 0603	490-6427- 1-ND
C11	4	CAP CER	1276-
C13		1.5UF 25V X7R	6873-1-
C2		1206	ND
C7			
C12	3	CAP CER	490-1512-
C28		0.01UF 50V X7R 0603	1-ND
C8			
C14	7	CAP CER 1UF	1276-
C29		25V X7R 0805	1066-1-
C34			ND
C4			
C49			
C50			
C9			
C15	5	CAP CER	1276-
C54		22UF 25V X7R	3392-1-
C55		1210	ND
C56			
C6	4	CAP CER	1276-
C16		2.2UF 25V X7R	2953-1-
C17		0805	ND
C19			
C22	1	CAP CER	478-6211-
C18		33PF 16V X7R 0603	1-ND
C20	7	CAP CER	587-2994-
C21		4.7UF 50V X7R	1-ND
C23		1206	
C24			
C43			
C44			
C45	4	CAP CER	1276-
C25		10UF 16V X7R	2872-1-
C31		0805	ND
C46			
C53			

Ref	Qty	Description	Digikey PN
C26	9	CAP CER	490-3285-
C30		0.1UF 100V	1-ND
C36		X7R 0603	
C37			
C38			
C39			
C47			
C51			
C52			
C27	1	CAP CER	1276-
		0.022UF 50V	2004-1-
		X7R 0603	ND
C3	1	CAP CER	1276-
		0.22UF 25V	1111-1-
		X7R 0603	ND
C33	2	CAP CER 22pF	399-9031-
C35		50V NP0 0603	1-ND
C40	2	CAP CER 2PF	490-
C42		50V C0G/NP0	10713-1-
		0603	ND
C41	1	CAP CER	490-1427-
		100PF 50V	1-ND
		C0G/NP0 0603	
C48	1	CAP CER	1276-
		10PF 50V NP0	2154-1-
		0603	ND
C5	1	CAP CER	1276-
		0.039UF 50V	2056-1-
		X7R 0603	ND
D1	2	DIODE	SS12-
D4		SCHOTTKY	E3/61TGICT-
		20V 1A SMA	ND
D2	2	VARISTOR	CG0603MLC-
D3		ESD	05ECT-
		PROTECT	ND
		USB	
F1	1	RESETTABLE	MF-
		FUSE 500mA	MSMF050-
		15V MF-MSMF	2CT-ND
J1 J2	2	HEADER	952-2262-
		MALE 2POS	ND
		TH 1x02 0.1IN	
J3	1	HEADER	WM4204-
		MALE 6POS	ND
		KK100 0.1IN	
J4	1	SHROUD TH	
		CONN MICRO	WM9731CT-
		SD CARD	ND
		PUSH-PULL	



Ref	Qty	Description	Digikey PN
J5	1	USB MICRO-B RECEPTACLE 5PIN SMT R/A STUDS	609-4616- 1-ND
J6	1	HEADER FEMALE 6POS 2x3 0.1IN	A30729CT- ND
J8	1	CONN PWR JACK 2.5X5.5MM HIGH CUR	PJ- 202BH
J9	1	CONN HEADER PH SIDE 2POS 2MM	455-1719- ND
L1	3	FERRITE	MH2029-
L3		BEAD 30 OHM	300YCT-
L4		0805 1LN	ND
L2	1	FIXED IND 1UH 3.3A 1226AS-H- 1R0N	490- 14149-1- ND
LED1	3	LED AMBER	475-2712-
LED2		DIFFUSED	1-ND
LED3		0603 SMD	
R1	1	RES SMD 220 OHM 5% 1/10W 0603	311- 220GRCT- ND
R10	1	RES SMD 732 OHM 1% 1/10W 0603	P732HCT- ND
R11	2	RES SMD	P1.43KHCT-
R8		1.43K OHM 1% 1/10W 0603	ND
R12	3	RES SMD	311-
R16		2.26K OHM 1% 1/10W 0603	2.26KHRCT- ND
R23			
R13	3	RES SMD 10K	RNCP0603FTD10K0CT-
R33		OHM 1% 1/8W	ND
R36		0603	
R14	4	RES SMD 470	RHM470DCT-
R39		OHM 5% 1/4W	ND
R40		0603	
R41			
R15	1	RES SMD 97.6K OHM 1% 1/10W 0603	P97.6KHCT- ND
R17	1	RES SMD 68 OHM 1% 1/10W 0603	P68.0HCT- ND

Ref	Qty	Description	Digikey PN
R18	2	RES SMD 91K	P91.0KHCT-
R19		OHM 1% 1/10W 0603	ND
R2	1	RES SMD 64.9K OHM 1% 1/10W 0603	P64.9KHCT- ND
R20	2	RES SMD 220K	P220KACT-
R21		OHM 5% 1/8W 0805	ND
R22	2	RES SMD 2.2K	P2.2KGCT-
R26		OHM 5% 1/10W 0603	ND
R24	2	RES SMD 22K	P22KGCT-
R28		OHM 5% 1/10W 0603	ND
R25	2	RES SMD	P4.32KHCT-
R29		4.32K OHM 1% 1/10W 0603	ND
R27	1	RES SMD 2.94K OHM 1% 1/10W 0603	P2.94KHCT- ND
R3	3	RES SMD 100K	RMCF0603FG100KCT-
R4		OHM 1% 1/10W 0603	ND
R44		1/10W 0603	
R30	2	RES SMD	P3.83KHCT-
R6		3.83K OHM 1% 1/10W 0603	ND
R31	1	RES SMD 330 OHM 5% 1/10W 0603	311- 330GRCT- ND
R32	2	RES SMD 1K	1276-
R37		OHM 1% 1/10W 0603	3484-1- ND
R34	3	RES SMD 2K	RNCP0603FTD2K00CT-
R35		OHM 1% 1/8W 0603	ND
R43		0603	
R38	1	RES SMD 0.0 OHM JUMPER 1/8W 0603	MCT0603- 0.0- ZZCT- ND
R42	1	NTC THERMISTOR 10K OHM 1% 0402	445-2550- 1-ND
R45	2	RES SMD 1M	P1.0MGCT-
R47		OHM 5% 1/10W 0603	ND
R46	1	RES SMD 111K OHM 5% 1/10W 0603	P110GCT- ND

Ref	Qty	Description	Digikey PN
R5	1	RES SMD 1.87K OHM 1% 1/10W 0603	P1.87KHCT- ND
R7	1	RES SMD 10 OHM 1% 1/10W 0603	P10.0HCT- ND
R9	1	RES SMD 470 OHM 5% 1/4W 0603	311- 1.02KHRCT- ND
S1	1	SWITCH TACTILE SPST-NO 0.05A 12V	SW1020CT- ND
U1	2	IC OPAMP	MCP6004T-
U2		QUAD GP RRO 1MHZ SOIC14	I/SLCT- ND
U10	1	IC REG BUCK BOOST ADJ 2A 10WSON	296- 30204-1- ND
U11	1	IC REG LDO 3.3V 0.25A MCP1703 SOT23A-3	MCP1703T- 3302E/CBCT- ND
U3	1	IC OPAMP GP 3MHZ RRO 14SOIC	296- 39258-1- ND
U4	1	IC OPAMP GP 1MHZ RRO MCP6001 SOT23-5	MCP6001T- I/OTCT- ND
U5	1	IC ADC 16BIT SPI 860SPS ADS1118 10MSOP	296- 38850-1- ND
U6	1	IC MCU 32BIT 256KB FLASH ATSAMD21G 48TQFP	ATSAMD21G18A- AUTCT- ND
U7	1	IC EEPROM 1MBIT 400KHZ 24AA1025 SOIC8	24AA1025- I/SN-ND
U8	1	IC RTC CLK/CALENDARE/SN- I2C MCP7940N SOIC8	MCP7940N- ND
U9	1	IC USB/AC BATT CHRGR MCP73871 20QFN	MCP73871T- 2CCI/MLCT- ND

Ref	Qty	Description	Digikey PN
X1	1	CRYSTAL 16MHZ 30PPM 18pF 4SMD	CTX1206CT- ND
X2	1	CRYSTAL 32.768kHz 7pF CFS- 20632768DZYB	300-8842- ND

Ref	Qty	Description	Adafruit PN
B1	1	Lithium Ion Polymer Battery - 3.7v 500mAh	1578
J7	1	ADAFRUIT FONA 808 + GPS	2542