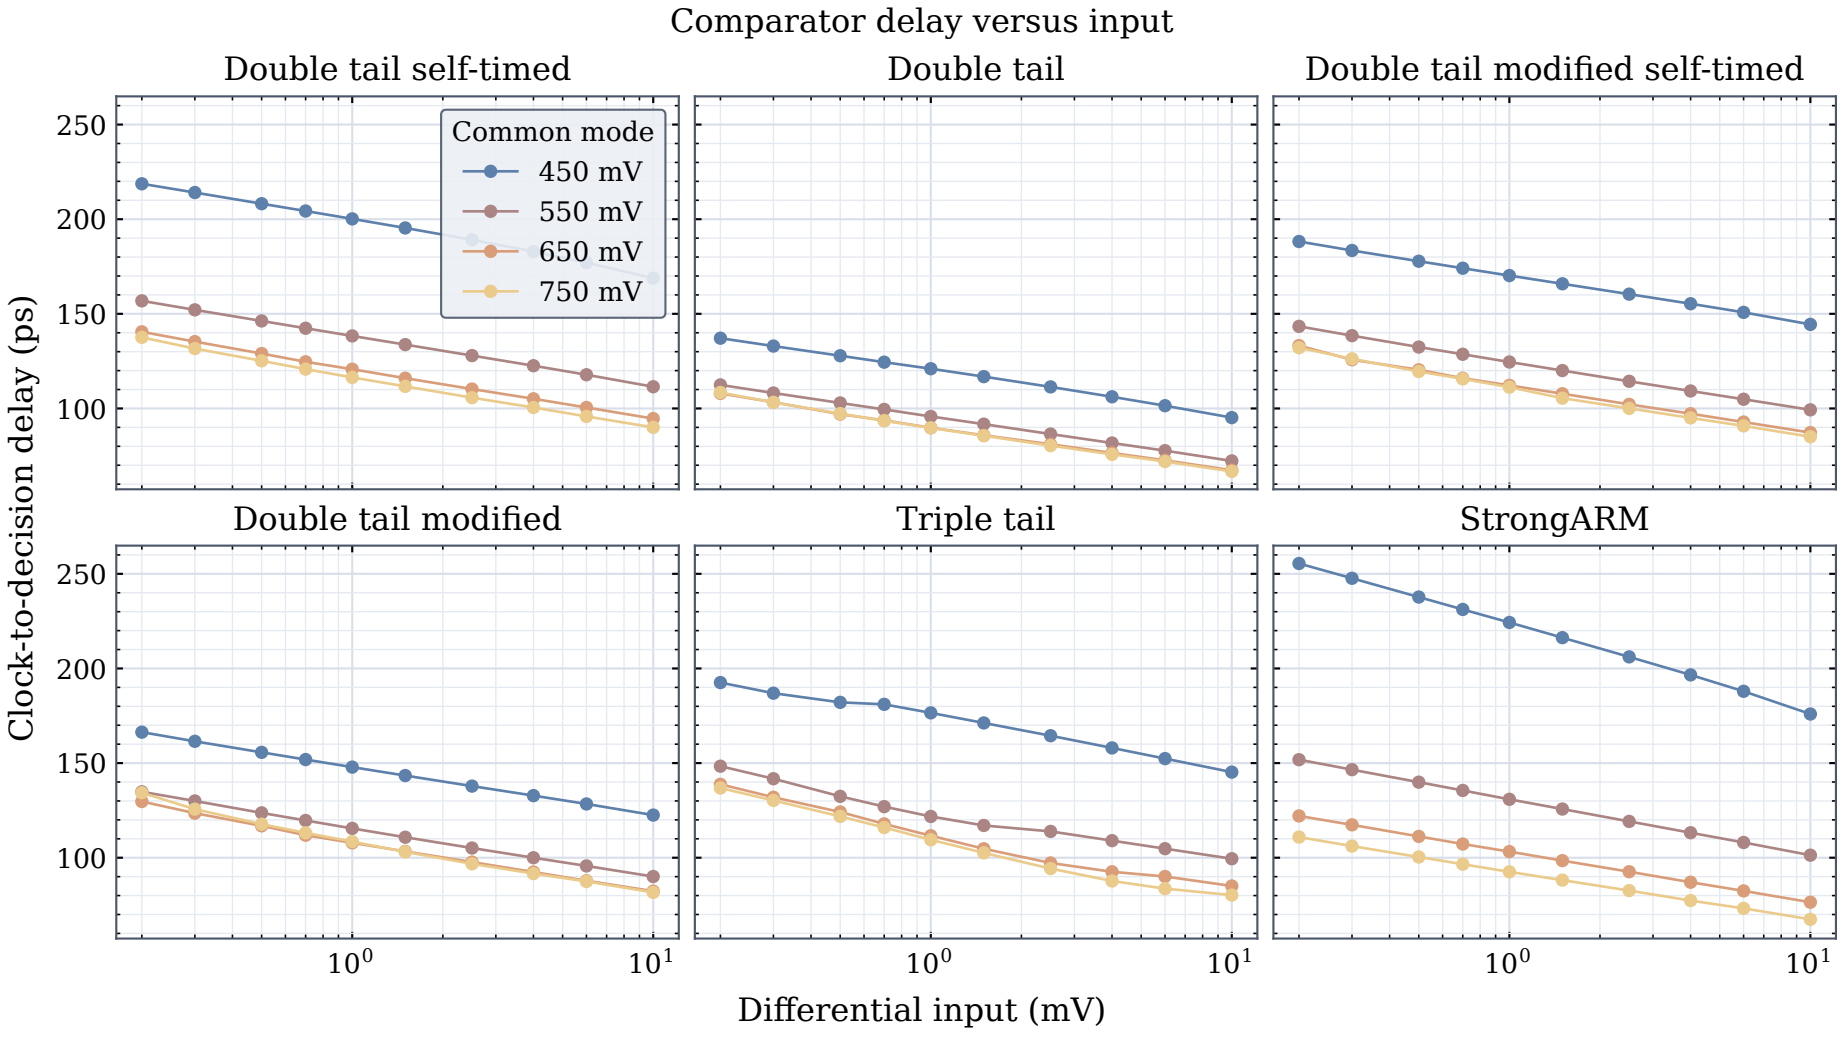
Comparator delay versus input
Double tail self-timed
Double tail
Double tail modified self-timed
Double tail modified
Triple tail
StrongARM
Common mode
450 mV
550 mV
650 mV
750 mV
Clock-to-decision delay (ps)
250
200
150
100
10^0
10^1
Differential input (mV)