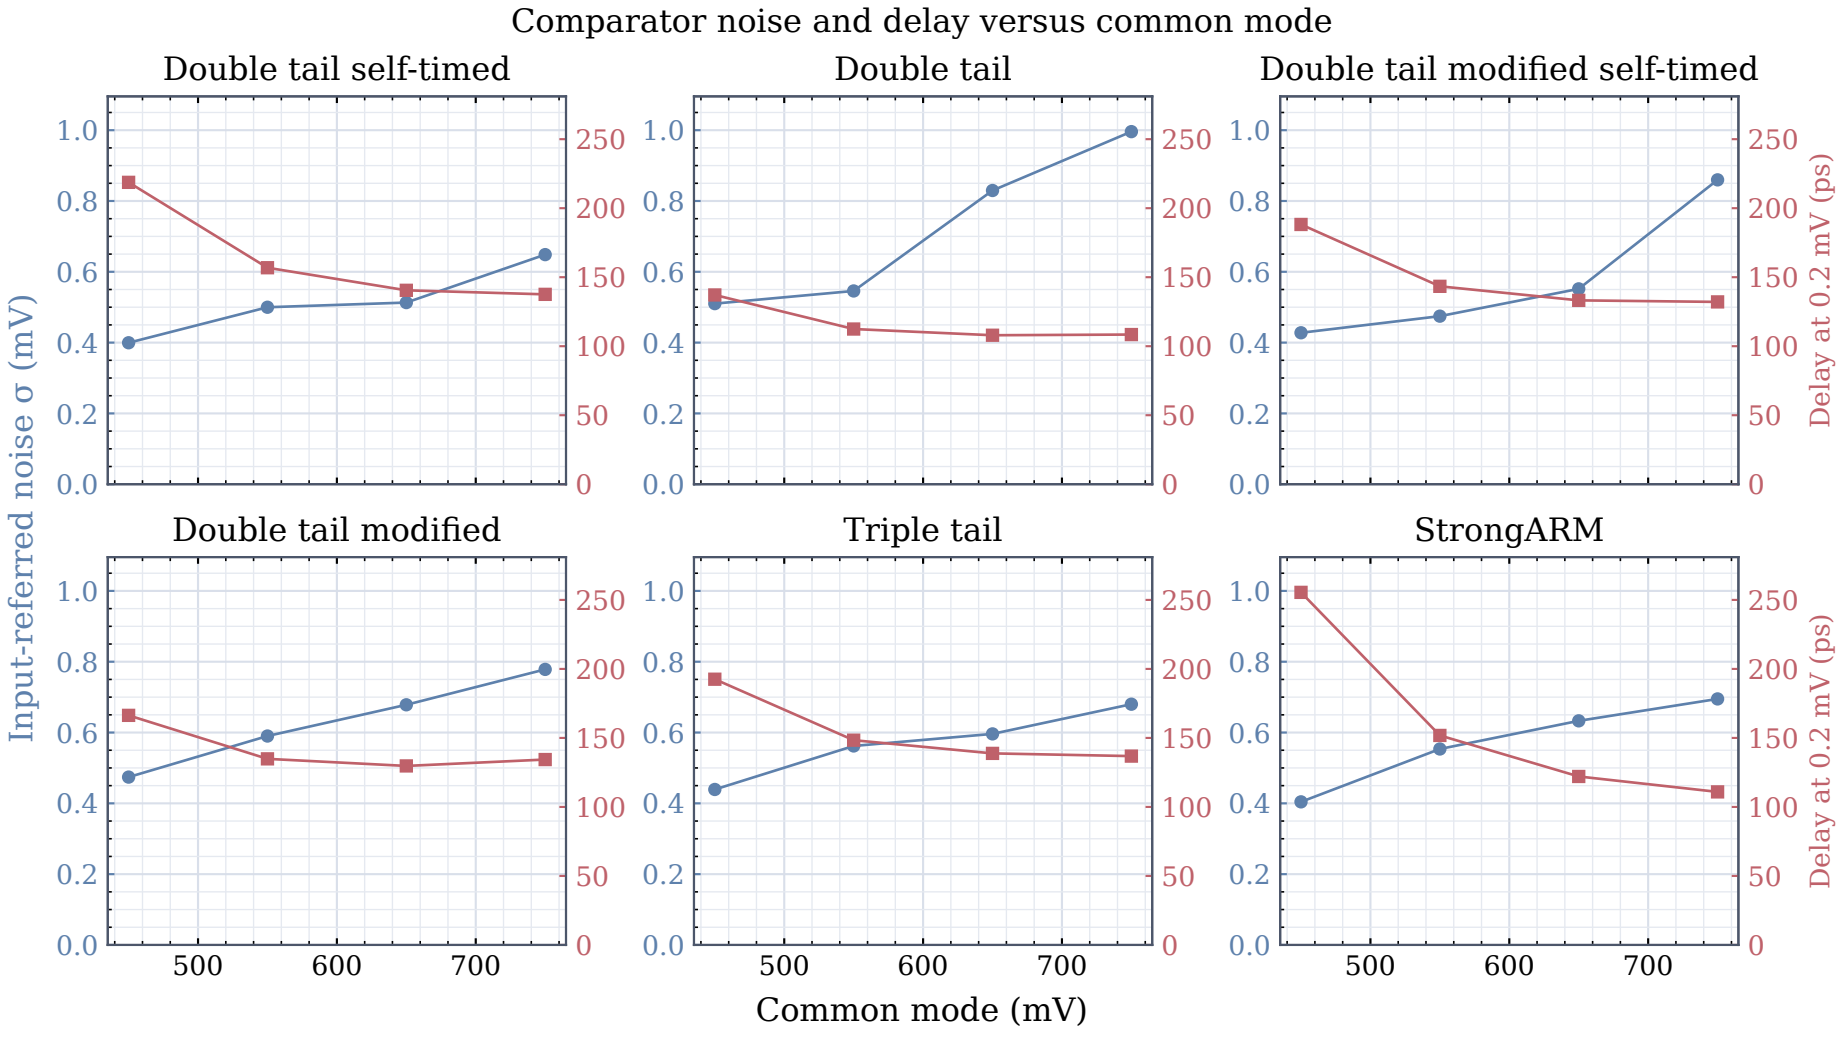
Comparator noise and delay versus common mode
Double tail self-timed
Double tail
Double tail modified self-timed
Double tail modified
Triple tail
StrongARM
Input-referred noise σ (mV)
Delay at 0.2 mV (ps)
Common mode (mV)
0.0
0.2
0.4
0.6
0.8
1.0
0
50
100
150
200
250
500
600
700