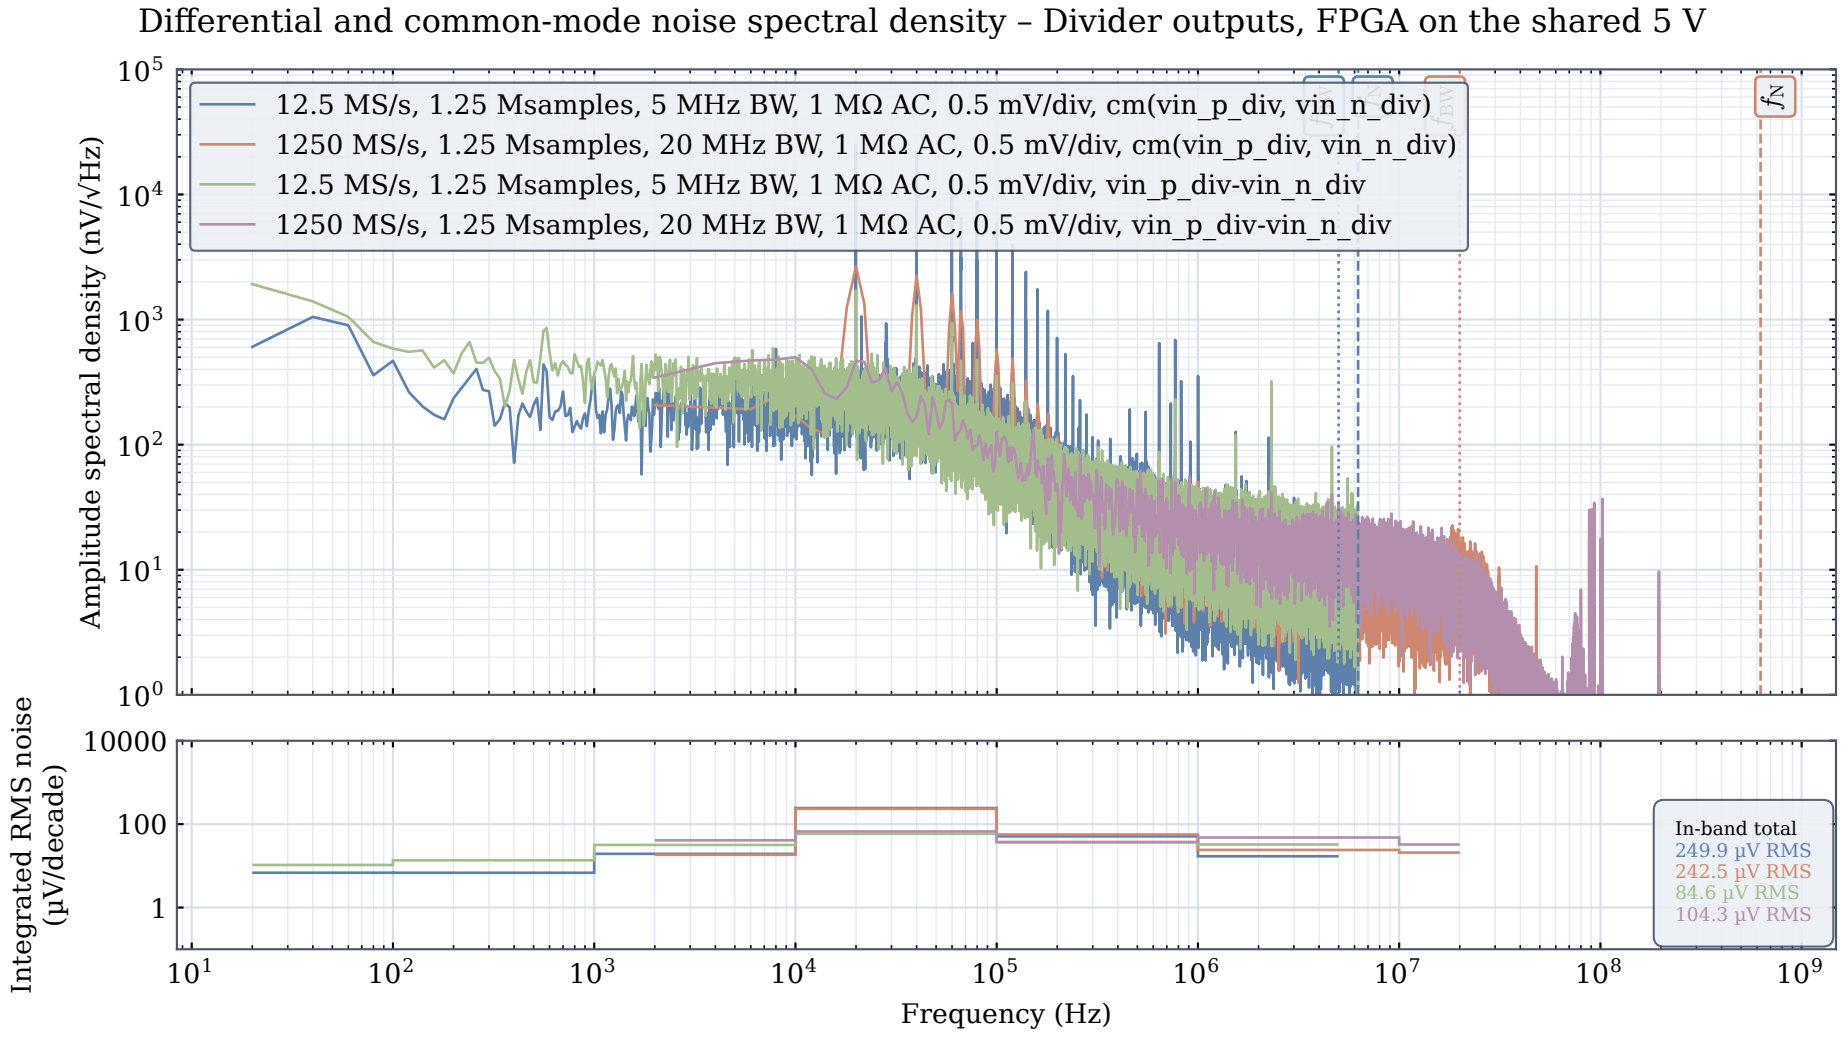

Differential and common-mode noise spectral density – Divider outputs, FPGA on the shared 5 V
12.5 MS/s, 1.25 Msamples, 5 MHz BW, 1 MΩ AC, 0.5 mV/div, cm(vin_p_div, vin_n_div)
1250 MS/s, 1.25 Msamples, 20 MHz BW, 1 MΩ AC, 0.5 mV/div, cm(vin_p_div, vin_n_div)
12.5 MS/s, 1.25 Msamples, 5 MHz BW, 1 MΩ AC, 0.5 mV/div, vin_p_div-vin_n_div
1250 MS/s, 1.25 Msamples, 20 MHz BW, 1 MΩ AC, 0.5 mV/div, vin_p_div-vin_n_div
f_N
Amplitude spectral density (nV/√Hz)
Integrated RMS noise (µV/decade)
In-band total
249.9 µV RMS
242.5 µV RMS
84.6 µV RMS
104.3 µV RMS
Frequency (Hz)