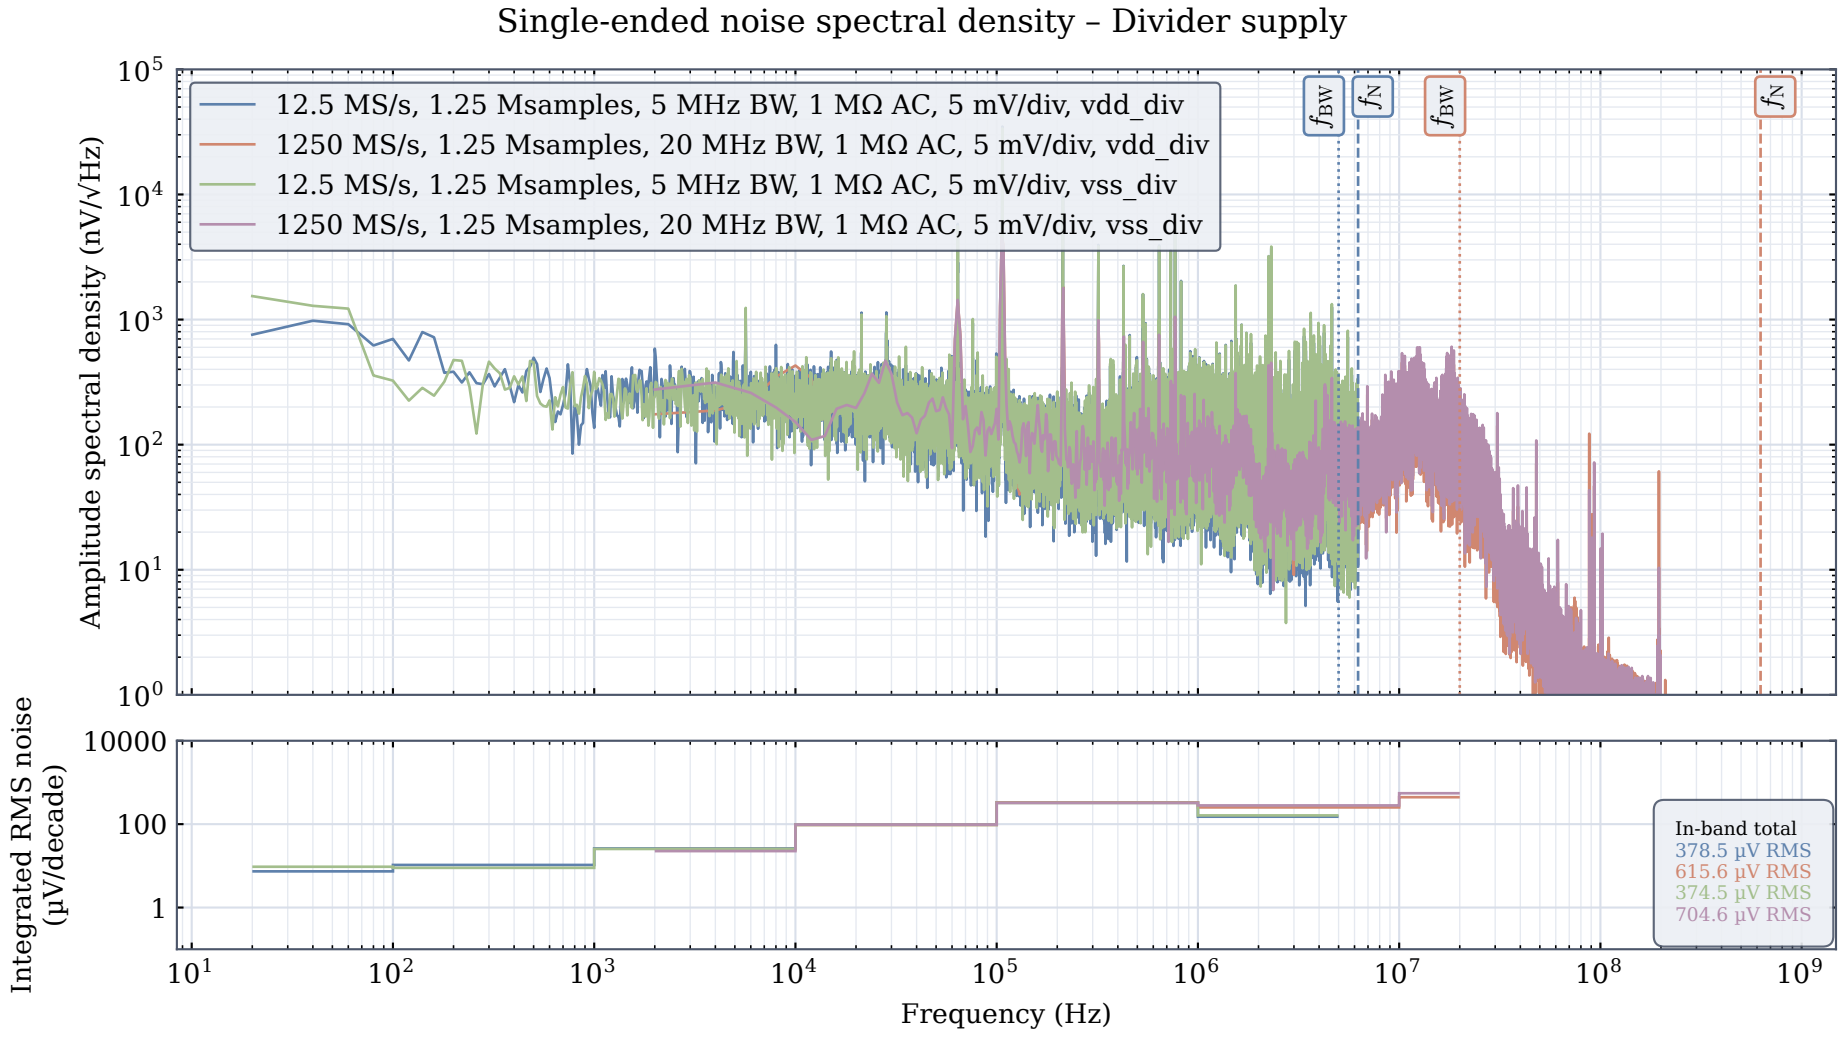

Single-ended noise spectral density – Divider supply
12.5 MS/s, 1.25 Msamples, 5 MHz BW, 1 MΩ AC, 5 mV/div, vdd_div
1250 MS/s, 1.25 Msamples, 20 MHz BW, 1 MΩ AC, 5 mV/div, vdd_div
12.5 MS/s, 1.25 Msamples, 5 MHz BW, 1 MΩ AC, 5 mV/div, vss_div
1250 MS/s, 1.25 Msamples, 20 MHz BW, 1 MΩ AC, 5 mV/div, vss_div
f_{BW}
f_N
f_{BW}
f_N
Amplitude spectral density (nV/√Hz)
10^5
10^4
10^3
10^2
10^1
10^0
Integrated RMS noise (µV/decade)
10000
100
1
In-band total
378.5 µV RMS
615.6 µV RMS
374.5 µV RMS
704.6 µV RMS
10^1
10^2
10^3
10^4
10^5
10^6
10^7
10^8
10^9
Frequency (Hz)