

Fictional review fixture — Broadway at Example Lane

Brief: artifact-review-fixture · Revision: 2026-09-28T00:00:00Z

Fictional example for artifact layout review only

Location: 39.74000, -104.99000

The concern

[illegible]

What we would like to improve

Keep the accessible route clear while providing enough room for people waiting at the crossing. Keep the accessible route clear while providing enough room for people waiting at the crossing. Keep the accessible route clear while providing enough room for people waiting at the crossing. Keep the accessible route clear while providing enough room for people waiting at the crossing.

What we are asking for

Please review the condition during a site walk and discuss where temporary signs can be placed without blocking the ramp.
Please review the condition during a site walk and discuss where temporary signs can be placed without blocking the ramp.
Please review the condition during a site walk and discuss where temporary signs can be placed without blocking the ramp.
Please review the condition during a site walk and discuss where temporary signs can be placed without blocking the ramp.

Observation evidence

Example observation · Not a verified community submission

Saved September 27, 2026 · Reference: fictional-fixture

[illegible]

Snapshot retained with this brief; the source may have changed. The saved date is not a verified photo capture date.

No photos attached.

Fictional data coverage snapshot

Example numbers for layout only. Do not use as civic evidence.

Snapshot: 2026-09-28

An incomplete dataset cannot establish that no safety concern exists.

Residents can document conditions without a recorded crash.

Example source: <https://example.com>

Concept for discussion. Review the dimensions, assumptions, and limited checks on the following pages. This document does not submit a request to an agency.


Prepared September 28, 2026 (UTC).

Existing-condition dimension basis: Estimated.

Existing dimensions are working assumptions, not a verified site survey.
Proposed widths remain concept allocations, not surveyed conditions.
Source or method: Fictional fixture; no field measurements or real evidence.

Before · recorded or assumed layout


Declared right-of-way: 66 ft · Two Way

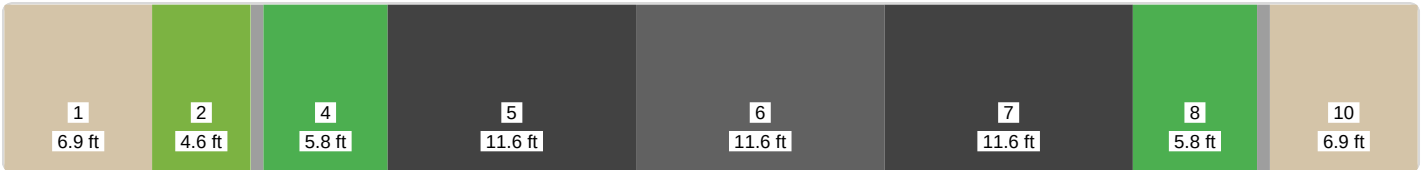

1. Sidewalk (6.9 ft) · 2. Planting Strip (4.6 ft) · 3. Curb (0.6 ft) · 4. Bike Lane (5.8 ft) · 5. Travel Lane (11.6 ft) · 6. Turn Lane (11.6 ft) · 7. Travel Lane (11.6 ft) · 8. Bike Lane (5.8 ft) · 9. Curb (0.6 ft) · 10. Sidewalk (6.9 ft)

After · proposed layout

Declared right-of-way: 66 ft · Two Way

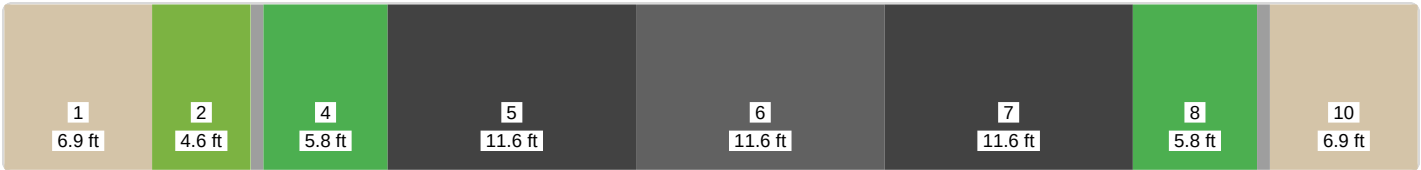

1. Sidewalk (6.9 ft) · 2. Planting Strip (4.6 ft) · 3. Curb (0.6 ft) · 4. Bike Lane (5.8 ft) · 5. Travel Lane (11.6 ft) · 6. Turn Lane (11.6 ft) · 7. Travel Lane (11.6 ft) · 8. Bike Lane (5.8 ft) · 9. Curb (0.6 ft) · 10. Sidewalk (6.9 ft)

Space allocation changes

No width allocation changes by element type.

Widths are summed by element type across the street. These changes do not predict traffic, safety, accessibility, or other real-world outcomes.

Schematic cross-sections, proportional within each diagram. Intersection geometry, grades, and conditions along the street are not represented.

Fictional review fixture — Broadway at Example Lane

Declared right-of-way: 66 ft · Curb-to-curb: 46.4 ft

Functional class: Collector · Template: tmpl-road-diet-60

Element	Side	Width	Min.	Rec. min.	Stored guidance source
Sidewalk	Left	6.9 ft	4 ft	5 ft	PROWAG R302.3; NACTO USDG p.39
Planting Strip	Left	4.6 ft	2 ft	4 ft	NACTO USDG p.43
Curb	Left	0.6 ft	0.5 ft	0.5 ft	NACTO USDG p.38
Bike Lane	Left	5.8 ft	4 ft	5 ft	NACTO USDG p.126
Travel Lane	Center	11.6 ft	9 ft	10 ft	NACTO USDG p.74
Turn Lane	Center	11.6 ft	9 ft	10 ft	NACTO USDG p.77
Travel Lane	Center	11.6 ft	9 ft	10 ft	NACTO USDG p.74
Bike Lane	Right	5.8 ft	4 ft	5 ft	NACTO USDG p.126
Curb	Right	0.6 ft	0.5 ft	0.5 ft	NACTO USDG p.38
Sidewalk	Right	6.9 ft	4 ft	5 ft	PROWAG R302.3; NACTO USDG p.39

Min. and recommended minimum values above are stored element guidance, not a complete specification or proof that local requirements are met.

Selected dimensional checks

The validator compares supported element widths against stored minimum, maximum, and recommended widths, including applicable stored PROWAG width entries and NACTO guidance. It also compares summed widths with the declared right-of-way and curb-to-curb widths.

Reported findings: 0 errors · 0 warnings · 3 guidance notes

These are findings, not a count of checks performed. An empty result does not establish compliance or approval.

Info · planting-strip width 4.6 ft is below NACTO recommended 6 ft — could be improved

NACTO USDG p.43 · Entered: 4.6 ft · Comparison value: 6 ft

Info · bike-lane width 5.8 ft is below NACTO recommended 6 ft — could be improved

NACTO USDG p.126 · Entered: 5.8 ft · Comparison value: 6 ft

Info · bike-lane width 5.8 ft is below NACTO recommended 6 ft — could be improved

NACTO USDG p.126 · Entered: 5.8 ft · Comparison value: 6 ft

Still to be assessed

Local requirements, verified site dimensions, right-of-way boundaries, slopes, crossing and curb-ramp details, sight distance, traffic operations, drainage, utilities, construction feasibility, and broader accessibility are not assessed here.

Citations identify guidance stored in the app. Check the original sources, their applicability, and current local requirements with the intended reviewer. This is not a comprehensive engineering, legal, or accessibility assessment.

Prepared with Curbwise on September 28, 2026 (UTC). Use this brief to discuss a next step, not as construction documentation.