KM FIT
Professional bike fitting

Session
KM-20261018-CVE0

Bike Fit Report — Road

CLIENT	DATE	FITTER	BIKE
Alex Martin	October 18, 2026	Kevin M	Canyon Endurace CF 7, size M

01 Fit summary

38 yrs · 8 h/week · Comfort & endurance · Moderate / All-road

M
FRAME SIZE
52–54 cm (c-t)
Stack 607 · Reach 484 mm


SADDLE HEIGHT
727 mm
Setback 50 mm · Crank 172.5 mm

HANDLEBAR X / Y
514 / 687 mm
Drop 20 · Reach 564 mm

KNEE FLEXION (BDC)
34°
In target range

02 Position analysis

Estimated from body proportions — verify on the bike with video or goniometer

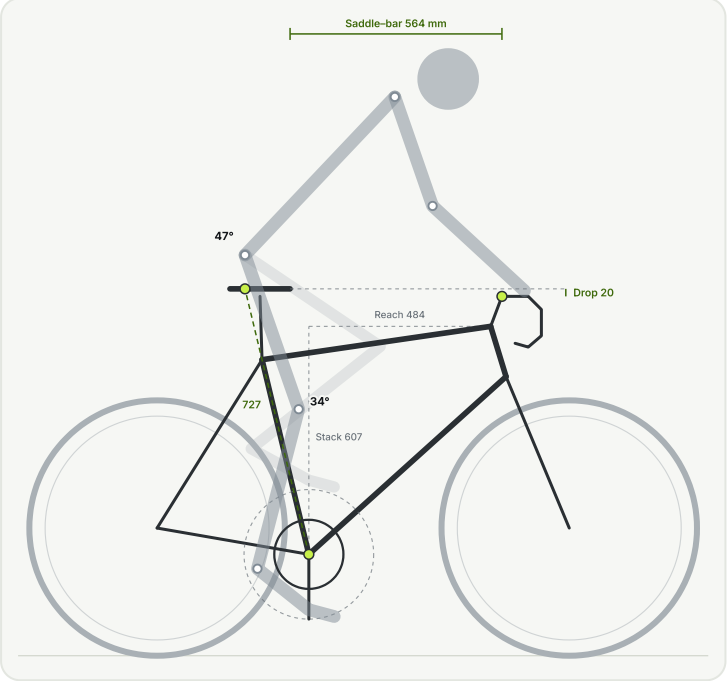

Rider (estimated) — Frame — Fit dimensions

Knee flexion at bottom of stroke 34°
35° at saddle height 724 mm (−3) — In range

Torso angle 47°
Typical for moderate position: 42–52° — In range

Shoulder angle 77°
Torso to arm, on the hoods: 70–95° — In range

Hip angle (top of stroke) 81°
Most closed hip angle — avoid < 40° — In range

Joint angles are modelled from inseam, torso and arm length using standard segment proportions, with the hip 90 mm above the sit bones and the foot 15° toe-down at the bottom of the stroke. Use them to sanity-check the fit, then confirm dynamically.

03 Fit coordinates

Recommended values can be fine-tuned — dependent targets update

MEASUREMENT	PRE-FIT	RECOMMENDED	CHANGE
SADDLE			
Saddle height BB centre to saddle top	712 mm	**727** mm	+15
Saddle setback Saddle nose behind BB	55 mm	**50** mm	-5
COCKPIT			
Saddle to handlebar Saddle nose to bar centre	585 mm	**564** mm	-21
Saddle to bar drop Saddle top above bar top	45 mm	**20** mm	-25
Handlebar X Horizontal from BB centre	530 mm	**514** mm	-16
Handlebar Y Vertical from BB centre	645 mm	**687** mm	+42
Handlebar width Centre to centre	42 cm	**40** cm	-2
DRIVETRAIN & FRAME			
Crank length	175 mm	**172.5** mm	-2.5
Frame stack target	560 mm	**607** mm	+47
Frame reach target	390 mm	**484** mm	+94
Saddle width	143 mm	**150** mm	+7

Saddle height: BB centre to saddle top along the seat tube. Setback & reach from saddle nose. Handlebar X/Y from BB centre.

04 Equipment & contact points

FRAME

M · 52–54 cm (c-t)

Seat tube 533 mm (c-t). Target stack 607 / reach 484 mm — verify against the manufacturer's geometry.

CRANKS

172.5 mm

Currently 175 mm. Adjust saddle height by the same difference when changing.

HANDLEBAR

40 cm c-c

Matched to 40 cm shoulder width.

SADDLE

≈ 150 mm width

125 mm sit bones + 25 mm. Set level to −2° nose down.

CLEATS

Road

Center of ball of foot over pedal axle. 0–5mm float recommended. Shoe size EU 43.

FOOTBEDS & SHIMS

3 mm shim — right

6 mm leg-length difference: start with ~50% correction under the right cleat and reassess. Low arch: supportive footbed; watch for knee tracking inwards (varus wedge if needed).

05 Clinical findings & recommendations

History
Patellofemoral pain (right) after spring sportive season. Desk job.

Front-of-knee pain
Usually a saddle that is too low or too far forward. Estimated knee flexion with the new fit is 34° (target 30–40°). Saddle raised by 15 mm.

Neck & shoulder tension
Often excess reach or drop. Keep elbows soft; consider a shorter stem or more spacers. Reach shortened by 21 mm.

Hamstring flexibility — 72° SLR
Average flexibility — suitable for the selected position.

Proportions
Long arms relative to torso — consider a longer stem or more reach.

Saddle height
This is a starting point. Fine-tune in 2 mm increments over 2–3 weeks.

06 Adaptation & follow-up

1. Ride easy for the first 3–4 rides on the new position; avoid long or hard efforts in week one.
2. Mark saddle height and bar position with tape so nothing slips while the body adapts.
3. Keep a note of any discomfort — where, when, and after how long.
4. Change saddle height by no more than 2 mm at a time, then ride at least 3 times before changing again.

RECOMMENDED REVIEW

November 8, 2026

Or sooner if any discomfort persists beyond the first week.

Fitter signature

Client signature

07 Appendix — client data

Height	178 cm	Sit-bone width	125 mm
Inseam	82 cm	Hamstring SLR	72 °
Torso (C7–hip)	58 cm	Shoe size	EU 43
Arm (shoulder–wrist)	62 cm	Arch type	Low / flexible
Femur	—	Leg-length difference	6 mm (right shorter)
Shoulder width	40 cm	Target position	Moderate — endurance

Calculated values are starting points based on LeMond / Hamley methods with anthropometric joint-angle estimates. Always validate on the bike with a qualified fitter.

KM-20261018-CVE0