




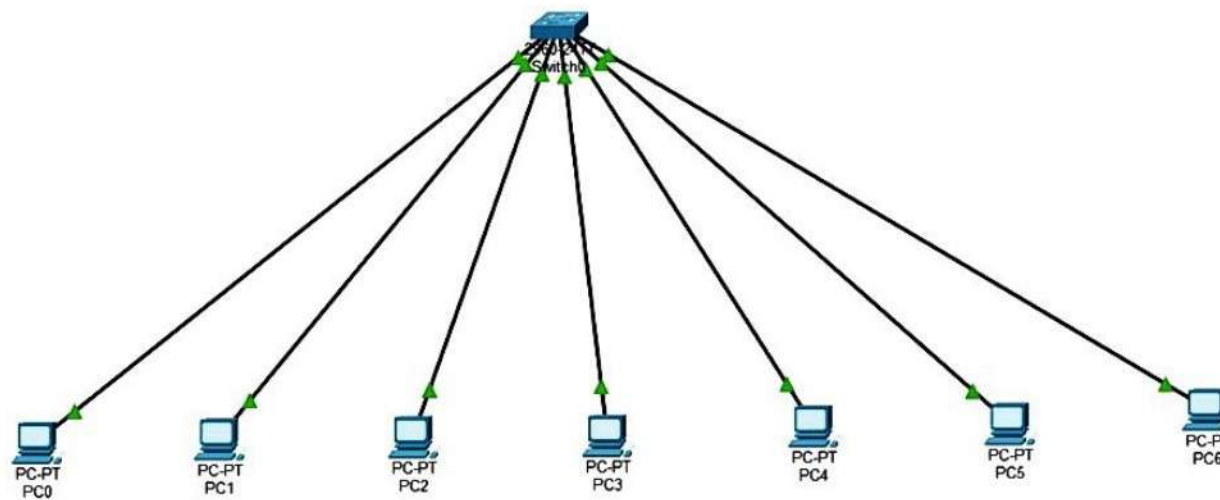



Logical Physical x 453, y 2

Root 09:47:30

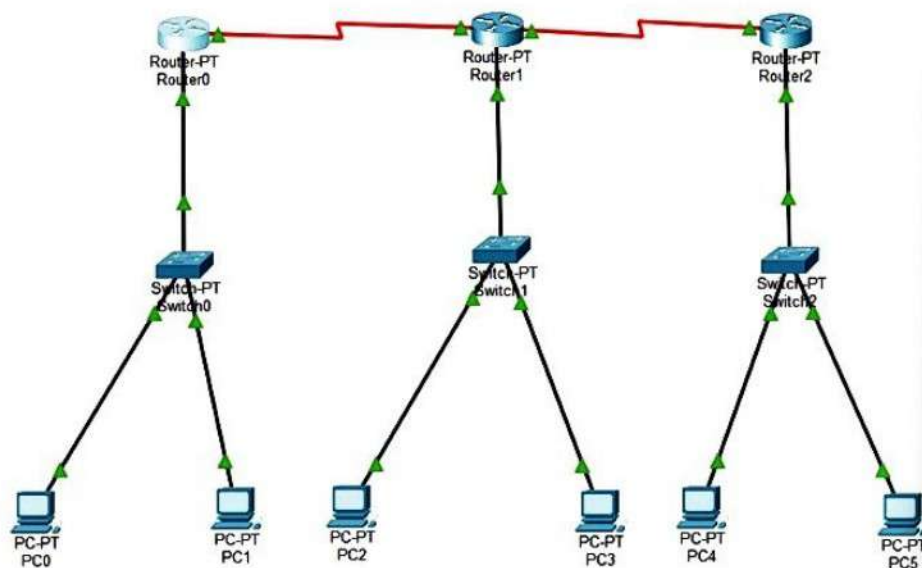

Router0

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Static Routes

Network 30.0.0.0

Mask 255.0.0.0

Next Hop 40.40.40.2

Add

Remove

Network Address


20.0.0.0/8 via 40.40.40.2

30.0.0.0/8 via 40.40.40.2

Equivalent IOS Commands

```
Router(config)#ip address 10.10.10.1 255.0.0.0
Router(config-if)#ip address 40.40.40.1 255.0.0.0
Router(config-if)#
%LINK-5-CHANGED: Interface Serial12/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial12/0, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 20.0.0.0 255.0.0.0 40.40.40.2
Router(config)#ip route 30.0.0.0 255.0.0.0 40.40.40.2
Router(config)#
```

Time: 00:19:21



Automatically Choose Connection Type

Scenario 0


New Delete

Toggle PDU List Window

Realtime Simulation



Logical Physical c 75. v. 0

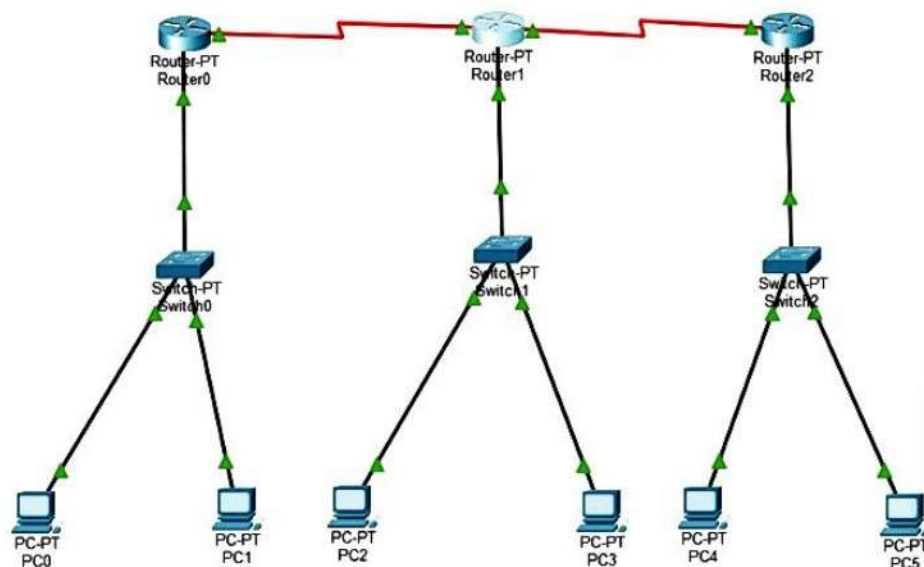

Router1

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Static Routes

Network 30.0.0.0

Mask 255.0.0.0

Next Hop 50.50.50.2

Add

Remove

Network Address


10.0.0.0/8 via 40.40.40.1

30.0.0.0/8 via 50.50.50.2

Equivalent IOS Commands

```
Router(config)#ip route 30.0.0.0 255.0.0.0 50.50.50.2
Router(config-if)#ip address 50.50.50.1 255.0.0.0
Router(config-if)#
%LINK-5-CHANGED: Interface Serial3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 10.0.0.0 255.0.0.0 40.40.40.1
Router(config)#ip route 30.0.0.0 255.0.0.0 50.50.50.2
Router(config)#
```

Time: 00:21:20




Scenario 0

New Delete


Toggle POI List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

Realtime Simulation



Logical Physical x 386 y: 1

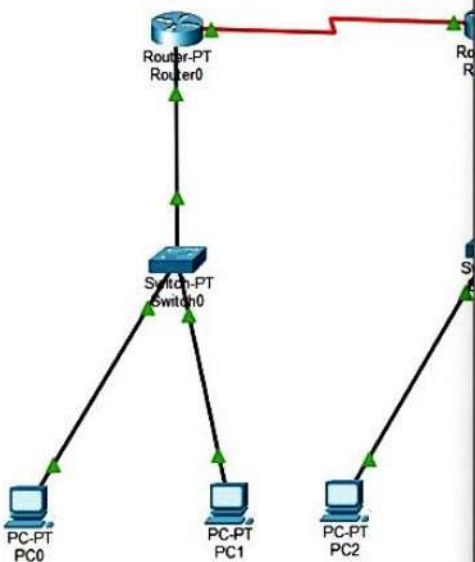

Router2

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

INTERFACE

FastEthernet0/0

FastEthernet1/0

Serial2/0

Serial3/0

FastEthernet4/0

FastEthernet5/0

Static Routes

Network 20.0.0.0

Mask 255.0.0.0

Next Hop 50.50.50.1

Add

Remove

Network Address

10.0.0.0/8 via 50.50.50.1

20.0.0.0/8 via 50.50.50.1


Equivalent IOS Commands

```
Router(config-if)#ip address 20.0.0.0 255.0.0.0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up

Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#ip route 10.0.0.0 255.0.0.0 50.50.50.1
Router(config)#ip route 20.0.0.0 255.0.0.0 50.50.50.1
Router(config)#
```


Time 00:22:39

Realtime Simulation




Spanning Tree

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

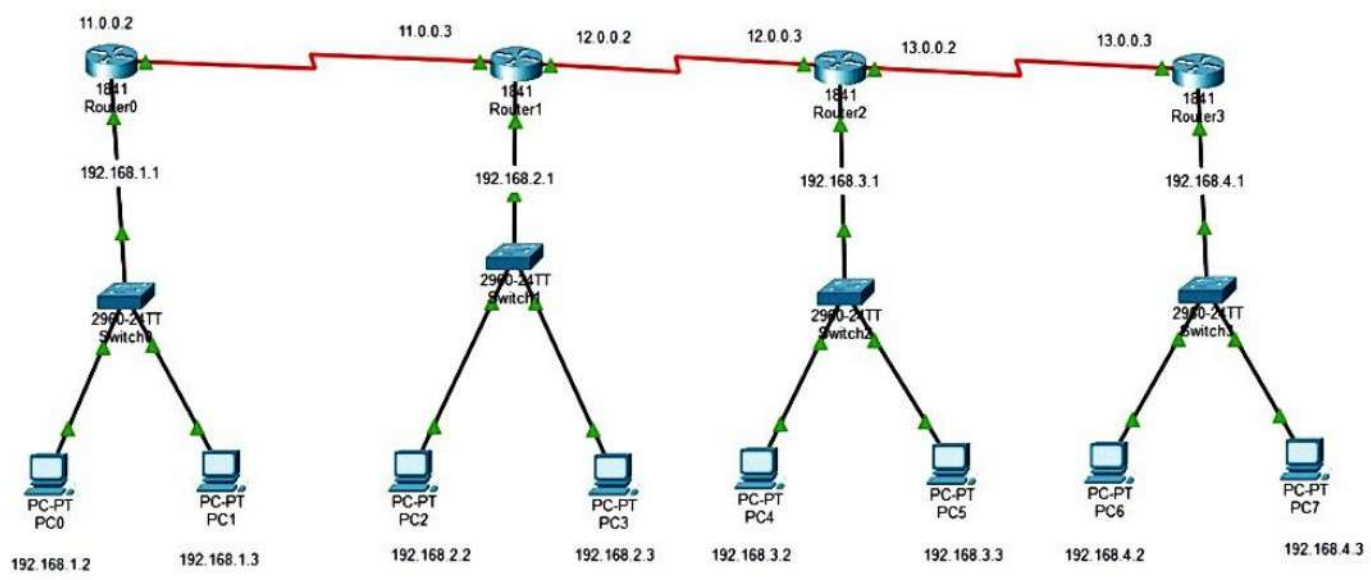


Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
☒	Successful	PC0	PC1	ICMP	Red	0.000	N	0	(edit)	(delete)
☒	Successful	PC2	PC4	ICMP	Green	0.000	N	1	(edit)	(delete)



Logical Physical x 1080, y 1

Root 09:54:30

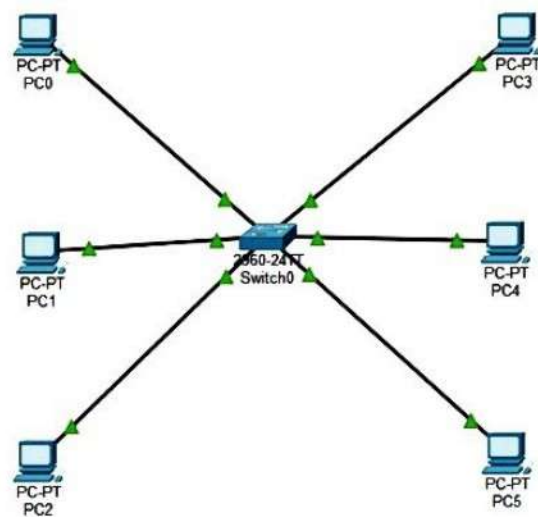

Time 00:23:35

Realtime Simulation


Scenario 0
New Delete
Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
Successful		PC0	192.168.1.4	ICMP		0.000	N	0	(edit)	(delete)
Successful		PC0	255.255.2...	ICMP		0.000	N	1	(edit)	(delete)