YSF Host (ysf_host) - flow chart

OpenMT - Rick KD0OSS

Talks to the Modem Host on :18000+N-1 and to the YSF gateway on :18600+N-1. The call logic is in the control module (ysf_func.c) that this host drives.

main() - start-up

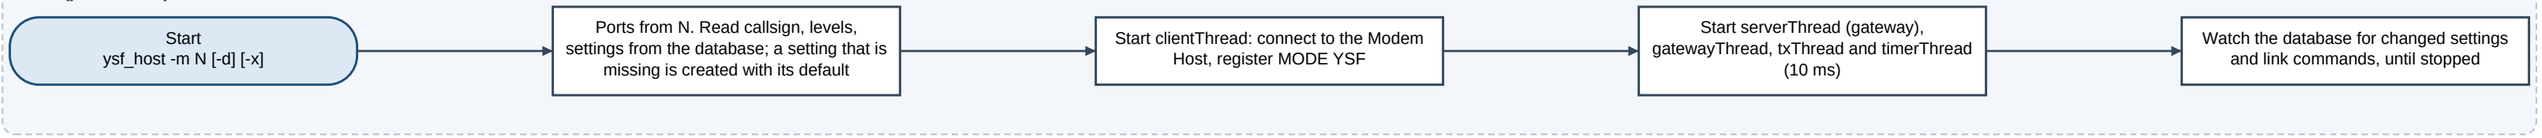

Modem -> gateway (traffic from the radio)

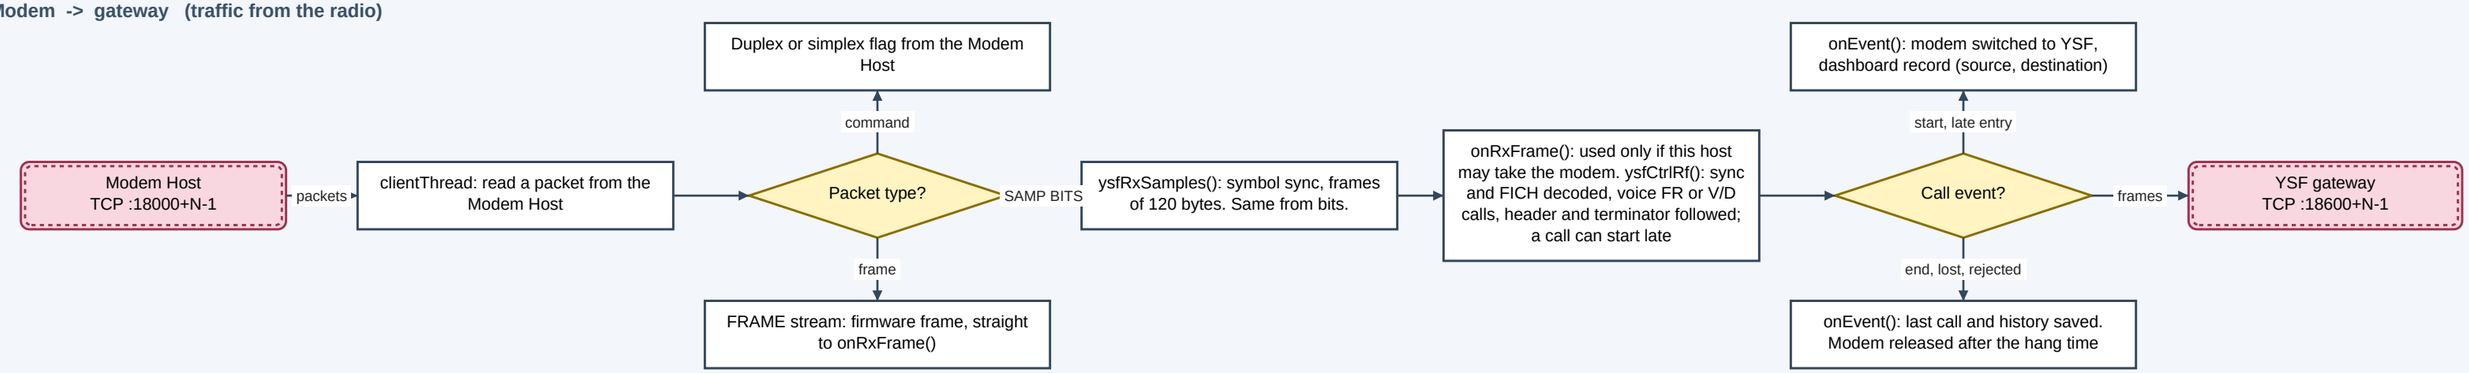

Gateway -> modem (traffic from the reflector)

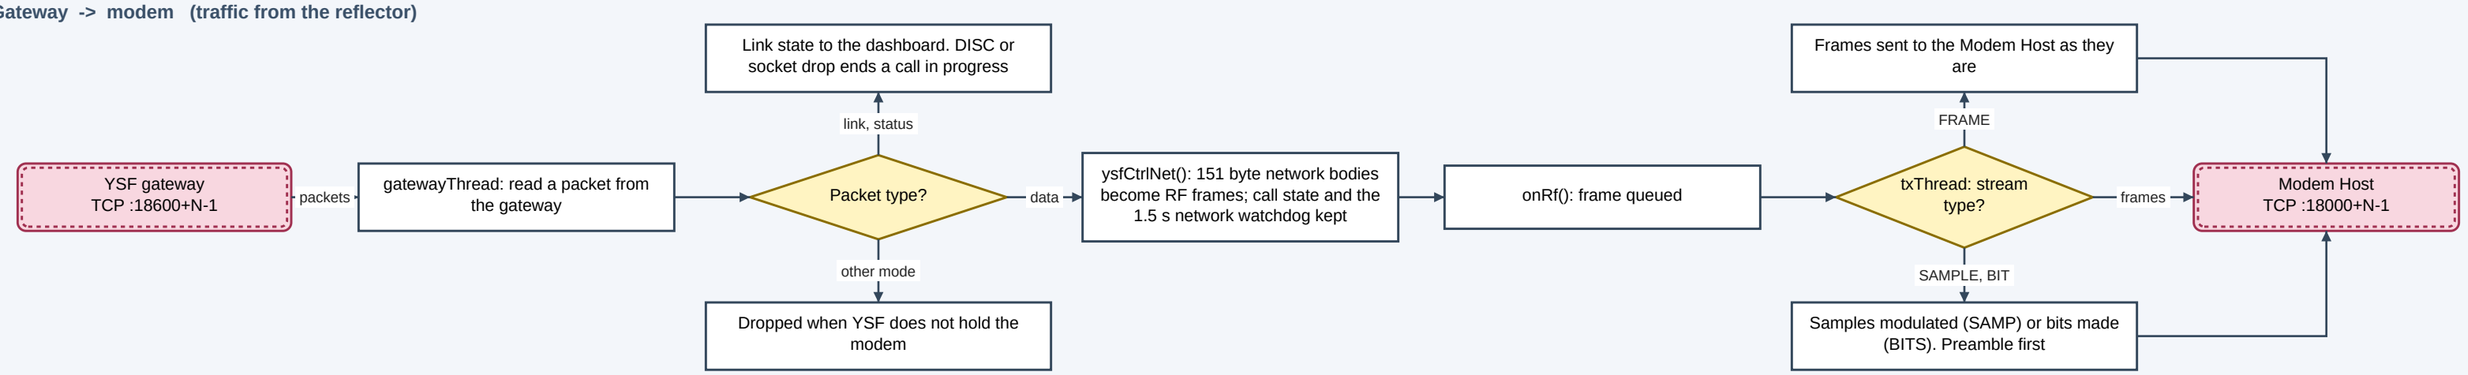

Timers, dashboard commands and the database



Key

step · decision · start / thread · outside / database / network · modem hardware · queue / buffer

Wires-X requests from the radio are answered by the gateway. The host sends each RF frame to the gateway as a 151 byte body. Errors go to the error log with reportError().