P25 Host (p25_host) - flow chart

OpenMT - Rick KD0OSS

Decodes and builds P25 frames for one modem. Talks to the Modem Host on :18000+N-1 and to the P25 gateway on :18300+N-1. Decodes everything but the voice codec.

main() - start-up

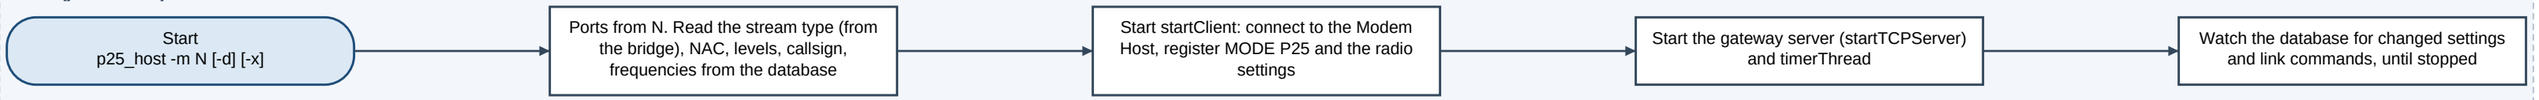

Modem -> gateway (traffic from the radio)

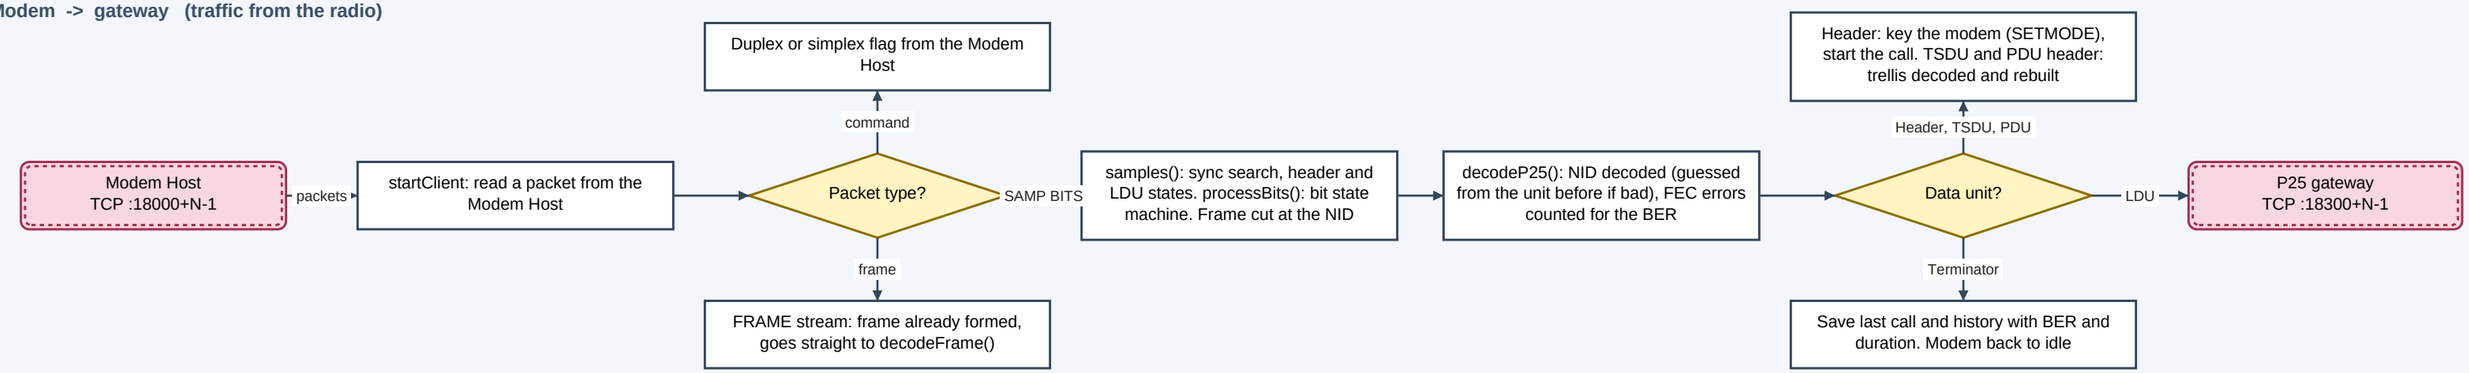

Gateway -> modem (traffic from the reflector)

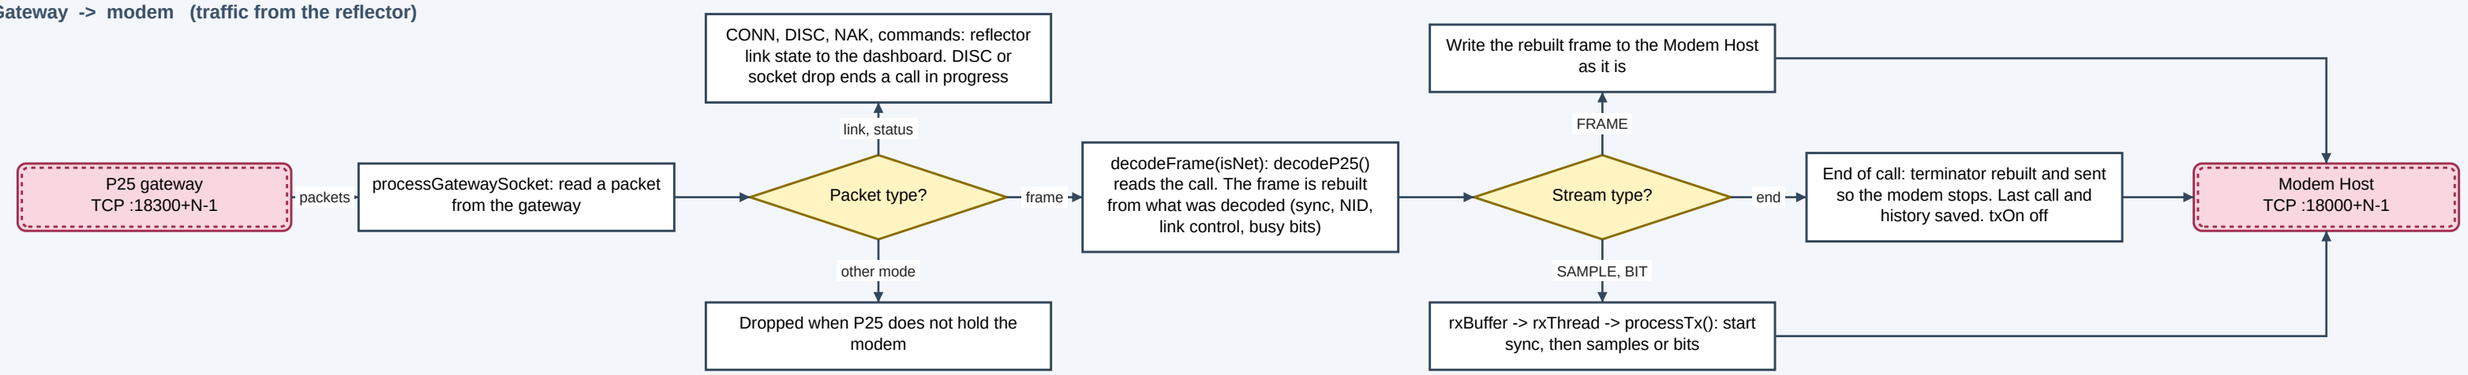

Timers, dashboard commands and the database

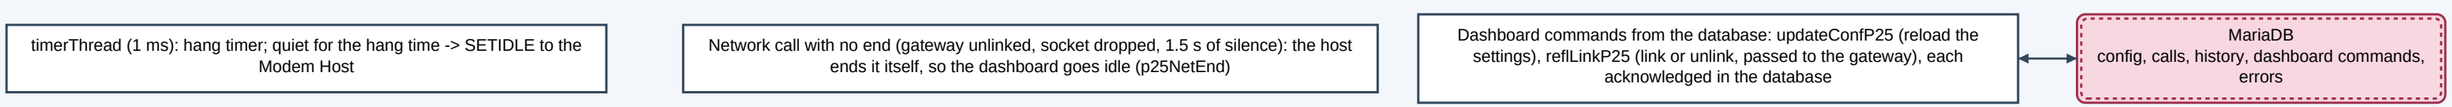

Key

In duplex the host rebuilds every frame from what it decoded before it relays it, as MMDVMHost does. Errors go to the error log with reportError().