P25 Host (p25_host) - flow chart

OpenMT - Rick KD0OSS

Decodes and builds P25 frames for one modem. Talks to the Modem Host on :18000+N-1 and to the P25 gateway on :18300+N-1. Decodes everything but the voice codec.

main() - start-up

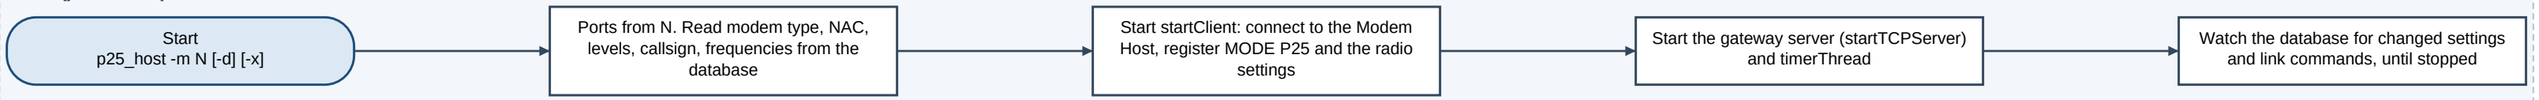

Modem -> gateway (traffic from the radio)

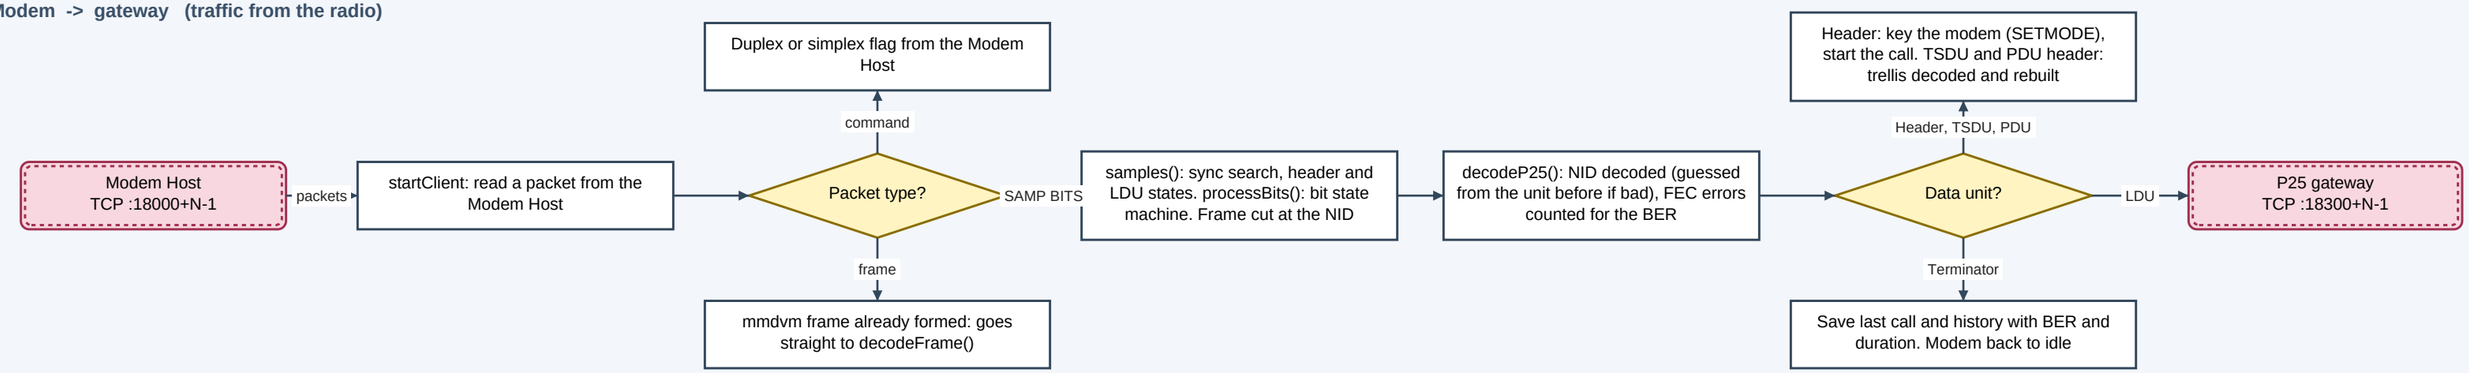

Gateway -> modem (traffic from the reflector)

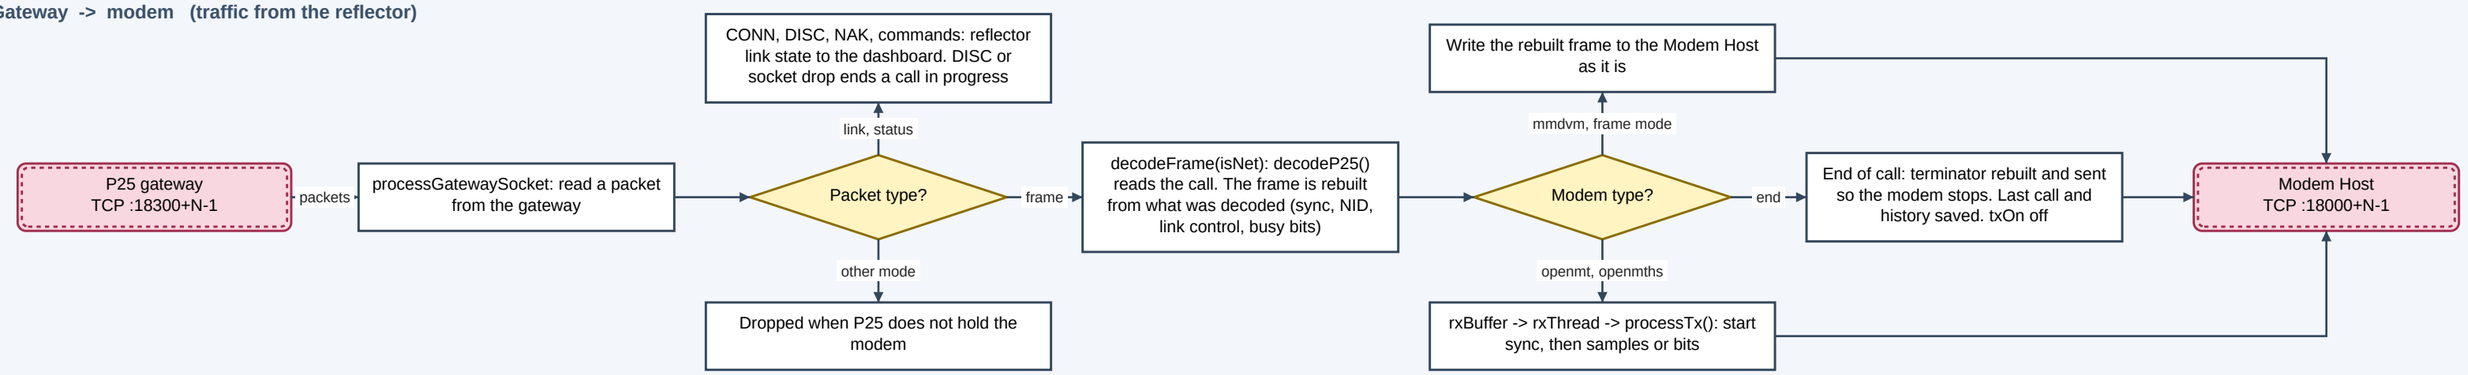

Timers, dashboard commands and the database

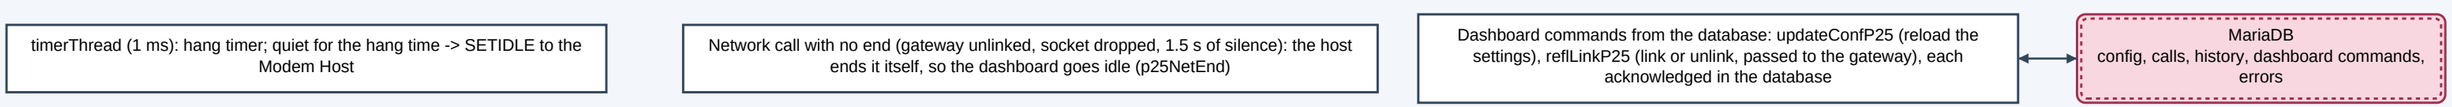

Key

step · decision · start / thread · outside / database / network · modem hardware · queue / buffer

In duplex the host rebuilds every frame from what it decoded before it relays it, as MMDVMHost does. Errors go to the error log with reportError().