

# Two-Line Alphanumeric Pager



*Scrolling display for easy-to-read messages from nurse call, fire, security, access control, building automation systems, etc.*




## VP-2 Two-line Alphanumeric Pager

- Two-line display, 10 characters per line
- Selectable two-line page by page or one line scrolling display
- 16 message storage, 1000 alphanumeric characters each
- Protection for 12 messages
- Message time stamping
- Choice to delete individual message or erase all
- Unread message indication
- Duplicate message indication
- 4 alarm settings
- 5 selectable alerts and silent vibration
- Battery low indication
- Backlit LCD
- Automatic power ON/OFF setting
- Out of range indication (option)
- Four ID addresses
- 512/1200/2400 bps switchable signal speed
- Message protection when changing the battery



## Performance Specifications:

Frequency	440-470 MHz, 150-174 MHz
Signal format	POCSAG
Paging sensitivity	10UV/M
Channel spacing	25 KHz
Selectivity	>60 DB
Spurious & image rejection	>50 DB
Alarm output	75 DB (MIN)
Baud Rate	512 BPS / 1200 BPS /2400 BPS
Frequency stability	±10 PPM -10°C TO +50°C
Power supply	ONE 1.5 V AAA size alkaline battery
Average life of battery	700 hours
Dimension	L 2.45" x W 1.62" x H 0.57"
Weight	2.1 oz (including battery & clip)

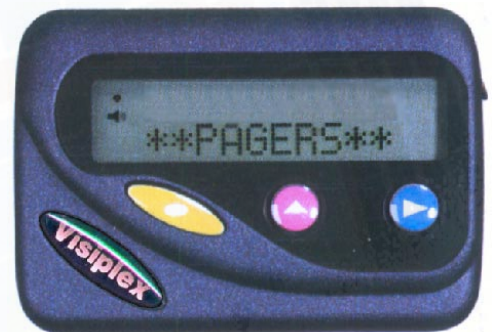

Actual Size



## Visiplex Technologies, Inc.

111 Deer Lake Road, Deerfield, IL 60015  
Phone: (847) 405-0771 Fax: (847) 405-0776  
E-mail: [sales@visiplex.com](mailto:sales@visiplex.com)  
Web site: [www.visiplex.com](http://www.visiplex.com)