The propulsion system consists of six identical 1.25 FPR remote lift fans and gas generators and the associated ducting and control elements to provide low speed propulsive lift, control and symmetrical thrust after a failure of any major component. In the lift-fan installations, at the 30-minute (military) power setting, SL/90°F day conditions each fan/gas generator unit produces 21,811 pounds of nominal thrust. In the lift-cruise installations each unit produces 19,566 pounds of thrust because of the differences in the installations losses. The integrated single swivel lift-cruise nozzle allows thrust to be directed downward for the V-mode, forward for inflight and ground deceleration and aft for cruise. The level of thrust provides an installed vehicle T/W ratio of 1.255 for the above nominal SL/90°F conditions. The lift and lift-cruise fans use quad flow entries to the fan scroll to reduce overall fan diameter and save wing pod and lift-cruise nacelle wetted area and structural weight. The wing pod location of the lift-fans makes it easier to control the internal cabin noise to the guideline requirements.

Figure 3 illustrates the internal cabin arrangement and typical cross-section. The cabin provides seating for 100 passengers in three by three, six abreast seating with 34 inch pitch between seats. Folding tables are

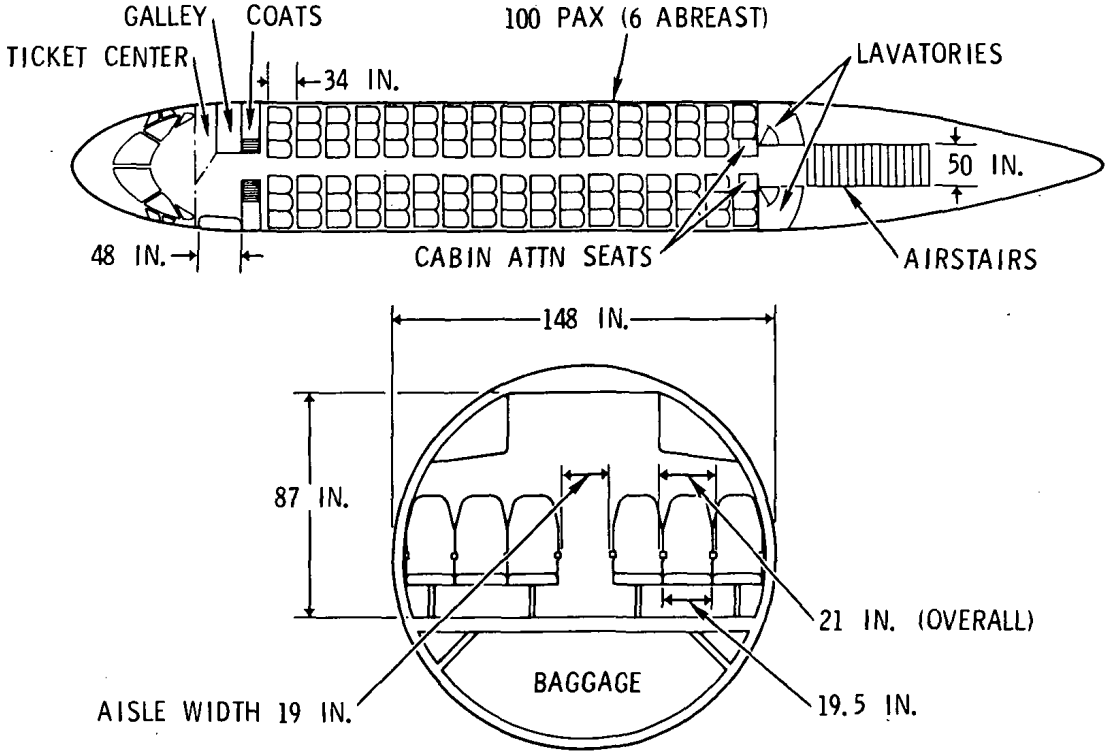


Figure 3. Passenger Cabin Arrangement

provided for each seat. Space is provided for carry-on items storage in overhead racks and under the seats. The interior dimensions of the configuration are comparable to the contemporary Boeing 737 jet airliner. A ticket