






LED

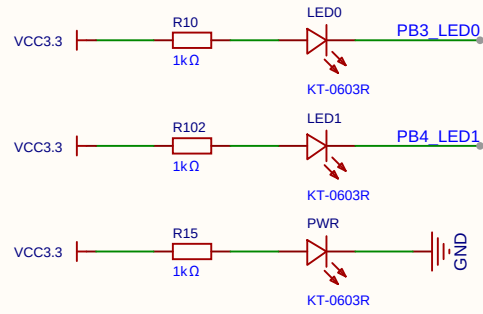


KEY

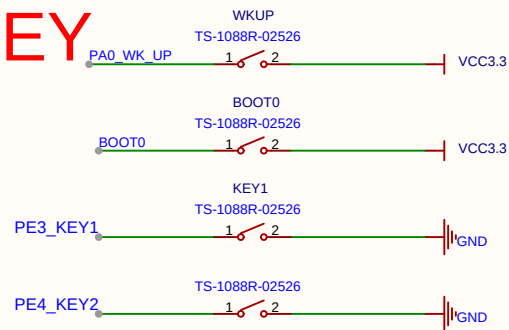


LDO

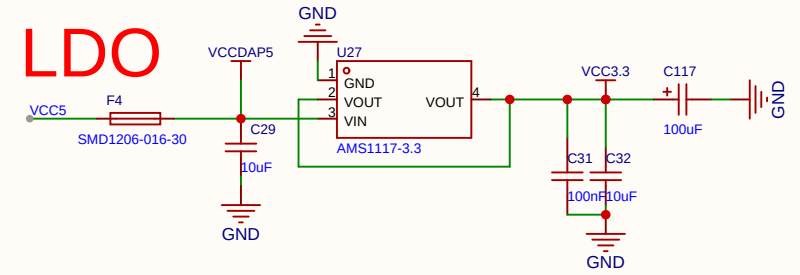


TYPE-C USB

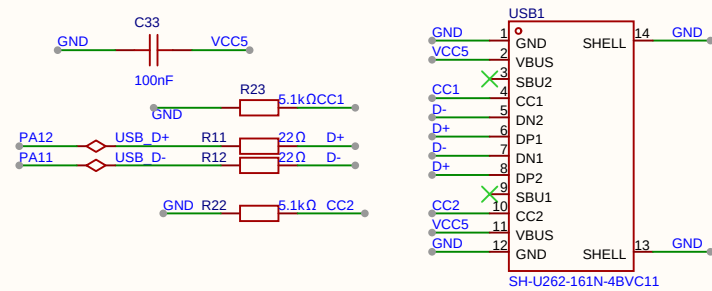


USBHost

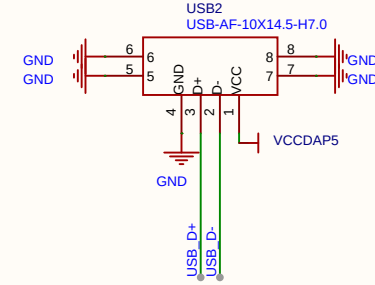


摄像头插口

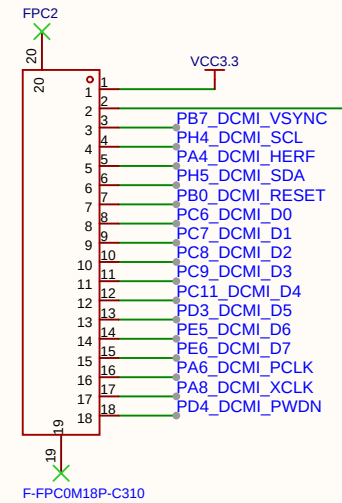

RGB LCD

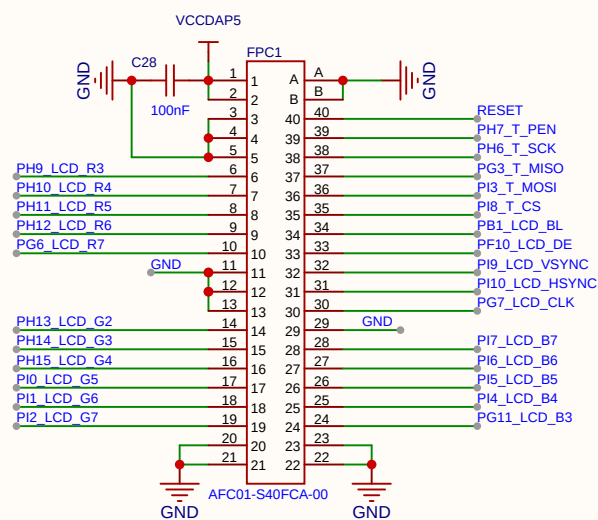

daplink下载器

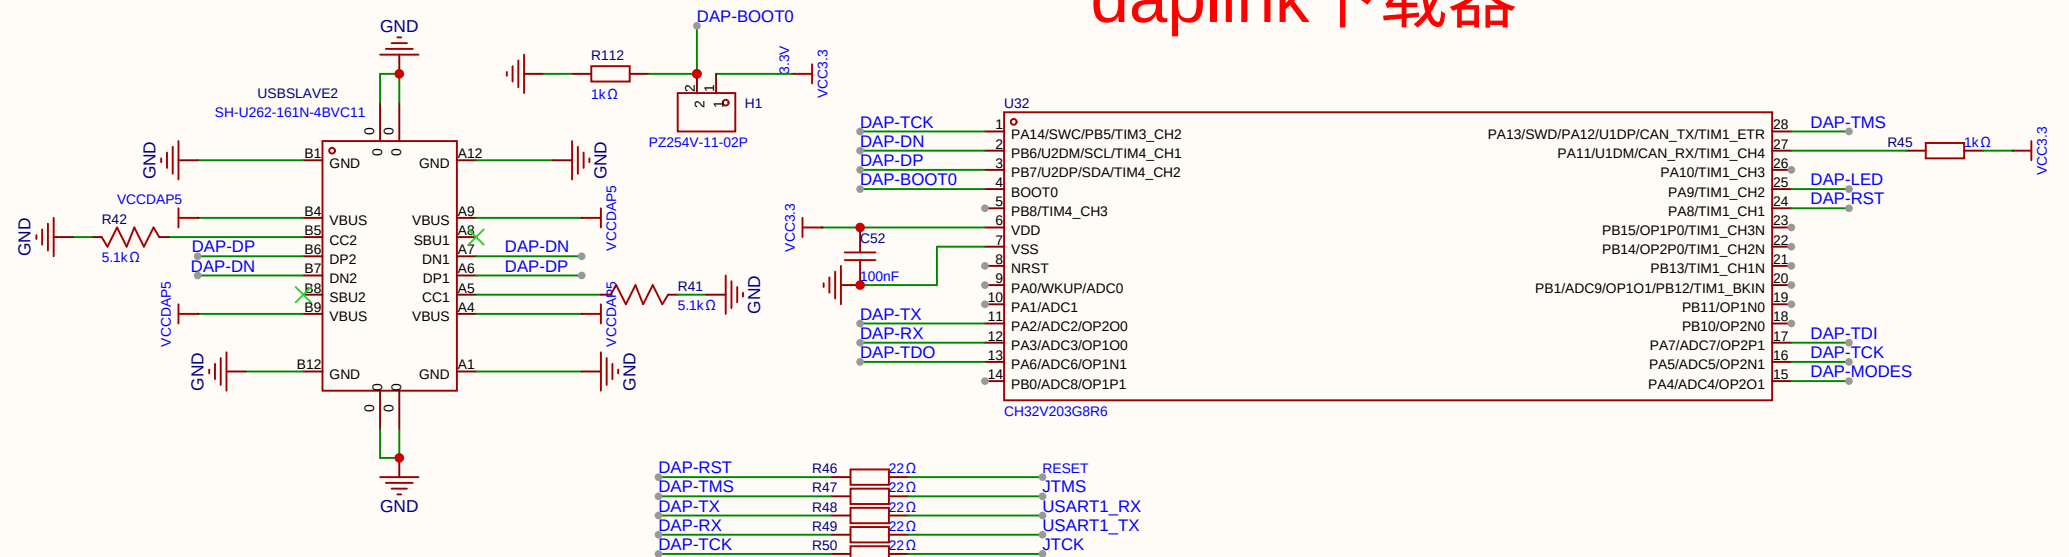

The schematic diagram illustrates the connection between a microcontroller and a W9825G6KH-6 memory module. The microcontroller pins are listed on the left, and the memory module pins are on the right. Power and ground connections are shown at the bottom.

Microcontroller Pins (Left):

- PD14 FMC D0
- PD15 FMC D1
- PD0 FMC D2
- PD1 FMC D3
- PE7 FMC D4
- PE8 FMC D5
- PE9 FMC D6
- PE10 FMC D7
- PE11 FMC D8
- PE12 FMC D9
- PE13 FMC D10
- PE14 FMC D11
- PE15 FMC D12
- PD8 FMC D13
- PD9 FMC D14
- PD10 FMC D15
- PC0 FMC SDNWE
- PG15 FMC SDNCAS
- PF11 FMC SDNRAS
- PC2 FMC SDNE0

Microcontroller Pins (Right):

- PF0 FMC A0
- PF1 FMC A1
- PF2 FMC A2
- PF3 FMC A3
- PF4 FMC A4
- PF5 FMC A5
- PF12 FMC A6
- PF13 FMC A7
- PF14 FMC A8
- PF15 FMC A9
- PG0 FMC A10
- PG1 FMC A11
- PG2 FMC A12
- PG4 FMC BA0
- PG5 FMC BA1
- PC3 FMC SDCKE0
- PG8 FMC SDCLK
- PE0 FMC NBL0
- PE1 FMC NBL1

Power and Ground Connections (Bottom):


- VCC3.3 is connected to the microcontroller's VCC pin (pin 19) and the memory module's VDD pin (pin 14).
- GND is connected to the microcontroller's GND pin (pin 40) and the memory module's VSS pins (pins 41, 27, 28, 6, 12, 46, 52).
- Capacitors C37, C38, C39, C40, C41, C42, and C43 are connected between VCC3.3 and GND.

Memory Module Pins (Right):


- A0
- A1
- A2
- A3
- A4
- A5
- A6
- A7
- A8
- A9
- A10/AP
- A11
- A12
- BS0
- BS1
- WE#
- CLK
- RAS#
- CS#
- NC
- VDD
- VSS
- VDDQ
- VSSQ
- VDDQ
- VSSQ
- VDDQ
- VSSQ

LAN8720以太网


485

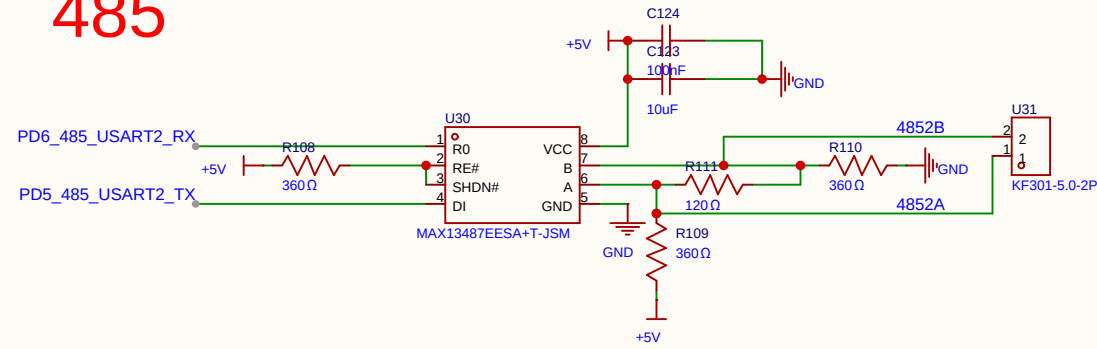


485

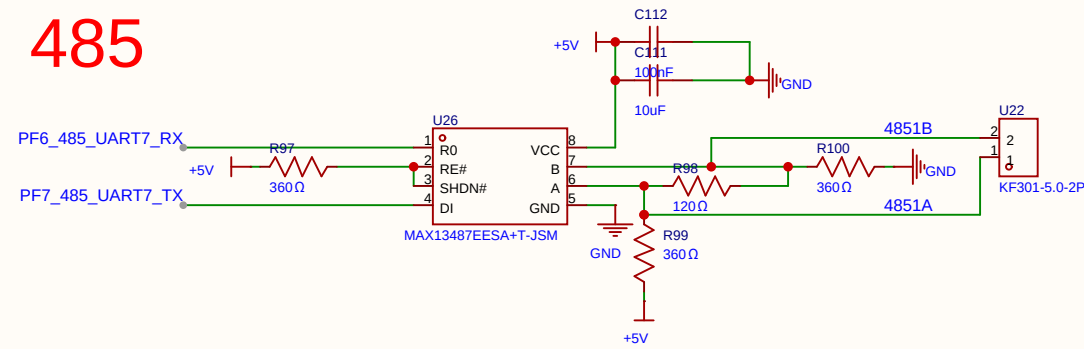

RS232

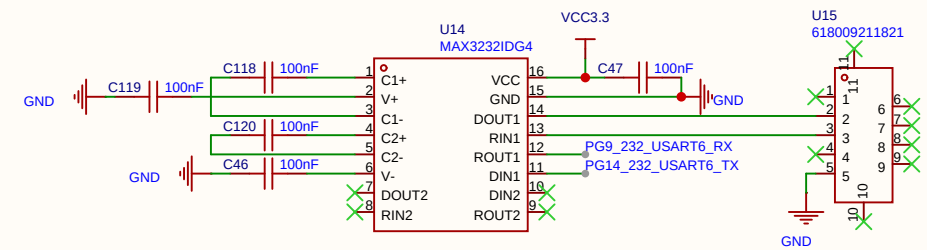

FDCAN/CAN

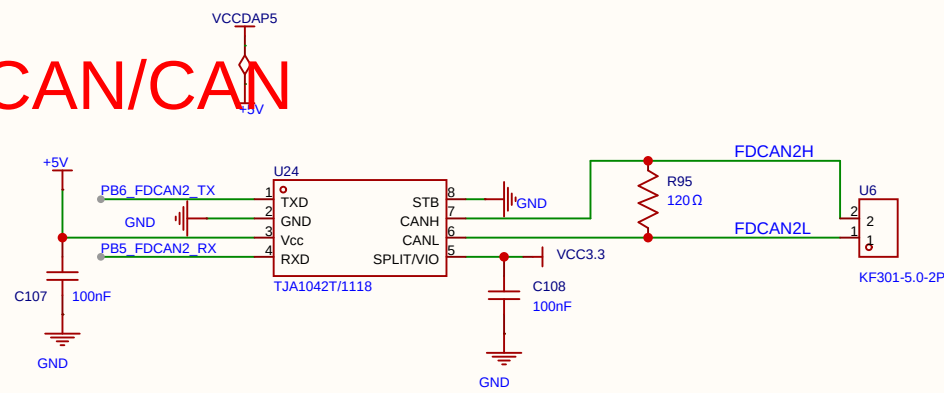

FDCAN/CAN

