

R8/9/10 allow for emulations using a 4Mb device (if A18 is used, inst R10 else for FLASH inst. R9, else inst R8)

R11/R12 allow for a 27C021 emulation (R11 for 27C021, else R12)

R6/R7 allow for a 27C513 emulation (R7 for 27C513, else R6)


R4/R5 allow for ICPgm (R5 if ICP, else R4) -- Vpp must be clipped with a wire jumper

Using 28F101:
27C011:
Inst: R6, R9, R4

27C513:
Inst: R7, R9, R4

Using 29F040:
27C011:
Inst: R6, R8, R4, R12

27C513:
Inst: R7, R8, R4, R12

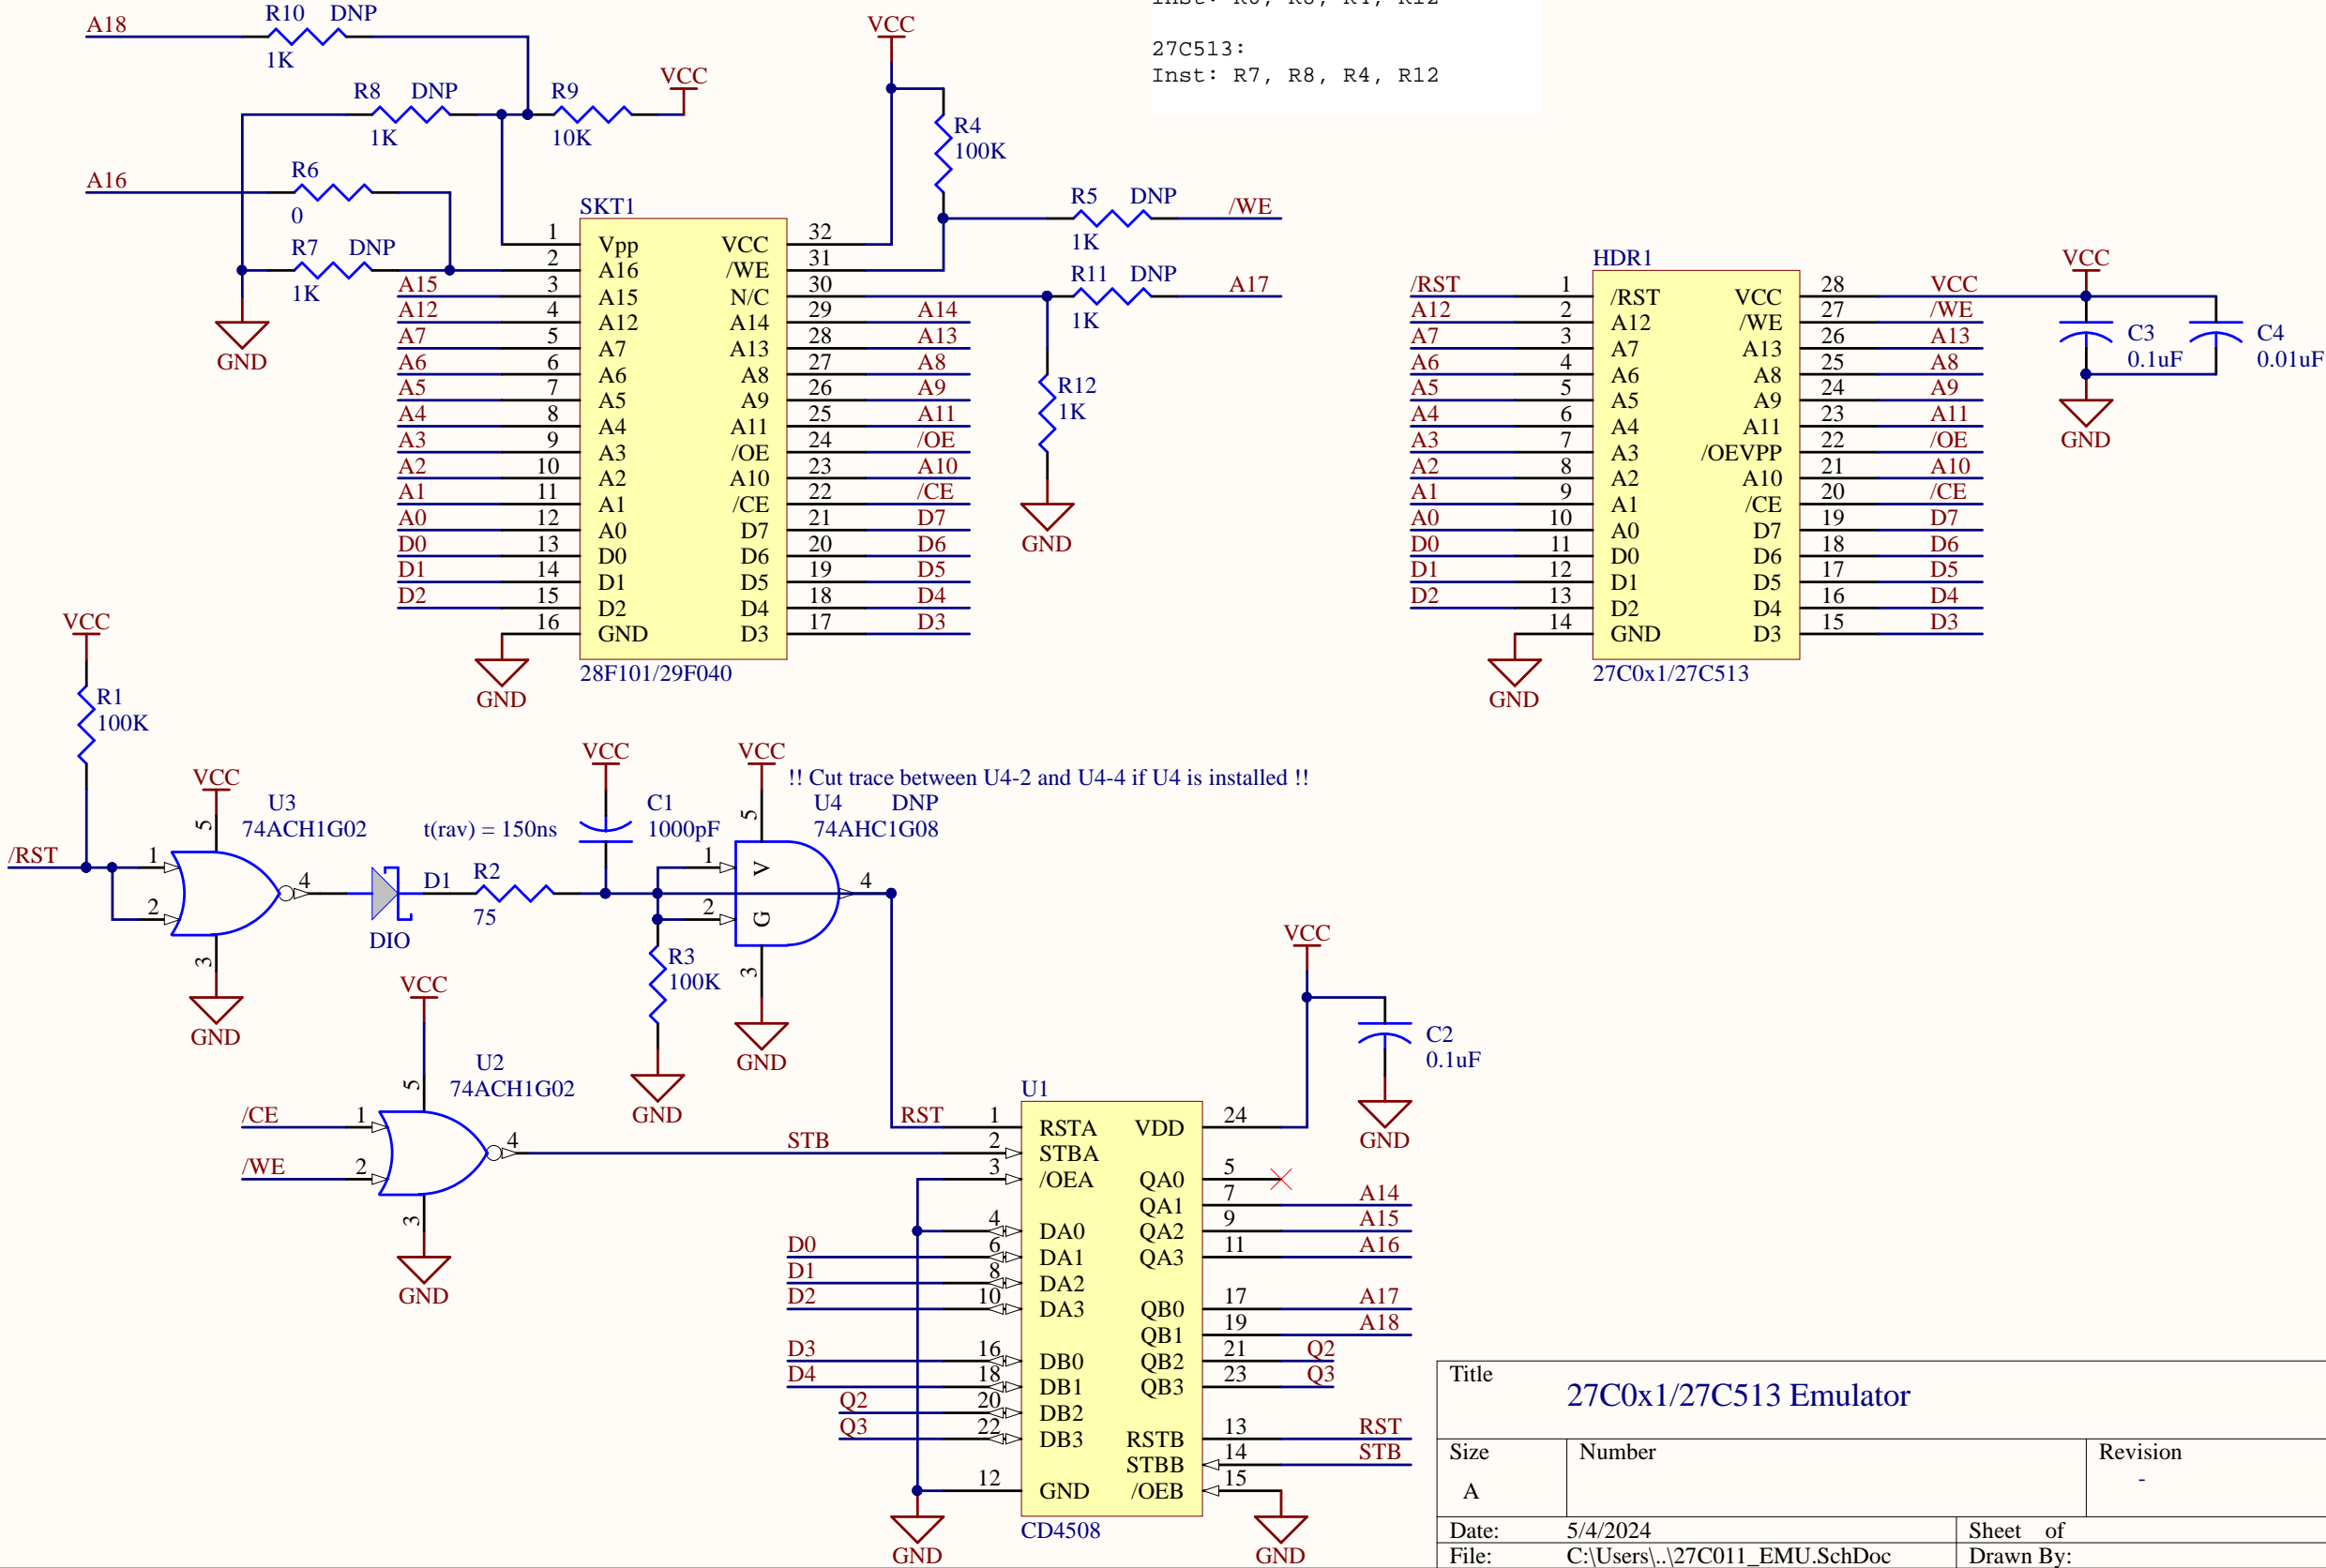

Title			27C0x1/27C513 Emulator	
Size	Number		Revision	
A			-	
Date:	5/4/2024		Sheet	of
File:	C:\Users\...\27C011_EMU.SchDoc		Drawn By:	