


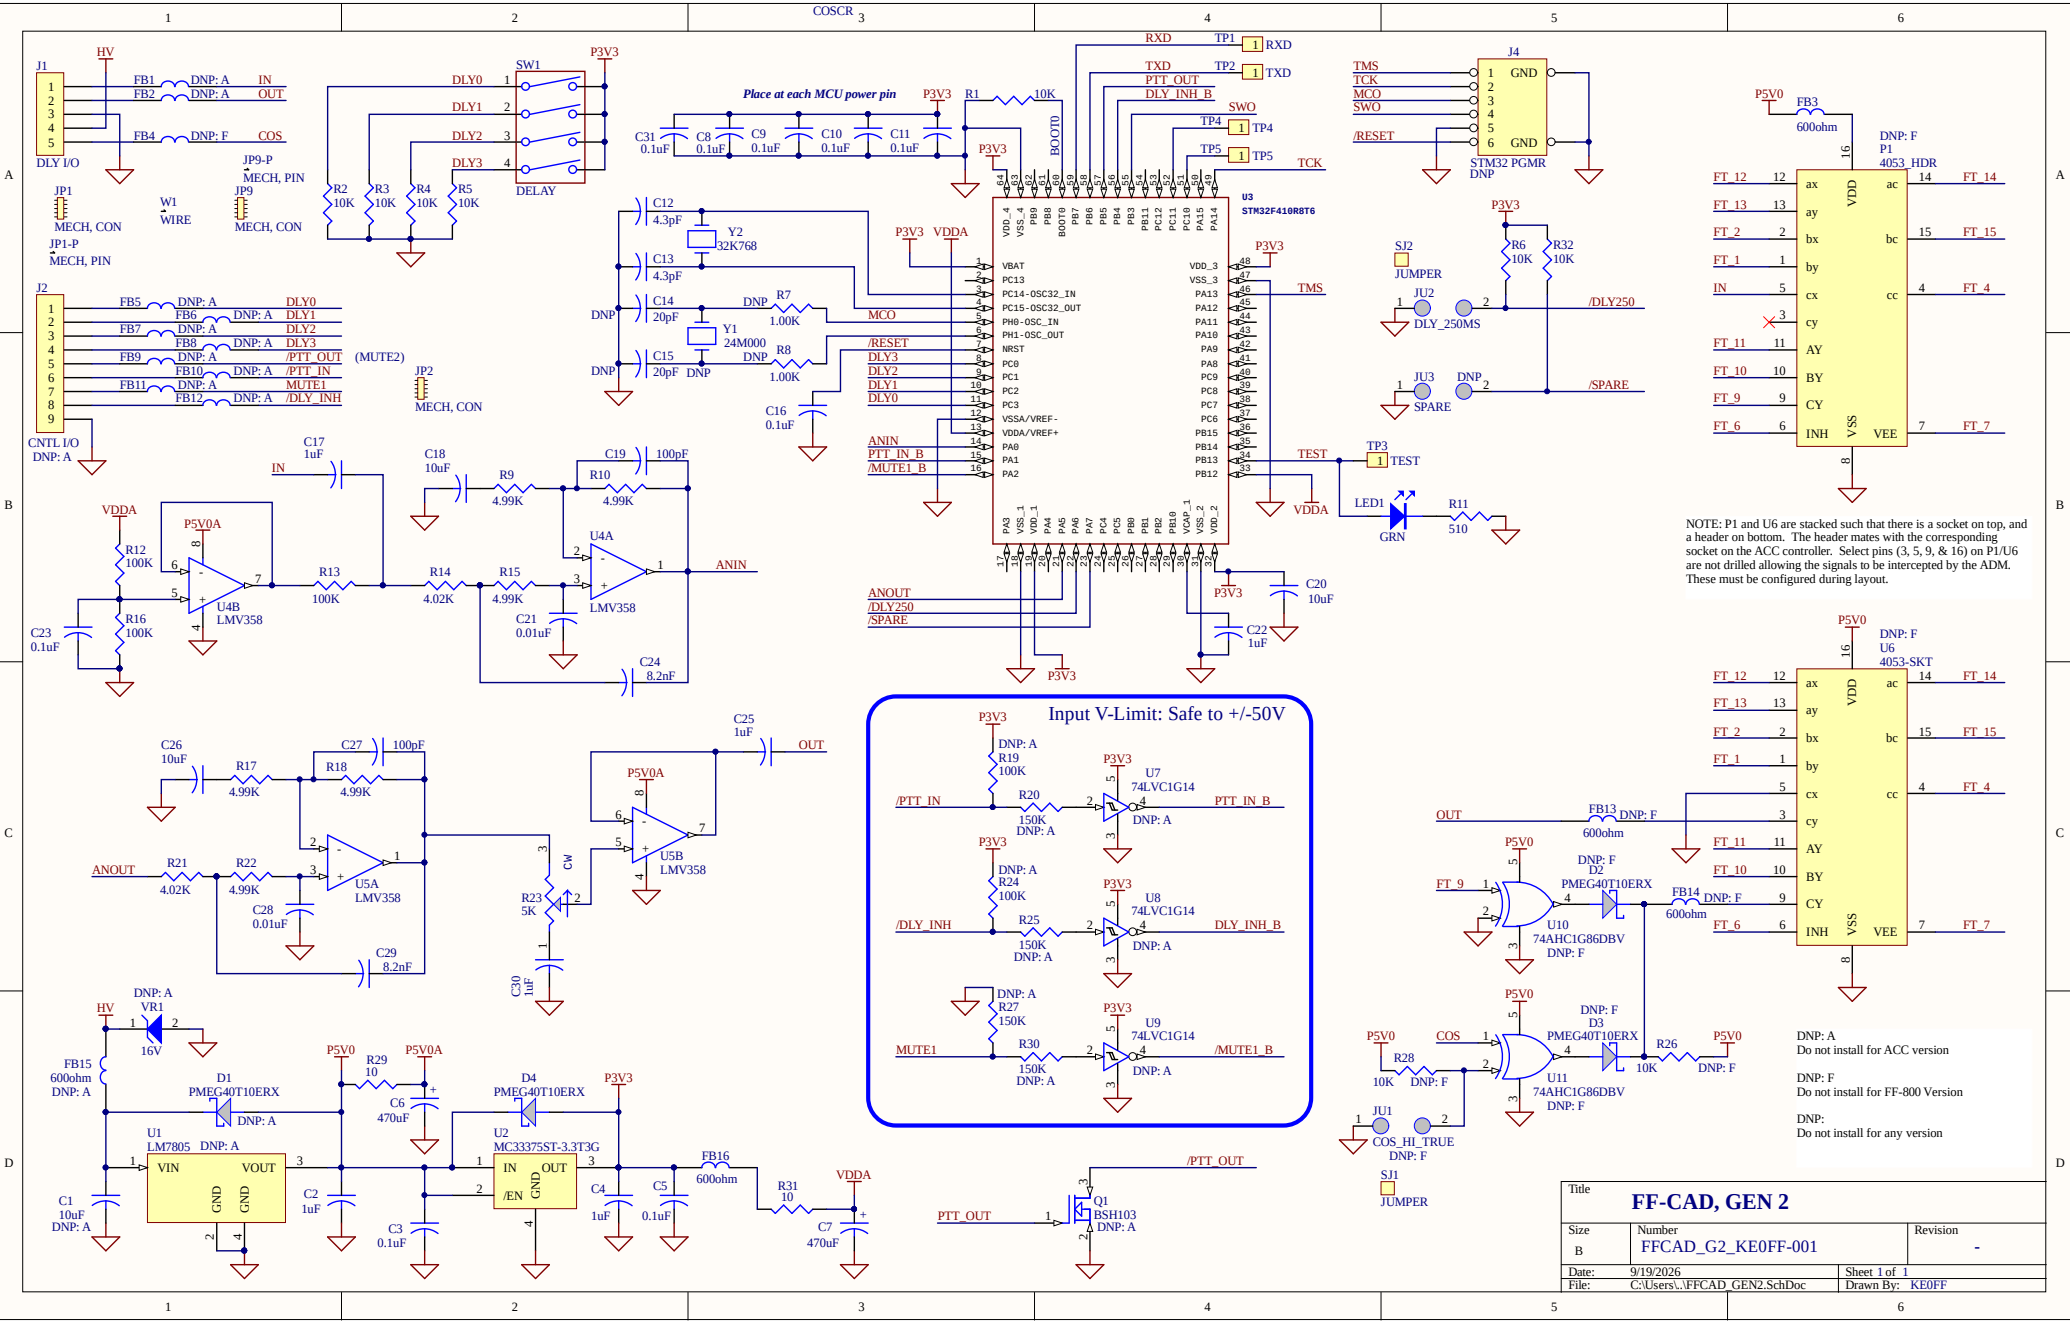

NOTE: P1 and U6 are stacked such that there is a socket on top, and a header on bottom. The header mates with the corresponding socket on the ACC controller. Select pins (3, 5, 9, & 16) on P1/U6 are not drilled allowing the signals to be intercepted by the ADM. These must be configured during layout.

DNP: A
Do not install for ACC version
DNP: F
Do not install for FF-800 Version
DNP:
Do not install for any version

Title		
FF-CAD, GEN 2		
Size	Number	Revision
B	FFCAD_G2_KE0FF-001	-
Date:	9/19/2026	Sheet 1 of 1
File:	C:\Users\...FFCAD_GEN2.SchDoc	Drawn By: KE0FF