


I/O Notes:

1) Select p

- * SSIO I/O for NVRAM
- * SSII OUT for DATA1
- CLK_EX766 is the PTT signal when the RX766 is connected
- * SSII OUT for LCD
- * SSII IN for DATA2
- * PWM for LED brt (x3)
- * PWM for backlight
- * UART2 I/O for BT
- * UART0 I/O for remote/debug
- * UART4 I/O for wired remote control mic
- * Edge GPIO & timer for DATA2
- * Comparators 1 & 0 to decode 3 MU/D2 states
- * GPIO for buttons (row/col)
- * Edge GPIO for up/dn encoder
- * TOCCP0 (BEEP)

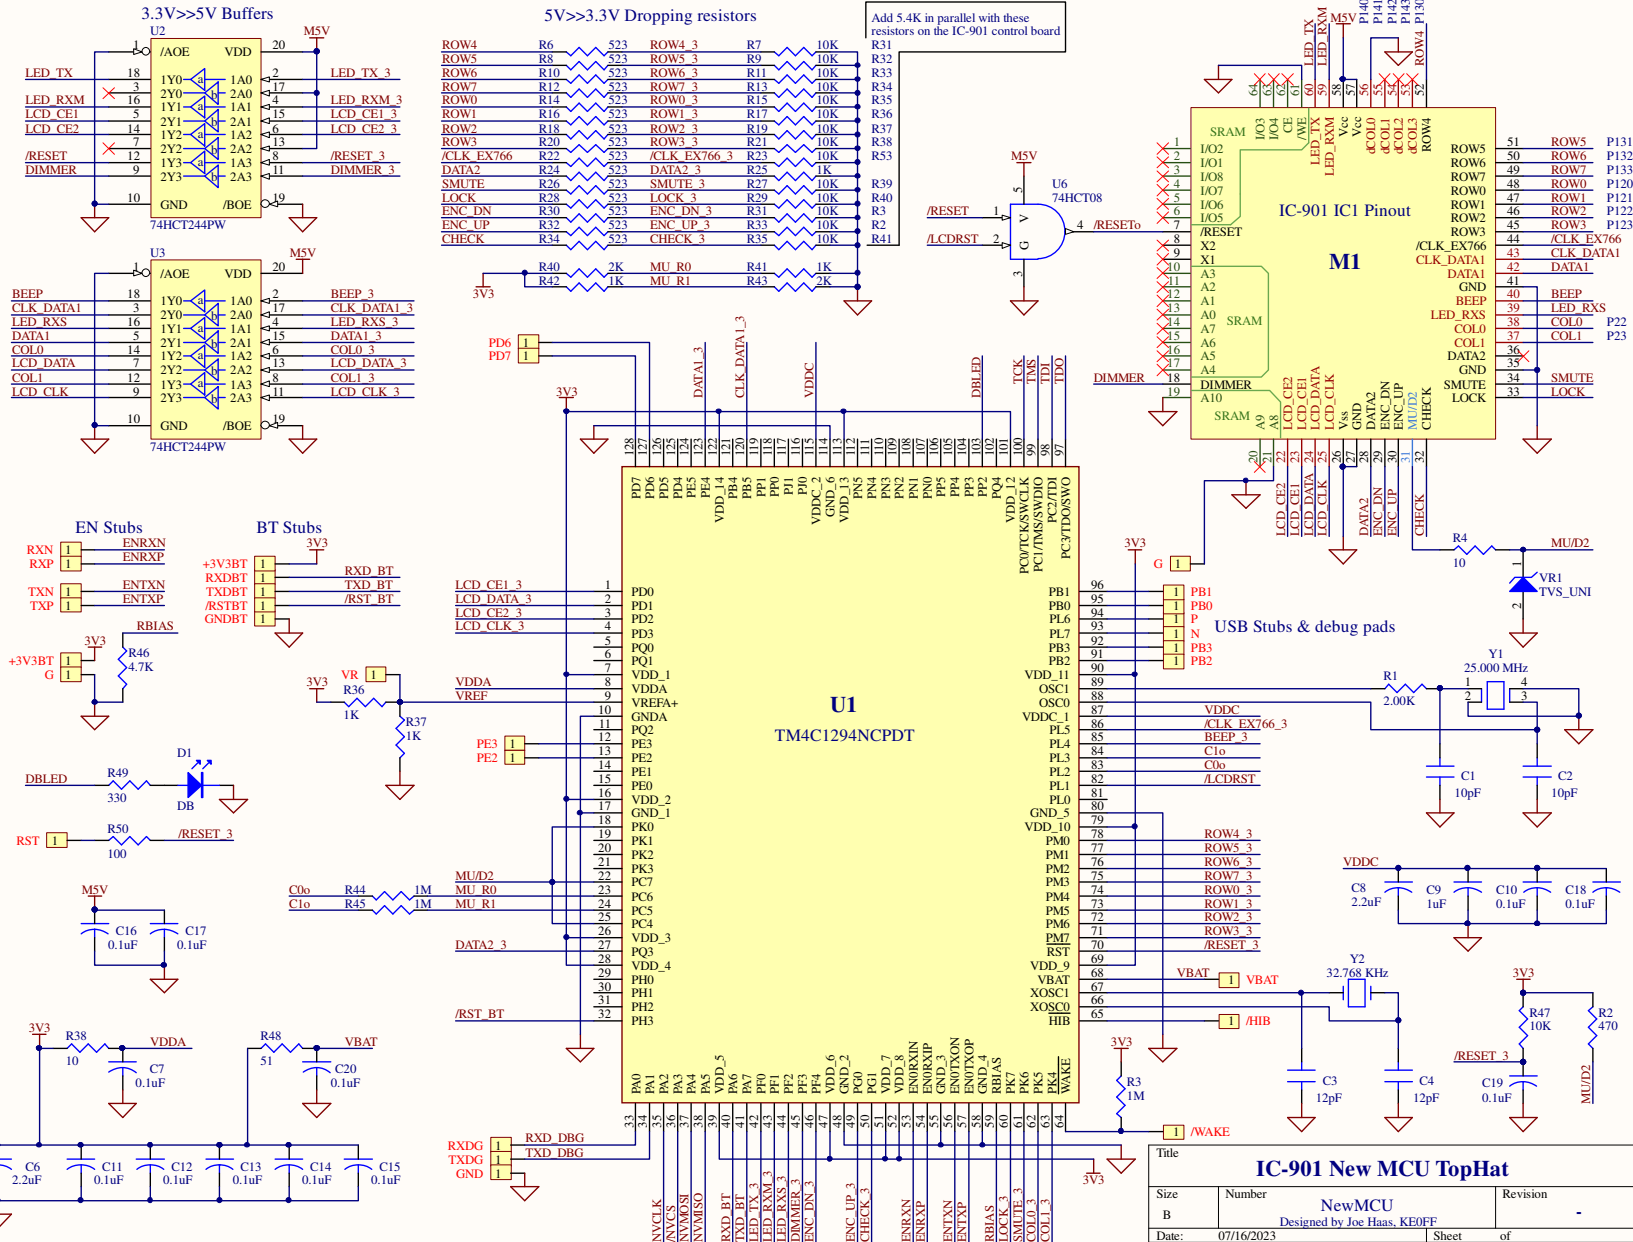

IC-901 New MCU TopHat

Size B	Number NewMCU Designed by Joe Haas, KE0FF	Revision -
Date:	07/16/2023	Sheet of
File:	C:\Users\JC901\NwBrn.SchDoc	Drawn By: KE0FF