




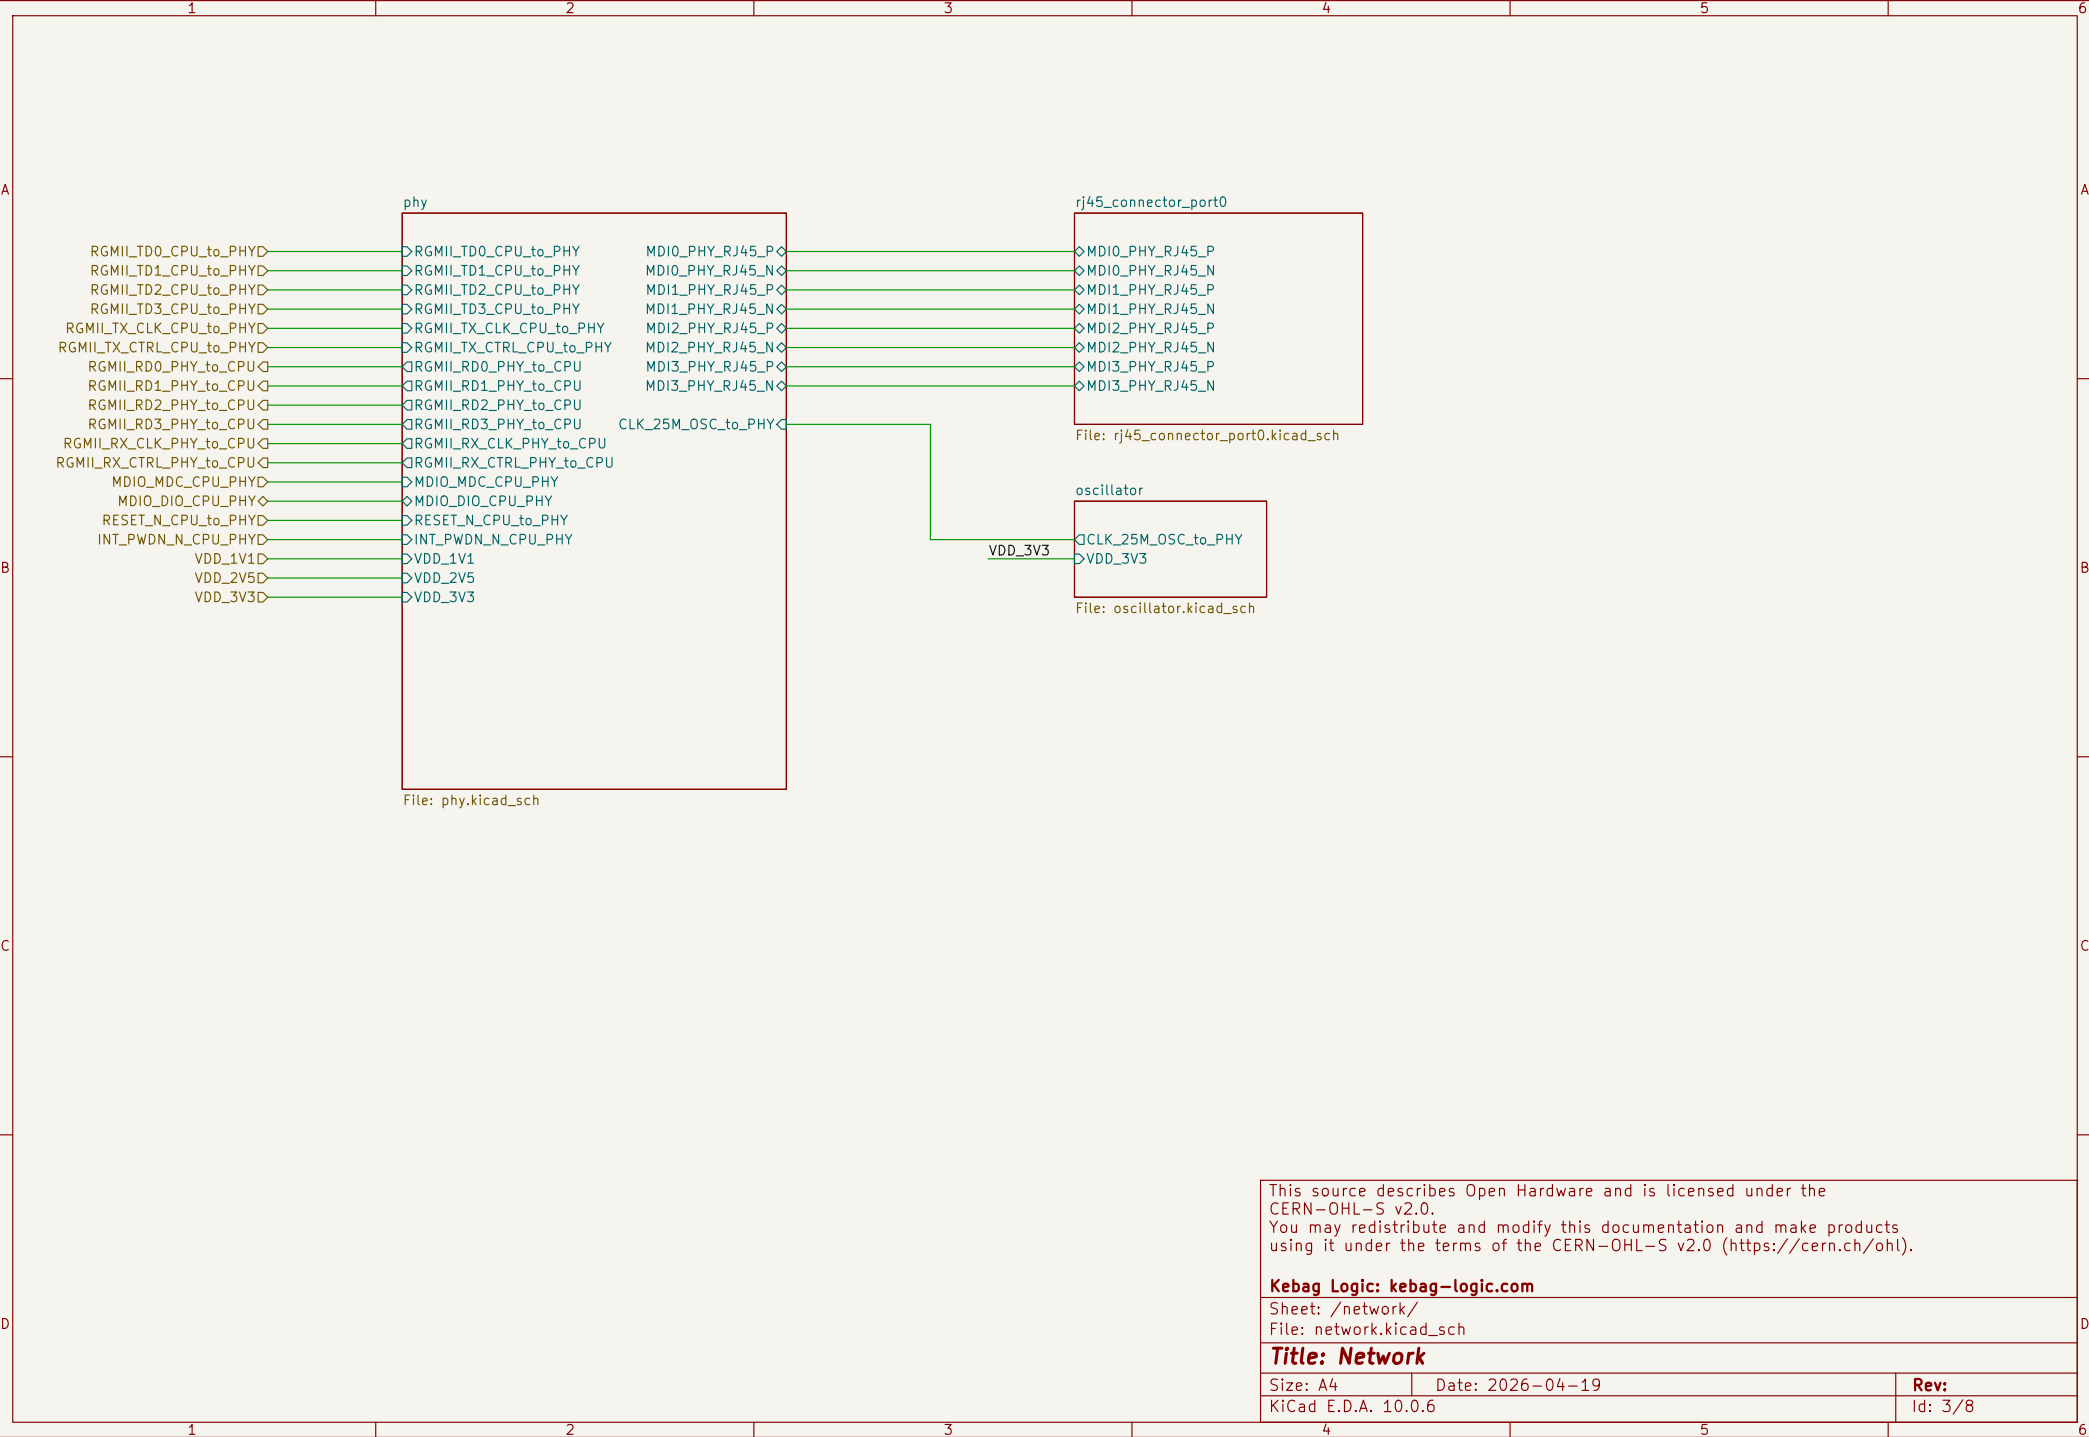


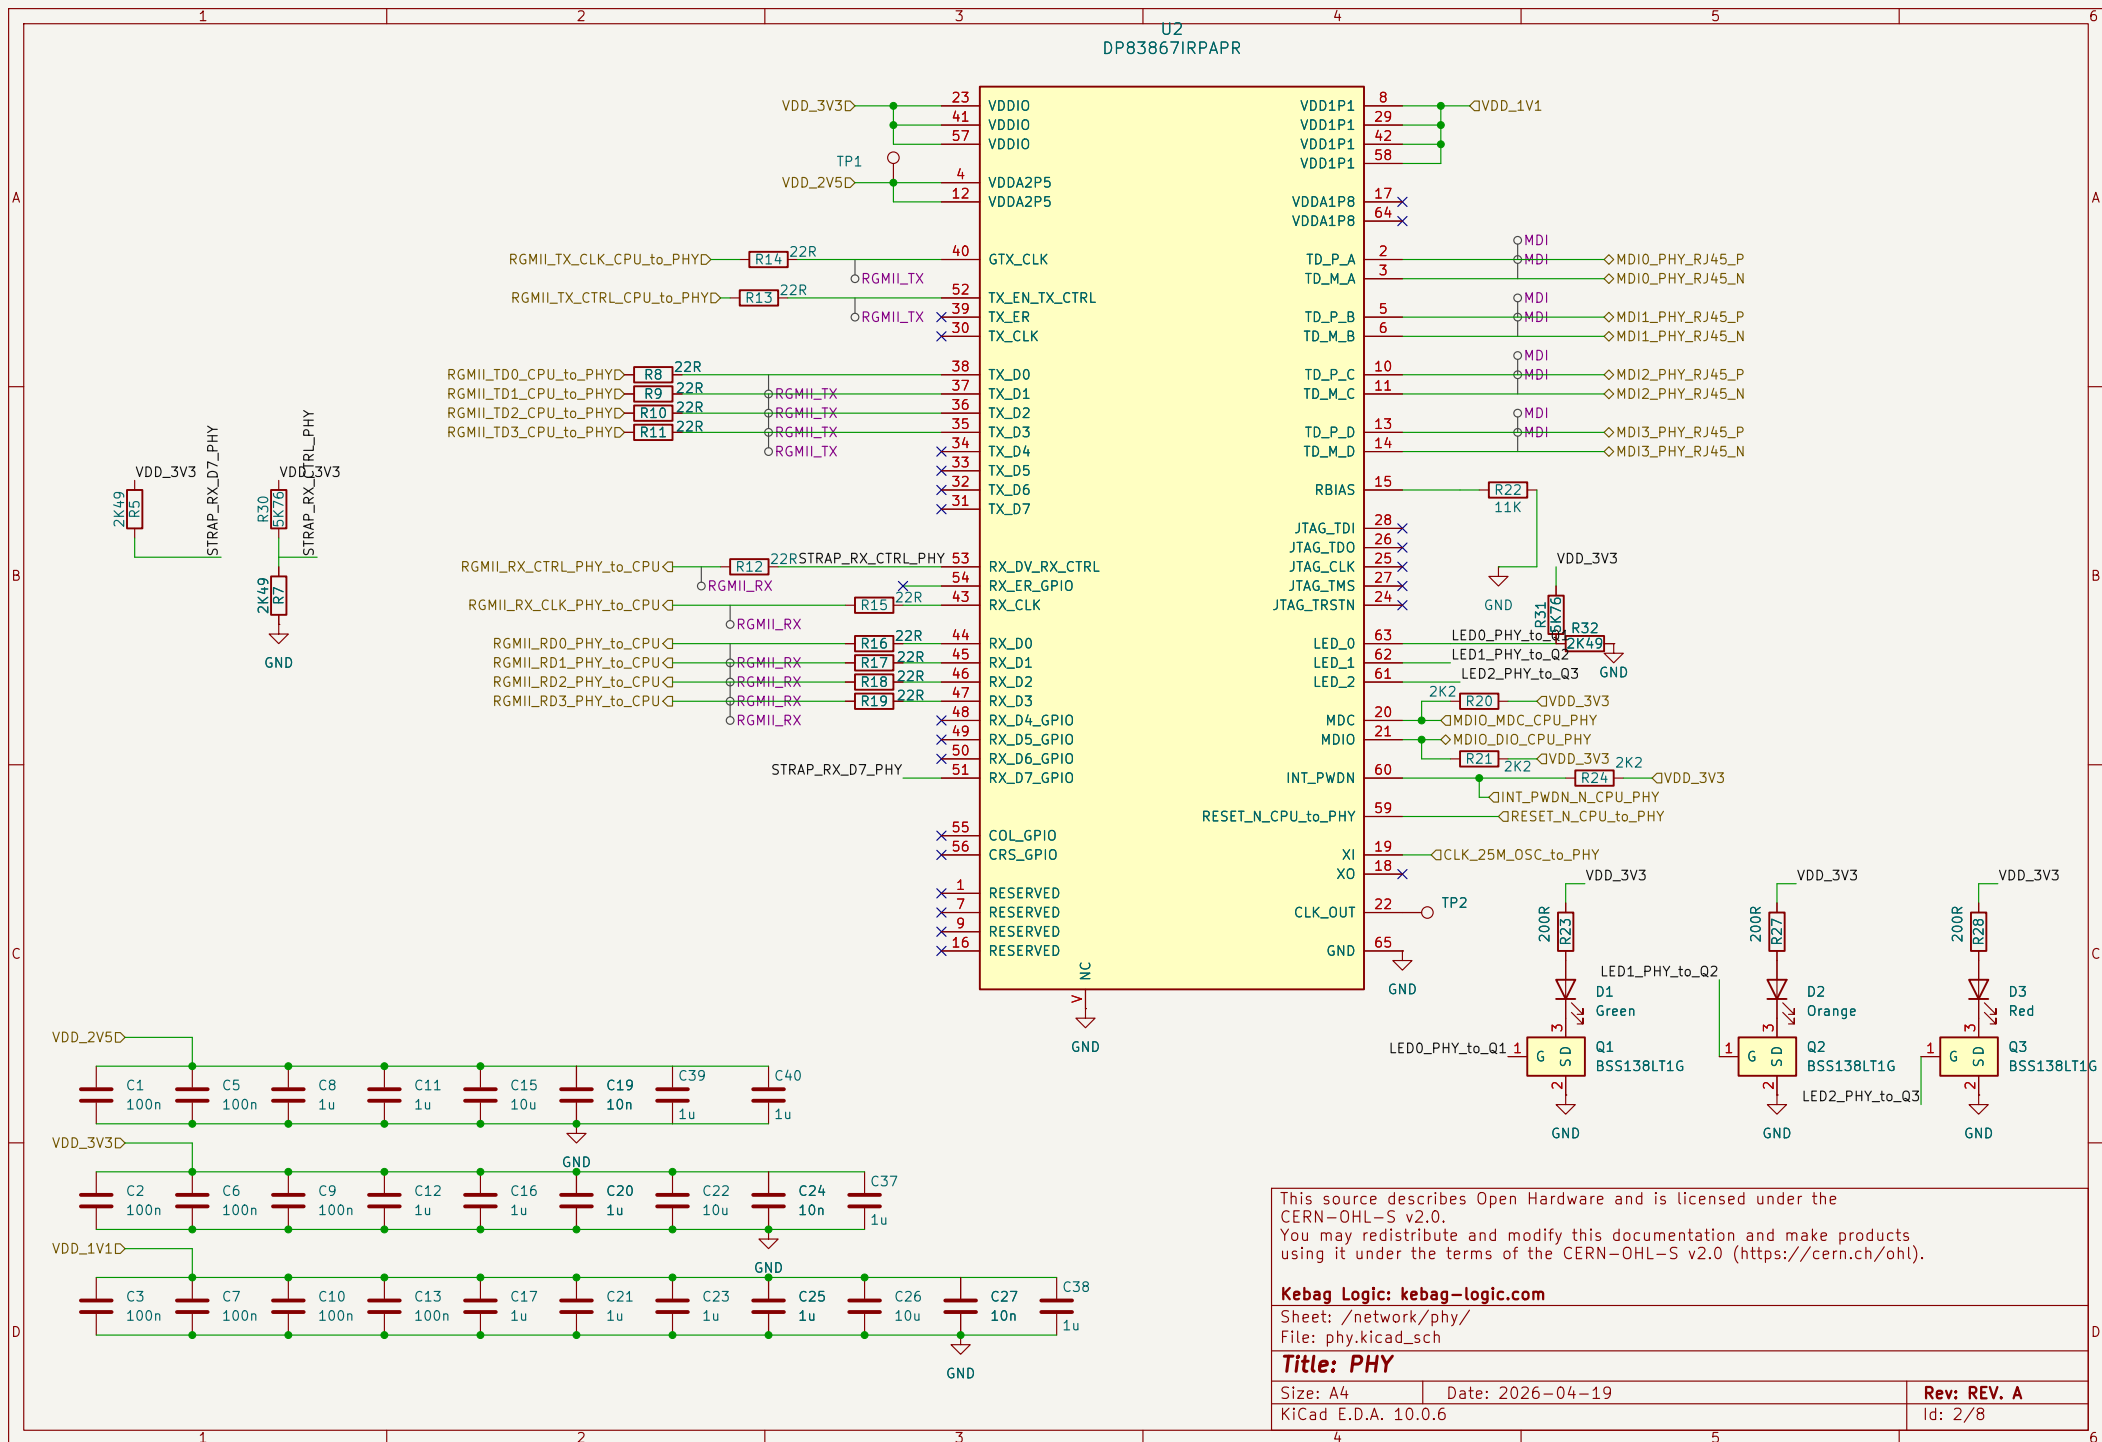

J1 is mounted on B.Cu (bottom), so its pin row is mirrored.
MDI pairs are mapped A<->D, B<->C with P/N swapped ON PURPOSE:
the DP83867 RJ45 mirror mode (LED_0 strap mode 3, R31/R32 on the
PHY sheet; datasheet 7.4.6.6) undoes it inside the PHY.
Do not "fix" this mapping without removing the strap.

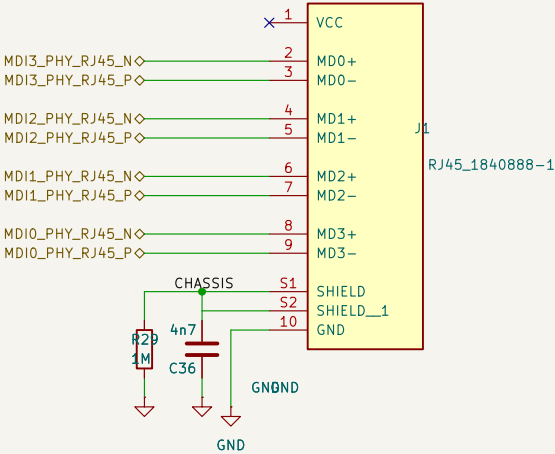

This source describes Open Hardware and is licensed under the CERN-OHL-S v2.0. You may redistribute and modify this documentation and make products using it under the terms of the CERN-OHL-S v2.0 (https://cern.ch/ohl).		
Kebag Logic: kebag-logic.com		
Sheet: /network/rj45_connector_port0/ File: rj45_connector_port0.kicad_sch		
Title: RJ45 Connector Port 0		
Size: A4	Date: 2026-04-19	Rev:
KiCad E.D.A. 10.0.6		Id: 7/8

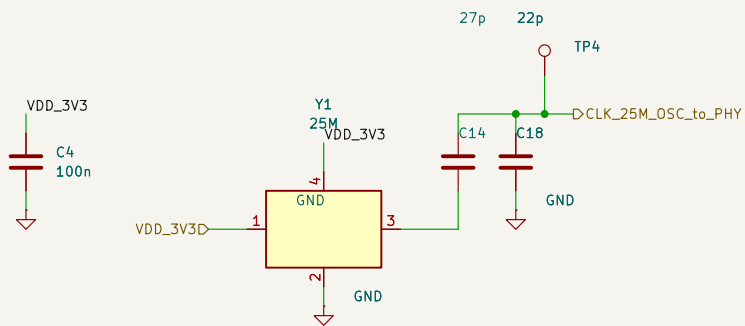

This source describes Open Hardware and is licensed under the CERN-OHL-S v2.0. You may redistribute and modify this documentation and make products using it under the terms of the CERN-OHL-S v2.0 (https://cern.ch/ohl).		
Kebag Logic: kebag-logic.com		
Sheet: /network/oscillator/ File: oscillator.kicad_sch		
Title: Oscillator		
Size: A4	Date: 2026-04-19	Rev:
KiCad E.D.A. 10.0.6		Id: 8/8

