


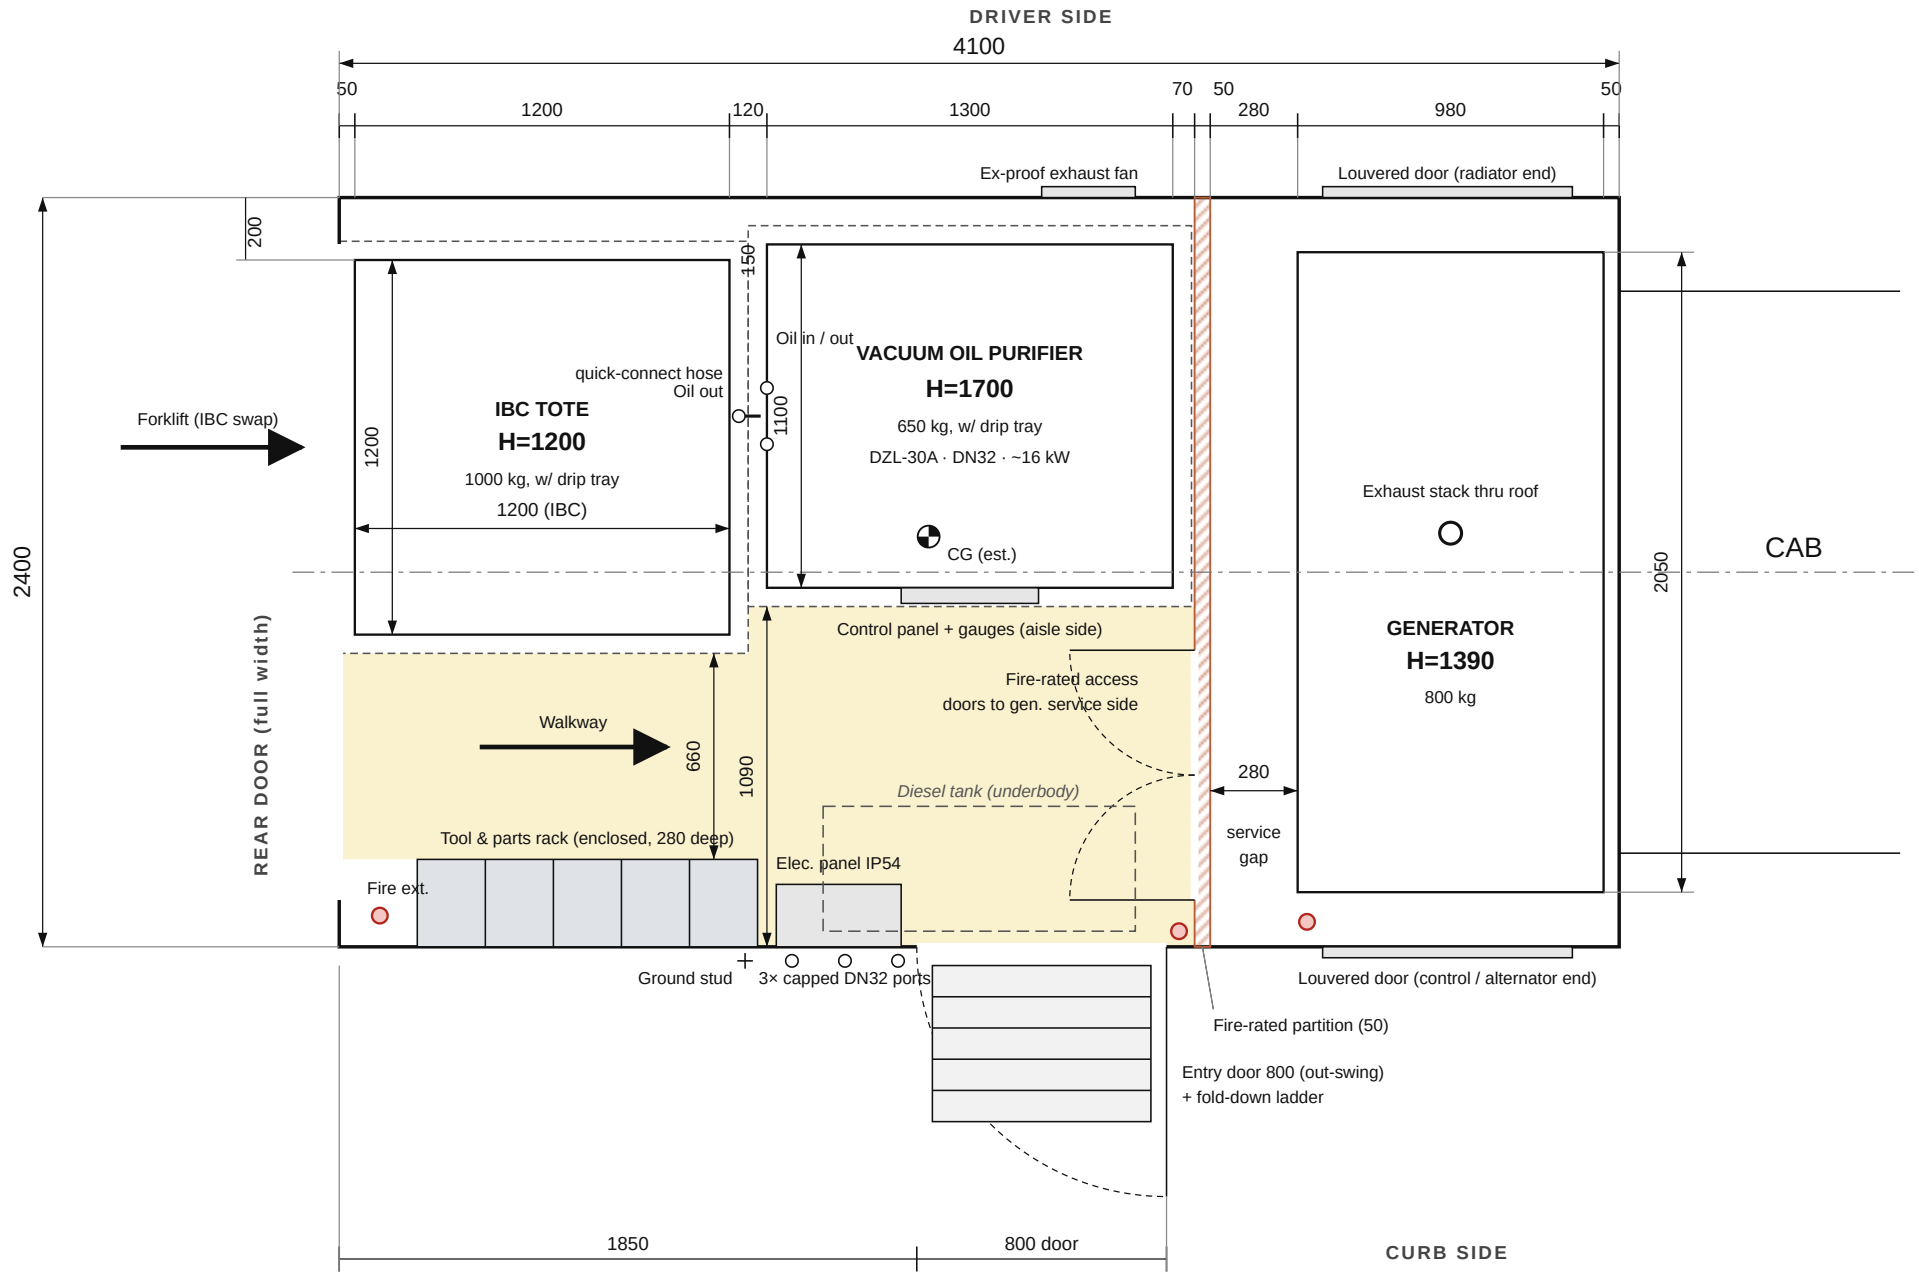

Option 3 (Final draft) – IBC tote at rear door, purifier along driver side, generator room at cab end

Plan view, cab to the right, mm. Box 4100 x 2400 (161 x 94.5 in). Dashed = drip trays (6 x 2 inches, 1 in drain). Yellow = walkways (main 1090 (43.0 in), rear 660 (26.0 in)).

Plan view, cab to the right, mm. BOX 4100 x 2400 (161 x 94.3 in). Dashed – drip trays (2 x 2 m main, 1 m drain). Yellow – walkway. Main 1090 (42.9 in), rear 600 (23.6 in).

IBC swapped by forklift through full-width rear door. Purifier casters removed, bolted to channel base; 304 SS piping DN32 run under floor to 3 curb-side ports.

Generator: louvered doors both ends, 280 service gap + fire-rated access doors in partition, remote oil drain / filters (confirm with genset maker). Roof exhaust per genset manual 3.3.

CG (est., incl. rack ~200 kg + full diesel ~200 kg): 1888 from rear wall, 114 toward driver side. Purifier load ~16 kW – verify genset kW rating. Preliminary – not for fabrication.