


14/06/26 Day 19 kamineni Dhana Sri Keerthi

▲ Defect free Hspice [Noise, Crosstalk, delay] "Defect-Free 01.Sp"

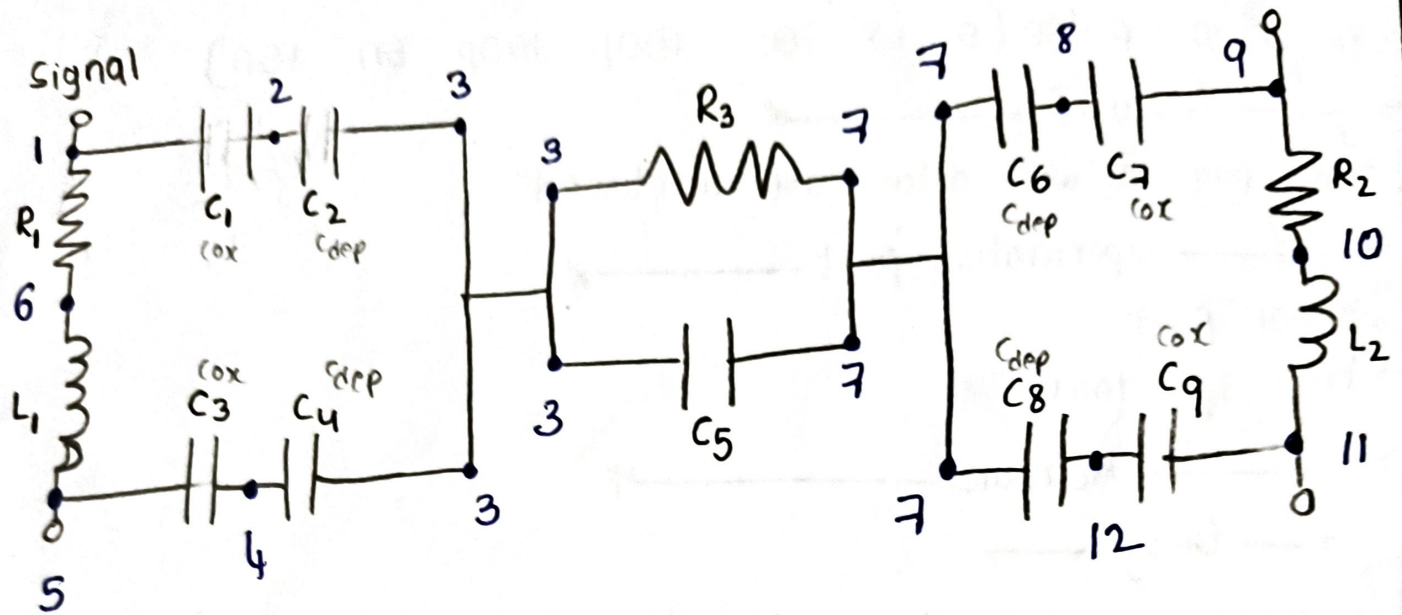

* Network *

R_1	1	6	82.8m
R_2	9	10	82.8m
R_3	3	7	354 μ S
L_1	6	5	2.09P
L_2	10	11	2.09P
C_1	1	2	32.53F
C_2	2	3	17.92F
C_3	5	4	32.53F
C_4	4	3	17.92F
C_5	3	7	3.73F
C_6	7	8	17.92F
C_7	8	9	32.53F
C_8	7	12	17.92F
C_9	12	11	32.53F.

Code:

• temp 25

* Supply Voltage *

Vin 1 0 pulse(0 1.8 0.5 100p 100p 5n 10n)

* Network *

"front page network details are mentioned"

* Operation part *

• option post

• tran 1p 100n

* Measure *

* Delay *

• measure tran tr trig V(1) val=0.9 rise=1 targ V(10) val=0.9 rise=1

• measure tran tf trig V(1) val=0.9 fall=1 targ V(10) val=0.9 fall=1

• measure tran tpd_avg PARAM = '(tr+tf)/2'

* Crosstalk * "Impulse crosstalk and noise over lap"
induced noise

• measure tran v_noise_peak_n7 max V(7)

• measure tran v_noise_peak_n8 max V(8)

• measure tran v_noise_peak_n11 max V(11)

• measure tran t_noise_peak_n7 when V(7)=v_noise_peak_n7 rise=1

• measure tran v_noise_final_n7 find V(7) at=100n

*