

SIMATS ENGINEERING
ASSESSMENT TOOL 3

COURSE NAME: COMPUTER NETWORKS COURSE CODE: CSA07

COURSE OUTCOME COVERED

CO2: Configure IP addressing schemes, subnetting, and basic routing techniques using simulation tool, for efficient network design and topology. (BL3)

Assessment Tool Weightage: 30%
Software: Cisco Packet Tracer, Wireshark

QUESTIONS: 5 **Total Marks:50**

Annexure A

Debugging & Optimisation Task

Code of Conduct:

I Keerthikaa N (192521064) certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment.
I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the student: Keerthikaa N

Annexure A

Debugging & Optimisation Task

1. A network administrator has configured a workstation with the following settings:

- **IP Address:** 192.168.10.65
- **Subnet Mask:** 255.255.255.192 (/26)
- **Default Gateway:** 192.168.10.1

However, the workstation is unable to communicate with other systems configured in the subnet **192.168.10.0/26**.

Task

Debug the network configuration by:

- Identifying the subnet to which the configured IP address belongs.
- Determining the network address, broadcast address, and valid host range.
- Verifying whether the configured IP address and gateway are valid.
- Identifying the configuration errors.
- Optimizing the configuration by assigning an appropriate IP address and default gateway.
- Calculating the total number of usable host addresses after correction.

2. Two devices are configured with the following IPv6 addresses:

- Device A: **2001:db8::ff00:42:8329/64** • Device B: **2001:db8:0:0:1::1/64**

Although both devices are connected to the same network, communication fails.

Task

Debug the IPv6 configuration by:

- Expanding both IPv6 addresses into their complete notation.
- Determining the network prefix of each device.
- Verifying whether both devices belong to the same subnet.
- Identifying the addressing or prefix mismatch.
- Optimizing the IPv6 configuration by assigning appropriate addresses.
- Calculating the number of available host addresses within the corrected subnet.

3. An organization has allocated the network **192.168.1.0/24** into several departments using the subnet masks **/26**, **/27**, and **/28**. Some departments report insufficient IP addresses, while others have a large number of unused addresses.

Task

Analyze and optimize the subnet allocation by:

- Identifying the network address, broadcast address, and host range for each subnet.
- Calculating the number of usable and unused IP addresses.
- Identifying inefficient subnet allocations.
- Debugging the addressing plan by locating subnet allocation mistakes.

- Recommending an optimized subnetting scheme using VLSM to improve address utilization while supporting current departmental requirements.

4. Two devices are configured with the following IPv6 addresses:

- Device A: **2001:db8::ff00:42:8329/64** • Device B: **2001:db8:0:0:1::1/64**

Although both devices are connected to the same network, communication fails.

Task

Debug the IPv6 configuration by:

- Expanding both IPv6 addresses into their complete notation.
- Determining the network prefix of each device.
- Verifying whether both devices belong to the same subnet.
- Identifying the addressing or prefix mismatch.
- Optimizing the IPv6 configuration by assigning appropriate addresses.
- Calculating the number of available host addresses within the corrected subnet.

5. A router contains the following routing table.

Destination Network	Next Hop
192.168.1.0/24	10.0.0.2
192.168.2.0/24	10.0.0.3
Default Route	10.0.0.1

Users report that packets destined for **192.168.2.100** are not reaching the intended network.


Task

Debug the routing configuration by:

- Identifying the matching routing entry using the longest-prefix match.
- Determining the next-hop router selected for packet forwarding.
- Verifying whether the destination IP belongs to the intended subnet.
- Identifying any routing configuration errors.
- Optimizing the routing table to improve packet forwarding efficiency.
- Identifying the route that will be used if no matching destination exists.

RUBRICS FOR CALCULATION

Criteria	Weightage	Level 4 (Exemplary)	Level 3 (Proficient)	Level 2 (Developing)	Level 1 (Beginning)
Problem Identification	20%	Accurately identifies all errors and root causes with clear understandin g	Identifies most errors with minor gaps	Identifies some errors but misses key issues	Unable to identify errors correctly
Debugging	25%	Applies systematic debugging techniques effectively to resolve issues	Uses appropriate debugging methods with minor errors	Limited debugging approach; requires guidance	Unable to debug or resolve issues
Optimization	20%	Optimizes code by significantly improving time complexity using efficient algorithms	Improves time complexity with minor gaps in efficiency	Limited improvement in time complexity	No improvement; inefficient approach retained
Analysis	20%	Demonstrates strong logical reasoning and clear justification of solutions	Shows reasonable analysis with some justificatio n	Limited analysis; weak reasoning	No analytical reasoning demonstrated
Code Quality	15%	Produces clean, wellstructur ed code with proper comments and documentatio n	Code is mostly clear wit h minor documentat ion gaps	Code lacks structure and proper documentatio n	Poorly written code with no documentatio n

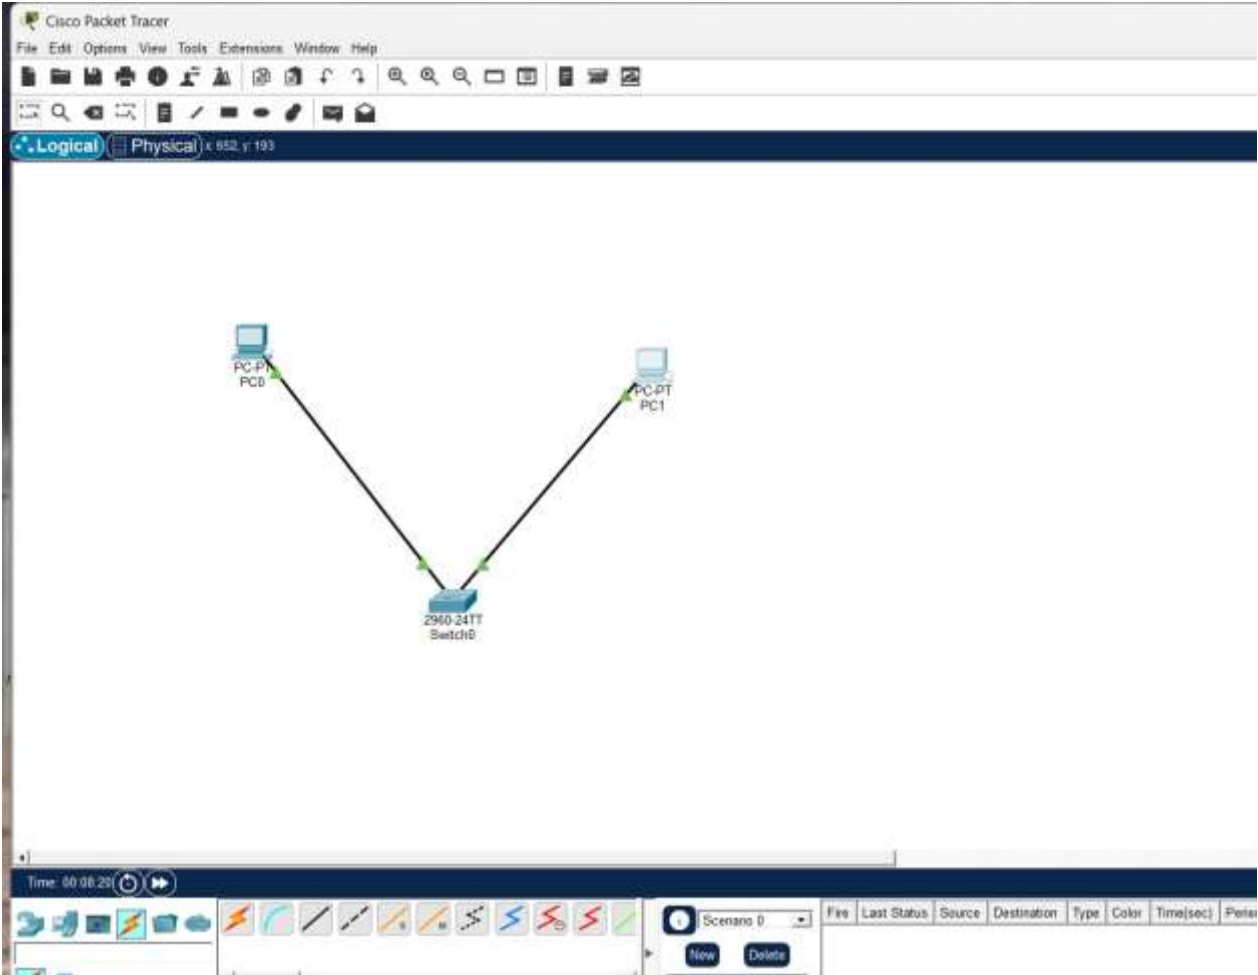

PC0

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address

Subnet Mask

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address 2001:DB8::FF00:42:8329 / 64

Link Local Address FE80::2E0:B0FF:FE31:2401

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Top

