

# Unit-2

## Data Link Layer

### Topic-7


## Wired Lan

Prepared by K.Lakshmipathi raju, Assistant professor  
Dept of IT

Local Area Network (LAN) is a data communication network connecting various terminals or computers within a building or limited geographical area. The connection among the devices could be wired or wireless. Ethernet, Token Ring and Wireless LAN using IEEE 802.11 are examples of standard LAN technologies.

Ethernet is most widely used LAN Technology, which is defined under IEEE standards 802.3. The reason behind its wide usability is Ethernet is easy to understand, implement, maintain and allows low-cost network implementation. Also, Ethernet offers flexibility in terms of topologies which are allowed. Ethernet generally uses Bus Topology. Ethernet operates in two layers of the OSI model, Physical Layer, and Data Link Layer. For Ethernet, the protocol data unit is Frame since we mainly deal with DLL. In order to handle collision, the Access control mechanism used in Ethernet is CSMA/CD.

Manchester Encoding Technique is used in Ethernet.

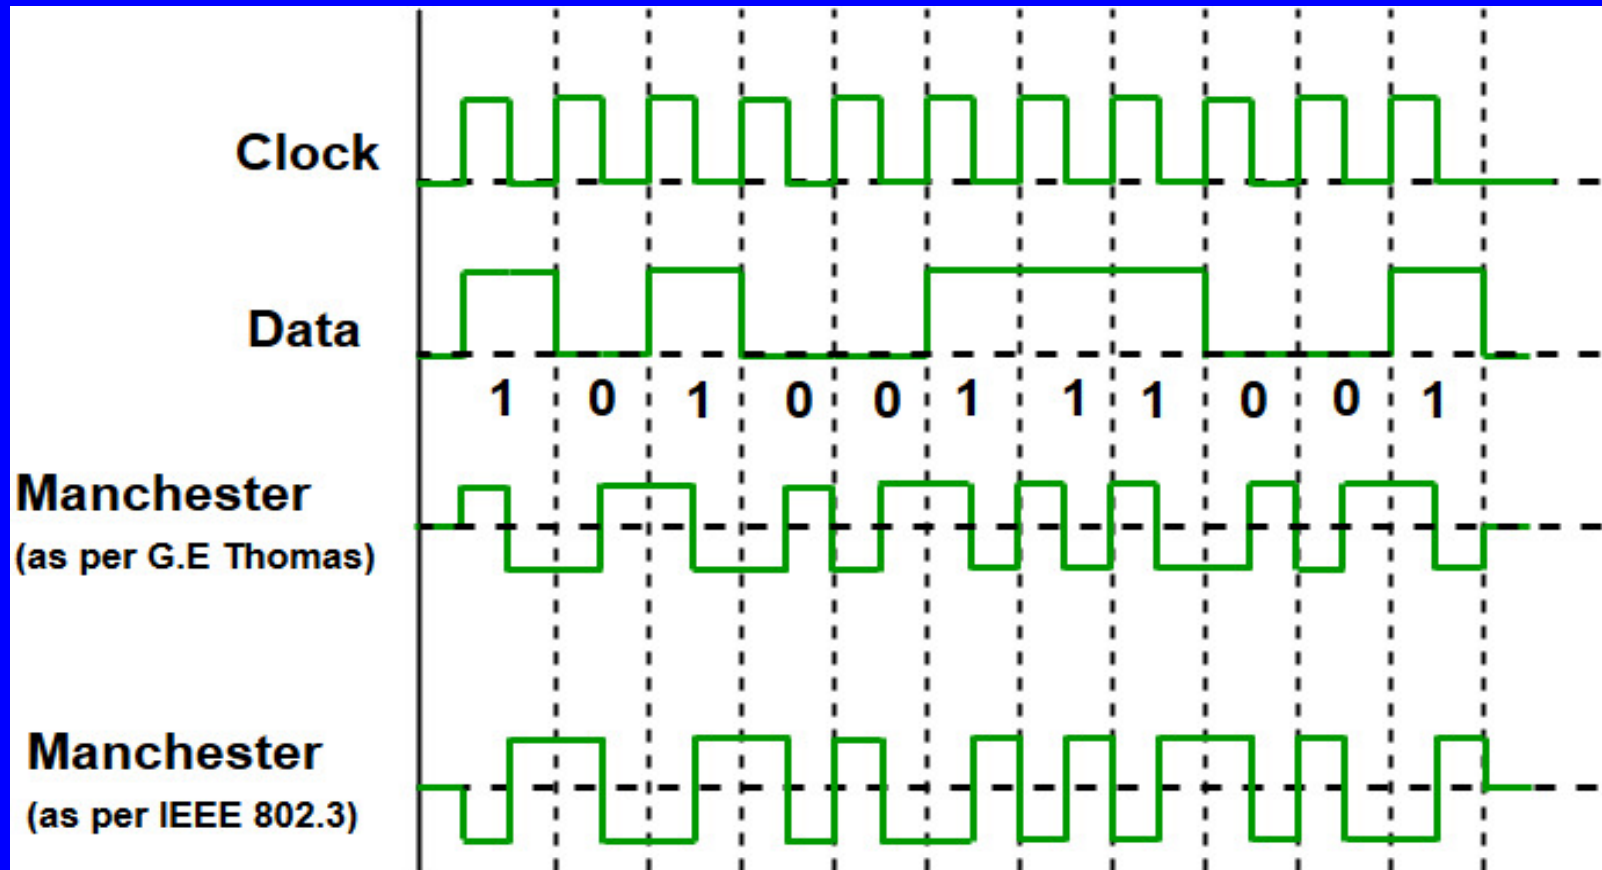

Since we are talking about IEEE 802.3 standard Ethernet therefore, 0 is expressed by a high-to-low transition, a 1 by the low-to-high transition. In both Manchester Encoding and Differential Manchester, Encoding Baud rate is double of bit rate.

Baud rate =  $2 * \text{Bit rate}$ .

Ethernet LANs consist of network nodes and interconnecting media or link. The network nodes can be of two types:

**Data Terminal Equipment (DTE)**

**Data Communication Equipment (DCE)**

**Data Terminal Equipment (DTE):-** Generally, DTEs are the end devices that convert the user information into signals or reconvert the received signals. DTEs devices are: personal computers, workstations, file servers or print servers also referred to as end stations. These devices are either the source or the destination of data frames. The data terminal equipment may be a single piece of equipment or multiple pieces of equipment that are interconnected and perform all the required functions to allow the user to communicate. A user can interact to DTE or DTE may be a user.

**Data Communication Equipment (DCE):-** DCEs are the intermediate network devices that receive and forward frames across the network. They may be either standalone devices such as repeaters, network switches, routers or maybe communications interface units such as interface cards and modems. The DCE performs functions such as signal conversion, coding and may be a part of the DTE or intermediate equipment.

Currently, these data rates are defined for operation over optical fibers and twisted-pair cables:

**i) Fast Ethernet**

Fast Ethernet refers to an Ethernet network that can transfer data at a rate of 100 Mbit/s.

**ii) Gigabit Ethernet**

Gigabit Ethernet delivers a data rate of 1,000 Mbit/s (1 Gbit/s).

**iii) 10 Gigabit Ethernet**

10 Gigabit Ethernet is the recent generation and delivers a data rate of 10 Gbit/s (10,000 Mbit/s). It is generally used for backbones in high-end applications requiring high data rates.



# Thank You