

Modification to run CPU09CMI on 3MHz bus.

Replace xtal into 12MHz


Replace GAL CMI_1 by CMI-4_1

Use the HD63C09 or MC68B02 with full modification.

On solder side:

Cut trace between U13-19 and via (OVMA)

Place 22K resistor between U13-19 and Gnd

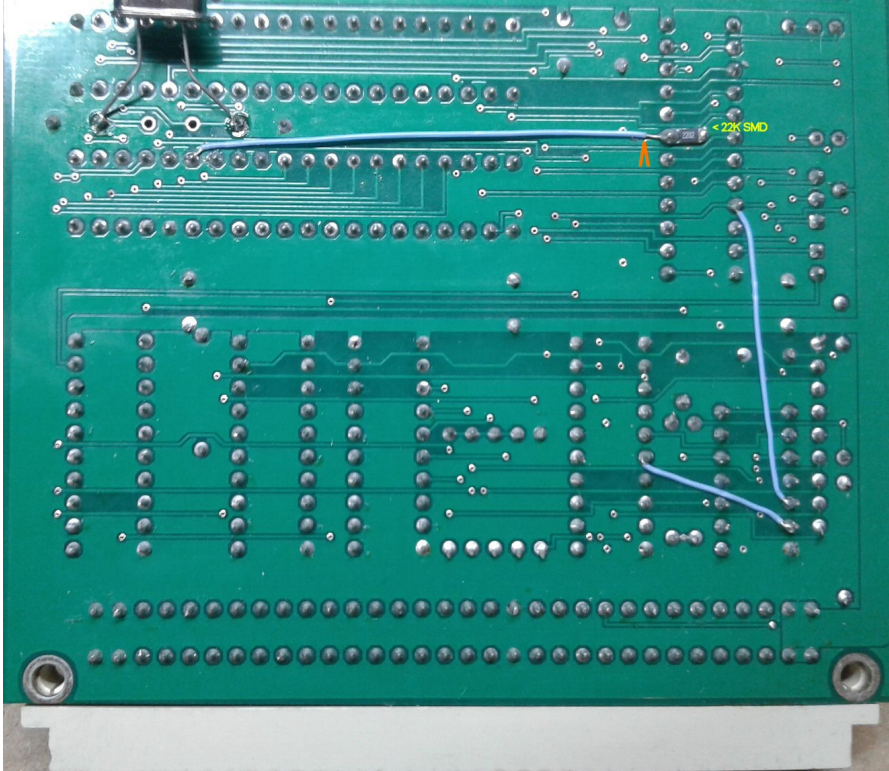

To keep CPUxxCMI 6802 compatible:


On top side:

Cut trace between U3-4 and U3-5

On solder side:

Place wire from U3-5 to U13-9

Place wire from U3-6 to U4-6

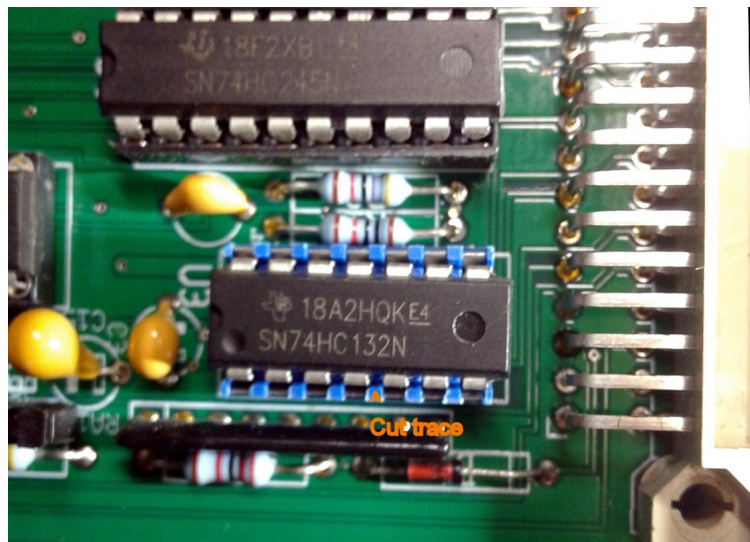

Remarks:

Works even fine with HD6350., MC6850.

Board also tested with S6802.

CdeJ