

The 4K ROM modification.

We now need A11 on the ROM instead of the RA2 jumper J4.

Mod-1:

- Remove jumper J4.
- Connect U8-23 to U9-25.


To avoid mistakes with jumper J4 use this modification.

Mod-2:

- On component side, cut the track to R_A11.



Place a wire between the two A11 vias on the solder side.

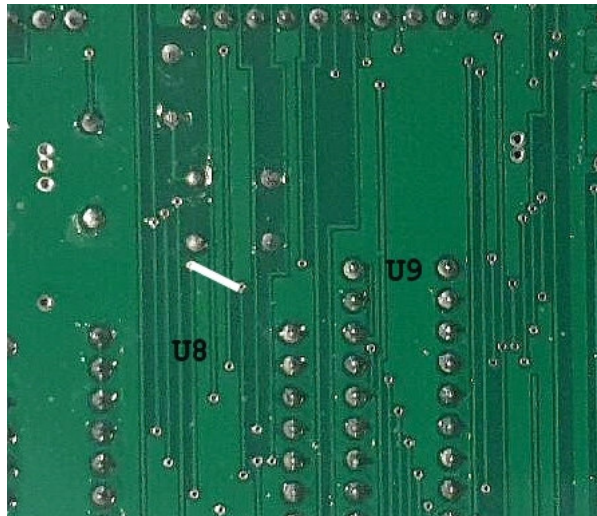

Flash G1 (U13) with CMI-X_1.JED
use CMI-4X_1.JED for the (12) 16 MHz card version.

Flash U8 with cmisbug5.bin and you can BOOT from Floppydisk/Gotek image
or Harddisk / SDcard and run FLEX.

CdeJ