


配重 Counter weight

臂长 (米) Length Of Jib(m)	样式 Type		重量 (吨) Weight (t)
	A (3, 5t)	B (2, 5t)	
30	2	2	12
35	3	1	13
40	4	0	14
45	3	2	15.5
50	3	2	15.5
55	4	1	16.5
60	5	0	17.5
65	5	0	17.5



机构性能 Mechanisms

机构特性 Mechanisms specification										kW
起升 Hoisting		40QP20HS- CRG2	m/min	0-40	0-80	0-20	0-40	500m	30	
			t	4,0	2,0	8,0	4,0			
变幅 Trolleying		40BPX65	m/min	0-56					4	
回转 Slewing		JH13E	r/min	0-0.7					8500N·M	
 电源 Power Supply					380V(±10%)/50Hz					

沈阳宝泉商贸有限公司

地址: 辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

电话: 0086-24-26210512

邮箱: bq@bq-sy.com

网址: http://www.bq-sy.com


SHENYANG BAOQUAN BUSINESS CO., LTD

ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

Tel: 0086-24-26210512

E-mail: bq@bq-sy.com

Url: http://www.bq-sy.com

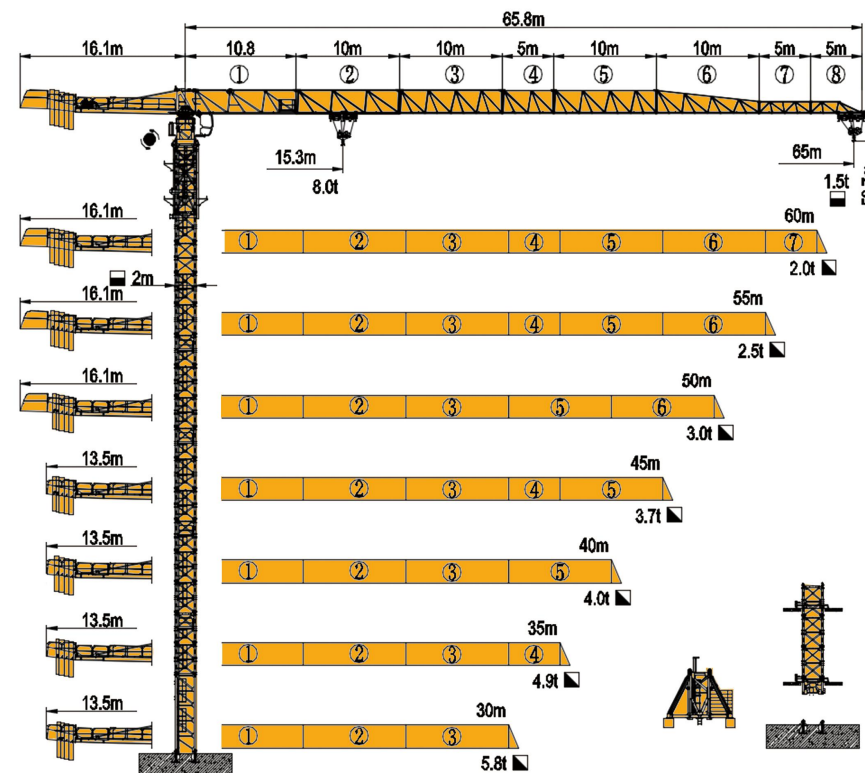


压重 ballast

序号 No. Of Mast	底座压重 (L46A) Ballast on static chassis (L46A)		底座压重 (L68B) Ballast on static chassis (L68B)	
	吊钩高度 Hook Height	臂长 Jibs 30-65m	吊钩高度 Hook Height	臂长 Jibs 30-65m
0	12.6	48t	13.9	48t
1	15.6	48t	16.9	48t
2	18.6	48t	19.9	48t
3	21.6	60t	22.9	48t
4	24.6	60t	25.9	48t
5	27.6	60t	28.9	48t
6	30.6	60t	31.9	48t
7	33.6	72t	34.9	48t
8	36.6	72t	37.9	48t
9	39.6	72t	40.9	60t
10	42.6	72t	43.9	72t
11	45.6	84t	46.9	72t
12	48.6	96t	49.9	84t
13	51.6	108t	52.9	96t
14			55.9	96t
15			58.9	120t
16			61.9	132t

载荷特性 Load Diagrams

	R(Cmax)m	C(max)t	10	15	20	25	30	35	40	45	50	55	60	65	m
65m	15.3	8.00	8.00	8.00	5.85	4.49	3.59	2.96	2.48	2.12	1.83	1.59	1.39	1.22	t
	29.2	4.00	4.00	4.00	4.00	3.87	3.23	2.76	2.39	2.10	1.86	1.67	1.50		t
60m	17.5	8.00	4.00	4.00	4.00	4.00	3.71	3.10	2.65	2.30	2.02	1.79	1.72		t
	33.5	4.00	8.00	7.78	5.60	4.32	3.74	2.87	2.43	2.08	1.81	1.59	2.00		t
55m	19.2	8.00	4.00	4.00	4.00	4.00	4.00	3.42	2.93	2.55	2.25	2.00			m
	36.8	4.00	8.00	6.37	4.94	4.00	3.34	2.84	2.46	2.15	1.90				t
50m	20.3	8.00	4.00	4.00	4.00	4.00	4.00	3.78	3.25	2.83	2.50				t
	39.0	4.00	8.00	8.00	7.01	5.45	4.42	3.70	3.15	2.73	2.40				t
45m	21.8	8.00	4.00	4.00	4.00	4.00	4.00	4.00	3.44	3.00					m
	42.0	4.00	8.00	8.00	7.39	5.75	4.67	3.91	3.34	2.90					t
40m	22.1	8.00	4.00	4.00	4.00	4.00	4.00	4.00	3.50						m
	40.0	4.00	8.00	8.00	7.51	5.85	4.75	3.98	3.40						t
35m	22.9	8.00	4.00	4.00	4.00	4.00	4.00	4.00							m
	35.0	4.00	8.00	8.00	7.91	6.16	5.01	4.20							t
30m	22.7	8.00	4.00	4.00	4.00	4.00	4.00								m
	30.0	4.00	8.00	8.00	8.00	6.27	5.10								t

塔身 Tower

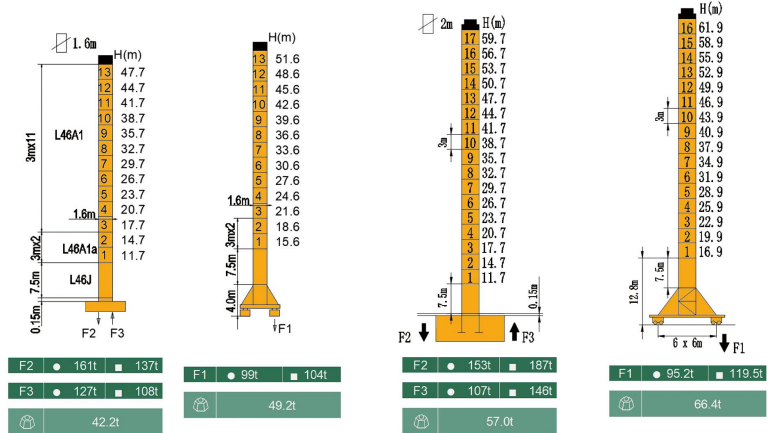

F 反力 Reactions	工作状态 In service	非工作状态 Out of service	自重 Self-load	独立高度自重 (不含配重) Total weight of free standing height (excludes counter weight ballast)
F2	161t	137t	153t	187t
F3	127t	108t	107t	148t
	42.2t	49.2t	57.0t	66.4t

附着 Anchorages

