


基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc(kN.m)	Nc(kN)	H(kN)	F1(kN)	F2(kN)
L68B2	51,5	75	5505	833	164,3	-1738	2154

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
L68B2	51,5			8	

机构性能 Mechanisms

机构特性 Mechanisms specification										kW
起升 Hoisting		55JLF30	m/min	86,0	64,5	43,0	43,0	32,2	21,5	
			t	2,8	3,8	6,0	5,6	7,6	12,0	
			m/min	70,4	52,8	35,3	35,2	26,4	17,6	
			t	2,5	3,8	6,0	5,0	7,6	12,0	
变幅 Trolleying		4TVF	m/min	63						185Nm
				65						5,5
回转 Stewing		7,5SVF	r/min	0,67						95Nm x 3
行走 Travelling		5,5RVF	m/min	25						5 x 4
电源 Power Supply				380V 50Hz / 440V 60Hz						
KVA 供电容量 Necessary Electric Power				80kVA / 67kVA						

沈阳宝泉商贸有限公司

地址: 辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

电话: 0086-24-26210512

邮箱: bqswgs@163.com

网址: http://www.bq-sy.com


SHENYANG BAOQUAN BUSINESS CO., LTD

ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA


Tel: 0086-24-26210512

E-mail: bqswgs@163.com

Url: http://www.bq-sy.com

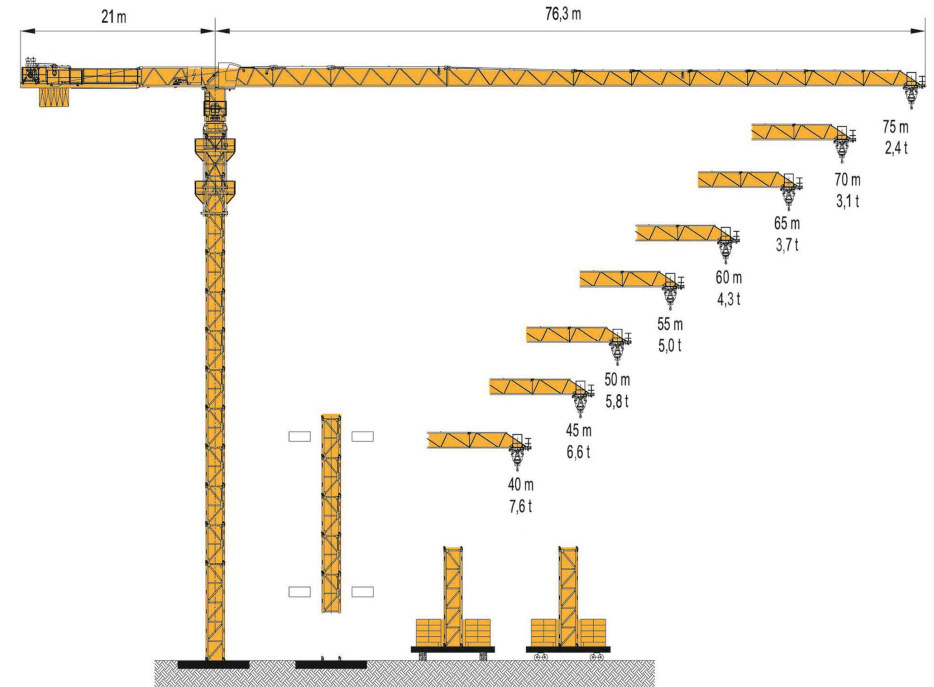


塔身 Tower

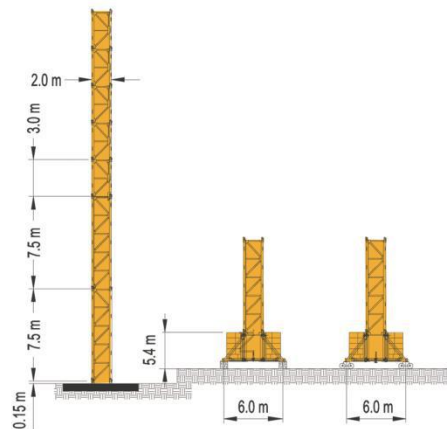

Tower configuration
塔身组成

序号 No.	塔身 Tower	基础节1 Base Mast 1	基础节2 Base Mast 2	过渡节 Adapter	标节 Mast	高度 (米) HH(m)	臂长 (米) Jib reach(m)
1	L68B2	1	1	1	12	51,5	40-75


起重臂 Jib

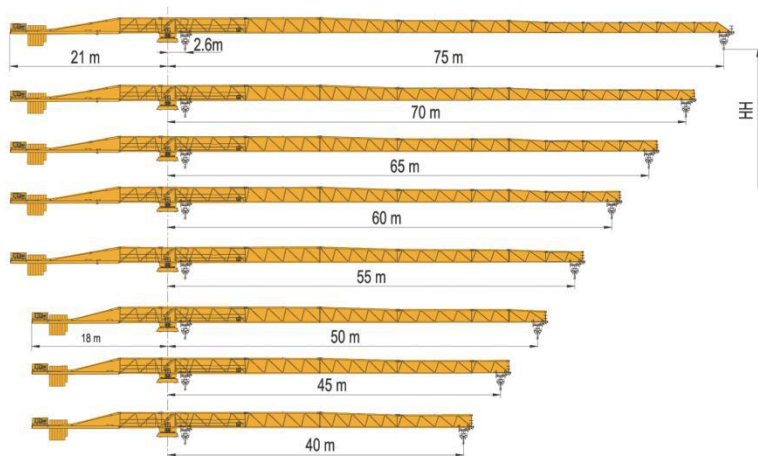

载荷特性 Load Diagrams

75m		2.6	15	18.9	20	25	30	35	40	45	50	55	60	65	70	75	m
			6.00	6.00	6.00	6.00	6.00	6.00	5.27	4.58	4.03	3.58	3.21	2.90	2.63	2.40	t
			12.00	12.00	11.44	8.82	7.68	7.10	4.99	4.30	3.75	3.29	2.92	2.60	2.33	2.10	t
70m		2.6	15	20	21.3	25	30	35	40	45	50	55	60	65	70	m	
			6.00	6.00	6.00	6.00	6.00	6.00	5.28	4.67	4.17	3.75	3.40	3.10	t		
			12.00	12.00	12.00	9.97	8.08	6.74	5.74	4.97	4.36	3.86	3.45	3.10	2.80	t	
65m		2.6	15	20	23.3	25	30	35	40	45	50	55	60	65	m		
			6.00	6.00	6.00	6.00	6.00	6.00	5.70	5.05	4.51	4.07	3.70	t			
			12.00	12.00	12.00	10.88	8.84	7.40	6.34	5.51	4.85	4.32	3.88	3.50	t		
60m		2.6	15	20	24.2	25	30	35	40	45	50	55	60	m			
			6.00	6.00	6.00	6.00	6.00	6.00	6.00	5.32	4.76	4.30	t				
			12.00	12.00	12.00	11.43	9.30	7.79	6.68	5.81	5.13	4.57	4.10	t			
55m		2.6	15	20	25	30	35	40	45	50	55	m					
			6.00	6.00	6.00	6.00	6.00	6.00	5.58	5.00	t						
			12.00	12.00	12.00	9.74	8.17	7.00	6.10	5.38	4.80	t					
50m		2.6	15	20	25	25.8	30	35	40	45	50	m					
			6.00	6.00	6.00	6.00	6.00	6.00	6.00	5.80	t						
			12.00	12.00	12.00	10.10	8.48	7.27	6.34	5.60	t						
45m		2.6	15	20	25	26.5	30	35	40	45	m						
			6.00	6.00	6.00	6.00	6.00	6.00	6.00	t							
			12.00	12.00	12.00	12.00	10.49	8.81	7.56	6.60	t						
40m		2.6	15	20	25	26.8	30	35	40	m							
			6.00	6.00	6.00	6.00	6.00	6.00	t								
			12.00	12.00	12.00	12.00	10.54	8.85	7.60	t							

附着 Anchorages

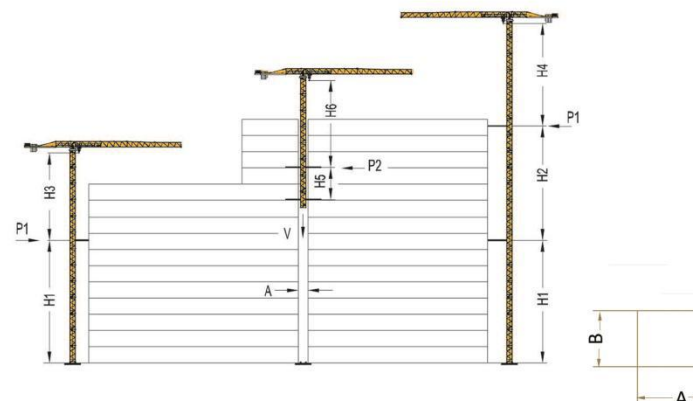

塔身 Tower	L68B2带过渡节 L68B2 with adapter	工作状态 Working	非工作状态 Off Working
H1	40.5	—	—
H2	24.0	—	—
H3	35.0	—	—
H4	35.0	—	—
H5	14.0	—	—
H6	21.0	—	—
P1	—	14.8	21.3
P2	—	16.2	26.4
V	—	89.1	77.1
A	2.6	—	—
B	2.2	—	—