


基础 Foundation



Stationary Crane
固定式起重机

塔身 Tower	高度 (米) TH(m)	臂长 (米) Jib reach(m)	基础载荷 Foundation loadings			地脚反力 Corner forces	
			Mc(kN.m)	Nc(kN)	H(kN)	F1(kN)	F2(kN)
TH20,3	60,0	75	6650	865	178,9	-2135	2559
L69B	51,65	75	5680	842	164,3	-1798	2218

运输 Shipping

塔身 Tower	高度 (米) TH(m)	集装箱数量 Container QTY			
		FR	40' OP	40' HQ	20' GP
TH20,3	60,0			13	
L69B	51,65			10	

机构性能 Mechanisms

机构特性 Mechanisms specification									kW
起升 Hoisting	75LVF40	m/min	82,0	69,0	46,0	41,0	34,5	23,0	
			t	3,5	5,0	8,0	7,0	10,0	16,0
变幅 Trolleying	6T3V7 8DVF7	m/min	65						185Nm
			74						7,5
回转 Slewing	RZV95×3	r/min	0,67						95Nm×3
行走 Travelling	5RTVF4	m/min	25						5,5×4
电源 Power Supply			380V 50Hz / 440V 60Hz						
KVA 供电容量 Necessary Electric Power			103 kVA						

沈阳宝泉商贸有限公司

地址: 辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA

电话: 0086-24-26210512

邮箱: bqswgs@163.com

网址: http://www.bq-sy.com


SHENYANG BAOQUAN BUSINESS CO., LTD

ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA


Tel: 0086-24-26210512

E-mail: bqswgs@163.com

Url: http://www.bq-sy.com

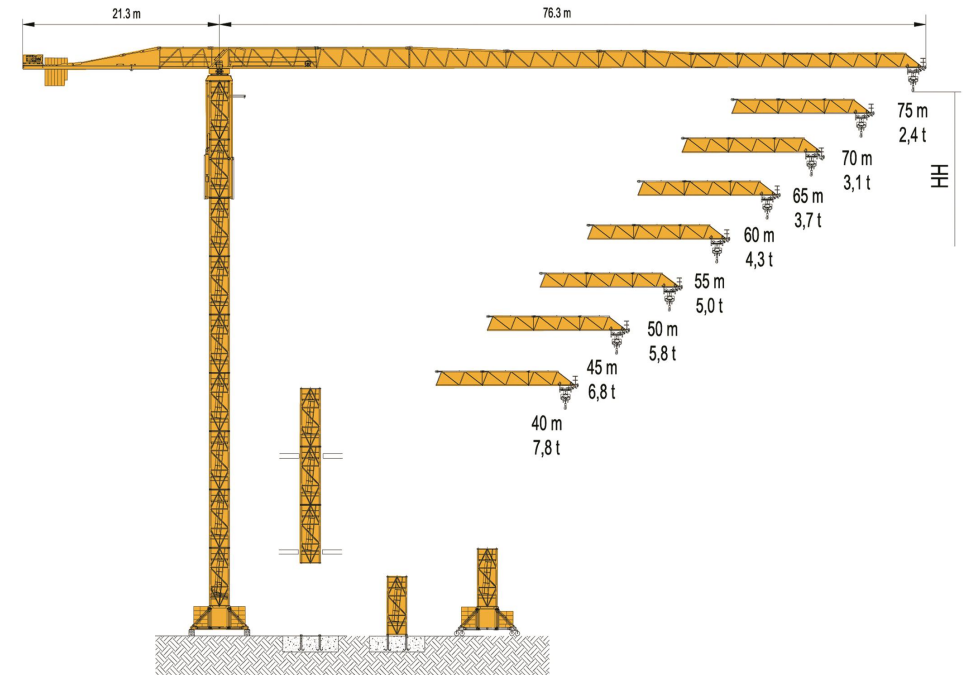


起重臂 Jib

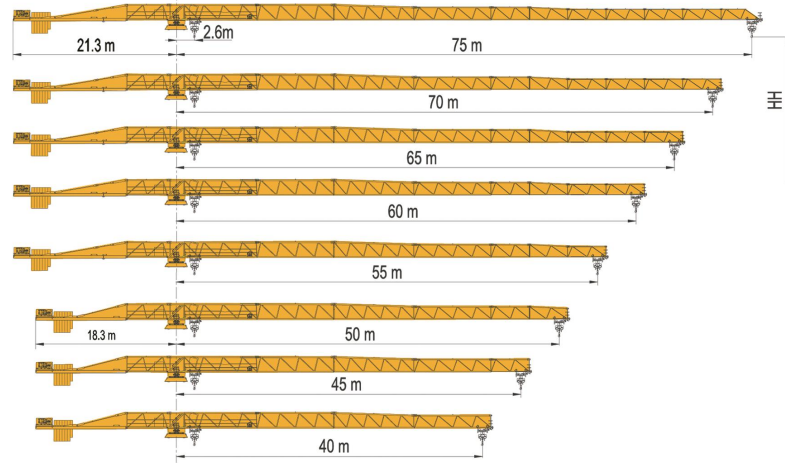

载荷特性 Load Diagrams

75m			2.6	14.9	15	20	25	30	35	40	45	50	55	60	65	70	75	m
				8.00	8.00	8.00	8.00	7.36	6.16	5.27	4.58	4.03	3.58	3.21	2.90	2.63	2.40	t
				16.00	15.92	11.44	8.82	7.10	5.89	4.99	4.30	3.75	3.29	2.92	2.60	2.33	2.10	t
70m			2.6	15	16.5	20	25	30	35	40	45	50	55	60	65	70	m	
				8.00	8.00	8.00	8.00	8.00	7.06	6.06	5.28	4.67	4.17	3.75	3.40	3.10	t	
				16.00	16.00	12.87	9.97	8.08	6.74	5.74	4.97	4.36	3.86	3.45	3.10	2.80	t	
65m			2.6	15	17.7	20	25	30	35	40	45	50	55	60	65	m		
				8.00	8.00	8.00	8.00	8.00	7.58	6.52	5.70	5.05	4.51	4.07	3.70	t		
				16.00	16.00	13.98	10.88	8.84	7.40	6.34	5.51	4.85	4.32	3.88	3.50	t		
60m			2.6	15	18.5	20	25	30	35	40	45	50	55	60	m			
				8.00	8.00	8.00	8.00	8.00	7.97	6.86	6.00	5.32	4.76	4.30	t			
				16.00	16.00	14.68	11.43	9.30	7.79	6.68	5.81	5.13	4.57	4.10	t			
55m			2.6	15	19.3	20	25	30	35	40	45	50	55	m				
				8.00	8.00	8.00	8.00	8.00	8.00	7.19	6.29	5.58	5.00	t				
				16.00	16.00	15.35	11.96	9.74	8.17	7.00	6.10	5.38	4.80	t				
50m			2.6	15	19.9	20	25	30	35	40	45	50	m					
				8.00	8.00	8.00	8.00	8.00	8.00	7.47	6.54	5.80	t					
				16.00	16.00	15.90	12.40	10.10	8.48	7.27	6.34	5.60	t					
45m			2.6	15	20	20.6	25	30	35	40	45	m						
				8.00	8.00	8.00	8.00	8.00	8.00	7.76	6.80	t						
				16.00	16.00	16.00	12.87	10.49	8.81	7.56	6.60	t						
40m			2.6	15	20	20.6	25	30	35	40	m							
				8.00	8.00	8.00	8.00	8.00	8.00	7.80	t							
				16.00	16.00	16.00	12.93	10.54	8.85	7.60	t							


塔身 Tower

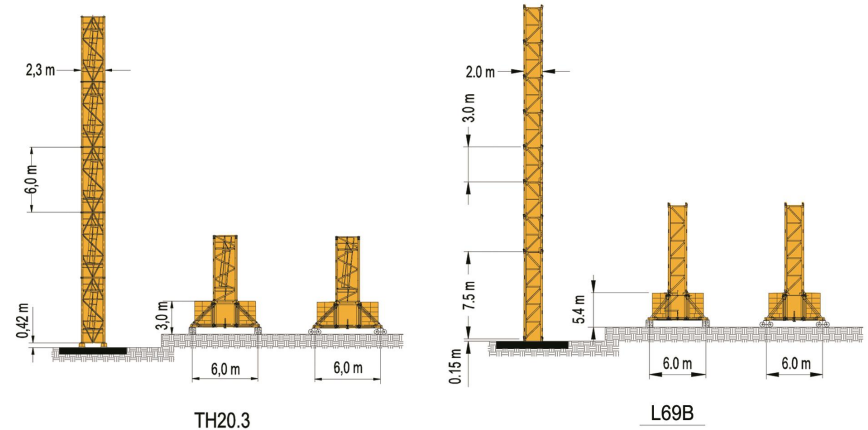

Tower configuration
塔身组成

序号 No.	塔身 Tower	基础节1 Base Mast 1	过渡节 Adapter	标节 Mast	高度 (米) HH(m)	臂长 (米) Jib reach(m)
1	TH20.3			10	60.0	40-75
2	L69B	1	1	14	51.65	40-75

附着 Anchorages

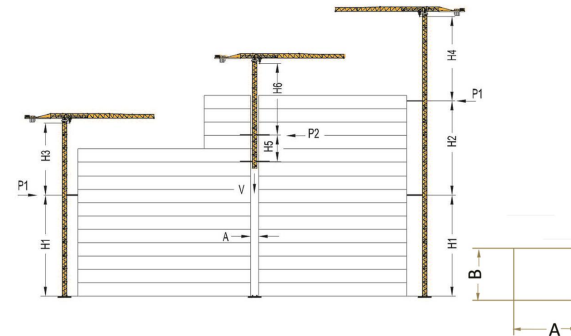

塔身 Tower	TH20.3			L69B		
	m	工作状态 Working	非工作状态 Off Working	m	工作状态 Working	非工作状态 Off Working
		t	t		t	t
H1	47.2	—	—	37.5	—	—
H2	36.0	—	—	27.0	—	—
H3	51.8	—	—	37.5	—	—
H4	45.8	—	—	37.5	—	—
H5	14	—	—	12.0	—	—
H6	32.8	—	—	36.0	—	—
P1	—	23	26	—	24.2	27.3
P2	—	22	25	—	23.2	26.3
V	—	100	90	—	105.0	94.5
A	2.6			2.6		
B	2.6			2.2		