

配重 Counter Weight


			
	2000kg	1500kg	
50m	5	0	10000kg
45m	4	1	9500kg
40m	3	2	9000kg
35m	1	4	8000kg
30m	0	5	7500kg
25m	1	3	6500kg

机构性能 Mechanisms


机构特性 Mechanisms specification											kW		
起升 Hoisting		33PC15	m/min	10	40	80	5	20	40	400m	24	可选择 Optional winch	
			t	3,0	3,0	1,5	6,0	6,0	3,0				
		24PFC15	m/min	20		10	40		20		450m		24
			t	1,5		3,0	3,0		6,0				
变幅 Trolleying		4D3V2	min	0 - 58							4		
回转 Slewing		RCV95 (JH07)	r/min	0 - 0,7							95Nm x 2		
行走 Travelling		RT443	m/min	0 - 30							4 x 4		
 电源 Power Supply						380V 50Hz / 440V 60Hz							
 供电容量 Necessary Electric Power						24LVF							
采用其它形式起升机构 Other Form Hoisting						75LVF: 105kVA 70RCS: 80kVA							

沈阳宝泉商贸有限公司
地址: 辽宁省沈阳市大东区东北大马路264号, 509-511室
电话: 0086-24-26210512
传真: 0086-415-3165597
邮箱: bqswgs@163.com
网址: http://www.bq-sy.com

SHENYANG BAOQUAN BUSINESS CO., LTD
ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA
Tel: 0086-24-26210512
Fax: 0086-415-3165597
E-mail: bqswgs@163.com
Url: http://www.bq-sy.com

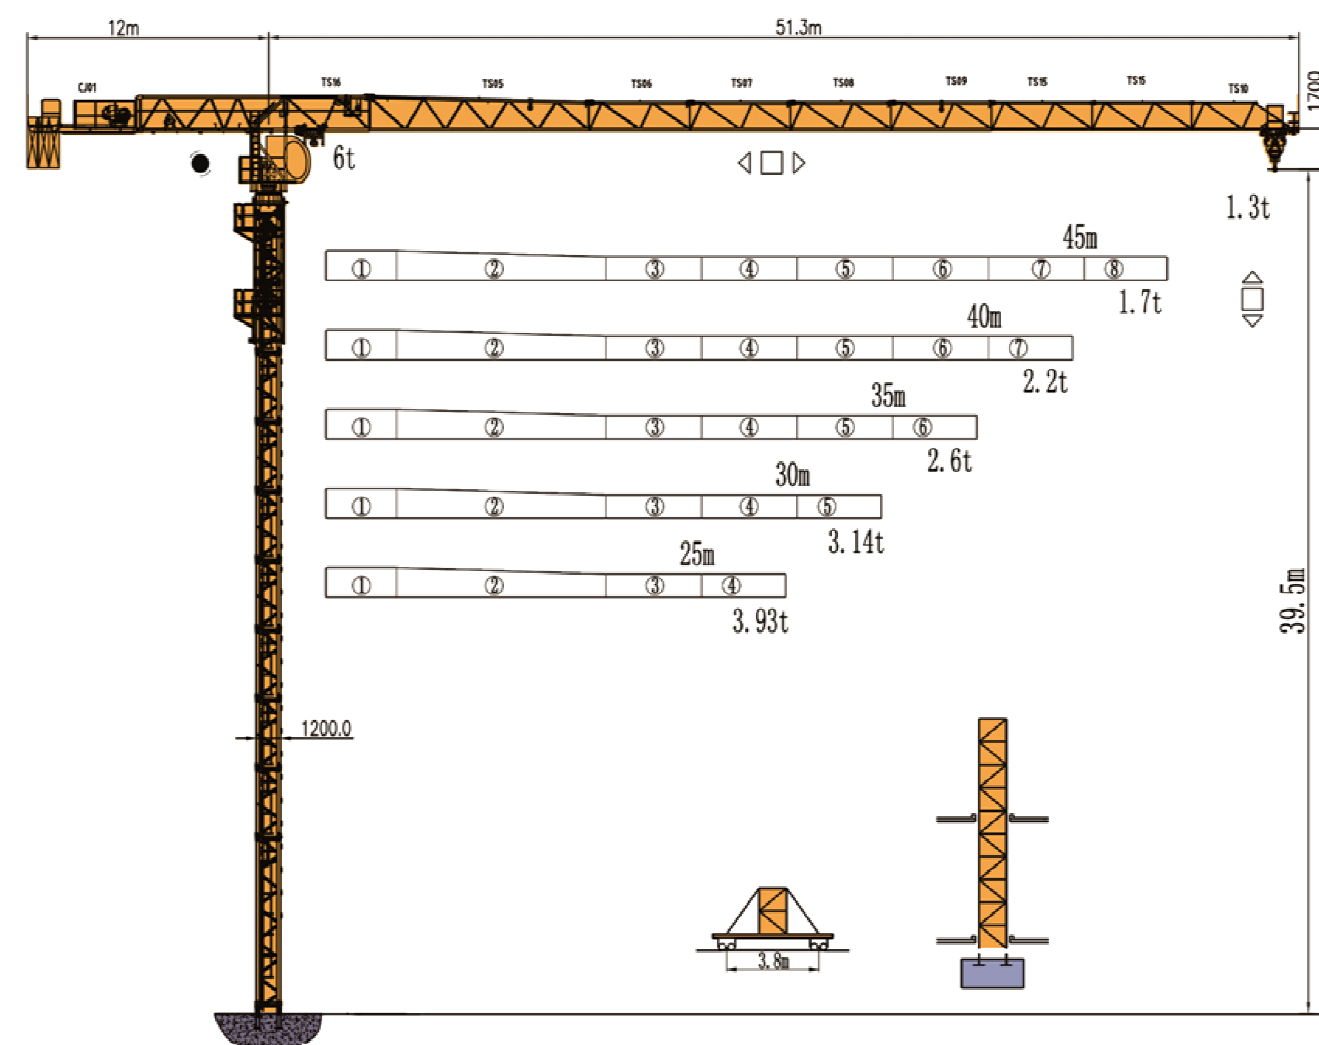


塔身 Tower

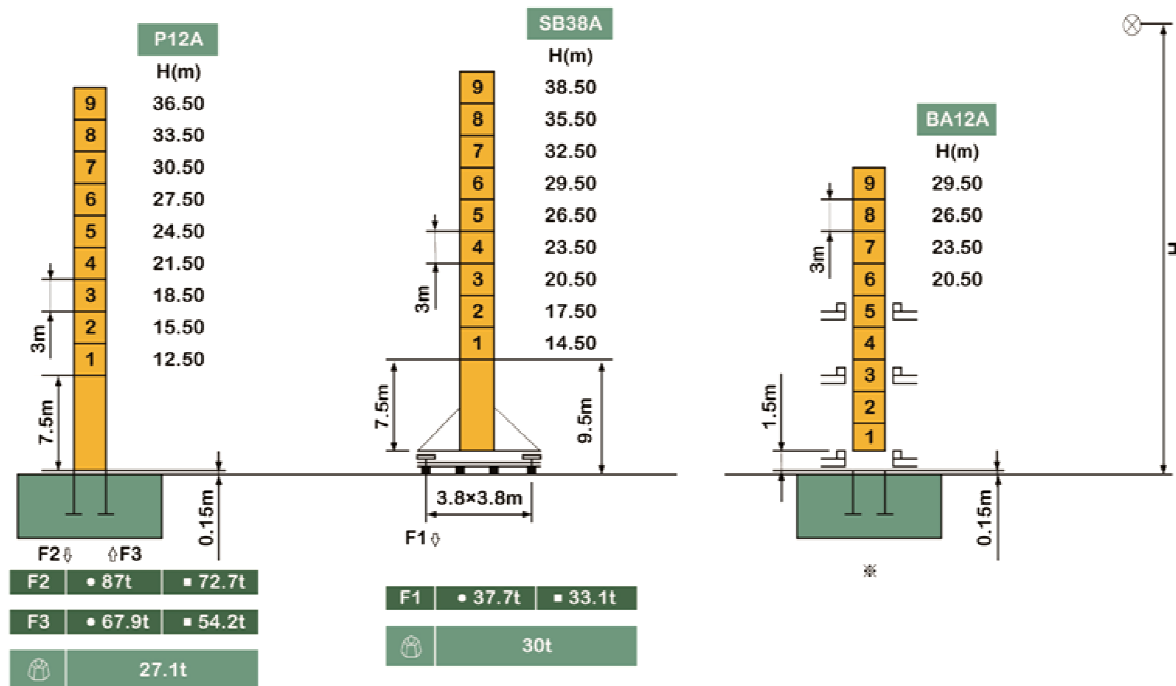


F 反力 Reactions	工作状态	In service	自重 Self-load	不带载荷及配重，最大臂长及标准高度时的自重。	Without load and counter-weight with longest jib and standard height
	非工作状态	Out of service			


内爬塔机 Climbing Crane

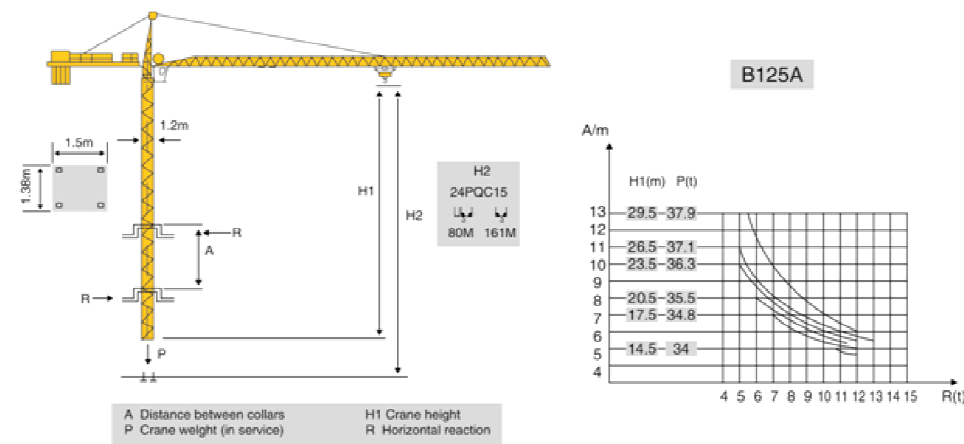

载荷特性 Load Diagrams

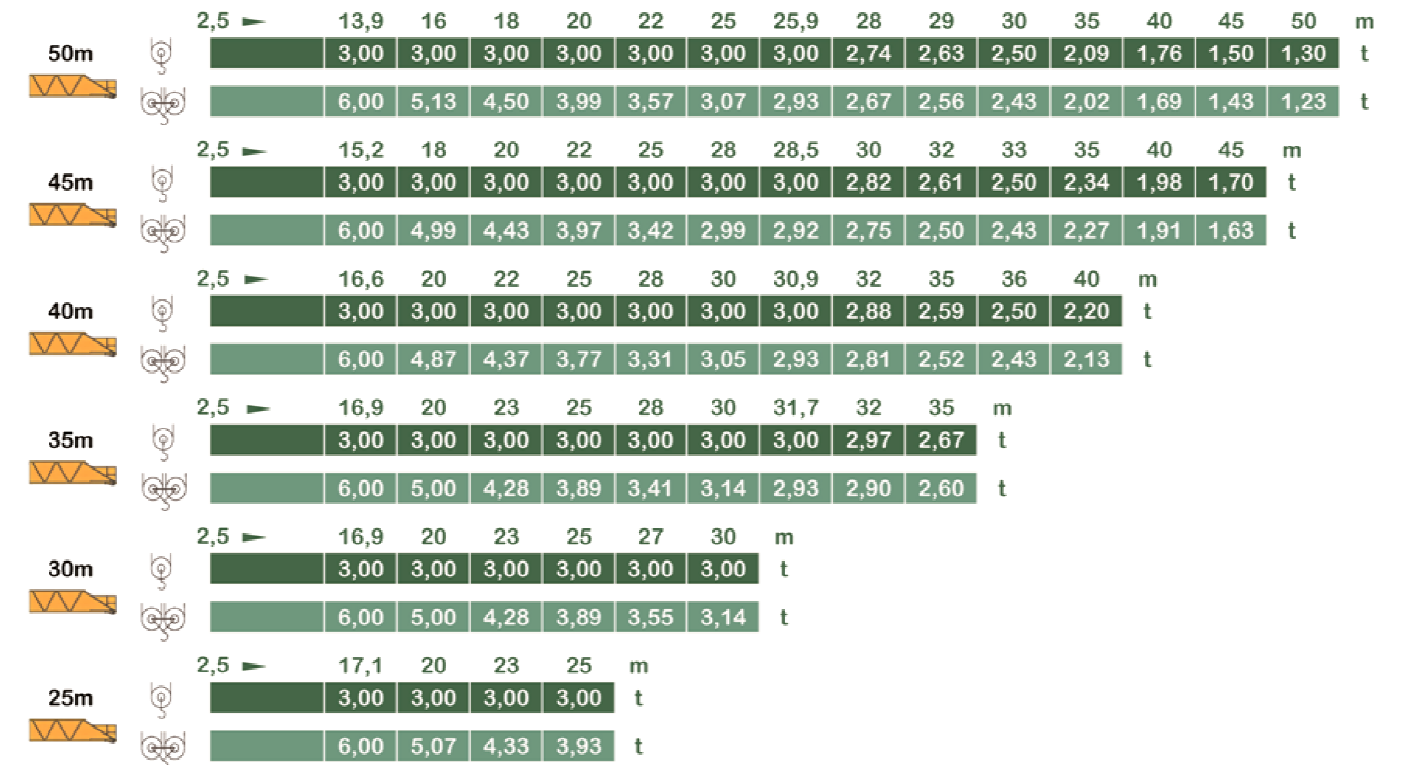

附着 Anchorage

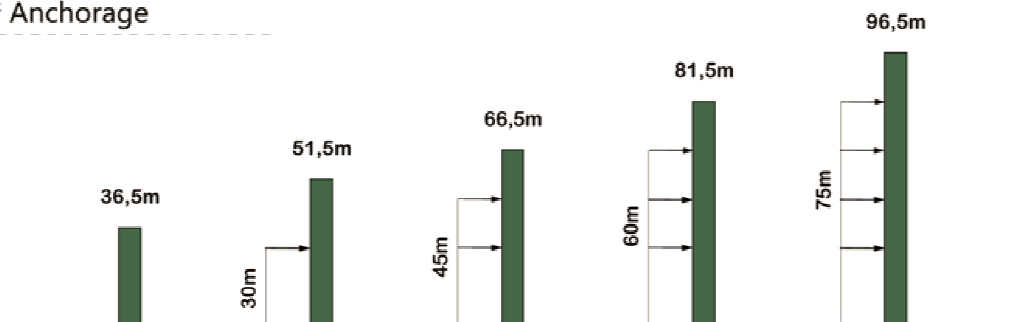

压重 Base Ballast

1.2m	SB38A	H(m)	38.5	35.5	32.5	29.5	26.5	23.5	20.5	17.5	14.5
		(t)	40	40	40	40	40	35	35	35	35