



机构性能 Mechanisms

机构特性 Mechanisms specification			 / 				备注 Remark
起升 Hoisting		m/min	0-6	0-12	0-24	0-48	无极变速 No step speed
		t	70-140	35-70	17,5-35	0-17,5	
变幅 Trolleying		m/min	0 - 20				无极变速 No step speed
回转 Slewing		r/min	0 - 0,3				无极变速 No step speed
顶升 Jacking		m/min	0 - 0,3				
 电源 Power Supply			380V 50Hz				
 供电容量 Necessary Electric Power			500kVA				

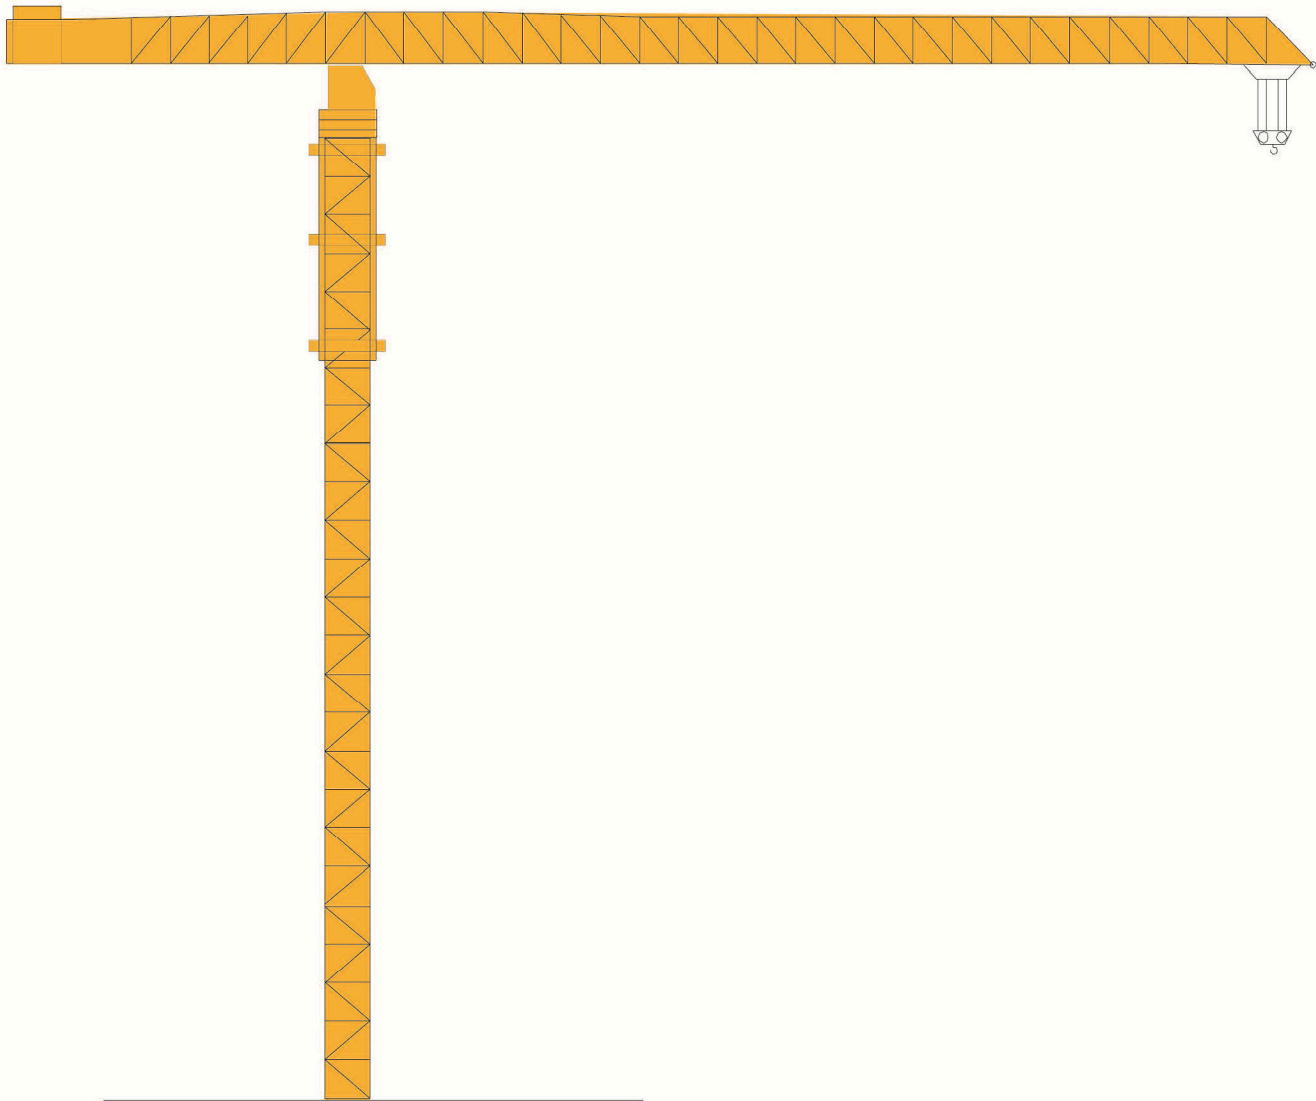


平头式塔式起重机 Topless Tower Crane GHP70360-140

外形尺寸 Dimensions

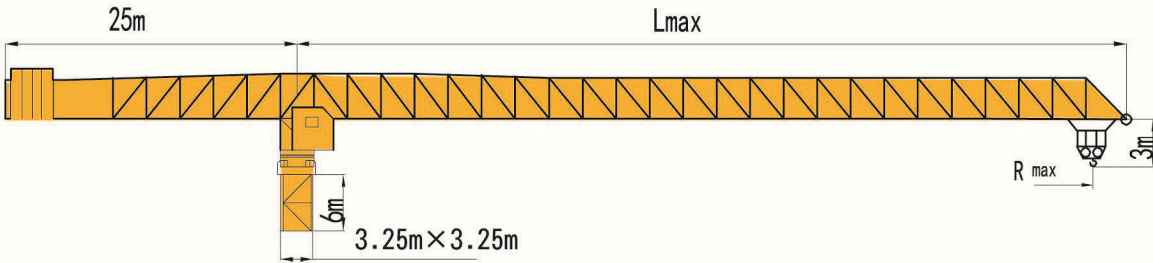

Lmax	52m	62m	72m
Rmax	50m	60m	70m


附着 Anchorages

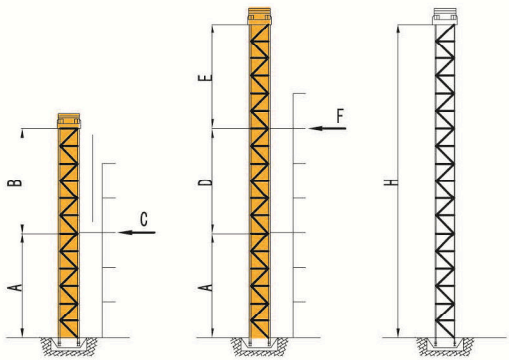

塔机工作状态风速 20m/s
In service wind speed up to 20m/s
非工作状态风速 42m/s
Out of service wind speed up to 42m/s

一道附着 Only one tie			
A	附着最低高度 Min height base to first tie	24	(m)
B	最大自由高度 Max height above first tie	54	(m)
C	最大附着反力 Max horizontal tie load	150	(t)
多道附着 More than one tie			
D	附着最小间距 Min distance between two ties	24	(m)
E	最大自由高度 Max height above top tie	54	(m)
F	最大附着反力 Max horizontal tie load	150	(t)
G	最大独立高度 Max lift height without tie	60	(m)

内爬 Climbing Crane



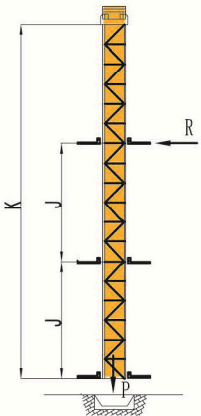


塔机工作状态风速 20m/s
In service wind speed up to 20m/s
非工作状态风速 42m/s
Out of service wind speed up to 42m/s

J	支撑最小间距 Min distance between collars	18	(m)
K	塔身长度 Mast length	48	(m)
R	最大支撑反力 Max. horizontal load	140	(t)
P	最大垂直力 Total vertical load	700	(t)

平头式塔式起重机 Topless Tower Crane GHP70360-140

载荷特性 Load Diagrams

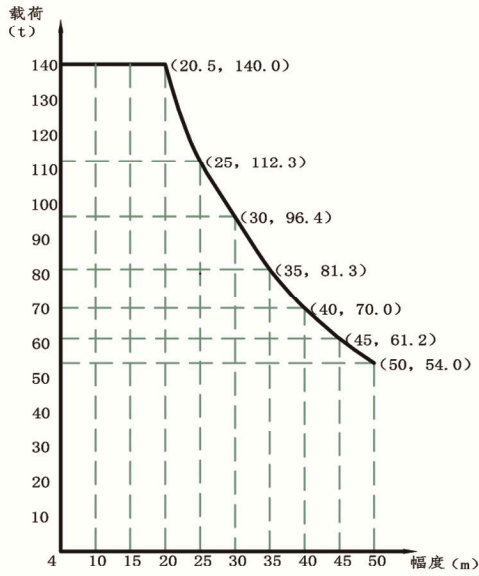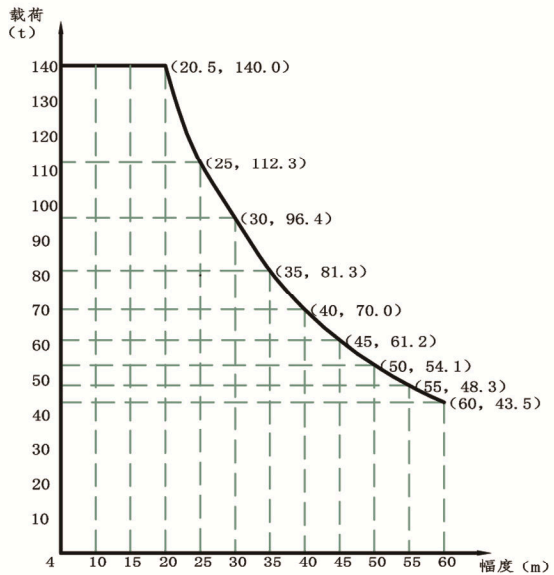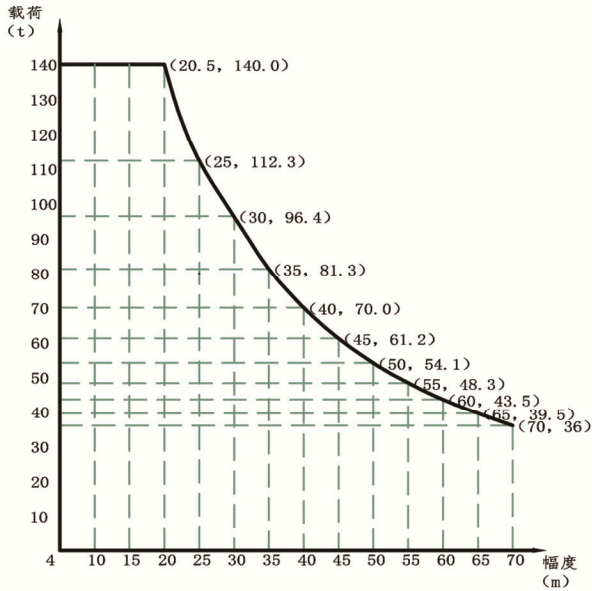

注：此曲线为起升高度100m时的净吊重，超过100m时起吊重量应扣除相应钢丝绳的重量。
Remark: This curve shows the net load at the hoist height of 100m, load weight of the wire rope should be deducted at the height of over 100m.