



Two-pillar flight clearance: No-Growth $\times$ residual-strength (CAI) — aligning Stage 3 with how composites are actually certified

(a) CAI knockdown (BVID design driver)
[S1,S4: CMH-17 / ASTM D7136-7]

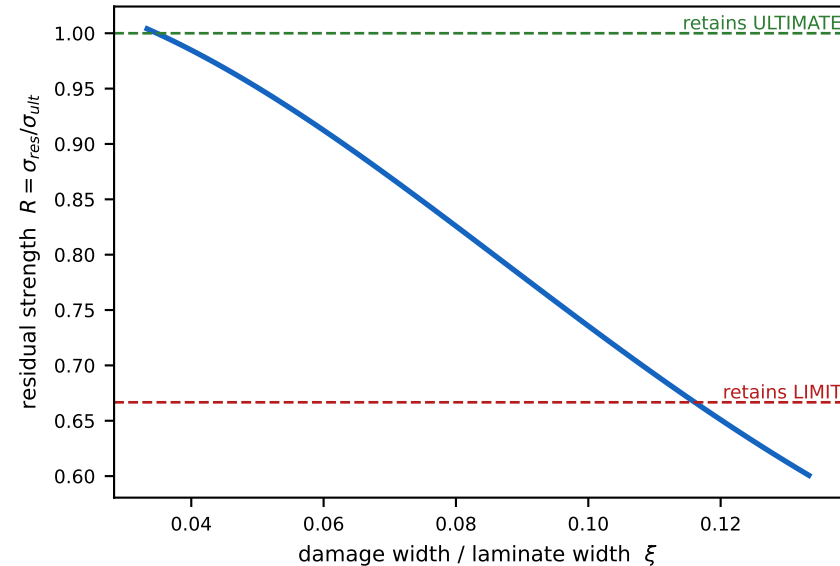

(b) two-pillar map: $\triangle$ = CAI pillar drove
final = more-severe(growth, strength)

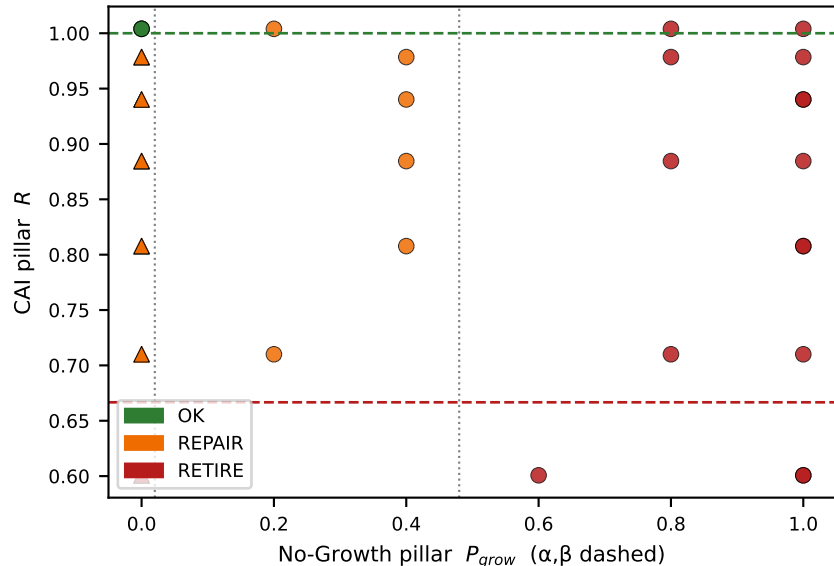

(c) CAI pillar escalates 43%
(18 growth-OK $\rightarrow$ not-OK = caught gap)

