
## 10 PINS 1.0 Pitch SMD Horizontal Type Bottom Contact

1.00±0.05

Ver	Date	Description
1.0	Aug-07-2013	Preliminary Release

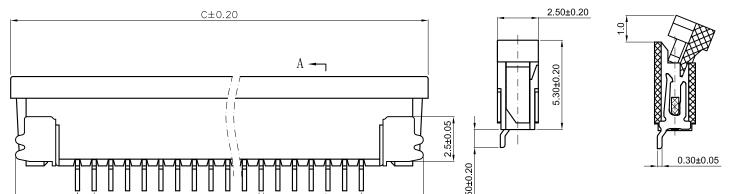

0.30±0.01

9.00


Pin Num	Α	В	С	D
10	9	11.3	17.1	16.1

## Material:

- 1、Housing: NYlon46 UL94V-0 Grey;
- 2 Loeker: PPS UL94V-0;
- 3. Contact:Phosphor bronze,tin/lead-plated;
- ${\tt 4. Solder\ tab: Phosphor\ bronze, tin/lead-plated.}$

## Specification:

- 1. Unverified Tolerance should comply with SJ1372-79;
- 2. Temperature Range: -25° C~85°C;
- 3、Rated Voltage: 50V, AC, DC;
- 4. Contact Resistance:  $\leq$  0.03  $\Omega$ ;
- 5. Insulation Resistance:  $\geq$ 500M  $\Omega$ ;
- 6、Withstand Voltage: 500V, AC/minute.

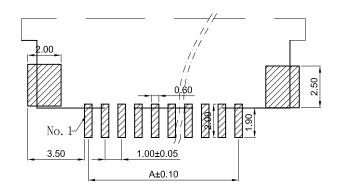

A±0.10

D±0.20

B<sub>-0</sub><sup>+0.10</sup>



1.0\*(n-1)±0.05

1.00±0.05

0.70±0.05

1.0\*(n+1)±0.05

UNIT: MM SIZE: A4
SHEET: 1 OF 1

SHEET: 1 OF 1

Part Number for Order: ER-CON10HB-2

DRAWN BY: Jim | CHECKED BY:Tony | APPROVED BY: Liu