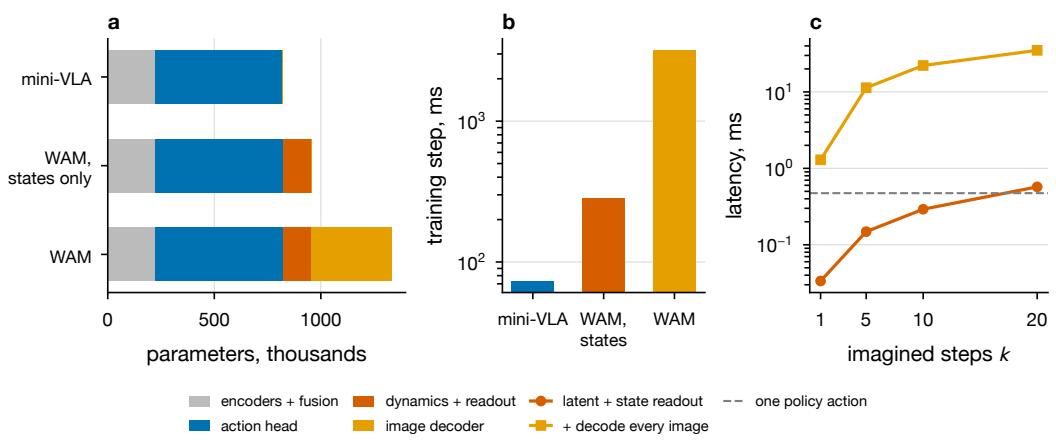
a
mini-VLA
WAM,
states only
WAM
0
500
1000
parameters, thousands
b
training step, ms
10^3
10^2
mini-VLA
WAM,
states
WAM
c
latency, ms
10^1
10^0
10^{-1}
1
5
10
20
imagined steps k
encoders + fusion
action head
dynamics + readout
image decoder
latent + state readout
+ decode every image
one policy action