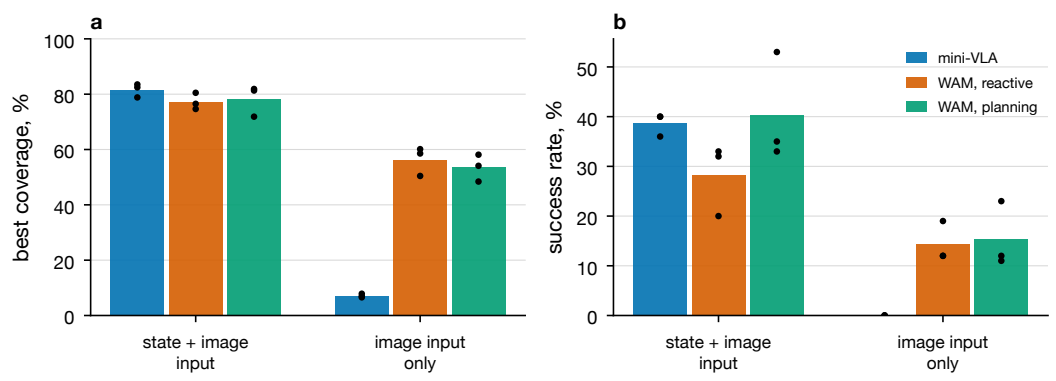
a
best coverage, %
100
80
60
40
20
0
state + image input
image input only
b
success rate, %
50
40
30
20
10
0
mini-VLA
WAM, reactive
WAM, planning
state + image input
image input only