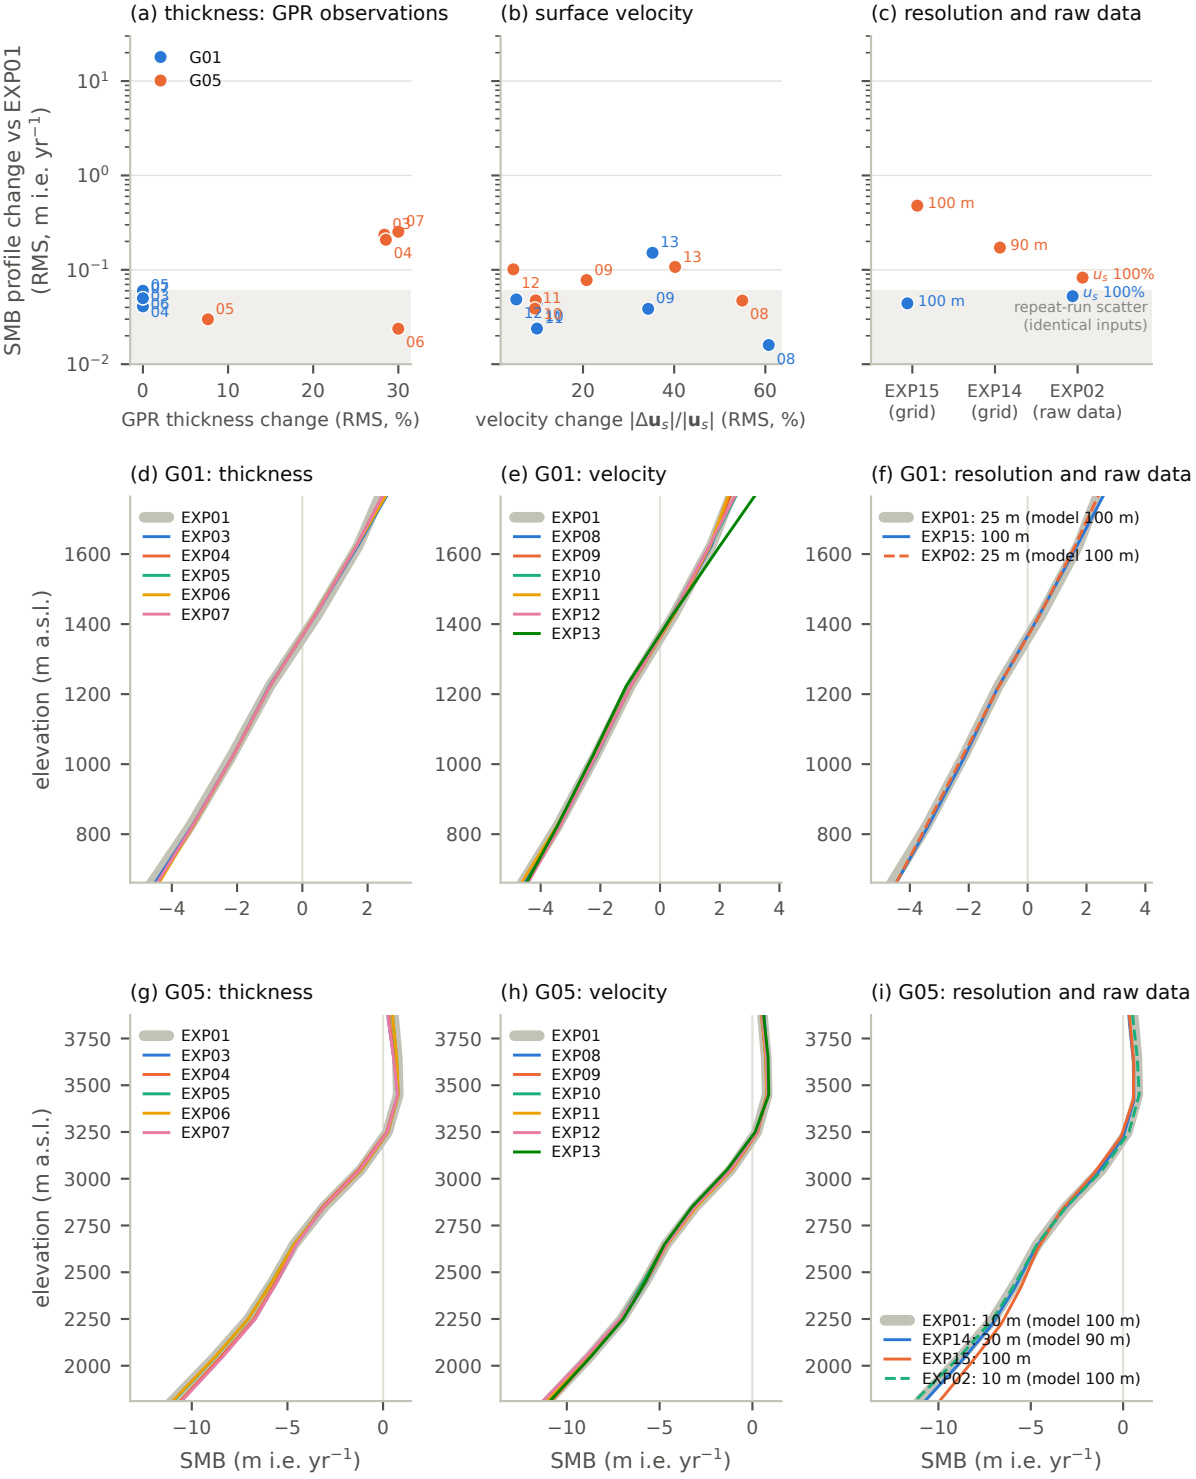
(a) thickness: GPR observations
(b) surface velocity
(c) resolution and raw data
SMB profile change vs EXP01 (RMS, m i.e. yr^{-1})
G01
G05
GPR thickness change (RMS, %)
velocity change $|\Delta \mathbf{u}_s|/|\mathbf{u}_s|$ (RMS, %)
100 m
90 m
u_s 100%
u_s 100%
repeat-run scatter (identical inputs)
EXP15 (grid)
EXP14 (grid)
EXP02 (raw data)
(d) G01: thickness
(e) G01: velocity
(f) G01: resolution and raw data
elevation (m a.s.l.)
EXP01
EXP03
EXP04
EXP05
EXP06
EXP07
EXP08
EXP09
EXP10
EXP11
EXP12
EXP13
EXP01: 25 m (model 100 m)
EXP15: 100 m
EXP02: 25 m (model 100 m)
(g) G05: thickness
(h) G05: velocity
(i) G05: resolution and raw data
SMB (m i.e. yr^{-1})
EXP01: 10 m (model 100 m)
EXP14: 30 m (model 90 m)
EXP15: 100 m
EXP02: 10 m (model 100 m)