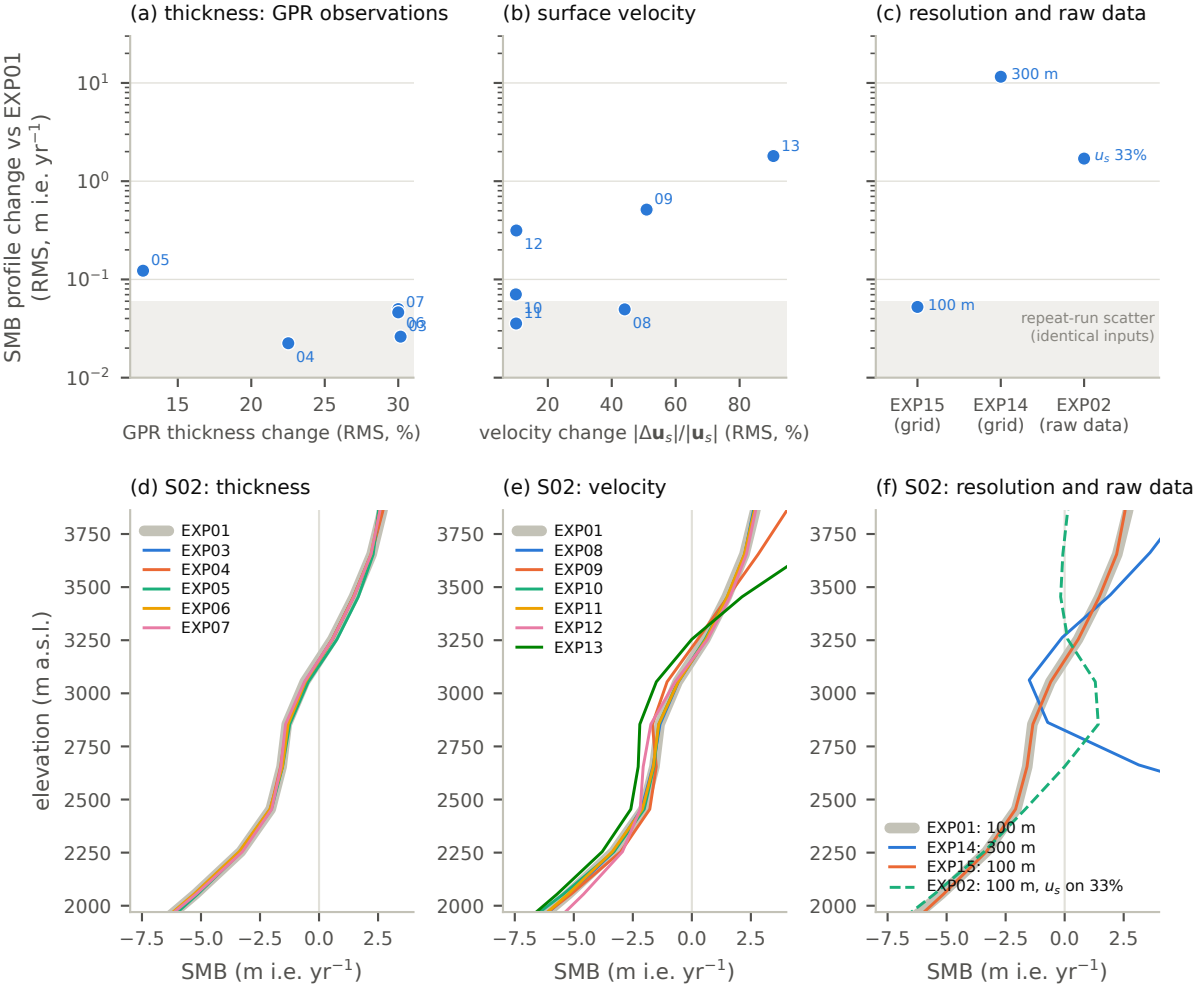
(a) thickness: GPR observations
(b) surface velocity
(c) resolution and raw data
SMB profile change vs EXP01 (RMS, m i.e. yr^{-1})
GPR thickness change (RMS, %)
velocity change $|\Delta \mathbf{u}_s|/|\mathbf{u}_s|$ (RMS, %)
05
04
07
06
03
13
09
12
10
11
08
300 m
u_s 33%
100 m
repeat-run scatter (identical inputs)
EXP15 (grid)
EXP14 (grid)
EXP02 (raw data)
(d) S02: thickness
(e) S02: velocity
(f) S02: resolution and raw data
elevation (m a.s.l.)
SMB (m i.e. yr^{-1})
EXP01
EXP03
EXP04
EXP05
EXP06
EXP07
EXP08
EXP09
EXP10
EXP11
EXP12
EXP13
EXP01: 100 m
EXP14: 300 m
EXP15: 100 m
EXP02: 100 m, u_s on 33%