



HARDROCK
PROFESSIONAL
DRILLING RIGS BRAND



HARDROCK
PROFESSIONAL
DRILLING RIGS BRAND



www.hardrockdrills.com

Phone: 021-55811053

Fax: 021-60852470

400 Phone: 400-685-4560

Email: service@hardrockdrills.com

Skype: hav.y.chen

Address: No3128, huyi Road,
Shanghai, China



SH Hardrock Heavy Industry Co.,Ltd

CONTENTS

Company Profile

001 - 003

Vertial Shaft Drilling Rig

004 HM- DP

Trailer Mounted Drilling Rig

006 HM-DB
008 HM-DC

Truck Mounted Drilling Rig


010 HM-Dy350
011 HM-Dy400
012 HM-Dy600
013 HM-Dy1000
014 HM-DT

Crawler Mounted Drilling Rig

016 HM- DG
018 HM- DU
020 HM- DU
022 HM- MC6R

Working Site

024 - 025

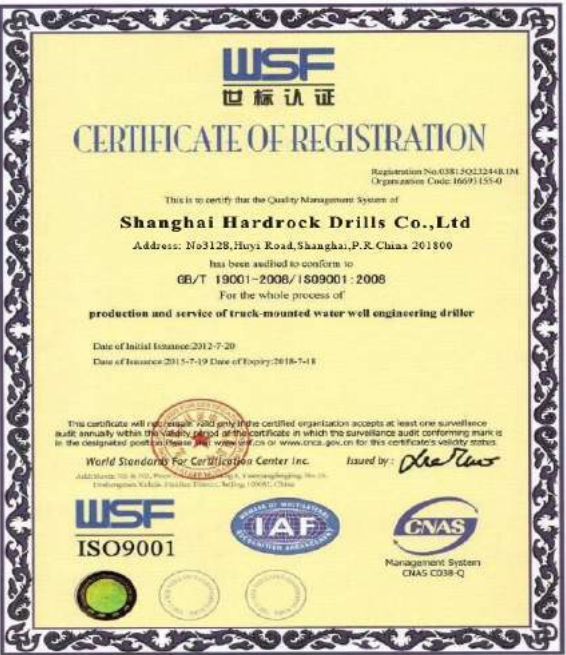



HARDROCK Trusted Partner

Shanghai hardrock heavy Industry Co.,Ltd is located in Shanghai, who is dedicated in designing and manufacturing the drilling rigs. The rigs have been widely used in water well drilling, soil sampling, geotechnical testing, mine exploration, foundation drilling, geothermal drilling, etc.

Our drill rigs are easy to set up, operate as well as maintain. And we always put the quality on the top. we use the 3d software to design and FEA software for simulation to insure our rigs are strong enough, but not overdesigned to reduce cost. Every individual component is inspected and each machine is tested by our quality people before shipping to customer.

Shanghai hardrock heavy industry has a powerful technical force and fine equipment, it's leading in the products design, workmanship and production capability, it's capable to design, manufacture, and assure the quality of whole series of drilling rigs. The products are sold to over thirty countries and regions including Asia, Africa, Europe, and South America. Shanghai hardrock rills has ISO9001 quality system and national CCC certification approved.

we are dedicating to build trust with customer and find new ways of working not only to meet customer specific requirement, but also get their work done more easily, efficiently and cheaply.

Considering the application condition in developing country especially for those remote area, our product is designed to be easier for transportation and best price /performance ratio.

HARDROCK welcomes your enquiries for pricing quotations, product and technical information and product recommendations. HARDROCK will also assist you with developing new functions and customized proposals. Call us at **86-21-5581- 1053 or email at **service@hardrocdrills.com****





HM-DP



Hydraulic Core Drilling Rig

DP Series hydraulic drilling rig is a light weight drilling rig, This product is widely used for general geological exploration of railways, roads, bridges, dams and tall building bases, geological core drilling, small grouting holes, blasting holes, civil wells, and earth central air conditioning wells, etc.

Main features

1. fed by hydraulic cylinder, the drilling efficiency is higher, and it can save labor.
2. Equipped with national patented technology taper clutch, it could achieve strong torque transmission, easy and free maintenance.
3. vertical spindles are fixed by four groups of bearings to ensure that the rotator has enough rigid for gravel layer and other complex geological conditions.



HM-DP

Specification

Spec	Unit	Value		
Model		DP – 150Y/130YY	DP – 180Y/180YY	DP – 230Y/230YY
Hole Depth	m	150	180	230
Hole Diameter	mm	75 – 220	75 – 220	75 – 325
Start Hole Diameter	mm	220	220	325
Final Hole Diameter	mm	75	75	75
Drill Pipe Diameter	mm	42 – 60	42 – 60	42 – 60
Borehole Inclination	Degree	90° – 75°	90° – 75°	90° – 75°
Drive Power	Kw	13.2	13.2	15
Weight	Kg	600/740	620/750	880/970
Overall Dimension	m	2.4 X 0.8 X 1.4	2.4 X 0.8 X 1.3	2.4 X 0.8 X 1.5
Vertical Shaft				
Rotating Speed	r/min	142/285/570	130/300/480/730/830/1045	64/128/287/557
Stroke	mm	450	450	450
Winch				
Max. Pull Force	KN	20	21	25
Pull Speed	m/s	0.41 – 1.64	0.35 – 2.23	0.12 – 0.95
Rope Dia.	mm	9.3	9.3	12.5
Drum Capacity	m	27	27	35
Drill Mast				
Rated Load	T	18	18	18
Height		6.5	6.5	6.5
Mud Pump(optional)				
Displacement	L/min	95	95	145
Working Pressure	bar	12	12	2
Times/min		93	93	93
Inlet Pipe Diameter	mm	51	51	51
Outlet Pipe Diameter	mm	32	32	38



HM-DB



Trailer Mounted Drilling Rig

DB Series trailer mounted hydraulic drilling rig is portable and easy to move, which are designed to drill water cheaply, easily and highly efficient. They are widely applied in building bases, geological core drilling, holes, blasting holes, civil wells, and earth central air conditioning wells, etc.

Main features

1. HM-DB series rotary trailer mounted drilling rig is equipped with wheel running gear and hydraulic oil cylinder pillar, transferring, convenient and easy to drill horizontal adjustment.
2. Equipped with hydraulic feed mechanism, drilling efficiency is greatly improved.
3. The rig is equipped with a cassette clamping device to replace chuck, which can be a non stop down rod, high efficiency, convenient and safe, reliable operation.
4. Equipped with a pressure gauge instructions at the bottom of the bore pressure, easy to monitor the hole.
5. falling tower for hydraulic operation, convenient and reliable.
6. Diesel engine with electric start, labor saving.



HM-DB

Specification

Spec	Unit	Value		
Model		HM-DB120	HM-DB150	DB350
Drilling Dia.	mm	90 – 150	90 – 250	115 – 325
Drilling Dep.	m	0-120	0-160	300
Once Promotion Distance	m	2	3	3
Applicable Rock	F	6-20	6-20	6-20
Wind Pressure	Mpa	0.7 – 1.4	1.2 – 2.46	1.5-3.0
Air Consumption	m3/min	7-15	16 – 25	16-35
Engine Power	kw	18.37	45	56/87(optional)
Outline Dimension	mm	4375x1650x1920	4375x1650x1920	5425X2250X2470
Weight	kg	1700	2000	2500





HM-DC



Trailer Mounted Drilling Rig

DC Series hydraulic drilling rig is a shallow/medium depth core drilling rig. The rig is mainly used for diamond drilling and able to meet the needs of various drilling technology requests.

It adopts electric motor or diesel engine as power unit. The rig owns a simple structure and is easy to operate.

Main features

1. The rig is equipped with latest MW525 heavy truck transmission which owns 10 forward gears and 2 reverse gears. The transmission ensures enough reasonable speed range, and can satisfy the needs of different drilling technology.
2. The rig's spindle inner diameter is 96mm, driven by mechanical system, and can output big torque. The winch can lift max 3000kg with single line.
3. Hydraulic system controls the feeding pressure and speed of the spindle. The machine is equipped with pressure meter so that the workers can grasp hole situation.



HM-DC

Specification

Spec	Unit	Value	
Model		HM-DT	
Hole Depth	m	230	650
Hole Diameter	mm	75 – 300	75 - 325
Start Hole Diameter	mm	300	325
Final Hole Diameter	mm	75	75
Driven Drill Pipe	mm	53/59, 4200	42 - 60
Drill Pipe Diameter	mm	60, 50	60, 50
Borehole Inclination	Degree	65° - 90°	90° - 75°
Vertical Shaft			
Vertical Shaft Forward Rotating Speed	r/min	64 – 557	32 - 1057
Vertical Stroke	mm	450	600
Vertical Inner Hole Diameter	mm	96	96
Vertical Shaft Hoisting Capacity	KN	60	80
Primary Winch			
Single Rope Winding Speed	m/s	0.12 – 0.95	0.3 - 1.9
Diameter of Wire Rope	mm	12.5	12.5
Single Rope Hoisting Capacity	KN	24	30
Drum Diameter	mm	140	300
Drum Capacity	m	35	65
Rig Tower			
Tower Height	mm	6000	11000
Take the initiative to drill pipe	mm	6500	11000
Rated Load	T	5	18
Mud Pump(optional)			
Horizontal Triplex BW-160 Type of Mud Pump		BW – 160	BW - 250
Displacement	L/min	160	250
Pressure of Work	bar	13	70
Drive Power			
Diesel Engine	kw	15	39
Diesel Speed	rpm	2200	2200
Weight and Size			
Weight	kg	1150	1350
Overall Dimension	m	2.57X0.95X1.8	2.700X0.95X2000



HM-Dy350



- 1.HM-DT350 adopts truck mounted and is a rotary table drilling rig.
2. The truck chassis adopts the special crane chassis of brand Sino truck, the main transit, transmission power gear box, sets of winch, mud pump, rotary table, mast are set up on the chassis
- 3.The rig is rotatry with drienctional circulation, which is with BW850/2A mud pump, it adopts the slurry as the washing fluid, it can drill on clary, sand and rock.
- 4.The power of truck engine transfer to PTO, and then drive the drilling rig.
- 5.The HM-DT350 can carry out down the hole hammer drilling with air compressor.

Spec	Unit	Value
Drilling Depth	m	300
Drilling diameter	mm	500
Speed of turntable	r/min	21.2; 36; 63.2; 100.6; 155; 20.2 (reverse)
Torque of turntable	KN.m	18; 10.6; 6; 3.8; 2.5; 18.9 (reverse)
Single rope lifting capacity of main windlass	KN	30
The capacity of main windlass	KN	180
Single rope lifting capacity of hydraulicwindlass	KN	40
The capacity of hydraulic windlass	KN	160
The lifting capacity of hook	KN	180
Bearing capacity of mast	KN	180
The height of mast	mm	11500
Bearing capacity	T	25
Kelly bar	mm	108×108×7500
Assistant pipe	mm	Φ89×10×5500
Mud Pump Flow	L/min	600 850
Mud Pump pressure	Mpa	3 2
Input speed	r/min	470
Input power	kw	40
Overall dimensions	mm	2000*1030*1400
Weight	T	1.5
Truck chassis model	TAZ5191TXJ	
Drive form	6×4	
Engine Model	TBD226B-6 II (Europe II emission standard)	
Engine Rated Power	KW	132
Speed	r/min	2300
Size (L*W*H)	mm	11110×2490×2500



HM-Dy400



- 1.HM-DT400 adopts truck mounted and is a rotary table drilling rig.
2. The truck chassis adopts the 6x6 special crane chasis of brand Beiben heavy duty truck, the main transit, transmission power, gear box, sets of windlass sewage pump, mud pump,mast are set up on the chassis
- 3.The rig is rotatry with drienctional circulation, which is with BW850/2A mud pump, it adopts the slurry as the washing fluid, it can drill on clary, sand and rock.
- 4.The power of truck engine transfer to PTO, and then drive the drilling rig.
- 5.The HM-DT400 can carry out down the hole hammer drilling with air compressor.

Spec	Unit	Value
Drilling Depth	m	400
Drilling diameter	mm	500
Speed of turntable	r/min	21.2;36; 63.2; 100.6; 155; 20.2 (reverse)
Torque of turntable	KN.m	18; 10.6; 6; 3.8; 2.5; 18.9 (reverse)
Single rope lifting capacity of main windlass	KN	45
The capacity of main windlass	KN	270
Single rope lifting capacity of hydraulicwindlass	KN	40
The capacity of hydraulic windlass	KN	160
The lifting capacity of hook	KN	270
Bearing capacity of mast	KN	270
The height of mast	mm	11500
Bearing capacity	T	25
Kelly bar	mm	108×108×7500
Assistant pipe	mm	Φ89×10×5500
Mud Pump Flow	L/min	600 850
Mud Pump pressure	Mpa	3 2
Input speed	r/min	470
Input power	kw	40
Overall dimensions	mm	2000*1030*1400
Weight	T	1.5
Truck chassis model	BeiBen Heavy-Duty Truck	
Drive form	6×6	
Engine Model	WP10.270 (Europe III emission standard)	
Engine Rated Power	KW	191
Speed	r/min	2300



HM-Dy600



- 1.HM-DT600 adopts truck mounted and is a rotary table drilling rig.
2. The truck chassis adopts the special crane chassis of brand Sino truck, the main drive system,the transfer case, gear box, double winch unit, mud pump,turntable, drilling tower, feed mechanism are set up on the chassis
- 3.The rig is rotatry with drienctional circulation, which is with WB1200/12 mud pump, it adopts the slurry as the washing fluid, it can drill on clary, sand and rock.
- 4.The power of truck engine transfer to PTO, and then drive the drilling rig.
- 5.The HM-DT600 can carry out down the hole hammer drilling with air compressor.
6. We set up a generator which can illuminate at night.

Spec	Unit	Value
Drilling Depth	m	600
Drilling diameter	mm	500
Speed of turntable	r/min	117,102,60,38,22,13,16(reverse)
Torque of turntable	KN.m	5.4----50
Single rope lifting capacity of main windlass	KN	50
The capacity of main windlass	KN	300
Single rope lifting capacity of hydraulicwindlass	KN	60
The lifting capacity of hook	KN	300
Bearing capacity of mast	KN	300
The height of mast	mm	12500
Kelly bar	mm	108×108×10500
Assistant pipe	mm	Φ89×10×9000
Mud Pump Flow	L/S	8.4,10.3,12.2,14.3,16.6
Mud Pump pressure	Mpa	10 8 7 6 5
Input power	kw	95
Weight	T	1.5
Drive form	8X6	
Engine Model	YC6A260-33YC water -cooled four strok diesel engine	
Engine Rated Power	KW	191
Speed	r/min	2300



HM-Dy1000



- 1.HM-Dy1000 is a rotary turnable drilling rig, which is mainly applied in water well, construction, building foundations, geothermic well and other proects with holes.
2. It can drill in soil, sand, and general rock layers.
- 3.The base machine, mud pump, and engine are installed in □Howo□brand 8 x 4 automotive chassis which can be easily and quickly moved.
- 4.The drilling mud is to cycle as the main way of drilling, equipped with the appropriate device, it can reali□e reverse circulation drilling, DTH hammer drilling.
- 5.Equipped with decompression device, it can significantly improve the drilling efficiency.

Spec	Unit	Value
Drilling Depth	m	1000
Drilling Diameter	mm	500
The whole machine weight	t	31
The shape size	mm	14808×2500×4400
Kelly	mm	108×108×10450
Drill chassis parts	Chassis	Sino Truck
	Driving method	8×4
The mast section	Type	Truss type
	Load	60T
	Height	15M
	Features	The mast with double hydraulic cylinder pressure
Diesel power part	Diesel engine model	WP10B216E201
	Power/Speed	210kW/2300r/min
Mud Pump	Model	BW1500 mud pump
	Maximum discharge	1500 L/min
	Maximum pressure	12Mpa
The guide pull down mechanism	The maximum pull down	44t
	Reduce pressure capacity	23t
	Stroke	10.6m
	Pull down doe rope diameter	Φ26MM
Rotary table gear box	Output speed (r/min)	I II III IV V
	reversal	27 49 80 131 208
Diameter of through hole	mm	505
Main hoist	Single rope tension	7t
	Wirerope diameter	Φ22MM
	Rope speed	2.05m/s - 3.1m/s
Accessory hoist	Single rope tension	1T
	Drum diameter	φ150MM
	Wirerope diameter	Φ11MM
	Rope capacity	45M



Truck Mounted Drilling Rig

DT Series hydraulic drilling rig is a light weight drilling rig, This product is widely used for general geological exploration of railways, roads, bridges, dams and tall building bases, geological core drilling, small grouting holes, blasting holes, civil wells, and earth central air conditioning wells, etc.

Main features

1. DT series drilling rig is efficient and multi-functional, which can use air, foam or mud rotary for percussive drilling according to different textures.
2. Its widely used in industrial and agricultural water conservancy projects, such as drilling wells, testing wells, or other exploration boreholes, in particular, in drilling holes for geothermal heating, it can also meet the engineering basis for reinforcement, loose gravel, drilling rock formation connected with a variety of engineering requirements.



Specification

Spec	Unit	Value		
		DT 150	DT 200	DT 300
Max Drilling Depth	m	150	200	300
Drilling Diameter	mm	105 - 350	115 - 350	115 - 350
Air Pressure	Mpa	1.05 –1.8	1.05 - 2.5	1.3 - 3.5
Air Consumption	m³/min	16 – 30	16 - 30	16 - 35
Engine Power	kw	56	87	118
Rod Length	m	3	3	3
Rod Diameter	mm	76/89	76/89	89/102
Shaft Pressure	T	3.5	4	5.7
Lifting Force	T	8	10	13
Fast Lifting Speed	m/min	23	20	25
Fast Forward Speed	m/min	35	32	40
Max Rotary Torque	Nm	3000	5600	7000
Max Rotary Speed	r/min	0 - 70	0 - 100	0 - 100
Uphill Angle		25	25	25
Weight	T	8	9	12
Outline Dimension	m	5995×2420×3380	7800*2500*3300	9000*2500*3300
Working Condition	Unconsolidated formation/stone head			
Drilling Method	DTH/core drilling			
Suitable Hammer	Medium and high air pressure			
Mud Pump (Optional)		BW250/7	BW250/7	BW450/5
Chasis				
Truck Brand	DongFeng			
Engine Power	hp	150	160	180
Gear		8 Speed	8 Speed	8 Speed
Car Length	m	6	6	6
Travelling Speed	km/h	75km/h	75km/h	75km/h
Drive Form		4X2	4X4	4X2



Hydraulic Core Drilling Rig

DG Series hydraulic drilling rig is a light weight drilling rig, This product is widely used for general geological exploration of railways, roads, bridges, dams and tall building bases, geological core drilling, small grouting holes, blasting holes, civil wells, and earth central air conditioning wells, etc.

Main features

1. fed by hydraulic cylinder, the drilling efficiency is higher, and it can save labor.
2. Equipped with national patented technology taper clutch, it could achieve strong torque transmission, easy and free maintenance.
3. vertical spindles are fixed by four groups of bearings to ensure that the rotator has enough rigid for gravel layer and other complex geological conditions.



Specification

Spec	Unit	Value		
Model		Dg – 150Y/130YY	Dg – 180Y/180YY	Dg – 230Y/230YY
Hole Depth	m	150	180	230
Hole Diameter	mm	75 – 220	75 – 220	75 – 325
Start Hole Diameter	mm	220	220	325
Final Hole Diameter	mm	75	75	75
Drill Pipe Diameter	mm	42 – 60	42 – 60	42 – 60
Borehole Inclination	Degree	90° – 75°	90° – 75°	90° – 75°
Drive Power	Kw	13.2	13.2	15
Weight	Kg	600/740	620/750	880/970
Overall Dimension	m	2.4 X 0.8 X 1.4	2.4 X 0.8 X 1.3	2.4 X 0.8 X 1.5
Vertical Shaft				
Rotating Speed	r/min	142/285/570	130/300/480/730/830/1045	64/128/287/557
Stroke	mm	450	450	450
Winch				
Max. Pull Force	KN	20	21	25
Pull Speed	m/s	0.41 – 1.64	0.35 – 2.23	0.12 – 0.95
Rope Dia.	mm	9.3	9.3	12.5
Drum Capacity	m	27	27	35
Drill Mast				
Rated Load	T	18	18	18
Height		6.5	6.5	6.5
Mud Pump(optional)				
Displacement	L/min	95	95	145
Working Pressure	bar	12	12	2
Times/min		93	93	93
Inlet Pipe Diameter	mm	51	51	51
Outlet Pipe Diameter	mm	32	32	38



HM-Du



Crawler Mounted Drilling Rig

Du series crawler mounted drilling rig is compact, suitable for narrow drilling condition, it is top driven and multi-functional, which is featured of high technology, easy operation, high efficiency and reliability. They are widely applied in well drilling, geothermal drilling, geotechnical drilling, mining exploration, offshore drilling, etc.

The Du series drilling rig could work in any different conditions through pneumatic drill driven by air compressor, it has high drilling speed even in rocks which hardness is with f4-20.

Main features

1. Perfect maneuverability with hydraulic control. In order to fullfill various application cases, the main parameters of drill can be adusted, such as rotation speed, torque, feeding pressure.
2. Rotation, feeding, lifting by top driven, easier for rod changing, reducing rod changing time, better for follow down drilling.
3. Multi-functional drilling, multiple drilling ways could be worked on the rig, such as DTH drilling, anti-air circulation drilling, anchor drilling, rotation drilling, and follow down drilling, core drilling.
4. low operation cost. Down the hole drilling for rocks has the lowest drilling cost with highest level of working productivity.
5. Crawler chassis with long stroke cylinders. long stroke cylinders are easy for truck self loading during transportation, and crawlers are of better mobility in mud working sites.
6. Adustable feeding pressure to get the best feeding force at various drilling depths.



HM-Du

Specification

Spec	Unit	Value		
		DU180	DU200	DU300
Max Drilling Depth	m	180	200	260
Drilling Diameter	mm	φ130-φ254	φ140-φ325	φ140-φ325
Engine Power	kw	42-65	65	75.8
Air Pressure	Mpa	1.7-2.5	1.7-3.0	1.7-3.0
Air Consumption	m³/min	15-27	17-35	17-35
Rod Length	m	3	3	3
Rod Diameter	mm	76/89	76/89	89/102
Shaft Pressure	T	3.5	4	5.7
Lifting Force	T	12	20	20
Fast Lifting Speed	m/min	23	24	25
Fast Forward Speed	m/min	35	38	40
Max Rotary Torque	Nm	5600	6000	9000
Max Rotary Speed	r/min	0 - 70	0-70	40-115
Big Secondary Winch Lifting Force	T	25	25	25
Small Secondary Winch Lifting Force	T	8	9	12
Drilling Efficiency	m/h	10-35	10-35	10-35
Moving Speed	Km/h	2.5	2.5	2.5
Uphill Angle	Degree	0-30	0-30	0-30
Weight	T	5.2	5.5	6.8
Transportation Size	mm	3800×1550×2350	3800×1600×2450	4100×1850×2600
Working Condition	Unconsolidated formation/stone head			
Drilling Method	DTH/Core Drilling			
Suitable Hammer	Medium and high air pressure			
Optional Accessories	RC installation/mud pump/centritugal pump/generator/foam pump			



HM-Du



Crawler Mounted Deep Well Drilling Rig

Du series crawler mounted drilling rig is top driven and multi-functional, which is featured of high technology easy operation, high efficiency and reliability. They are widely applied in well drilling, geothermal drilling, mining exploration, offshore drilling, etc. The DTH crawler drilling rig could work in any different conditions through pneumatic drill driven by air compressor.

Main features

1. Perfect maneuverability with hydraulic control. In order to fullfill various application cases, the main parameters of drill can be adusted, such as rotation speed, torque, feeding pressure.
2. Rotation, feeding, lifting by top driven, easier for rod changing, reducing rod changing time, better for follow down drilling.
3. Multi-functional drilling, multiple drilling ways could be worked on the rig, such as DTH drilling, anti-air circulation drilling, anchor drilling, rotation drilling, and follow down drilling, core drilling.
4. low operation cost. Down the hole drilling for rocks has the lowest drilling cost with highest level of working productivity.
5. Crawler chassis with long stroke cylinders. long stroke cylinders are easy for truck self loading during transportation, and crawlers are of better mobility in mud working sites.
6. Adustable feeding pressure to get the best feeding force at various drilling depths.



HM-Du

Specification

Spec	Unit	Value			
Model		DU200S	DU450S	DU600S	DU800B
Max Drilling Depth	m	260	450	600	700
Drilling Diameter	mm	105 - 300	105 - 500	105 - 500	140 - 450
Air Pressure	Mpa	1.05 - 3.45	1.05 - 3.45	1.05 - 3.45	1.2 - 6.5
Air Consumption	m3/min	16 - 55	16 - 55	16 - 55	20 - 100
Rod Length	m	3.5	6	6	4.5
Rod Diameter	mm	89	89/102	108	89/102/114/127
Shaft Pressure	T	4	8	15	6
Lifting Force	T	16	16	30	40
Fast Lifting Speed	m/min	20	25	25	19
Fast Forward Speed	m/min	30	40	50	28
Max Rotary Torque	Nm	3500/4000/5000	9000	11000	11000/22000
Max Rotary Speed	r/min	100/80/70	60/120	95/190	80/160
Small Secondary Winch Lifting Force	T	1.5	1.5	1.5	1.5
Jack Stroke	m	1.3	1.6	1.6	1.8
Drilling Efficiency	m/h	10 - 35	10 - 35	10 - 35	10-25
Moving Speed	Km/h	2	3.5	3	2.5
Uphill Angle		21	21	21	21
Weight	T	6.9	13	15	16.5
Outline Dimension	m	4X1.35X2.15	5.5X2.08X2.65	5.6X2.25X2.9	8.8X2.3X3.2
Working Condition	Unconsolidated formation/stone head				
Drilling Method	Reverse / Direct / DTH Drilling				
Suitable Hammer	Medium and high air pressure				
Optional Accessories	RC installation/Mud pump/Centritugal pump/Generator/Foam pump				



Crawler Mounted Well Drilling Rig

MC6R series drilling rig is a type of multi-functional drilling rig of medium-shallow hole drilling for mineral exploration and geotechnical drilling. It is not only for RC core drilling, but also for diamond wire line core drilling. It adapts modular design, and can carry out multi purpose by changing different modular top-drive head. Brand new designed top drive head use mechanical and hydraulic together to shift speed, and to make the head wide speed range to suit for different drilling technology. It is mainly used for solid mineral exploration, micropile hole drilling, and slide resistant pile construction, well drilling, etc.

Main features

1. Multi purpose, fast switch to achieve a variety of drilling technology.
2. Top-drive head of a wide range of speed regulation, large torque, high speed and low speed to meet different process requirements.
3. Console layout is reasonable, head of digital speed display, easy to operate.
4. Hydraulic system with load sensing control system, imported components, energy saving and high reliability.
5. The hole sliding variable angle, ground support, implementation, and enhance the stability of the drilling.
6. Main winch is imported from America, which can realize the function of drilling. Track mounted, easy, fast and convenient to move.



Specification

Spec		Value	
Drilling capacity	wire line coring	S75（NQ）	600m
	Air reverse circulation coring(sample)	Φ108 Double-wall drill pipe	200 m
	air forward circulating	hole diameter Φ150	300 m
Power model	4BTA3.9-C125 diesel	Power/rated speed	93kW/2200rpm
Power head	high speed (Speed/torque)	0～900rpm/1727～575Nm	
	Low speed (Speed/torque)	0～92rpm/5936～4781Nm	
	spindle diameter	Φ93mm	
Hydraulic chuck (the spring clamp, hydraulic clamping force)		160 kN	
Feed system	feed trip	3600 mm	
	Feed/pull force	50/103 kN	
Hydraulic system	Main pump/deputy pump pressure rating	28/22 MPa	
Main winch	maximum lift/line speed	54kN / 42m/min	
Auxiliary hoist	maximum lift/line speed	13.6/8 kN	
	inner/outer line speed	80/130 m/min	
	Rope capacity	800m (Φ5mm)	
Drill pipe/pipe length		3/6 m	
Drilling Angle		90 °～45 °	
Crawler walking	speed	1.7～3.3 km/h	
	Climbing angles	20°	
Rig weight		7000 kg	
Machine dimension	Transport status		
	Vertical work state	4950×2150×8725 mm (L*W*H)	
Optional components	Wire line coring drilling technology	hydraulic drive Trojan gripper, main winch, hydraulic driving mud pump (160 l/min; 6 Mpa)	
	RC drilling technology	air system, upper and lower air swivel, sample collector, un-tighten device, fork, and special lifter.	



Supporting the drilling rig



Air compressor-SULLAIR



Air compressor-ATLAS



Air compressor-Hardrock



Tri-cone



Drilling rod



Drilling rod



Drilling rod



DTH hammer

Project Cases

