

# PRODUCT MANUAL

GLOBAL SCAFFOLDING AND FORMWORK MANUFACTURING CENTER

QUALITY BUILDS FUTURE



QUALITY PRODUCTS SAFETY ASSURED

**GLOBAL SCAFFOLDING AND FORMWORK MANUFACTURING CENTER**

ADTO INDUSTRIAL GROUP LIMITED

HEADQUARTERS:

8F, 11F, 15F, 16F, 18F, MINGCHENG INTL BLDG, CHANGSHA CITY, CHINA

TEL: 86-731-8866 0581 / 8866 0584 / 8866 0573 / 8866 0572

FAX: 86-731-8866 0576

www.adtomall.com

E-mail: Info@adtomall.com

PRODUCTION BASE #1: JIAYU COUNTY, HUBEI, CHINA

PRODUCTION BASE #2: JINGHAI COUNTY, TIANJIN, CHINA

PRODUCTION BASE #3: TANGSHAN CITY, HEBEI, CHINA

PRODUCTION BASE #4: NANJING, CHINA

PRODUCTION BASE #5: AN PING, HEBEI, CHINA

PRODUCTION BASE #6: SHOUGUANG, SHANDONG, CHINA



PRODUCTION BASE #7: SHIJIAZHUANG, HEBEI, CHINA



HUNAN ADTO INDUSTRIAL GROUP CO.,LTD.

OUR HISTORY

QUALITY BUILDS FUTURE  
GLOBAL SCAFFOLDING AND FORMWORK MANUFACTURING CENTER  
PRODUCT MANUAL

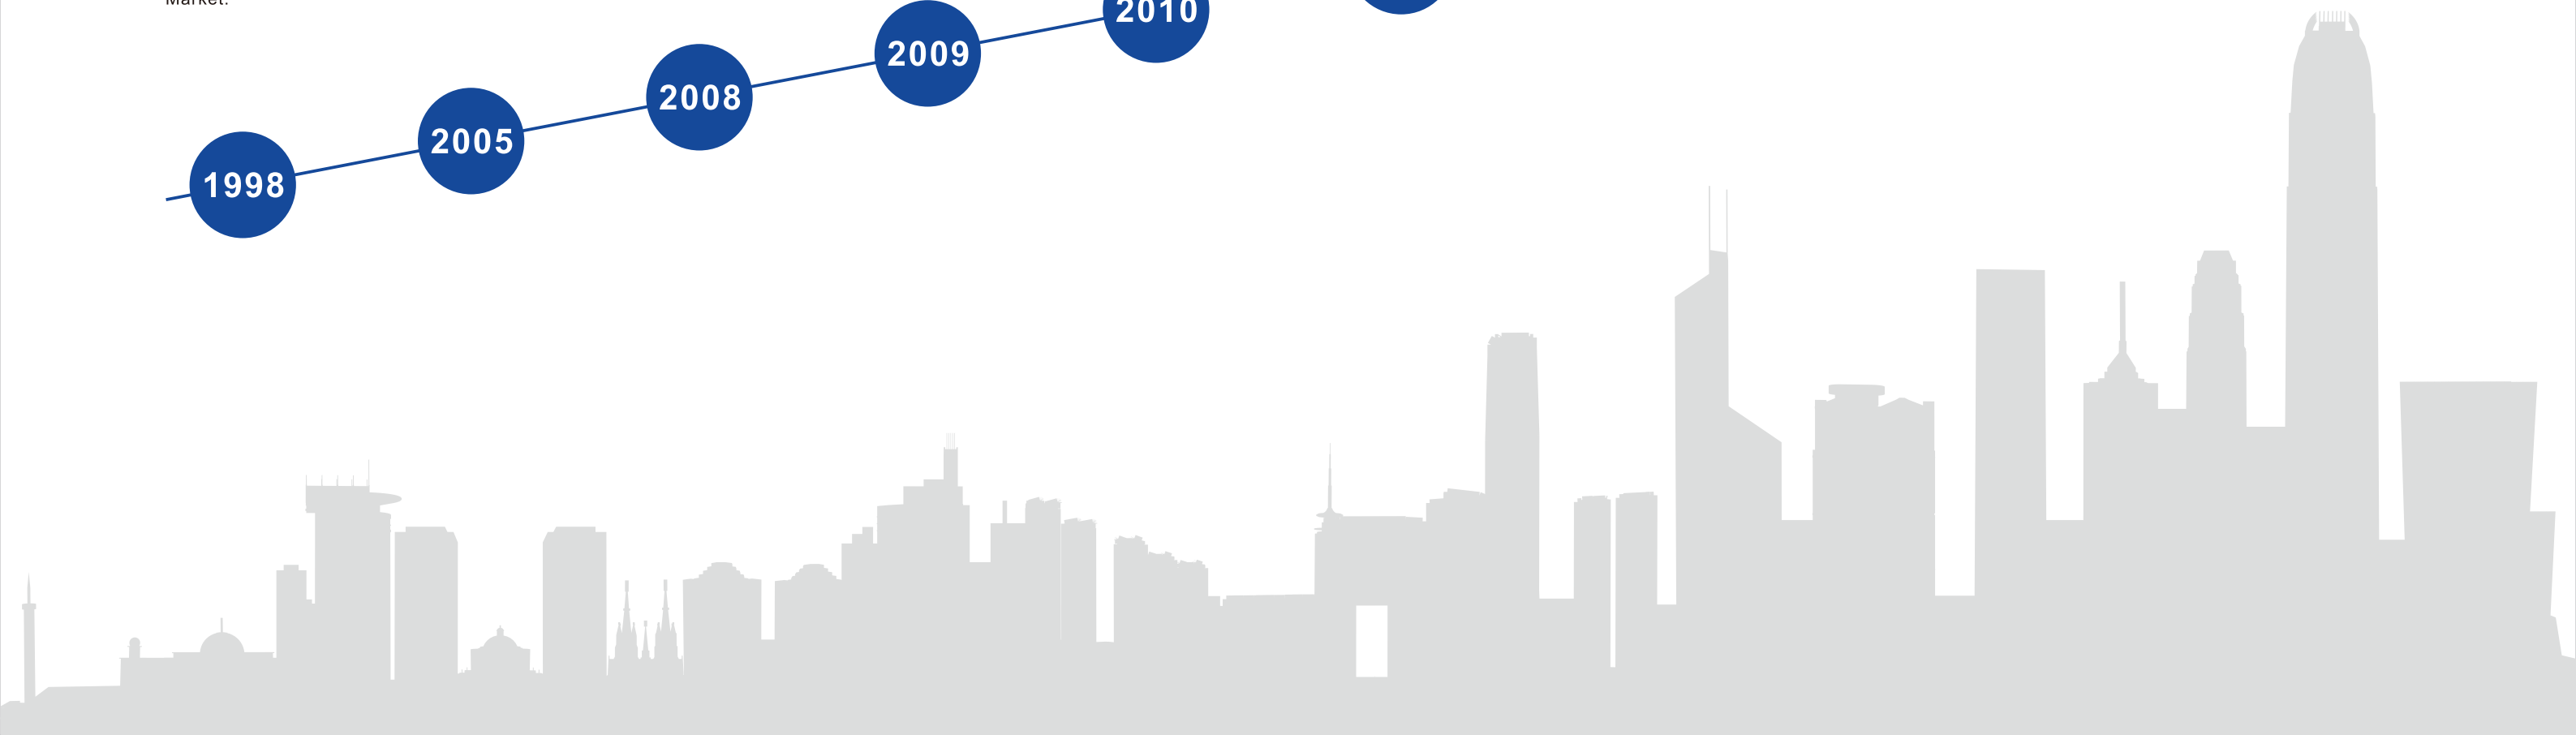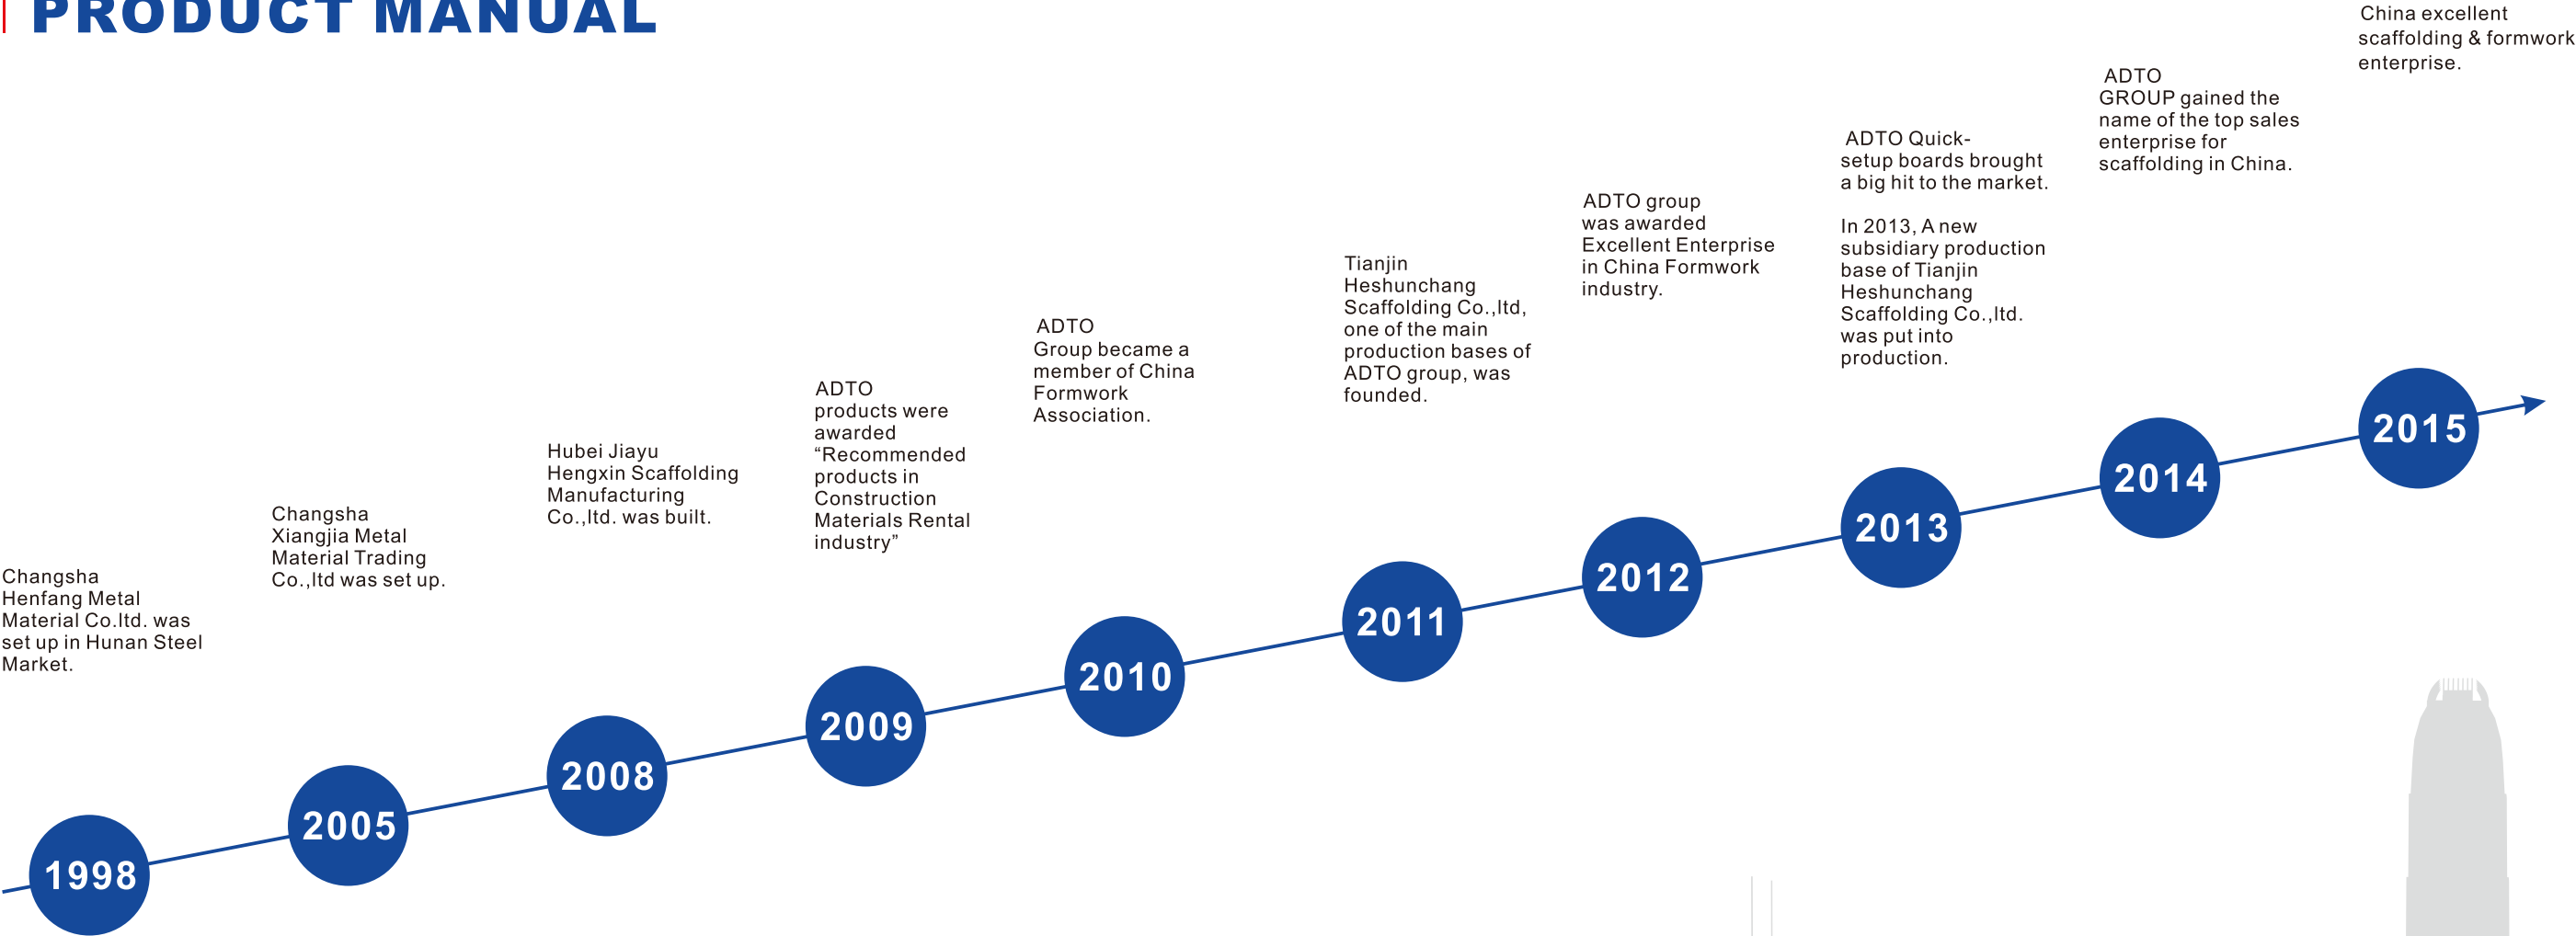






# 01

**QUALITY BUILDS FUTURE**  
GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER  
**ADTO STAR PRODUCTS**

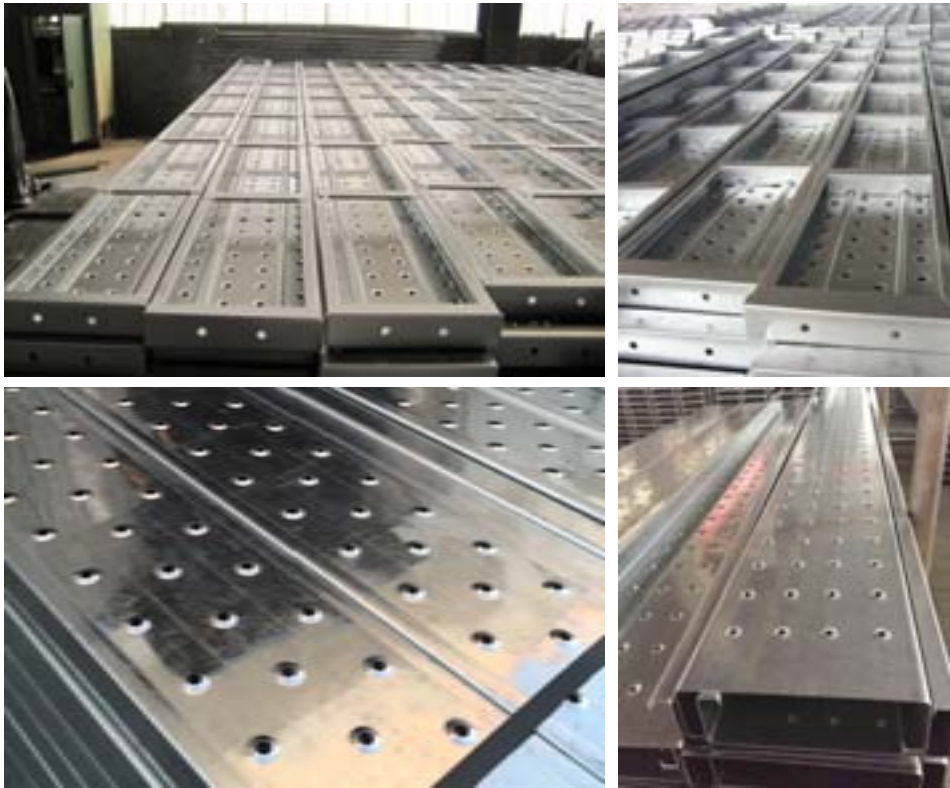

## I METAL PLANK

Surface: Pre-galvanized, Hot Dipped Galvanized,Black  
Material: GB/T 700: Q195~Q235  
Standard: EN1004:2004, BS EN 12811-1 : 2003, AS 1577  
Certificate: ISO, SGS,BV,TUV

| Types | Width  | Height | Thickness | Length     |
|-------|--------|--------|-----------|------------|
| 210   | 210 mm | 45 mm  | 1.1-2.0mm | 500-4000mm |
| 225   | 225 mm | 38 mm  |           |            |
| 240   | 240 mm | 45 mm  |           |            |
| 250A  | 250 mm | 40 mm  |           |            |
| 250B  | 250 mm | 50 mm  |           |            |
| 300   | 300 mm | 50 mm  |           |            |
| 230   | 230 mm | 63 mm  |           |            |
| 240   | 240 mm | 63 mm  |           |            |


## I CATWALK

Surface: Pre-galvanized, Hot Dipped Galvanized, Black  
Material: GB/T 700: Q195~Q235  
Standard: EN1004:2004, BS EN 12811-1 : 2003  
Certificate: ISO, SGS,BV,TUV



| Types | Width | Height | Thickness   | Length      |
|-------|-------|--------|-------------|-------------|
| 420   | 420mm | 45mm   | 1.1 – 2.0mm | 1000-2500mm |
| 450   | 450mm | 45mm   |             |             |
| 480   | 480mm | 45mm   |             |             |
| 500   | 500mm | 50mm   |             |             |
| 225   | 225mm | 38mm   |             |             |

## STEEL PLANK WITH HOOK

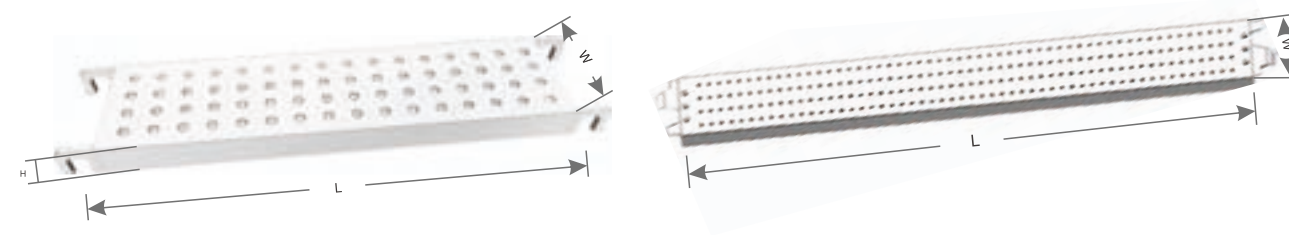

| Description           | Width  | Height | Thickness | Length     |
|-----------------------|--------|--------|-----------|------------|
| STEEL PLANK WITH HOOK | 225 mm | 63 mm  | 1.5-1.8mm | 730-3070mm |
| STEEL PLANK WITH HOOK | 230 mm | 63 mm  |           |            |
| STEEL PLANK WITH HOOK | 240 mm | 63 mm  |           |            |



U-TYPE AND O-TYPE DECKS



| Description             | Width  | Height | Thickness | Length     |
|-------------------------|--------|--------|-----------|------------|
| U-Type and O-Type Decks | 320 mm | 76 mm  | 1.5-1.8mm | 730-3070mm |

ALUMINUM PLANK



| Description             | Specification<br>W*H*L | Weight(approx.) |       |
|-------------------------|------------------------|-----------------|-------|
|                         |                        | Lb              | Kg    |
| 3' Aluminum Deck Plank  | 19.25" W -3'L          | 14.57           | 6.61  |
| 4' Aluminum Deck Plank  | 19.25" W -4'L          | 18.21           | 8.26  |
| 5' Aluminum Deck Plank  | 19.25" W -5'L          | 21.83           | 9.90  |
| 6' Aluminum Deck Plank  | 19.25" W -6'L          | 25.46           | 11.55 |
| 7' Aluminum Deck Plank  | 19.25" W -7'L          | 29.10           | 13.20 |
| 8' Aluminum Deck Plank  | 19.25" W -8'L          | 32.72           | 14.84 |
| 9' Aluminum Deck Plank  | 19.25" W -9'L          | 36.33           | 16.48 |
| 10' Aluminum Deck Plank | 19.25" W -10'L         | 39.97           | 18.13 |




PLYWOOD DECK



| Description      | Specification<br>W*H*L | Weight(approx.) |       |
|------------------|------------------------|-----------------|-------|
|                  |                        | Lb              | Kg    |
| 5' Plywood Deck  | 19.25" W -5'L          | 25.79           | 11.70 |
| 6' Plywood Deck  | 19.25" W -6'L          | 30.86           | 14.00 |
| 7' Plywood Deck  | 19.25" W -7'L          | 35.72           | 16.20 |
| 8' Plywood Deck  | 19.25" W -8'L          | 39.68           | 18.00 |
| 9' Plywood Deck  | 19.25" W -9'L          | 45.19           | 20.50 |
| 10' Plywood Deck | 19.25" W -10'L         | 47.62           | 21.60 |

I FRAME SYSTEM

Surface: Pre-galvanized, Hot Dipped Galvanized, Painted, Powder Coated.  
Advantages: Easy Erection, Strong Loading Capacity,  
Safety And Stability,  
Main Components: Frame, Catwalk, Joint Pin, Cross Brace,  
Base Jack, U-head Jack And Castor.



| Width | Height |
|-------|--------|
| 1219  | 1930   |
| 1219  | 1700   |
| 1219  | 1524   |
| 914   | 1700   |
| 914   | 1930   |

| Width | Height |
|-------|--------|
| 1219  | 1930   |
| 1219  | 1700   |
| 1219  | 1219   |
| 1219  | 914    |
| 1219  | 610    |

A:610/914/1219mm  
B:1219/1524/1829mm



Lock pin  
12x45mm



Joint pin  
36x225mm

STAIR CASE

Width:420mm/450mm/860mm




MONKEY LADDER

Width:300mm/350mm/380mm



WALK THROUGH FRAME




| Width | Height | Weight   |
|-------|--------|----------|
| 5'    | 6'4"   | 47.19lbs |
| 5'    | 6'7"   | 48.92lbs |
| 5'    | 6'8"   | 50.72lbs |




| Width | Length | Weight   |
|-------|--------|----------|
| 3'    | 4'     | 25.79lbs |
| 3'    | 5'     | 28.88lbs |
| 5'    | 6'8"   | 50.72lbs |

CROSS BRACE




| Width | Height | Weight   |
|-------|--------|----------|
| 7'    | 3'     | 12.38lbs |
| 7'    | 4'     | 13.00lbs |
| 10'   | 4'     | 16.75lbs |

MASON FRAME



| Width | Height | Weight   |
|-------|--------|----------|
| 5'    | 5'     | 44.54lbs |
| 5'    | 5'4"   | 44.34lbs |
| 5'    | 6'4"   | 55.73lbs |




| Width | Height | Weight   |
|-------|--------|----------|
| 2'    | 6'8"   | 34.80lbs |
| 2'    | 3'     | 31.28lbs |

STAIR CASE




| Width | Length | Weight |
|-------|--------|--------|
| 8'    | 6'4"   | 115lbs |

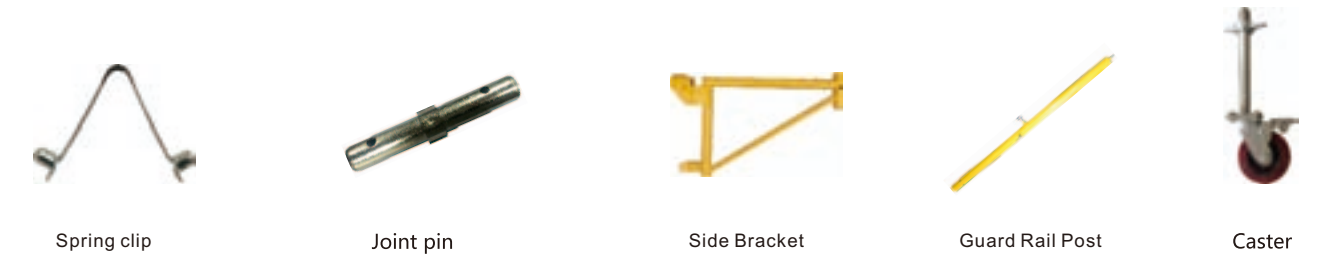

LADDER BEAM

Surface: Painted or Hot Dipped Galvanized  
Width: 300/305mm  
Length: 1000-7000mm  
Other size can be supplied to order.

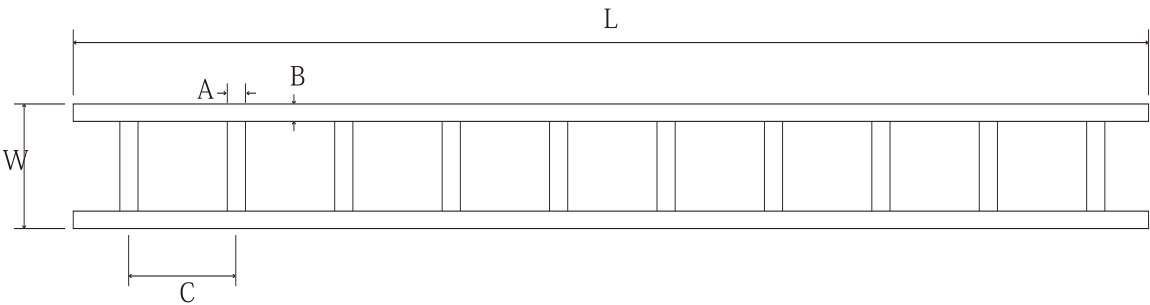



I ADJUSTABLE SCREW JACK

Surface: Silver Painting, Electro-galvanized, Hot Dipped Galvanized



BASE JACK

|                  | Size           | Base Plate    |
|------------------|----------------|---------------|
| Solid Base Jack  | 30×600mm       | 120×120×4/5mm |
|                  | 32×600mm       | 120×120×4/5mm |
|                  | 34×600mm       | 120×120×4/5mm |
|                  | 30×400mm       | 120×120×4/5mm |
|                  | 32×400mm       | 120×120×4/5mm |
|                  | 34×400mm       | 120×120×5mm   |
| Hollow Base Jack | 34×4×400mm     | 150×150×5/6mm |
|                  | 34×4×600mm     | 150×150×5/6mm |
|                  | 38×4×400mm     | 150×150×5/6mm |
|                  | 38×4×600/660mm | 150×150×5/6mm |
|                  | 38×4×760mm     | 150×150×5/6mm |
|                  | 48×4/5×600mm   | 150×150×8mm   |
|                  | 48×4/5×820mm   | 150×150×8mm   |

U-HEAD JACK

|               | Size           | Base Plate       |
|---------------|----------------|------------------|
| Solid U Head  | 30×600mm       | 150×120×50×4/5mm |
|               | 32×600mm       | 150×120×50×4/5mm |
|               | 34×600mm       | 150×120×50×4/5mm |
|               | 30×400mm       | 150×120×50×4/5mm |
|               | 32×400mm       | 150×120×50×4/5mm |
|               | 34×400mm       | 150×120×50×4/5mm |
| Hollow U Head | 34×4×400mm     | 150×120×50×5mm   |
|               | 34×4×600mm     | 150×120×50×5/6mm |
|               | 38×4×400mm     | 150×120×50×5/6mm |
|               | 38×4×600/660mm | 150×170×80×5/6mm |
|               | 38×4×760/780mm | 150×170×80×5/6mm |
|               | 48×4/5×600mm   | 150×120×50×8mm   |
|               | 48×4/5×820mm   | 150×120×50×8mm   |



I ADJUSTABLE STEEL PROP

ADTO steel prop is kind of vertical supporting system that can be fit for any shuttering.  
Surface:Electro-galvanized,Pre-galvanized,Hot Dipped Galvanized,Painted,Powder-coated.

- Advantage:**
- ★ Simple structure,simple erection
  - ★ High efficiency with strong loading capacity
  - ★ With galvanized surface(endurable)
  - ★ Widely applied in proping system such as construction,plants

HEAVY DUTY PROP-MIDDLE EAST OR GERMAN PROP

| Min  | Max  | Internal Tube | External Tube |
|------|------|---------------|---------------|
| 1.4m | 2.7m | 48*2.0mm      | 60*2.0mm      |
| 2.0m | 3.6m | 48*2.0mm      | 60*2.0mm      |
| 2.2m | 4.0m | 48*2.0mm      | 60*2.0mm      |
| 3.0m | 5.0m | 48*2.0mm      | 60*2.0mm      |

LIGHT DUTY PROP-SPANISH PROP

| Min  | Max  | Internal Tube | External Tube |
|------|------|---------------|---------------|
| 0.8m | 1.4m | 40*1.8mm      | 48*1.8mm      |
| 2.0m | 3.6m | 40*1.8mm      | 48*1.8mm      |
| 2.2m | 4.0m | 40*1.8mm      | 48*1.8mm      |
| 3.0m | 5.0m | 40*1.8mm      | 48*1.8mm      |

LIGHT DUTY PROP--ITALIAN PROP

| Min  | Max  | Internal Tube | External Tube |
|------|------|---------------|---------------|
| 1.6m | 2.9m | 48*2.0mm      | 56*2.0mm      |
| 1.8m | 3.1m | 48*2.0mm      | 56*2.0mm      |
| 2.0m | 3.6m | 48*2.0mm      | 56*2.0mm      |
| 2.2m | 4.0m | 48*2.0mm      | 56*2.0mm      |

PUSH-PULL PROP

| Min  | Max  | Internal Tube | External Tube |
|------|------|---------------|---------------|
| 2.2m | 4.1m | 48*2.0mm      | 60*2.0mm      |
| 2.5m | 4.5m | 48*2.0mm      | 60*2.0mm      |
| 3.0m | 5.0m | 48*2.0mm      | 60*2.0mm      |



HEAVY DUTY PROP AUSTRALIA -PROP

| Standard | Min    | Max    | Inner Tubes | Outer Tubes |
|----------|--------|--------|-------------|-------------|
| As3610mm | 1.08m  | 1.83m  | 48.3*3.0mm  | 60.3*3.0mm  |
| As3610mm | 1.83m  | 3.035m | 48.3*3.0mm  | 60.3*3.0mm  |
| As3610mm | 1.985m | 3.285m | 48.3*3.0mm  | 60.3*3.0mm  |
| As3610mm | 2.6m   | 3.955m | 48.3*3.0mm  | 60.3*3.0mm  |





# 02

QUALITY BUILDS FUTURE  
GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER  
**ADTO SCAFFOLDING  
TUBE & COUPLER**

## | SCAFFOLDING TUBE(GALVANIZED/BLACK/STK500)

Outer Diameter: 42.3mm, 48.3mm, 48.6mm, 60.3mm.

Thickness: 1.8mm-4.0mm

Steel Grade: Q235B, Q345B, S235JR, S275JR,  
STK400,STK500.

Standard: BS1139-1990, BS EN39-2001, En10219, JIS G3444-2004

Surface: Hot Dipped Galvanized, Pre-galvanized , Black, Painted.

| OD(mm)    | Wall Thickness (mm) | Length (m) |
|-----------|---------------------|------------|
| 48.3-48.6 | 1.8-2.5             | 0.3-12     |
| 48.3-48.6 | 2.75                | 0.3-12     |
| 48.3-48.6 | 3.0                 | 0.3-12     |
| 48.3-48.6 | 3.2                 | 0.3-12     |
| 48.3-48.6 | 3.6                 | 0.3-12     |
| 48.3-48.6 | 3.8                 | 0.3-12     |
| 48.3-48.6 | 4.0                 | 0.3-12     |
| 42.3      | 2.0-4.0             | 0.3-12     |
| 60.3      | 2.0-4.0             | 0.3-12     |

## TESTING PHOTOS:







## I FORMWORK ACCESSORIES

### TIE ROD

Size: 15/17mm\* (1m ~ 6m)

Material: 45# steel

Surface: Black with anti-rusting oil, Electro galvanized



Washer Plate  
0.57kg



Tie Nut  
0.9kg



Wing Nut  
0.28kg



Tie Nut  
0.60kg



Steel Cone  
0.615kg



Water Stop  
0.48kg



Hexagonal Long Nut  
0.21kg



Form tie




### REBAR COUPLER

Chinese Standard

Material: 45# high-quality carbon structural steel

Specification: 14mm-40mm

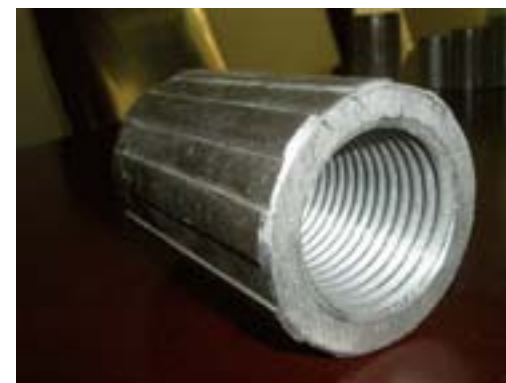

### KOREAN STANDARD

Material: 45C cold drawn pipe

Yield strength 500N/mm, tensile strength 640N/mm

Specification: 13mm-41mm




### UPSETTING FORGING MACHINE AND THREADING MACHINE

Upsetting splice is a parallel threaded rebar mechanical splice designed for the connection of concrete reinforcement bars, for diameters 16 to 40 mm.

The full performance of upsetting rebar splices is stronger than the reinforcement bar and guarantees bar break undertensile stress.

PRESSING MACHINE


PROCESSING STEP

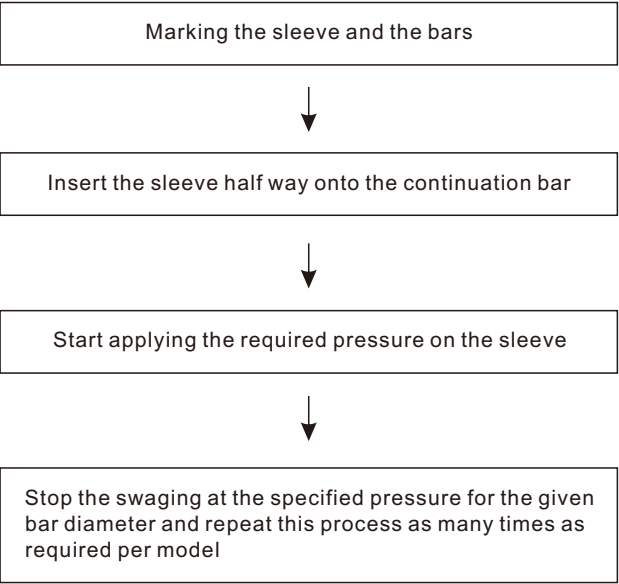

PARALLEL ROLLING THREADING MACHINE

Machining diameter (mm):14-40/50

PROCESSING STEP

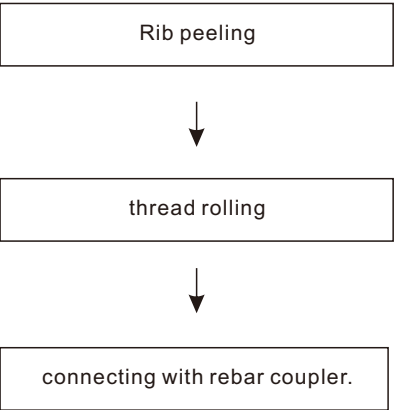

SCAFFOLDING COUPLERS

|                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    |    |    |    |
| British Pressed Double Coupler<br>48.3mm/0.83-0.87kg                                  | British Pressed Swivel Coupler<br>48.3mm/1.02-1.05kg                                  | British Sleeve Coupler<br>48.3mm/1.0kg                                                | Pressed Putlog Coupler<br>48.3mm/0.62kg                                               |
|    |    |    |    |
| 110° Pressed Swivel Coupler<br>48.6mm/0.58-0.65kg                                     | 110° Pressed Double Coupler<br>48.6mm/0.58-0.65kg                                     | 90° Pressed Swivel Coupler<br>48.6mm/0.59-0.65kg                                      | 90° Pressed Double Coupler<br>48.6mm/0.59-0.65kg                                      |
|   |   |   |   |
| JIS Swivel Girder Clamp<br>48.6mm/0.98kg                                              | Pressed Limpet Coupler<br>0.32kg                                                      | Ladder Clamp<br>48.3mm/0.5kg                                                          | British Inner Joint Pin<br>48.3mm/0.72kg                                              |
|  |  |  |  |
| British Drop Forged Double Coupler<br>48.3mm/0.97-1.05kg                              | British Drop Forged Swivel Coupler<br>48.3mm/1.12-1.25kg                              | Drop Forged Half Coupler<br>48.3mm/0.9kg                                              | Drop Forged Joint Pin<br>48.3mm/1.1kg                                                 |
|  |  |  |  |
| Girder Coupler<br>48.3mm/1.5kg                                                        | Board Retaining Coupler<br>48.3mm/0.61-0.63kg                                         | Ladder Clamp<br>48.3mm/0.50kg                                                         | Drop Forged Putlog Coupler<br>48.3mm/0.63kg                                           |
|  |  |  |  |
| US Drop Forged Double Coupler<br>1.5kg                                                | US Drop Forged Swivel Coupler<br>1.8kg                                                | German Drop Forged Double Coupler<br>1.07kg                                           | German Drop Forged Swivel Coupler<br>1.27kg                                           |



# 03


QUALITY BUILDS FUTURE

GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER





## ADTO SCAFFOLD SYSTEM

### | RINGLOCK SYSTEM

ADTO Ringlock system is a modular system.It is composed of standards,ledgers,diagonal braces,base collars,triangle brackets and wedge pins.Rosettes are welded to the standards in every 50mm and totally 8 rosettes can be made in one standard.Ledgers and diagonal braces are connected to the rosettes with a system of casted heads and wedge pins. Due to hot dip galvanization,this system as high corrosion resistance.They are widely used in is construction of bridges, tunnels,water towers,oil refinery,etc.

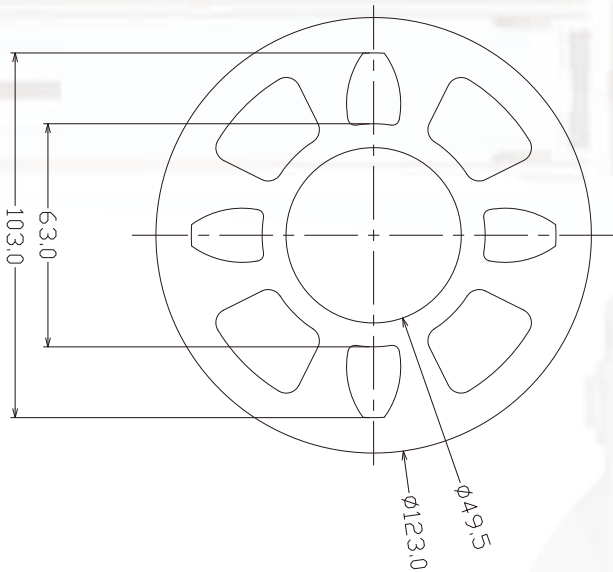

### | SPECIFICATION OF RINGLOCK COMPONENTS

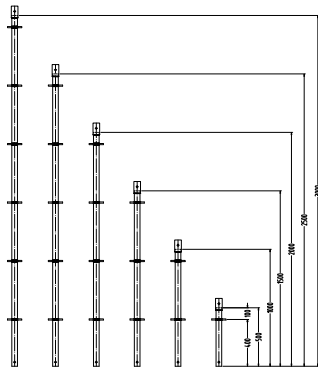

#### M48 STANDARD

| No.      | Size(mm) | Item     | Type | Material     | OD(mm) | Thickness(mm) | Rebar Sleeve(mm) |
|----------|----------|----------|------|--------------|--------|---------------|------------------|
| YP4-L0.5 | 500      | standard | M48  | Q345<br>Q235 | 48.3   | 3.25          | 60*3.5*100       |
| YP4-L1.0 | 1000     |          |      |              |        |               |                  |
| YP4-L1.5 | 1500     |          |      |              |        |               |                  |
| YP4-L2.0 | 2000     |          |      |              |        |               |                  |
| YP4-L2.5 | 2500     |          |      |              |        |               |                  |
| YP4-L3.0 | 3000     |          |      |              |        |               |                  |

#### M60 STANDARD


| No.      | Size(mm) | Item     | Type | Material     | OD(mm) | Thickness(mm) |
|----------|----------|----------|------|--------------|--------|---------------|
| YP6-L0.5 | 500      | standard | M60  | Q345<br>Q235 | 60.3   | 3.25          |
| YP6-L1.0 | 1000     |          |      |              |        |               |
| YP6-L1.5 | 1500     |          |      |              |        |               |
| YP6-L2.0 | 2000     |          |      |              |        |               |

#### M48/M60 SPIGOT

| No.         | Item   | Type | Size(mm)  | Material | OD(mm) | Thickness(mm) |
|-------------|--------|------|-----------|----------|--------|---------------|
| YP4-LJB0.27 | spigot | M48  | 270<br>70 | Q235     | 38.0   | 2.00 / 3.50   |
| YP6-LJB0.25 | spigot | M60  | 250<br>70 | Q235     | 50.0   | 2.50          |

#### BASE COLLAR M48/M60 SERIES


| No.         | Item                          | Type | Size(mm) | Material | OD(mm) | Thickness(mm) |
|-------------|-------------------------------|------|----------|----------|--------|---------------|
| YP4-LJB0.28 | Base Collar<br>M48/m60 Series | M48  | 280      | Q235     | 58.0   | 3.50          |
| YP6-LJB0.37 | Base Collar<br>M48/m60 Series | M60  | 370      | Q275     | 70.0   | 3.50          |

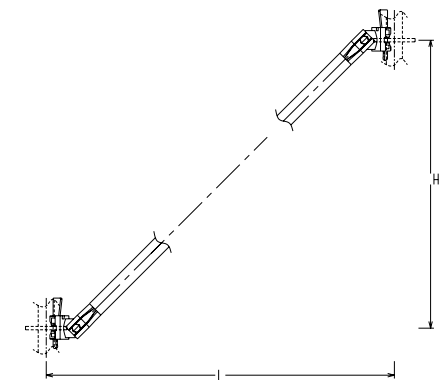

VERTICAL DIAGONAL BRACE







| No.          | Size(mm)    | Item                   | Type | Material | OD(mm)       | Thickness(mm) |
|--------------|-------------|------------------------|------|----------|--------------|---------------|
| YP6-H1.5L0.6 | H1500 L600  | Verticaldiagonal brace | M60  | Q235     | 48.3<br>42.0 | 2.4           |
| YP6-H1.5L0.9 | H1500 L900  |                        |      |          |              |               |
| YP6-H1.5L1.2 | H1500 L1200 |                        |      |          |              |               |
| YP6-H1.5L1.5 | H1500 L1500 |                        |      |          |              |               |
| YP6-H1.5L1.8 | H1500 L1800 |                        |      |          |              |               |

| No.              | Size(mm)    | Item                    | Type | Material | OD(mm)       | Thickness(mm) |
|------------------|-------------|-------------------------|------|----------|--------------|---------------|
| YP4-XGH2.0L0.600 | H2000 L600  | Vertical diagonal brace | M48  | Q 235    | 48.3<br>42.0 | 2.4           |
| YP4-XGH2.0L0.680 | H2000 L680  |                         |      |          |              |               |
| YP4-XGH2.0L0.732 | H2000 L732  |                         |      |          |              |               |
| YP4-XGH2.0L0.880 | H2000 L880  |                         |      |          |              |               |
| YP4-XGH2.0L0.900 | H2000 L900  |                         |      |          |              |               |
| YP4-XGH2.0L0.914 | H2000 L914  |                         |      |          |              |               |
| YP4-XGH2.0L1.150 | H2000 L1150 |                         |      |          |              |               |
| YP4-XGH2.0L1.219 | H2000 L1219 |                         |      |          |              |               |
| YP4-XGH2.0L1.500 | H2000 L1500 |                         |      |          |              |               |
| YP4-XGH2.0L1.524 | H2000 L1524 |                         |      |          |              |               |
| YP4-XGH2.0L1.572 | H2000 L1572 |                         |      |          |              |               |
| YP4-XGH2.0L1.800 | H2000 L1800 |                         |      |          |              |               |
| YP4-XGH2.0L1.829 | H2000 L1829 |                         |      |          |              |               |
| YP4-XGH2.0L2.072 | H2000 L2072 |                         |      |          |              |               |
| YP4-XGH2.0L2.572 | H2000 L2572 |                         |      |          |              |               |
| YP4-XGH2.0L3.072 | H2000 L3072 |                         |      |          |              |               |
| YP4-XGH1.5L0.600 | H1500 L600  |                         |      |          |              |               |
| YP4-XGH1.5L0.680 | H1500 L680  |                         |      |          |              |               |
| YP4-XGH1.5L0.732 | H1500 L732  |                         |      |          |              |               |
| YP4-XGH1.5L0.900 | H1500 L900  |                         |      |          |              |               |
| YP4-XGH1.5L0.914 | H1500 L914  |                         |      |          |              |               |
| YP4-XGH1.5L1.150 | H1500 L1150 |                         |      |          |              |               |
| YP4-XGH1.5L1.219 | H1500 L1219 |                         |      |          |              |               |
| YP4-XGH1.5L1.500 | H1500 L1500 |                         |      |          |              |               |
| YP4-XGH1.5L1.524 | H1500 L1524 |                         |      |          |              |               |

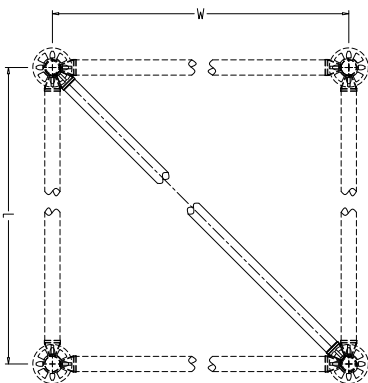

LEVEL DIAGONAL BRACE

| No.                  | Size(mm)    | Item                 | Type | Material | OD(mm) | Thickness(mm) |
|----------------------|-------------|----------------------|------|----------|--------|---------------|
| YP4-SPW0.6L0.6       | W600 L600   | Level diagonal brace | M48  | Q235     | 48.3   | 3.25          |
| YP4-SPW0.9L0.9       | W900 L900   |                      |      |          |        |               |
| YP4-SPW0.914L0.914   | W914 L914   |                      |      |          |        |               |
| YP4-SPW1.150L0.1.150 | W1150 L1150 |                      |      |          |        |               |
| YP4-SPW1.200L0.1.200 | W1200 L1200 |                      |      |          |        |               |
| YP4-SPW1.219L0.1.219 | W1219 L1219 |                      |      |          |        |               |
| YP4-SPW1.500L0.1.500 | W1500 L1500 |                      |      |          |        |               |
| YP4-SPW1.524L0.1.524 | W1524 L1524 |                      |      |          |        |               |

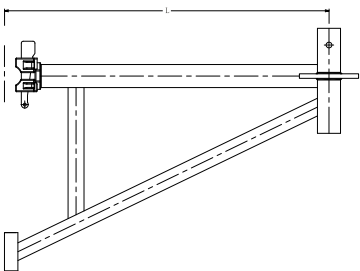

TRIANGLE BRACKET

| No.         | Length |
|-------------|--------|
| YP4-SJJ-400 | 400MM  |
| YP4-SJJ-425 | 425MM  |
| YP4-SJJ-680 | 680MM  |
| YP4-SJJ-880 | 880MM  |
| YP4-SJJ-900 | 900MM  |

HEAVY TRUSS

| No.         | Length(mm)           | Material  | OD(mm) |
|-------------|----------------------|-----------|--------|
| YP4-HL2.5   | 2500                 | Q235/Q345 | 48.3   |
| YP4-HL3.0   | 3000                 | Q235/Q345 | 48.3   |
| YP4-HL6.0   | 6000                 | Q235/Q345 | 48.3   |
| YP4-HL4.177 | 4144(2072+2072)      | Q235/Q345 | 48.3   |
| YP4-HL3.644 | 3644(2072+1572)      | Q235/Q345 | 48.3   |
| YP4-HL5.716 | 5716(2072+1572+2072) | Q235/Q345 | 48.3   |
| YP4-HL6.216 | 6216(2072+2072+2072) | Q235/Q345 | 48.3   |

M48 LEDGER

| No.        | Size(mm) | Item   | Type | Material     | OD(mm) | Thickness(mm) |
|------------|----------|--------|------|--------------|--------|---------------|
| YP4-H0.3   | 300      | ledger | M48  | Q235<br>Q345 | 48.3   | 3.25<br>3.00  |
| YP4-H0.6   | 600      |        |      |              |        |               |
| YP4-H0.65  | 650      |        |      |              |        |               |
| YP4-H0.68  | 680      |        |      |              |        |               |
| YP4-H0.732 | 732      |        |      |              |        |               |
| YP4-H0.75  | 750      |        |      |              |        |               |
| YP4-H0.9   | 900      |        |      |              |        |               |
| YP4-H0.914 | 914      |        |      |              |        |               |
| YP4-H1.15  | 1150     |        |      |              |        |               |
| YP4-H1.2   | 1200     |        |      |              |        |               |
| YP4-H1.219 | 1219     |        |      |              |        |               |
| YP4-H1.5   | 1500     |        |      |              |        |               |
| YP4-H1.524 | 1524     |        |      |              |        |               |
| YP4-H1.572 | 1572     |        |      |              |        |               |
| YP4-H1.8   | 1800     |        |      |              |        |               |
| YP4-H1.829 | 1829     |        |      |              |        |               |
| YP4-H2.072 | 2072     |        |      |              |        |               |
| YP4-H2.1   | 2100     |        |      |              |        |               |
| YP4-H2.572 | 2572     |        |      |              |        |               |
| YP4-H3.072 | 3072     |        |      |              |        |               |

REINFORCED LEDGER

| No.          | Size(mm) | Item              | Type | Material     | OD(mm) | Thickness(mm) |
|--------------|----------|-------------------|------|--------------|--------|---------------|
| YP4-JQH1.800 | 1800     | Reinforced Ledger | M48  | Q345<br>Q235 | 48.3   | 3.25<br>3.00  |
| YP4-JQH1.829 | 1829     |                   |      |              |        |               |
| YP4-JQH2.072 | 2072     |                   |      |              |        |               |
| YP4-JQH2.572 | 2572     |                   |      |              |        |               |

INTERMEDIATE TRANSOM

| No.          | Size(mm) | Item                 | Type | Material | OD(mm) | Thickness(mm) |
|--------------|----------|----------------------|------|----------|--------|---------------|
| YP4-ZJG0.9   | 900      | Intermediate Transom | M48  | Q235     | 48.3   | 3.00          |
| Yp4-ZJG0.914 | 914      |                      |      |          |        |               |
| Yp4-ZJG1.200 | 1200     |                      |      |          |        |               |
| Yp4-ZJG1.219 | 1219     |                      |      |          |        |               |
| Yp4-ZJG1.500 | 1500     |                      |      |          |        |               |
| Yp4-ZJG1.524 | 1524     |                      |      |          |        |               |
| Yp4-ZJG1.800 | 1800     |                      |      |          |        |               |
| Yp4-ZJG1.829 | 1829     |                      |      |          |        |               |





| KWIKSTAGE SYSTEM

Material:Q235B  
Standard:AS/NZS 1576;AS/NZS1577

Kwikstage Standard Φ48.3\*4.0mm

| AU01 -Standard                                                                    | Size | Surface               |
|-----------------------------------------------------------------------------------|------|-----------------------|
|  | 0.5M | Painted               |
|                                                                                   | 1.0M |                       |
|                                                                                   | 1.5M |                       |
|                                                                                   | 2.0M | Hot Dipped Galvanized |
|                                                                                   | 2.5M |                       |
|                                                                                   | 3.0M |                       |

Kwikstage Transom 50\*50\*5mm

| AU01 -Transom                                                                       | Size | Surface               |
|-------------------------------------------------------------------------------------|------|-----------------------|
|  | 0.5M | Painted               |
|                                                                                     | 0.7M |                       |
|                                                                                     | 0.8M |                       |
|                                                                                     | 1.2M | Hot Dipped Galvanized |
|                                                                                     | 1.8M |                       |
|                                                                                     | 2.4M |                       |

Kwikstage Tie Bar 40\*40\*4mm

| AU01-Tie Bar                                                                        | Size | Surface               |
|-------------------------------------------------------------------------------------|------|-----------------------|
|  | 0.5M | Painted               |
|                                                                                     | 0.7M |                       |
|                                                                                     | 1.0M |                       |
|                                                                                     | 1.2M | Hot Dipped Galvanized |
|                                                                                     | 1.8M |                       |
|                                                                                     | 2.4M |                       |

Kwikstage Hop Up Bracket

| Bracket                                                                             | Name                | Surface                          |
|-------------------------------------------------------------------------------------|---------------------|----------------------------------|
|  | One Board Bracket   | Painted<br>Hot Dipped Galvanized |
|                                                                                     | Two Board Bracket   |                                  |
|                                                                                     | Three Board Bracket |                                  |

Kwikstage Ledger Φ48.3\*3.2mm

| AU01 -Ledger                                                                       | Size | Surface    |
|------------------------------------------------------------------------------------|------|------------|
|  | 0.5M | Painted    |
|                                                                                    | 0.7M |            |
|                                                                                    | 0.8M |            |
|                                                                                    | 1.0M | Hot Dipped |
|                                                                                    | 1.2M |            |
|                                                                                    | 1.8M | Galvanized |
|                                                                                    | 2.4M |            |

Kwikstage Diagonal Brace Φ48.3\*3.2mm

| AU01-Diagonal Brace                                                                  | Size | Surface               |
|--------------------------------------------------------------------------------------|------|-----------------------|
|  | 1.7M | Painted               |
|                                                                                      | 2.1M |                       |
|                                                                                      | 2.7M |                       |
|                                                                                      | 3.2M | Hot Dipped Galvanized |
|                                                                                      | 3.5M |                       |

Kwikstage Steel Board 230\*63\*1.8mm

| AU01 -Steel Board                                                                    | Size | Surface    |
|--------------------------------------------------------------------------------------|------|------------|
|  | 0.7M | Galvanized |
|                                                                                      | 1.0M |            |
|                                                                                      | 1.2M |            |
|                                                                                      | 1.8M |            |
|                                                                                      | 2.4M |            |

Kwikstage Accessories

| Wall Tie & Toe-Board Clip                                                            | Name           | Surface               |
|--------------------------------------------------------------------------------------|----------------|-----------------------|
|  | Wall Tie       | Painted<br>Hot Dipped |
|   | Toe-Board Clip | Galvanized            |

| CUPLOCK SYSTEM

Material:Q235B,Q345B.  
Surface Treatment:1.Self Finish 2.Painted 3.Hot Dipped Galvanized.

Tube:48.3mm x 3.2mm Thickness

Brace:48.3 x 2.75mm Thickness

| Pictures                                                                              | Name                 | Length(M)       | Weight (Kg) |         |           |
|---------------------------------------------------------------------------------------|----------------------|-----------------|-------------|---------|-----------|
|                                                                                       |                      |                 | Self Finish | Painted | Hot Galv. |
|    | Standard(Vertical)   | L=1.00Mt        | 4.84        | 4.98    | 5.13      |
|                                                                                       |                      | L=1.50Mt        | 7.25        | 7.47    | 7.69      |
|                                                                                       |                      | L=1.80Mt        | 8.96        | 9.22    | 9.49      |
|                                                                                       |                      | L=2.00Mt        | 9.67        | 9.96    | 10.25     |
|                                                                                       |                      | L=2.30Mt        | 11.37       | 11.71   | 12.05     |
|                                                                                       |                      | L=2.50Mt        | 12.08       | 12.44   | 12.81     |
|                                                                                       |                      | L=3.00Mt        | 14.50       | 14.93   | 15.37     |
|                                                                                       |                      | L=0.60Mt        | 2.38        | 2.45    | 2.52      |
|   | Ledger(Horizontal)   | L=0.90Mt        | 3.44        | 3.55    | 3.65      |
|                                                                                       |                      | L=1.00Mt        | 3.80        | 3.91    | 4.03      |
|                                                                                       |                      | L=1.20Mt        | 4.51        | 4.65    | 4.78      |
|                                                                                       |                      | L=1.30Mt        | 4.87        | 5.01    | 5.16      |
|                                                                                       |                      | L=1.50Mt        | 5.58        | 5.75    | 5.91      |
|                                                                                       |                      | L=1.80Mt        | 6.65        | 6.85    | 7.05      |
|                                                                                       |                      | L=2.00Mt        | 7.36        | 7.58    | 7.80      |
|                                                                                       |                      | L=2.50Mt        | 9.14        | 9.41    | 9.69      |
|  | Intermediate Transom | L=0.60Mt        | 3.59        | 3.70    | 3.80      |
|                                                                                       |                      | L=0.90Mt        | 4.66        | 4.80    | 4.93      |
|                                                                                       |                      | L=1.00Mt        | 5.01        | 5.16    | 5.31      |
|                                                                                       |                      | L=1.20Mt        | 5.72        | 5.90    | 6.07      |
|                                                                                       |                      | L=1.30Mt        | 6.08        | 6.26    | 6.44      |
|                                                                                       |                      | L=1.80Mt        | 7.86        | 8.09    | 8.33      |
|                                                                                       |                      | L=2.00Mt        | 8.57        | 8.83    | 9.08      |
|                                                                                       |                      | L=2.50Mt        | 10.35       | 10.66   | 10.97     |
|  | Diagonal Brace       | L=3.00Mt        | 12.13       | 12.49   | 12.86     |
|                                                                                       |                      | L=1.2Mt H=2.0Mt | 8.25        | 8.50    | 8.74      |
|                                                                                       |                      | L=1.8Mt H=2.0Mt | 9.36        | 9.46    | 9.92      |
|                                                                                       |                      | L=2.5Mt H=2.0Mt | 10.93       | 11.26   | 11.59     |
|                                                                                       |                      | L=1.3Mt H=1.5Mt | 7.18        | 7.39    | 7.61      |
|                                                                                       |                      | L=1.5Mt H=1.5Mt | 7.60        | 7.83    | 8.05      |
|                                                                                       |                      | L=2.0Mt H=1.5Mt | 8.77        | 9.03    | 9.29      |
|  | Spigot Connector     | L=0.25Mt        | 0.69        | 0.71    | 0.73      |



Top Cup

Material: Malleable Casting Iron; Drop Forged Steel.  
Type: 3 lugs & 4 lugs.  
Weight: 0.41kg-0.46kg.  
Finish: Self Color.



Bottom Cup

Material: Pressed Carbon Mild Steel Plate.  
Type: Closed & Open.  
Weight: 0.19kg-0.22kg.  
Finish: Self Color.



Ledger Blade

Material: Drop Forged Graded Low  
Type: Closed & Open.  
Weight: 0.19kg-0.25kg.  
Finish: Self Color.





| Material           | 6061-T6 ALUMINUM ALLOY |
|--------------------|------------------------|
| Panel thickness    | 4mm                    |
| Template thickness | 65mm                   |
| Template weight    | 22-25kg/m2             |
| Carrying capacity  | 60KN/m2                |




**Material: 6061-T6 Aluminum**


## ALUMINUM ALLOY PROFILE

- 1、Light weight
- 2、High strength
- 3、Corrosion resistance
- 4、High turnover frequency
- 5、High Residual
- 6、Low average cost


Belows are the main sizes we do

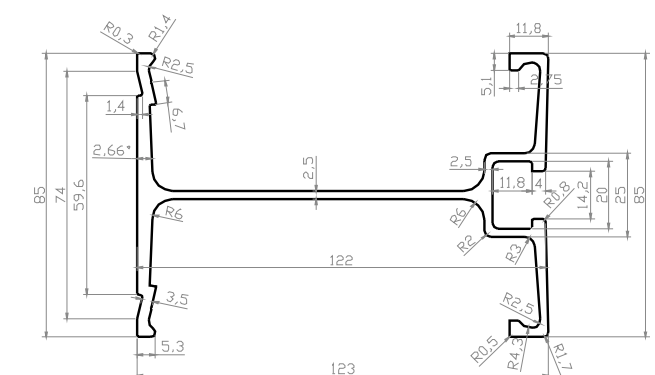

123\*85mm

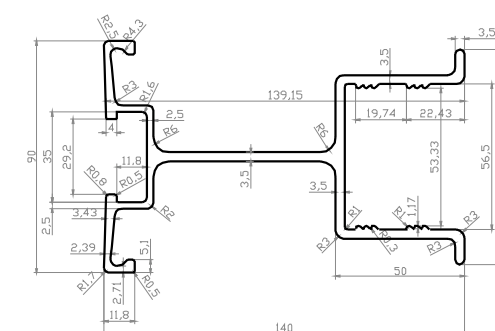

140\*90mm

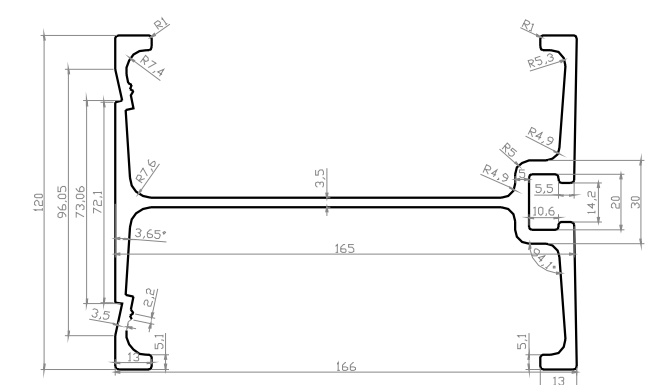

120\*166mm





## I ADTO ALUMINUM LADDERS

Sizes and designs can be customized

Material: Aluminum 6063-T5

Thickness: 1.2mm

Loading capacity: 150KGS


Light weight, portable, durable ,anti-corrosion ,water proof , environment-friendly



Single Straight Ladder



A Type Ladder

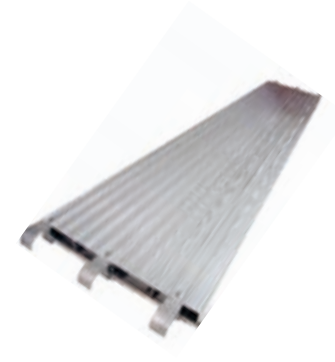

Aluminum Plank



Multi-purpose Aluminum Ladder



Dual-purpose Aluminum Ladder



Household Ladder



Telescopic Ladder



Extension Ladder



3 Sections Aluminum Extension Ladder



2 Sections Aluminum Extension Ladder



Aluminum Stool Ladder



Smart Portable Work Platform

04

QUALITY BUILDS FUTURE  
GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER  
FORMWORK SYSTEM


| ADJUSTABLE COLUMN FORMWORK SUITE

Size adjustable as 50mm increment  
>100KN/m² fresh concrete pressure permitted  
300 times reusable  
Simple & Easy operation; Quickly move and setup  
Reduce use of disposable material



| PLASTIC FORMWORK

Super light, Only 14kg/m²  
>45KN/m² fresh concrete pressure permitted  
80 times reusable  
Special handles for panel joint, Easy!  
Environmentally friendly

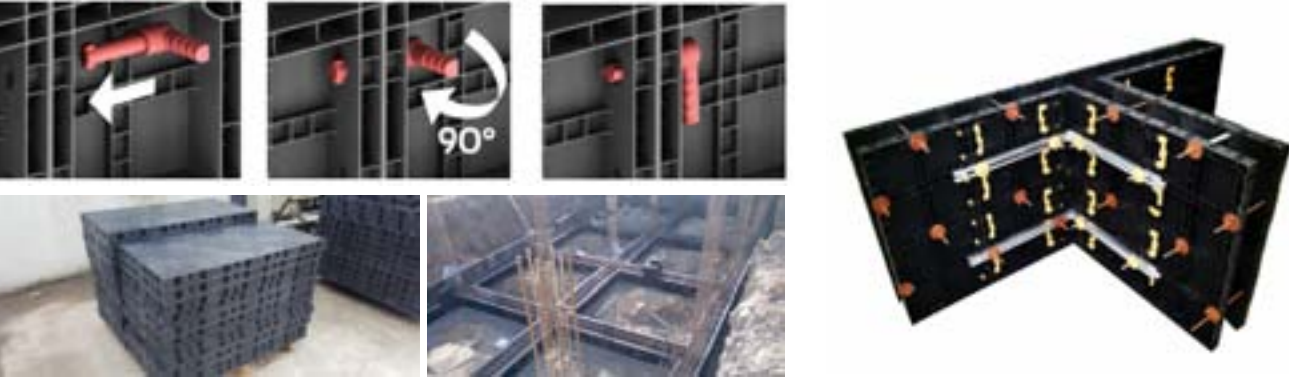

| Timber Formwork (FILM FACED PLYWOOD)



|                  |                                                                                                                            |
|------------------|----------------------------------------------------------------------------------------------------------------------------|
| Size             | 1220x2440mm, 915x1830mm, 1250x2500mm                                                                                       |
| Thickness        | 12mm, 15mm, 18 mm(as your request)                                                                                         |
| Glue             | MR, Melamine, Phenolic (WBP)                                                                                               |
| Core             | Poplar, Hardwood, Eucalyptus, Birch, Combi, Bamboo                                                                         |
| Surface          | Dynea brown film, Nano mirror film.                                                                                        |
| Moisture content | 7%-13%                                                                                                                     |
| Grade            | A, B, AB,C                                                                                                                 |
| Application      | Furniture, Construction, Decoration, Platform Floor                                                                        |
| Loading          | 8pallets/20ft, 16pallets/40ft, 18pallets/40HQ                                                                              |
| Packaging        | bottom is palletsinner coverd by plastic film.<br>outer protected by plywood or carton and then<br>steel tape for strength |
| Supply ability   | 6000Cubic meter per Month                                                                                                  |
| Certificate      | FSC,CE,CARB,ISO9001:2000, F17                                                                                              |





# 05

QUALITY BUILDS FUTURE  
GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER  
STEEL PIPE PRODUCTS

## | ERW PIPE

**ERW Pipe:**Electric Resistance Welded steel tube used in oil drilling and machinery manufacturing,etc  
**Steel Grade:**Q235,Q345,S235JR,S275JR,S355J2H,GR.A,GR.B,GR.C,GR.D,STK400,STK500,A,B,X42,X46,X52,X56,X60,/X65,X70  
**Standard:**GB/T3091-2001,BS1387-1985,DIN EN10025,EN10219,JIS G3444:2004,ASTMA53,API5L



ERW Pipe Welded With Flanges,Epoxy Coated                      Welded Pipe



## | LSAW PIPE

**LSAW steel pipe Structural Pipes and low-pressure liquid trans portation pipes**  
**Standard:** ASTMA139 (Grade A-E)ASTMA 252(Grade 1 -3)JIS G3444 (STK290 -540) GB/T 3091 (Q215-345)  
**OD:** 508 -1422MM                      **WT:** 6 - 40MM                      **Length:** 6 -12m  
**Uses:** as low-pressure liquid transportation pipes and different types of load bearing structure units as well as other purposes. We can also supply with other sizes according to your requirements



## | SSAW STEEL PIPES

**Quality Standard:** GB/T3091 GB/T9711 ASTMA53 DIN 2458 EN10217 API 5L Line Pipe  
**Size:**  
**Outer Diameter:** 219.1mm - 4064mm (8" - 160")  
**Wall Thickness:** 3.2 mm - 40mm  
**Length:** 6mtr-30mtr

## | HOT DIPPED GALVANIZED PIPE/ PRE-GALVANIZED PIPE

**Steel Grade:**Q195,Q235,Q345,S235JR,S275JR,S355JR,GR.A.B,GR.C,GR.D,STK400,STK500  
**Standard:**GB/T3091-2001,BS1387-1985,DIN EN10025,EN10219,JIS G3444:2004,ASTMA53,engraved,Groove  
**Surface Finish:**hot dipped galvanized,electro galvanized,black,painted,threaded,socket,engraved,Groove  
**Pre-galvanized pipe:**outer diameter: 19mm-100mm;thickness 1mm-2.3mm;zinc coating:80-120g/m<sup>2</sup>



Hot Dipped Galvanized Pipe



Pre-Galvanized Pipe

| Outer Diameter |       | Wall Thickness | Length |
|----------------|-------|----------------|--------|
| Inch           | mm    | mm             | m      |
| 1/2"           | 21.3  | 0.6-3.0        | 0.3-12 |
| 3/4"           | 26.9  | 0.6-3.0        | 0.3-12 |
| 1"             | 33.4  | 1.0-3.0        | 0.3-12 |
| 1-1/4"         | 42.3  | 1.0-4.0        | 0.3-12 |
| 1-1/2"         | 48.3  | 1.0-4.0        | 0.3-12 |
| 2"             | 60.3  | 1.5-4.0        | 0.3-12 |
| 2-1/2"         | 76.1  | 1.5-4.0        | 0.3-12 |
| 3"             | 88.9  | 1.5-9.5        | 0.3-12 |
| 4"             | 114.3 | 2.0-9.5        | 0.3-12 |
| 5"             | 141.3 | 3.0-9.5        | 0.3-12 |
| 6"             | 168.3 | 3.0-12.0       | 1.0-12 |
| 8"             | 219.1 | 3.2-12.0       | 1.0-12 |
| 10"            | 273   | 3.2-12.0       | 1.0-12 |
| 12"            | 323.8 | 6.0-15.0       | 1.0-12 |
| 14"            | 355.6 | 8.0-15.0       | 1.0-12 |
| 16"            | 406.4 | 8.0-20.0       | 1.0-12 |

## | PIPE FITTINGS AND FLANGES

- 1.Product Name: Butt Welding Fittings, Forged Fittings, Flanges
- 2.Product Standard: ASME B16.9, EN 10253, DIN, BS 1640, GOST, ISO 3419, JIS B2311, GB/T 12459, GB/T 13401; ASME B16.11, BS 3799, JIS B2316, GB/T 14383; ASME B16.5, ASME B16.47, EN 1092, DIN, BS 4504, GOST, ISO 7005, JIS B2220, GB/T 9112.
- 3.Product Material: A234 WPB WPC, A234 WP, A420 WPL, A860 WPHY; P195, P235, P265, 16Mo3, 10CrMo5-5, P215NL, P265NL, L290NB, L450QB, P355N; A105, A181, A182, A350, A522, A707, A694; P245GH, P280GH, P305GH, 16Mo3, 13CrMo4-5, 13MnNi6-3, P285NH, P420QH; 10#, 20#, 20G, 20MnG, 16Mn, 16MnDG.





## | SEAMLESS STEEL PIPE

### Line Pipe

- 1.Standard: API 5L, GB/T 9711
- 2.Steel Grade: GR.B(L245), X42(L290), X46(L320), X52(L360), X56(L390), X60(L415), X65(L450), X70(L485)
- 3. Specification: OD: 1/2''(21.3mm)~48''(1219mm), WT: 2mm~60mm, L: Cut length, SRL, DRL



### Boiler Tube

- 1.Standard: ASME SA106, ASME SA192M, ASME SA209M, ASME SA210M, ASME,SA213M, ASME SA335M, DIN 17175, JIS 3461, GB 3087, GB 5310
- 2.Steel Grade: St35.8, St45.8, 15Mo3, SA192, GR.B, GR.C, T1, T2/P2, T11/P11, T12/P12, T22/P22, T23/P23, P5, T91/P91, STB340, STB 410, 10#, 20#, 20G, 25MnG, 15MoG.
- 3. Specification: OD: 1/2''(21.3mm)~30''(762mm), WT: 2.0mm~40mm, L: Cut length, SRL, DRL



### Structural Pipe and Mechanical Tube

- 1.Standard: DIN 1629, ASTM A53, GB/T 8162
- 2.Steel Grade: ST37.0, ST44.0, ST55, ST52.0, GR.B, 10#, 20#, 35#, 45#, Q345
- 3.Specification: OD: 1/2''(21.3mm)~48''(1219mm), WT: 2mm~60mm, L: Cut length, SRL, DRL



### Fluid Pipe

- 1.Standard: ASTM A53M, ASTM A106, GB/T 8163
- 2.Steel Grade: GR.A, GR.B, GR.C, 10#, 20#, Q295, Q345
- 3. Specification: OD: 1/2''(21.3mm)~48''(1219mm), WT: 2mm~40mm, L: Cut length, SRL, DRL



### OCTG Products

- 1.Standard: API 5CT(ISO 11960), API 5DP
- 2.Steel Grade: H40, J55, K55, N80-1, N80-Q, L80-1, L80-13Cr, C90, T95, P110, Q125; E-75, X-95, G-105, S-135
- 3.Specification: OD: 2 3/8''(60.32mm)~20''(508mm), Weight: 4ppf~133ppf, L: R1, R2, R3, Connection Type: BTC, LTC, STC, EUE, NUE, IEU

## | SQUARE/RECTANGULAR TUBE(HOLLOW SECTION)

Square/Rectangular Tube is applicable to frame for civil construction,furniture and etc.we can supply the products according to following standards:GB/T6728-2002,ASTMA500,JIS G3466,En10210,EN10219



| Size(mm) | Thickness(mm) | Size(mm) | Wall Thickness (mm) | Size(mm) | Thickness(mm) |
|----------|---------------|----------|---------------------|----------|---------------|
| 20x10    | 0.7-2.0       | 70x25    | 1.2-6.0             | 100x90   | 2.0-6.0       |
| 20x14    | 0.7-2.0       | 70x30    | 1.2-6.0             | 110x25   | 2.0-6.0       |
| 20x15    | 0.7-2.0       | 70x40    | 1.2-6.0             | 110x30   | 2.0-6.0       |
| 26x13    | 0.7-2.0       | 70x50    | 2.0-6.0             | 110x40   | 2.0-6.0       |
| 30x10    | 0.7-2.0       | 70x60    | 2.0-6.0             | 110x50   | 2.0-6.0       |
| 30x15    | 0.7-2.0       | 80x20    | 1.2-4.0             | 110x60   | 2.0-6.0       |
| 30x20    | 0.8-2.0       | 80x25    | 1.2-6.0             | 110x70   | 2.0-6.0       |
| 40x10    | 0.8-2.0       | 80x30    | 1.2-6.0             | 110x80   | 2.0-6.0       |
| 40x15    | 1.0-2.0       | 80x40    | 1.2-6.0             | 110x90   | 2.0-6.0       |
| 40x20    | 1.0-2.5       | 80x50    | 2.0-6.0             | 110x100  | 2.0-6.0       |
| 40x25    | 1.0-2.5       | 80x60    | 2.0-6.0             | 110x140  | 4.0-6.0       |
| 40x30    | 1.0-2.5       | 80x70    | 2.0-6.0             | 120x25   | 2.0-6.0       |
| 50x11    | 1.0-2.0       | 90x25    | 1.2-6.0             | 120x30   | 2.0-6.0       |
| 50x15    | 1.0-3.0       | 90x30    | 1.2-6.0             | 120x40   | 2.0-6.0       |
| 50x20    | 1.0-3.0       | 90x40    | 2.0-6.0             | 120x50   | 2.0-6.0       |
| 50x25    | 1.0-3.0       | 90x50    | 2.0-6.0             | 120x60   | 2.0-6.0       |
| 50x30    | 1.0-3.0       | 90x60    | 2.0-6.0             | 120x70   | 2.0-6.0       |
| 50x40    | 1.0-3.0       | 90x70    | 2.0-6.0             | 120x80   | 2.0-6.0       |
| 60x15    | 1.0-3.0       | 90x80    | 2.0-6.0             | 120x90   | 2.0-6.0       |
| 60x20    | 1.0-3.0       | 100x25   | 2.0-6.0             | 120x100  | 2.0-6.0       |
| 60x25    | 1.0-4.0       | 100x30   | 2.0-6.0             | 120x110  | 2.0-6.0       |
| 60x30    | 1.0-4.0       | 100x40   | 2.0-6.0             | 120x130  | 4.0-6.0       |
| 60x40    | 1.2-6.0       | 100x50   | 2.0-6.0             | 120x140  | 4.0-6.0       |
| 60x50    | 1.2-6.0       | 100x60   | 2.0-6.0             | 120x200  | 4.0-6.0       |
| 70x20    | 1.0-6.0       | 100x70   | 2.0-6.0             | 130x30   | 2.0-6.0       |
| 70x25    | 1.2-6.0       | 100x80   | 2.0-6.0             | 130x40   | 2.0-6.0       |

## | SQUARE TUBE

| Size (mm) | Wall Thickness (mm) | Size (mm) | Wall Thickness (mm) | Size (mm) | Wall Thickness (mm) | Size (mm) | Wall Thickness (mm) |
|-----------|---------------------|-----------|---------------------|-----------|---------------------|-----------|---------------------|
| 10x10     | 0.6-0.8             | 42x42     | 1.2-6.0             | 90x90     | 2.5-6.0             | 150x150   | 4.0-8.0             |
| 12x12     | 0.6-0.8             | 45x45     | 1.2-6.0             | 95x95     | 2.5-6.0             | 160x160   | 4.0-8.0             |
| 13x13     | 0.6-2.0             | 48x48     | 1.2-6.0             | 100x100   | 2.5-6.0             | 180x180   | 4.0-8.0             |
| 15x15     | 0.7-2.0             | 50x50     | 1.5-6.0             | 105x105   | 2.5-6.0             | 200x200   | 5.0-10.0            |
| 16x16     | 0.7-2.0             | 55x55     | 1.5-6.0             | 110x110   | 3.0-6.0             | 220x220   | 8.0-25.0            |
| 20x20     | 1.0-3.0             | 60x60     | 1.5-6.0             | 115x115   | 3.0-6.0             | 250x250   | 8.0-25.0            |
| 25x25     | 1.0-3.0             | 65x65     | 2.0-6.0             | 120x120   | 3.0-6.0             | 280x280   | 8.0-25.0            |
| 30x30     | 1.2-4.0             | 70x70     | 2.0-6.0             | 125x125   | 3.0-6.0             | 300x300   | 8.0-25.0            |
| 35x35     | 1.0-4.0             | 75x75     | 2.0-6.0             | 130x130   | 3.0-6.0             | 350x350   | 8.0-25.0            |
| 38x38     | 1.0-5.0             | 80x80     | 2.5-6.0             | 135x135   | 4.0-14.0            | 400x400   | 8.0-25.0            |
| 40x40     | 1.0-6.0             | 85x85     | 2.5-6.0             | 140x140   | 4.0-8.0             | 450x450   | 8.0-25.0            |
|           |                     |           |                     |           |                     | 500x500   | 8.0-25.0            |



06

QUALITY BUILDS FUTURE

GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER

STAINLESS STEEL PRODUCTS

I STAINLESS STEEL PLATE (HOT ROLLED & COLD ROLLED)



| Available Steel grades:                                                             |                                                                                   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Austenitic grade:                                                                   | 301,301L,304,304L,304NbN, 305,370,317L,316,316L,316Ti, 310S,314,309S, S30815,904L |
| Ferritic grade:                                                                     | 410L, 410S,405,409L, 430,434,436L ,420J1,420J2,444                                |
| Martensitic grade:                                                                  | 410, 420J1,420J2                                                                  |
| Duplex (Ferritic- Austenitic):                                                      | 3RE60,S32101,TDS2101,S31803,S32205,S32101,TDS2101, S32304,S32750,SUS329J4L        |
| Above steel grades can supply in accordance with GB, JIS, EN, ASTM, ASME standards. |                                                                                   |

PRODUCTION SPECIFICATION

| Product | Thickness(mm) | Width (mm) | Length (mm) |
|---------|---------------|------------|-------------|
| PMP     | 6.0~100.0     | 1500~3000  | 2000~12000  |
| CMP     | 2.5~20.0      | 1000~2000  | 2000~12000  |

NOTE:Double length delivery is possible if requested.

DIMENSIONAL PRECISION

| Products | Thickness(mm) | Allowable Thickness tolerance (mm) |
|----------|---------------|------------------------------------|
| CMP      | 2.5~20.0      | ±0.4                               |
|          | 6.0~20.0      | ±0.5                               |
|          | 20.0~40.0     | -0.5~+0.8                          |
|          | 40.0~100.0    | -0.5~+1.0                          |

AVAILABLE SURFACE TREATMENT:

|            |                     |
|------------|---------------------|
| Hot plate: | NO.1, 2E, THS, TSHS |
| Cold sheet | 2B,2D,No.3,No.4, HL |

**SIZE BENEFIT:**  
Guarantee if made of superwide thick plate for normalizing, leveling and size cut.

**PACKAGING**  
Waterproofing material for medium plate packaging, supporting frame to prevent plate from deformation.



I STAINLESS STEEL TUBE & PIPE



|                         | Seamless Stainless Steel Tubes                                                                       | Welded pipe                                       |
|-------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------|
| Specification Range(mm) | (6~762) x (1~40)                                                                                     | (12.7~4800) x (1~50)                              |
| Type of Steel           | Austenite,Martensite,Ferrite, Dual phase steel,Alloy steel and Nickel based alloy                    | Austenite,Martensite,Ferrite and Dual phase steel |
| Executive Standards     | GB,ASTM,JIS,DIN and other enterprise standard.It also can produce according to the clients'requests. |                                                   |

Based on the high quality, high precision and high performance stainless steel tubes and pipes products, ADTO stainless steel Co., Ltd provides the best stainless steel tubes to domestic and foreign users.

I DECORATIVE STAINLESS STEEL SHEET



| Finish                          | Stainless Steel     | Size                                                                                                 |                                                            |
|---------------------------------|---------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| 8k Mirror                       | 304/316<br>/201/430 | 1219x2438mm<br>1000x2000mm<br>Length Can Be Changeable<br>Length Max: 4000mm<br>Thickness Max: 2.0mm |                                                            |
| Pvd Color Coated                |                     |                                                                                                      | Gold/rose<br>Gold/bronze/black/champange /brass/blue/green |
| Etched                          |                     |                                                                                                      | Mirror Etched/hl Etched /no.4 Etched                       |
| HL/no.4                         |                     |                                                                                                      |                                                            |
| Embossed                        |                     |                                                                                                      | More Than 30 Patterns                                      |
| Sandblast                       |                     |                                                                                                      |                                                            |
| Vibration                       |                     |                                                                                                      |                                                            |
| Decorative Stainless Steel Tube |                     |                                                                                                      |                                                            |
| Pvd Color Coated                | 304/201             | Diametr No Limitation<br>Length Max: 3000mm                                                          | Gold/rose<br>Gold/bronze/black/champange /brass/blue/green |

07

QUALITY BUILDS FUTURE

GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER

PREPAINTED GALVANIZED STEEL COIL

I GALVANIZED & GALVALUME STEEL COIL/SHEET

|                  |                                                           |
|------------------|-----------------------------------------------------------|
| Width            | 600-1500mm                                                |
| Thickness        | 0.15-2.3mm                                                |
| Operate Standard | ASTM A653M-04/JIS G3302/DIN EN10143/GBT2518-2008          |
| Grade            | SGCD,SGCH,Q195,DX51D                                      |
| Surface          | Regular/mini/zero spangle, chromated, skin pass, dry etc. |
| Zink Coating     | Regular/mini/zero spangle, chromated, skin pass, dry etc. |
| Coil Weight      | 4-10MT(As required)                                       |
| Coil ID          | 508mm/610mm                                               |



I PREPAINTED GALVANIZED & GALVALUME STEEL COIL/SHEET

|                   |                                         |
|-------------------|-----------------------------------------|
| Raw Material      | GI, GL, Cold Roll                       |
| Pattern           | Customized                              |
| Painting and Film | Customized ,PE or PVDF                  |
| Colors            | refer to RAL numbers or customer sample |
| Width & Thickness | Within 1250mm,thickness from 0.13-1.5mm |
| Zink Coating      | Refer to GI or GL                       |
| Coil Weight       | 4-10MT(As required)                     |

1. Resistance to acid rain:

Coating protection mechanism: It is very easy to form acid rain in the high level of industrial emissions or pollutants environment. Acidic penetration is formed in the surface of pre-painted steel, and accelerates the corrosion, forming blistering, peeling and so on.

2. Resistance ultraviolet rays:

Coating protecting Mechanism: pre-painted sheet in ultraviolet or strong sunlight conditions, the coating will exhibit chalking degeneration, manifested as discoloration and loss of gloss, lose paint quickly.

3. Resistance to humid heat:

Coating protecting mechanism: in hot and humid environments, high osmotic pressure of water vapor accelerates penetration, forming the degeneration of painting film, then the corrosion of the substrate, with the phenomenon of bubbles and peeling.

4. Resistance to low temperature:


Coating protecting mechanisms: most of the paint can keep stable processing performance above 0 degree, but at alpine region, the temperature will be below 20-40 degree, normal paint will become brittle,bend cracking, or even lose paint, thus protection function is lost totally.

5.Anti-Fading & Anti-Staining paint formulation,, fireproofing and environmentally friendly.





I PRODUCTS SERIES

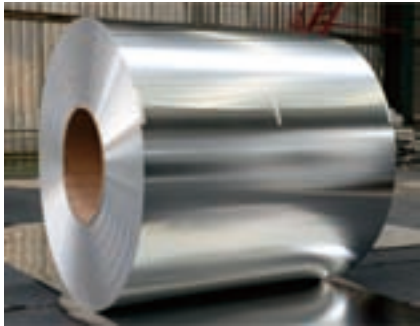

Aluminum Coil

|                  |                                                                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Aluminum         | 1XXX 、 3XXX 、 5XXX                                                                                                                                                   |
| Temper           | O、 H14 、 H16 、 H18 、 H32 、 H34                                                                                                                                       |
| Thickness ( mm ) | 0.2-4.0                                                                                                                                                              |
| Width ( mm )     | 30-2300                                                                                                                                                              |
| Diameter ( mm )  | Inner Diameter ： 500/150/75<br>Out Diameter: 800-2500                                                                                                                |
| Standard         | ASTM B209 、 JIS H4000 、 DIN EN485 、 GB/T3880                                                                                                                         |
| Application      | Panel, Decoration, Insulation, Oxidation Products, Deep Punching Products, Roof Making, Chassis/Cabinet, Back Light Sheet, Electronic Equipment, Transportation etc. |

Aluminum Sheet

|                  |                                                                                                                                                                      |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Aluminum         | 1XXX 、 3XXX 、 5XXX                                                                                                                                                   |
| Temper           | O、 H14 、 H16 、 H18 、 H32 、 H34                                                                                                                                       |
| Thickness ( mm ) | 0.2-4.0                                                                                                                                                              |
| Width ( mm )     | 30-2300                                                                                                                                                              |
| Length ( mm )    | 500-16000                                                                                                                                                            |
| Standard         | ASTM B209、 JIS H4000、 DIN EN485、 GB/T3880                                                                                                                            |
| Application      | Panel, Decoration, Insulation, Oxidation Products, Deep Punching Products, Roof Making, Chassis/Cabinet, Back Light Sheet, Electronic Equipment, Transportation etc. |

Embossed Aluminum Sheet

|                |                                                                                                                         |
|----------------|-------------------------------------------------------------------------------------------------------------------------|
| Aluminum       | 1XXX 、 3XXX 、 5XXX                                                                                                      |
| Temper         | H14 、 H18                                                                                                               |
| Thickness (mm) | 1.0-4.0                                                                                                                 |
| Width (mm)     | 100-2300                                                                                                                |
| Length (mm)    | 500-16000                                                                                                               |
| Standard       | ASTM B209 、 JIS H4000、 DIN EN485 、 GB/T3880                                                                             |
| Application    | 1xxx、3xxx、5xxx series of Aluminum Sheet is widely used in Building, Vehicles, Ships , Anti-slip Floors, Decoration etc. |

Color Coated Aluminum Coil

|                  |                                                                                                                                 |
|------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Aluminum         | 1XXX 、 3XXX 、 5XXX                                                                                                              |
| Temper           | H12 、 H14 、 H16 、 H18                                                                                                           |
| Thickness ( mm ) | 0.25-2.5                                                                                                                        |
| Width ( mm )     | 500-1800                                                                                                                        |
| Diameter ( mm )  | Inner Diameter ： 500/150/75<br>Out Diameter: 800-2500                                                                           |
| Standard         | ASTM B209、 JIS H4000、 DIN EN485、 GB/T3880                                                                                       |
| Application      | 1xxx、 3xxx、 5xxx series of Aluminum Roll is widely used in Building, Decoration, Electronic Products Cases , Public Signs, etc. |

Aluminium Foil



|               |                                                                                                                 |
|---------------|-----------------------------------------------------------------------------------------------------------------|
| Aluminum      | 1235、 8011、 8079、 1200、 3102、 1030                                                                              |
| Temper        | O、 H22、 H24、 H26、 H18                                                                                           |
| Thickness(mm) | 0.0055-0.2                                                                                                      |
| Width(mm)     | 100-2000                                                                                                        |
| Diameter(mm)  | Inner Diameter ： 76.2/152.4/300<br>Out Diameter:350-1100                                                        |
| Standard      | GB/T 3198-2010                                                                                                  |
| Application   | Flexible package foil, household foil, container foil, pharmaceutical foil, cap foil, air-conditioner foil etc. |

I TECHNICAL EQUIPMENTS

Modern technical equipments, leading development of the industry

We mainly produce and sell aluminum plate, aluminum tape, aluminum foil, with 6 semi-continuous casting (hot rolling) production lines, 10 continuous casting and rolling lines, 7 sets of cold rolling mill and 10 sets foil mill, bending-straightening-cleaning machine column, flying shear machine, cutting machine, thick foil cutting, slitting machine, (1 + 4) hot rolling production line, etc.



Super High Capacity (1 + 4) Hot Rolling Production Line, Annual Output of 450000 Tons

The super high capacity (1+4) hot rolling production line is the only independent researched and developed line in China, and at the international leading place. With high precision integrated plate type convexity control system, it can improve product quality, continuous casting and rolling, and improve production capacity to 450000 tons.




Unique Heat Treatment Technology To Ensure Qualified Products Rate Above 99%

Natural gas is used for solid furnace heating, which makes the furnace uniformly and fast heated up, and products cooling very fast in water as well. The solid furnace can be used for aluminum plate heat treatment with different thickness and width. Batches can be continuous production at the same time, product qualified rate can reach more than 99%.



Online Quenching, Endure Stable Product Performance

With online quenching applied, we can greatly shorten the production cycle, reduce the energy consumption and stable product performance. After quenching, the checkered plate is with beautiful surface and good corrosion resistance.

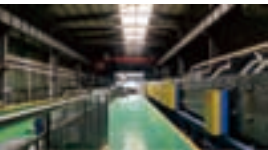

Strip Shape Entrance Design, Build Perfect Plate Type

Italian SELEMA bending and straightening machine ensures good plate type, no scratches, no vibration marks or surface defects.



# 09

## QUALITY BUILDS FUTURE

### GLOBAL SCAFFOLDING AND FORMWORK MANUFACTURING CENTER

## CONSTRUCTION NET & WORKING GLOVES



### ADTO WORKING GLOVES

ADTO protective gloves are ideal for construction, farm planting, gardening, mining, petroleum, auto repair, chemical industry, and so on. Different types of gloves have different function, such as : wearproof, anti-slip, anti-acid & alkali, and so on. We can do the gloves as your requests.

#### I MAIN PRODUCTS



Cotton Knitted Gloves



PVC Dotted Cotton Gloves



Palm Rubber Laminated Gloves



Latex Coated Gloves



Wrinkled Latex Coated Gloves



Butyronitrile Gloves (Oilproof)



Cow Split Leather Gloves



Cow Grain Leather Gloves



Half Leather Gloves



Leather Welding Gloves

#### I PRODUCTION LINE



### I ADTO CONSTRUCTION NET

#### Specification


**Weight:**70g/m<sup>2</sup> to 300g/m<sup>2</sup>, or as your request

**Type A:** Polyethylene , with UV or fire retardant as request

**Type B:** high-strength polyester filament with PVC coating (UV and fire retardant)


**Color:** blue, green ,grey, black, orange, dark green, green+black,or as your request

**Size:** 1.22m\*46m,1.8m\*5.1m, 1.8m\*3.4m, 2.5m\*6m, 2m\*100m, 3m\*50m or as your request

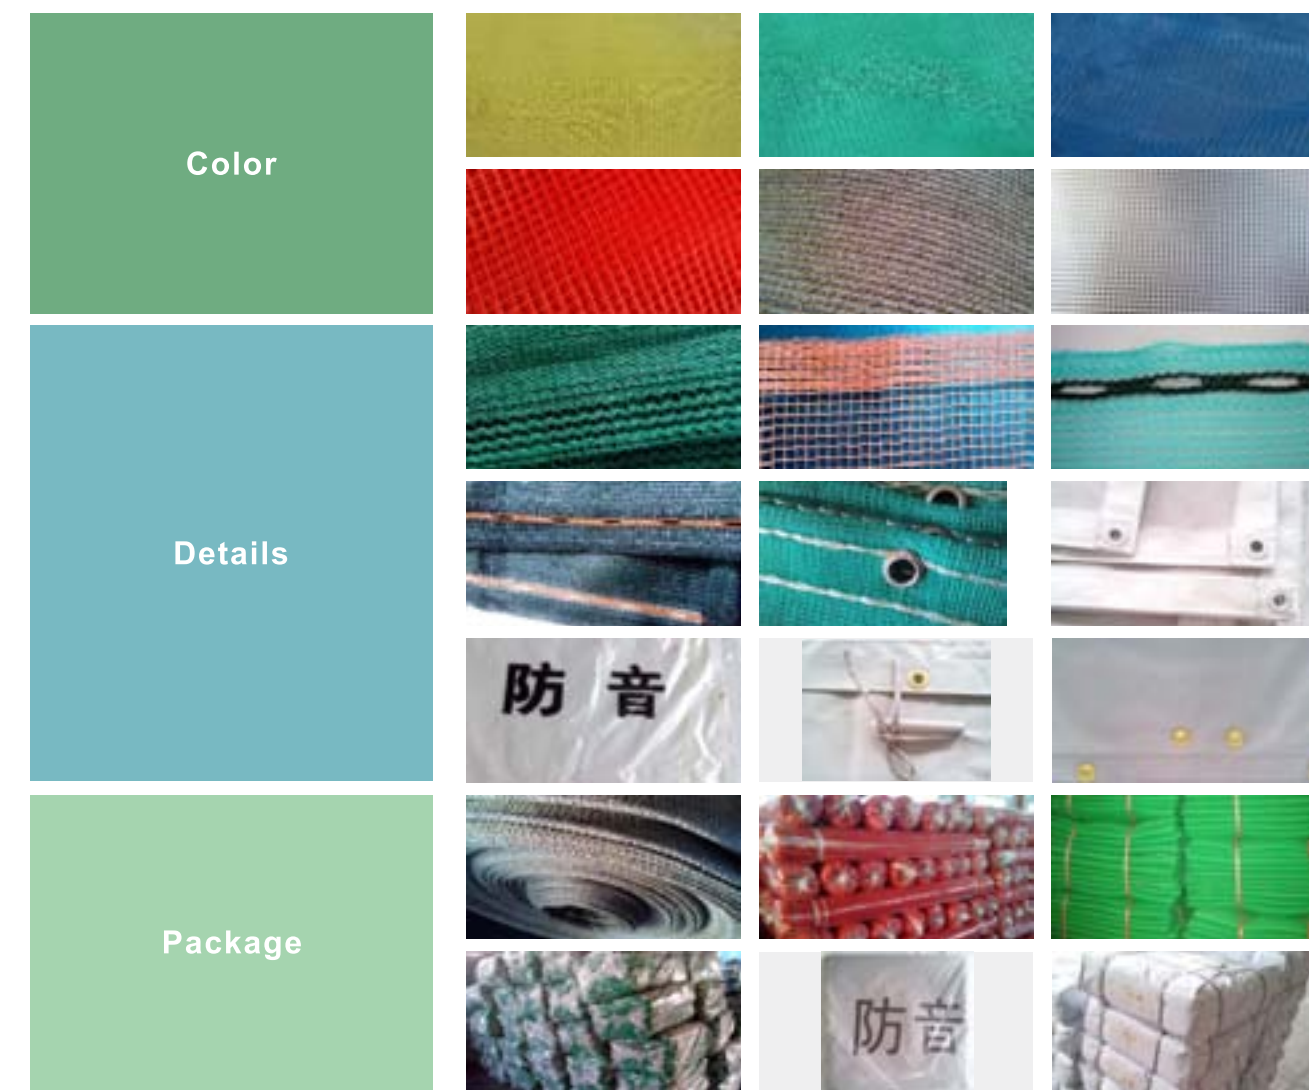



I HEXAGONAL HEAD BOLT SERIES

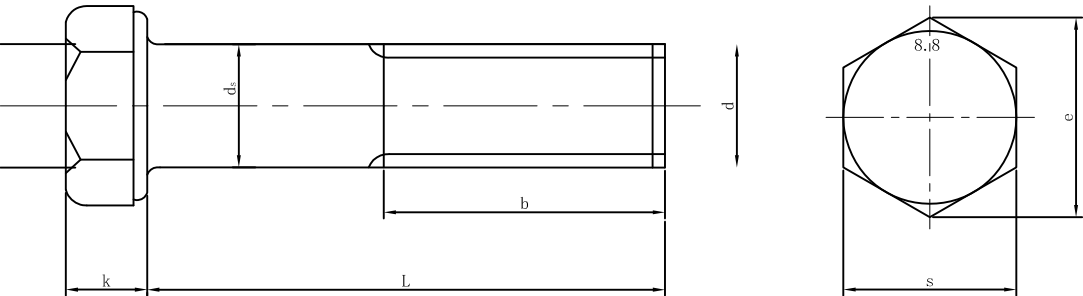

HEXAGON HEAD BOLTS


Mechanical properties: steel, 8.8 to 10.9  
Thread accuracy: 6 g  
Thread length: 125 b = 2 or less L d + 6, 125 L, 200 or less  
or less b = 2 d + 12

GB5782-86(ISO4014-79)  
DIN931

| d  |     | M6 | M8    | M10   | M12   | M14   | M16   | M18   | M20   | M22   | M24   | M27   | M30   | M33   | M36   | M39   |
|----|-----|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| ds | max | 6  | 8     | 10    | 12    | 14    | 16    | 18    | 20    | 22    | 24    | 27    | 30    | 33    | 36    | 39    |
|    | min | A级 | 5.82  | 7.78  | 9.78  | 11.7  | 13.73 | 15.73 | 17.73 | 19.67 | 21.67 | 23.67 |       |       |       |       |
| e  | min | B级 |       |       |       |       | 15.57 | 17.57 | 19.48 | 21.48 | 23.48 | 26.48 | 29.48 | 32.38 | 35.48 | 38.38 |
|    | max | A级 | 11.05 | 14.38 | 17.77 | 20.03 | 23.36 | 26.75 | 30.14 | 33.53 | 37.72 | 39.98 |       |       |       |       |
| k  | min | B级 |       |       |       |       | 26.17 | 29.56 | 32.95 | 37.29 | 39.55 | 45.2  | 50.85 | 55.37 | 60.79 | 66.44 |
|    | 公称  |    | 4     | 5.3   | 6.4   | 7.5   | 8.8   | 10    | 11.5  | 12.5  | 14    | 15    | 17    | 18.7  | 21    | 22.5  |
| s  | min | A级 | 3.85  | 5.15  | 6.22  | 7.32  | 8.62  | 9.82  | 11.28 | 12.28 | 13.78 | 14.78 |       |       |       |       |
|    | max | B级 | 4.15  | 5.45  | 6.58  | 7.68  | 8.98  | 10.18 | 11.72 | 12.72 | 14.22 | 15.22 |       |       |       |       |
| s  | min | A级 | 9.78  | 12.73 | 15.73 | 17.73 | 20.67 | 23.67 | 26.67 | 29.67 | 33.38 | 35.38 |       |       |       |       |
|    | max | B级 |       |       |       |       | 23.16 | 26.16 | 29.16 | 33    | 35    | 40    | 45    | 49    | 53.8  | 58.8  |



I HEXAGONAL NUT SERIES

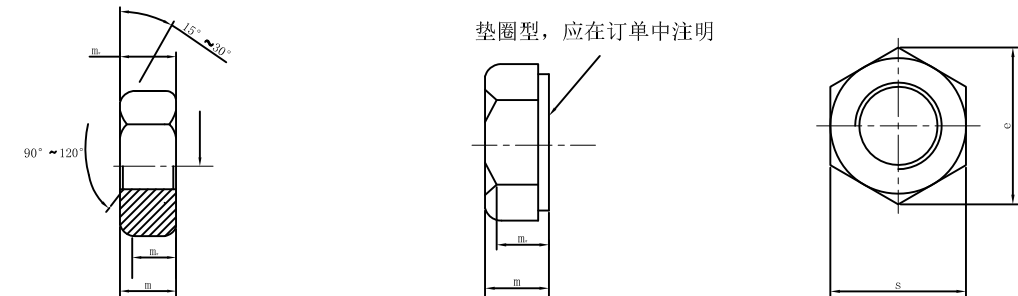

HEXAGONAL NUT

Tag the sample

D = M12 thread specification, performance level for 8, without surface treatment, product grade 8.8  
for the class A type 1 hexagonal nut Tags: nut GB/T6170 M12

GB/T6170-2000  
mm

| D                       |     | M1.6 | M2    | M2.5  | M3    | M(3.5) | M4    | M5   | M6    | M8    | M10   | M12   |
|-------------------------|-----|------|-------|-------|-------|--------|-------|------|-------|-------|-------|-------|
| P                       |     | 0.35 | 0.4   | 0.45  | 0.5   | 0.6    | 0.7   | 0.8  | 1     | 1.25  | 1.5   | 1.75  |
| e                       | min | 3.41 | 4.32  | 5.45  | 6.01  | 6.58   | 7.66  | 8.79 | 11.05 | 14.38 | 17.77 | 20.03 |
| m                       | max | 1.3  | 1.6   | 2     | 2.4   | 2.8    | 3.2   | 4.7  | 5.2   | 6.8   | 8.4   | 10.8  |
| m <sub>w</sub>          | min | 0.8  | 1.1   | 1.4   | 1.7   | 2      | 2.3   | 3.5  | 3.9   | 5.2   | 6.4   | 8.3   |
| s                       | max | 3.2  | 4     | 5     | 5.5   | 6      | 7     | 8    | 10    | 13    | 16    | 18    |
| m <sub>1</sub> ≈kg/1000 |     | 0.05 | 0.103 | 0.212 | 0.301 | 0.411  | 0.643 | 1.19 | 2.19  | 4.74  | 8.9   | 13.67 |

| 螺纹规格 D                  |     | (M14) | M16   | (M18) | M20   | (M22) | M24   | (M27) | M30   | (M33) |
|-------------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| P                       |     | 2     | 2     | 2.5   | 2.5   | 2.5   | 3     | 3     | 3.5   | 3.5   |
| e                       | min | 23.36 | 26.75 | 29.56 | 32.95 | 37.29 | 39.55 | 45.2  | 50.85 | 55.37 |
| m                       | max | 12.8  | 14.8  | 15.8  | 18    | 19.4  | 21.5  | 23.8  | 25.6  | 28.7  |
| m <sub>w</sub>          | min | 9.7   | 11.3  | 12.1  | 13.5  | 14.5  | 16.2  | 18    | 19.4  | 21.9  |
| s                       | max | 21    | 24    | 27    | 30    | 34    | 36    | 41    | 46    | 50    |
| m <sub>1</sub> ≈kg/1000 |     | 21.63 | 32.66 | 42.31 | 58.37 | 82    | 100.5 | 147.3 | 205.2 | 268.8 |

| D                       |     | M36   | (M39) | M42   | (M45) | M48   | (M52) | M56   | M(60) | M64    |
|-------------------------|-----|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| P                       |     | 4     | 4     | 4.5   | 4.5   | 5     | 5     | 5.5   | 5.5   | 6      |
| e                       | min | 60.79 | 66.44 | 71.3  | 76.95 | 82.6  | 88.25 | 93.56 | 99.21 | 104.86 |
| m                       | max | 31    | 33.4  | 34    | 36    | 38    | 42    | 45    | 48    | 51     |
| m <sub>w</sub>          | min | 23.5  | 25.4  | 25.9  | 27.5  | 29.1  | 32.3  | 34.7  | 37.1  | 39.3   |
| s                       | max | 55    | 60    | 65    | 70    | 75    | 80    | 85    | 90    | 95     |
| m <sub>1</sub> ≈kg/1000 |     | 351.7 | 455.9 | 534.8 | 663.1 | 816.8 | 1012  | 1202  | 1418  | 1659   |


Above are regular size,optional size in Parentheses.P--Pitch





### HL-A<sub>1</sub>O

| Product code          | Size(H*W*L)(mm) |                  | Side(mm) | Floor(mm) |
|-----------------------|-----------------|------------------|----------|-----------|
| HL-A <sub>1</sub> O-3 | 3x8 x16 feet    | 914x2438x4880mm  | 5        | 6         |
| HL-A <sub>1</sub> O-5 | 5x8x16feet      | 1524x2438x4880mm | 5        | 6         |
| HL-A <sub>1</sub> O-6 | 6x8 x16 feet    | 1829x2438x5791mm | 5        | 6         |
| HL-A <sub>1</sub> O-7 | 7x8x16feet      | 2133x2438x4880mm | 5        | 6         |




### HL-A<sub>2</sub>O

| Product code          | Size(H*W*L)(mm) |                  | Side(mm) | Floor(mm) |
|-----------------------|-----------------|------------------|----------|-----------|
| HL-A <sub>2</sub> O-3 | 3x8 x16 feet    | 914x2438x4880mm  | 5        | 6         |
| HL-A <sub>2</sub> O-5 | 5x8x16feet      | 1524x2438x4880mm | 5        | 6         |
| HL-A <sub>2</sub> O-6 | 6x8 x16 feet    | 1829x2438x5791mm | 5        | 6         |
| HL-A <sub>2</sub> O-7 | 7x8x16feet      | 2133x2438x4880mm | 5        | 6         |




### HL-F0

| Capacity | Internal size(L*W*H)(mm) | Side(mm) | Floor(mm) |
|----------|--------------------------|----------|-----------|
| 6M       | 3600*2010*840            | 4        | 5         |
| 8M       | 4500*2010*885            | 4        | 5         |
| 10M      | 5100*2010*990            | 4        | 5         |
| 12M      | 5400*2010*1125           | 4        | 5         |
| 15M      | 5400*2010*1400           | 4        | 5         |
| 20M      | 5600*2010*1800           | 4        | 5         |
| 25M      | 5600*2010*2225           | 4        | 5         |
| 30M      | 6660*2010*2225           | 4        | 5         |




### HL-G0

| Capacity | Internal size(L*W*H)(mm) | Side(mm) | Floor(mm) |
|----------|--------------------------|----------|-----------|
| 6M       | 3600*2010*840            | 4        | 5         |
| 8M       | 4500*2010*885            | 4        | 5         |
| 10M      | 5100*2010*990            | 4        | 5         |
| 12M      | 5400*2010*1125           | 4        | 5         |
| 15M      | 5400*2010*1400           | 4        | 5         |
| 20M      | 5600*2010*1800           | 4        | 5         |
| 25M      | 5600*2010*2225           | 4        | 5         |
| 30M      | 6660*2010*2225           | 4        | 5         |



### MS-A0

| Capacity | Length(mm) | Width(mm) | Load Height(mm) |
|----------|------------|-----------|-----------------|
| 2M       | 1900       | 1600      | 950             |
| 3M       | 2500       | 1600      | 1050            |
| 4M       | 3300       | 1600      | 1050            |
| 5M       | 3400       | 1600      | 1380            |
| 6M       | 3750       | 1650      | 1380            |
| 8M       | 3750       | 1650      | 1750            |

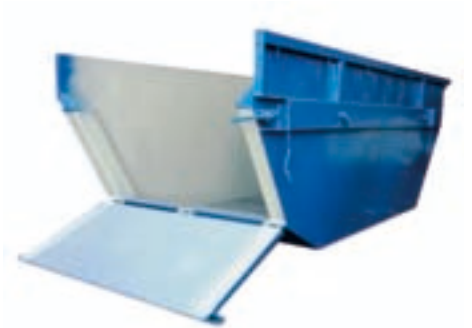

### MS-E0

| Capacity | Length(mm) | Width(mm) | Load Height(mm) |
|----------|------------|-----------|-----------------|
| 2M       | 1900       | 1600      | 950             |
| 3M       | 2500       | 1600      | 1050            |
| 4M       | 3300       | 1600      | 1050            |
| 5M       | 3400       | 1600      | 1380            |
| 6M       | 3750       | 1650      | 1380            |
| 8M       | 3750       | 1650      | 1750            |







# 12

**QUALITY BUILDS FUTURE**  
GLOBAL SCAFFOLDING AND FORMWORK  
MANUFACTURING CENTER  
**ELECTRICAL POWER EQUIPMENT  
AND TECHNOLOGY**

## I PRODUCT DEVELOPMENT

### ELECTRICAL MATERIAL PRODUCTS

- ▶ Copper & Aluminum Products
- ▶ Wire & Cable

### POWER ENGINEERING PRODUCTS

- ▶ Substation
- ▶ Power Iron Tower
- ▶ Power Controls

### ENGINEERING EQUIPMENT PRODUCTS

- ▶ Construction Machinery
- ▶ Hardware & mechanical and electrical products
- ▶ Tools

### ELECTRICAL EQUIPMENT PRODUCTS

- ▶ Instrument & Meter
- ▶ Electrical Components
- ▶ Monitoring Facilities
- ▶ Lamps and Lanterns



Anaerobic (hypoxia) electric round copper rods series



Electric round aluminum rod (alloy 5 6 of 8) series



Power cables



Flexible control cables



High voltage power transformer cooling series



35 kv high-voltage transformer substation facilities



Armoured open ac metal-enclosed switchgear



Transmission line tower



# 13

## QUALITY BUILDS FUTURE

### GLOBAL SCAFFOLDING AND FORMWORK MANUFACTURING CENTER

## PRE ENGINEERED BUILDING (PEB)

Pre engineered building is a steel structure built over a structural concept of primary members, secondary members, and the cover sheeting connected to each other. The structural members are custom designed to be lighter in weight as well as high in strength.

Today and in the future, Steel has become the material of choice in building construction, compared to concrete and timber. Thus steel building designs have become more flexible, durable and adaptable.

Pre Engineered Steel Buildings (PEB) revolutionized the construction market using built-ups in place of conventional Hot Rolled Sections. Pre-Engineered Steel Buildings can be fitted with different structural additions like trusses, mezzanine floors, fascias, canopies and crane systems as per user requirements.

Pre-engineered buildings are ideal for use in non residential, wide span low rise buildings. Among the advantages of PEB is low cost, consistent quality control, and fast delivery to name a few. PEB buildings are used for diverse applications such as factories, warehouses, offices, shopping malls, schools, hospitals, community buildings and several more.

Pre-engineered buildings are ideal for use in non residential, wide span low rise buildings. Among the advantages of PEB is low cost, consistent quality control, and fast delivery to name a few. PEB buildings are used for diverse applications such as factories, warehouses, offices, shopping malls, schools, hospitals, community buildings and several more.

### The basic parameters of PEB building are:

**Building Length :** The between the outside from flanges of end wall columns in opposite end walls is considered the building length.


**Building Height :** Building height is the eave height which usually is the distance from the bottom of the main frame column base plate to the top outer point of the eave strut. When columns are recessed or elevated from finished floor, eave height is the distance from finished floor level to top of eave strut.

**Roof Slope :** This is the angle of roof with respect to the Horizontal. The most common roof slopes are 1/10 and 1/20. Though any practical roof slope is possible as per customer's requirement.

**Design Loads :** Unless otherwise specified PEB are designed for the following minimum loads:

### PRE ENGINEERED BUILDING CONSISTS OF FOLLOWING COMPONENTS:

- |                                 |                  |                                 |                     |
|---------------------------------|------------------|---------------------------------|---------------------|
| ▶ Intermediate Frame : Rafter   | ▶ Foam Filler    | ▶ Strut purlin for wind bracing | ▶ Monitor           |
| ▶ Intermediate Frame : Column   | ▶ Inside gutter  | ▶ Eave strut                    | ▶ Canopy            |
| ▶ Bearing Frame : Rafter        | ▶ Valley gutter  | ▶ Rake angle                    | ▶ Parapet, Sidewall |
| ▶ Bearing Frame : Corner column | ▶ Ridgevent      | ▶ Girts                         | ▶ Parapet, endwall  |
| ▶ Endwall column                | ▶ Turbovent      | ▶ Roof panels                   | ▶ Crane runway      |
| ▶ Tie rods for wind bracing     | ▶ Sectional door | ▶ Wall panels                   | ▶ Bridge crone      |
| ▶ Purlins                       | ▶ Single door    | ▶ Blanket insulation            | ▶ Mezzanine         |
| ▶ Wind bracing                  | ▶ Window         |                                 | ▶ Skylight          |

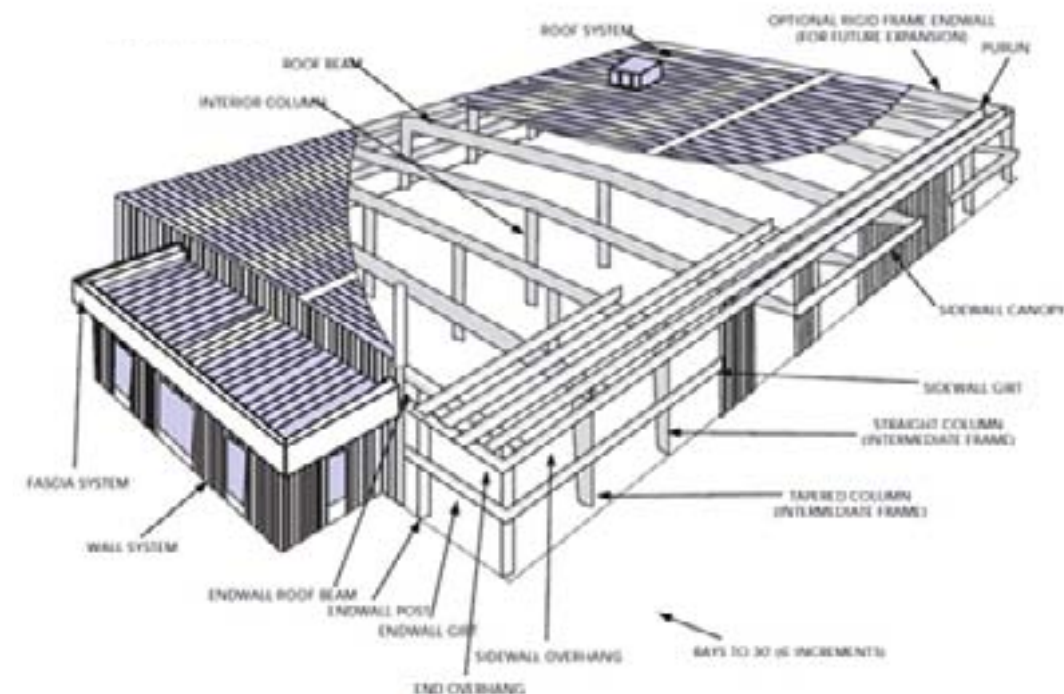





VISION: SERVICE PROVIDER OF INTEGRATED ENGINEERING MATERIALS

MISSION: ENGINEERING SUPPLIES ONE-STOP SERVICE

AIM: TO PROVIDE A SAFE, AS CUSTOMERS THE MOST COMPETITIVE PRODUCTS AND SERVICES OF ENGINEERING MATERIALS

# I CERTIFICATES





**ADTO SLOGAN OF SAFETY**

**6S Management**

Execution improved, quality and safety assured, we make your benefits maximized by 6S Management.

**Professional Team**

With abundant technical force and more than 20 professionals, we supply innovative and practical high quality products.

**Strict QC**

With professional QC team, rigorous QC process, we assure products quality and your benefits.

**Guaranteed Products**

Using high-quality material, modern technology and strict QC, every process is inspected by professional, we manufacture products of safety and assurance.

**Best Service**

Professional team and full-hearted service, we offer you warmth and remove from worries.

**ADTO GROUP OVERSEAS SALES AND SERVICES NETWORK**

ADTO GROUP opened up overseas market in 2006 and products are exported to more than 50 countries and regions in Oceanic southeast Countries, Middle East, Europe, America, Africa.