


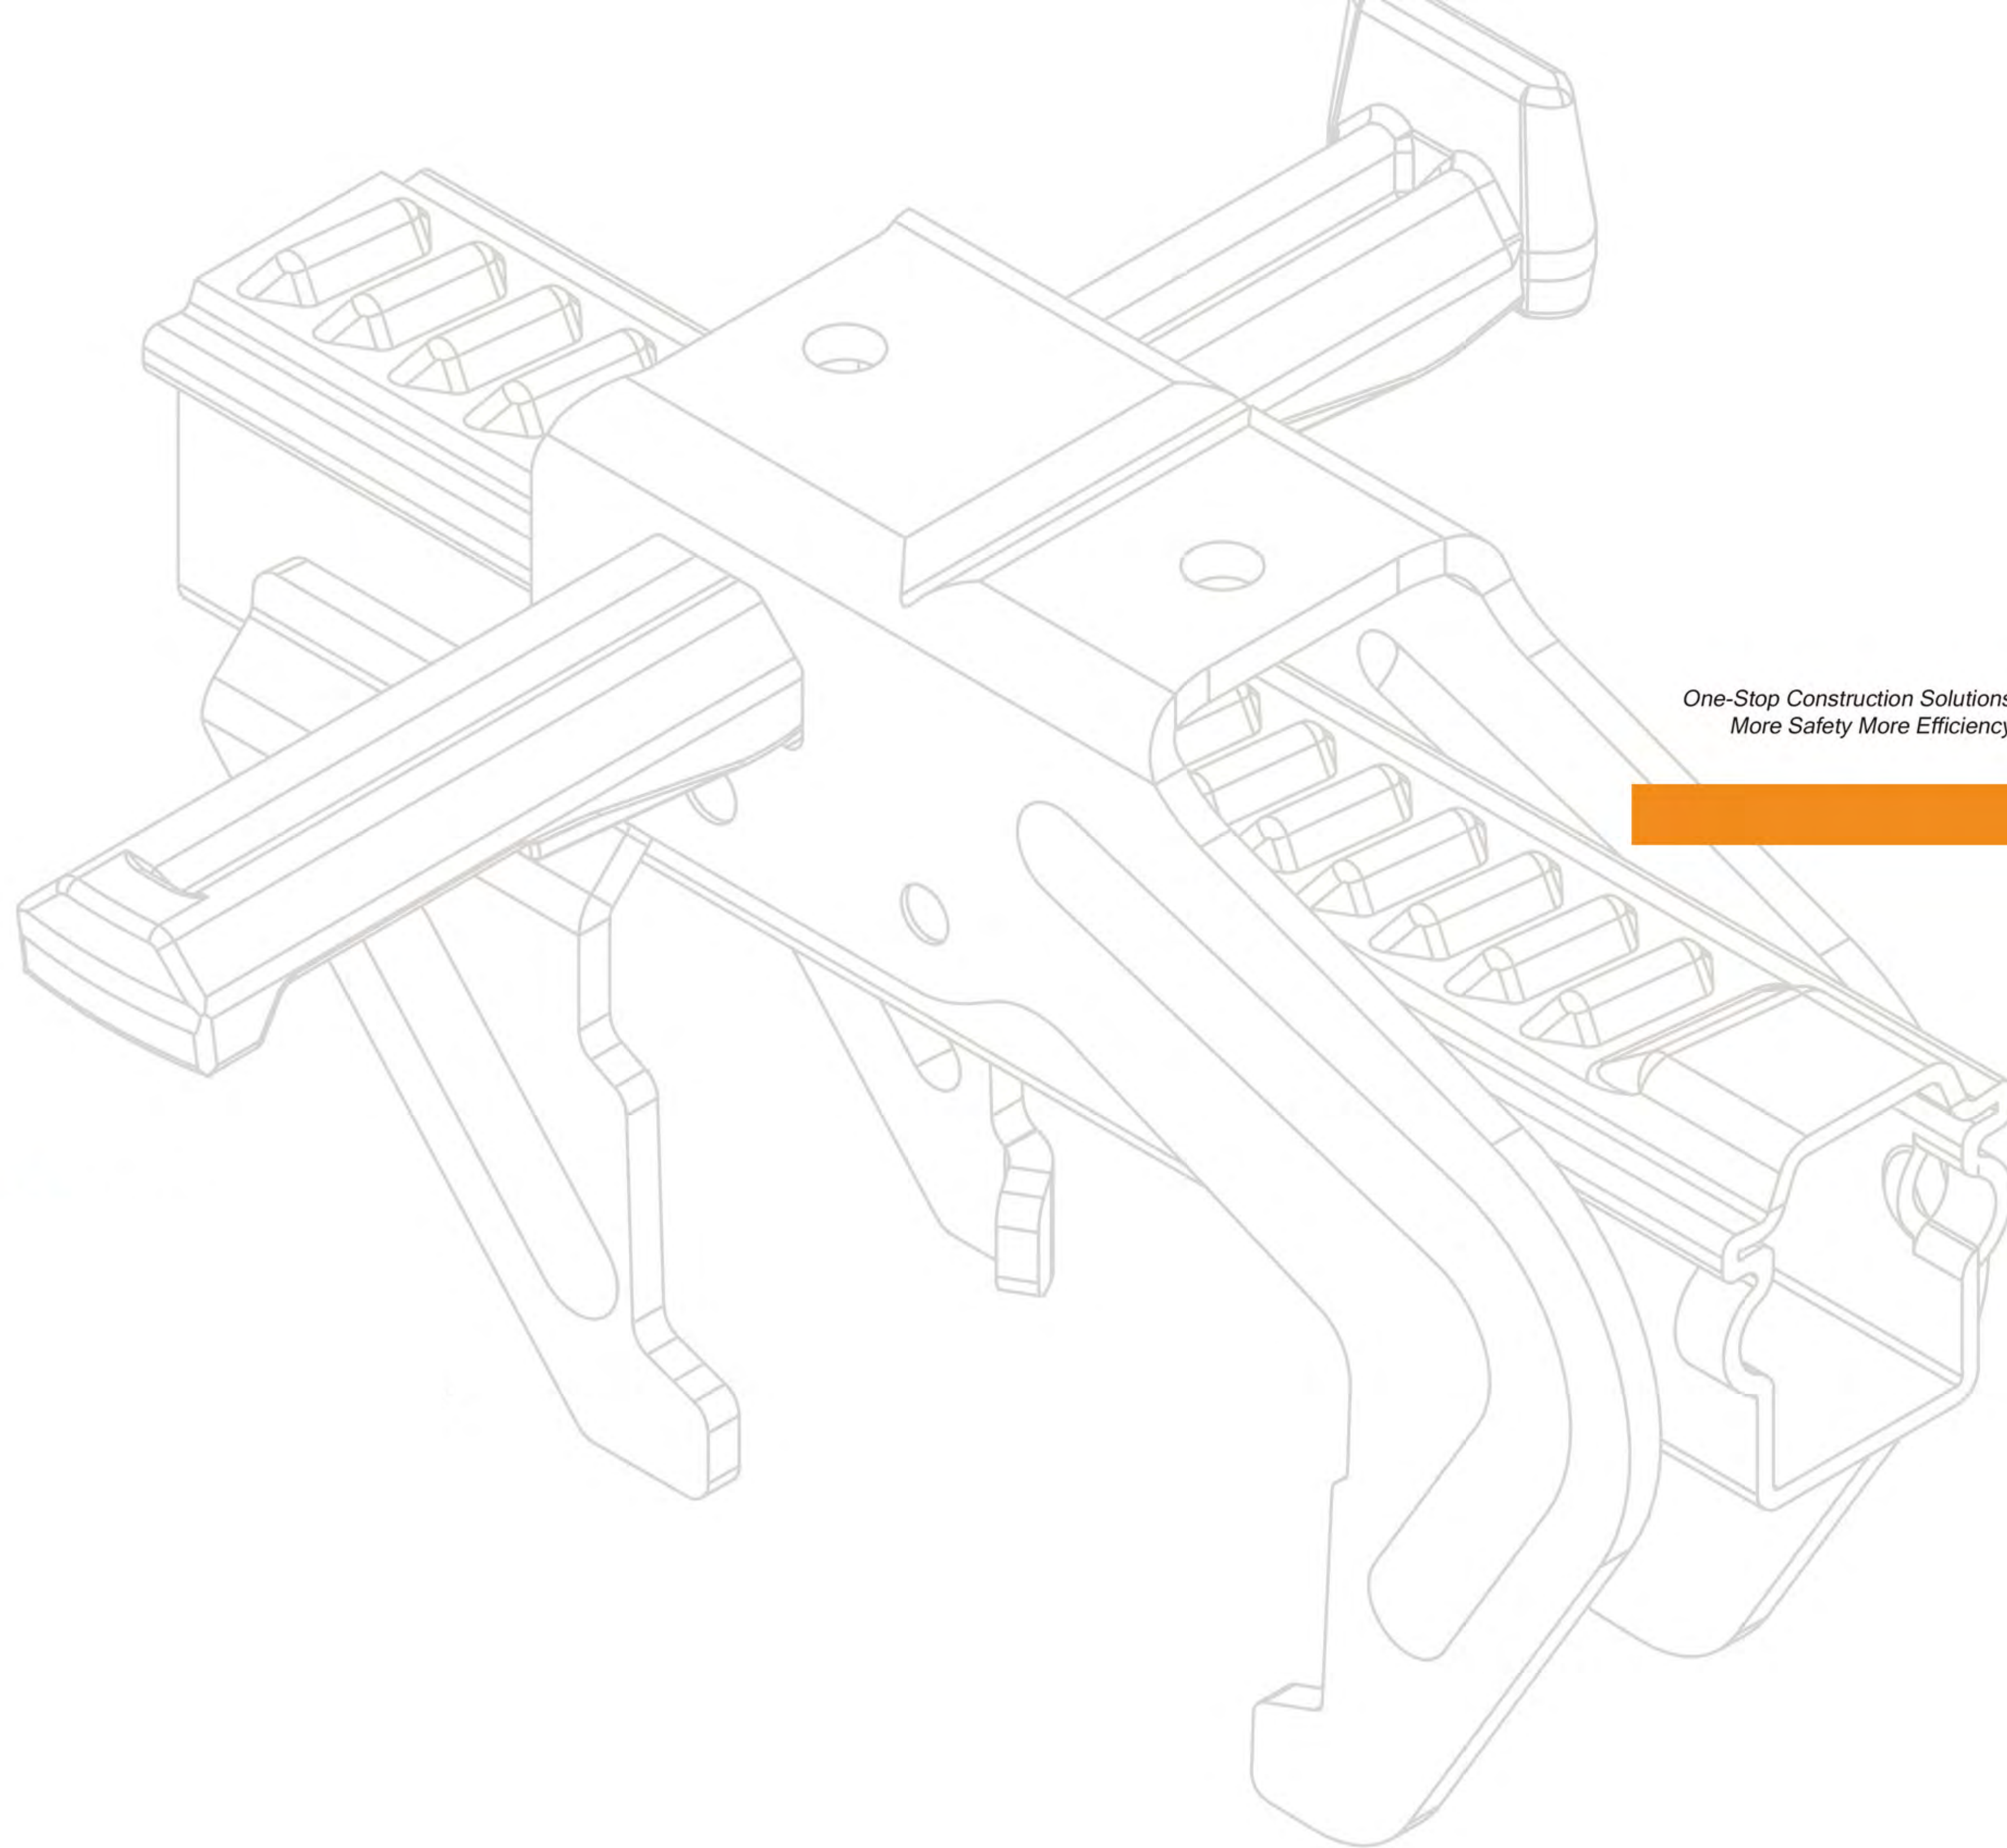

One-Stop Construction Solutions
More Safety More Efficiency

KEVA

- FORMWORK •
- SCAFFOLDING •
- OEM CASTING •

COMPANY PROFILE

KEVA is a group company focus on the one-stop solution of Formwork System, Scaffolding & Accessories. We are providing the whole solutions from project design, manufacturing, installation guide, logistics and maintenance. Our top design team from Europe with our leading production lines, strict quality control system and professional customer service team to makes KEVA becoming to the leading company in the global formwork & scaffolding industry.

The factories of KEVA are covered an area of total 20,000 square meters with more than 200 staffs located in Qingdao, China. The average annual turnover is 20 Million US dollars. All KEVA's factories have certified EN 1090 by SGS & ISO 9001:2015 by Bureau Veritas.

To makes the excellent quality control, KEVA equips the advanced Automatic Production Lines, such as FANUC Welding Robots, Digital Plywood Cutting Machine, Formwork & Scaffolding Auto-Welding lines, Screw Jack Auto-Welding Lines, Shoring Prop Auto-Welding Lines etc., also different types of Digital Punching Machines.

In casting factory, we have Electronic Furnaces, Automatic Mould Lines, Heat-Treatment Furnace. Meanwhile, we use Advanced Testing Machines including Spectrometer Machine for chemical composition, Tensile Testing Machine, Pressure Testing Machine, Hardness Testing Machine, Waterproof Testing Machine etc.

Besides the production of KEVA, rely on our experienced marketing, sales & customer service team. The target of KEVA is providing the most professional service to satisfy our each client from all over the world. We understand how the safety and efficiency are important for the construction industry, especially concerned for European, American & Australian markets.

KEVA always learning to know what is the customers really needs and makes your construction more safety, more efficiency.



The design and manufacturing of our formwork & scaffolding products are strictly following the EN1090 standard. From the technique selecting, production planning, molding, cutting, forming until to machining, welding and assembling works, all the process can be performed in our factory. Therefore, we can efficiently control the production process and supervision of quality to satisfy the fast delivery with premium quality requirement from all customers.



KEVA
最立明



We are using the shell moulding which is the new technique has been developed in recent years. This new technique has many advantages to compare with traditional techniques. The productivity of shell making and core making are faster to ensure the production in enormous quantities. And the dimension and surface are good to satisfy all requirements from customers. Besides to supplying for our own formwork & scaffolding systems, our casting products are also supplying for machinery, automobile, hardware, pipeline and many other industries.



The attitude of KEVA's quality is always on the top level with the most strict quality control.

We have not only holding the certificate of ISO 9001:2015 quality management system, but also obtained the EN1090 certificate.

All the process of our welding production are strictly following EN1090 standard, including technique, welding process, qualification of workers, inspect equipments and management system. Therefore, KEVA's products gained very high reputation from customers.



ISO 9001



EN 1090



SGS TEST REPORT



Characteristic

Designed for concrete walls, columns and structural beams for foundations and agricultural constructions.
Frame Material: Aluminium 6061-T6
Back cover: by 15mm European birch plywood, for best water resistance and excellent concrete surface.

Offer variety of height and width dimensions
Height: Up to maximum of 3.0m.
Width: maximum 0.9m.
Light weight for both handy & crane work.
The permissible concrete pressure upto 60[kN/m²].
All accessories full compatible with Original Rasto system.
Welding quality follows EN1090 standard.



Panel Widths: 20 / 25 / 30 / 35 / 40 / 45 / 50 /
55 / 60 / 65 / 70 / 75 / 90 / 100 /
120 / 180 / 240 cm.

Panel Heights: 120 / 150 / 240 / 270 / 300cm

Multi-purpose Panel: 70x150 / 70x270 /
70x300 cm.

Profile Thickness: 12 cm Steel Frame.

Maximum Concrete Pressure: 60 kN/m²

Protection: Powder Coating / Hot Dip
Galvanized.


Standard Connection: KR / KS adjustable
clamps, KRL / KSL
corner clamps.

Inner Corners: 30x30 cm.

Back Cover: by 15mm European birch
plywood, for best water resistance and
excellent concrete surface.



All accessories full compatible with Original
Rasto system.

Welding quality follows EN1090 standard.

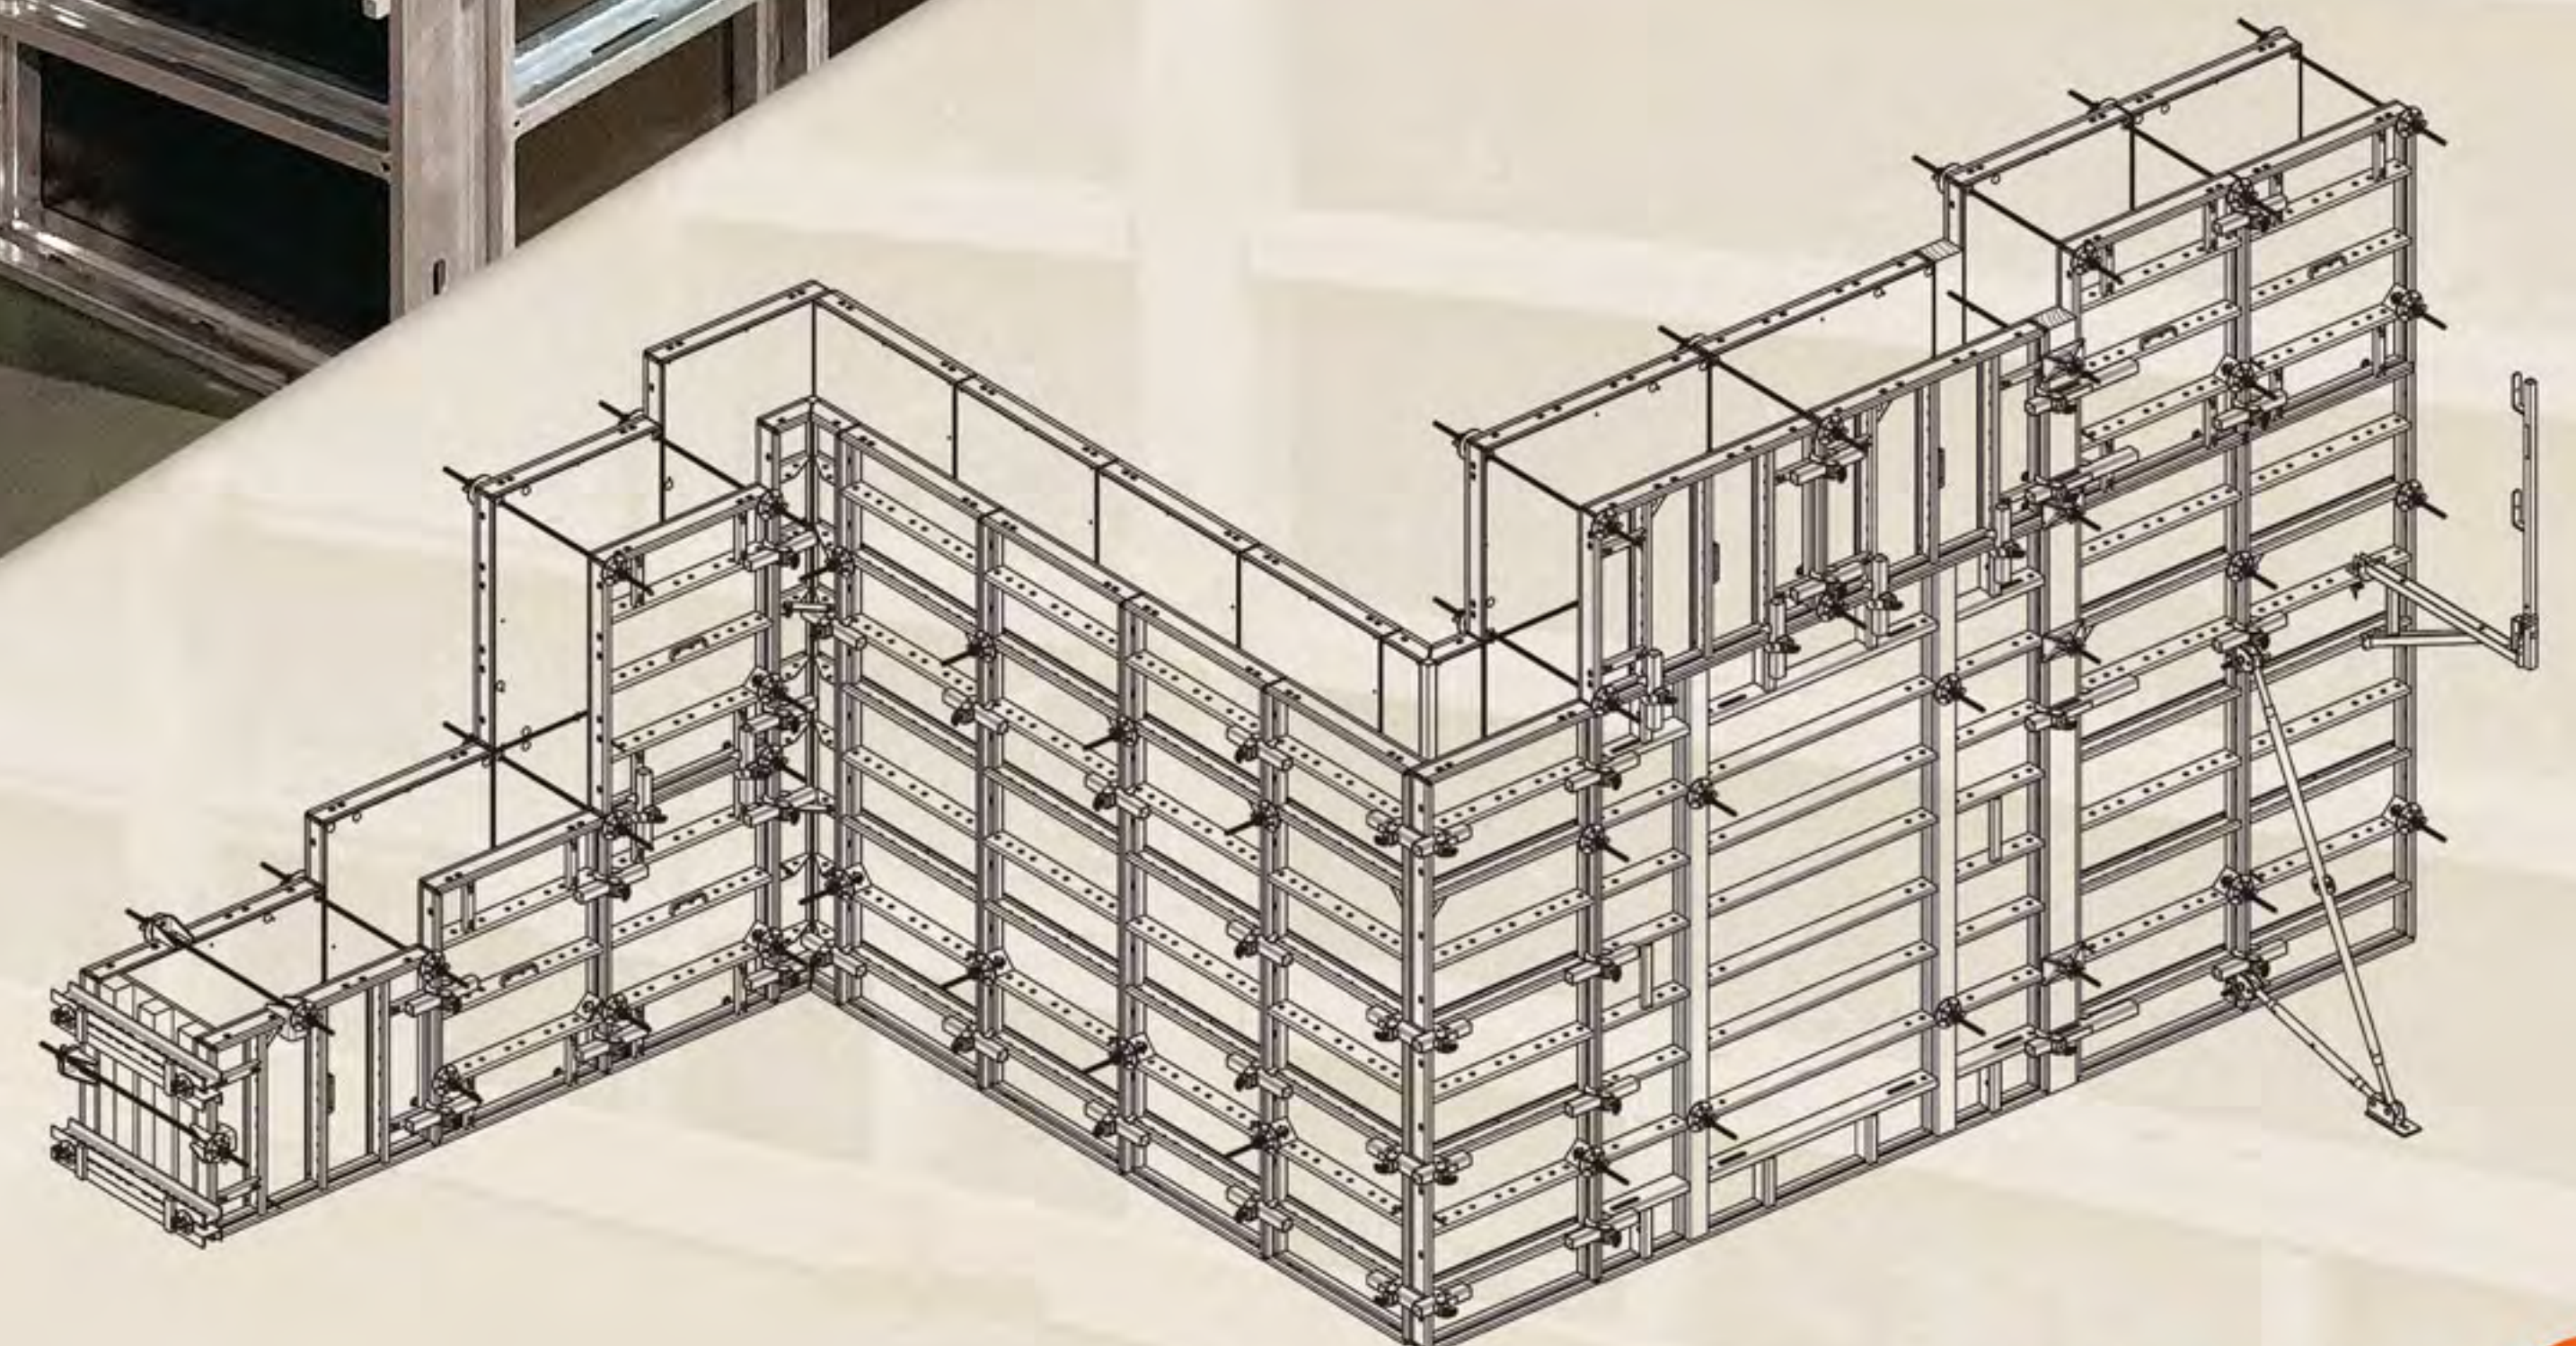


Standard Panels

Unit: CM

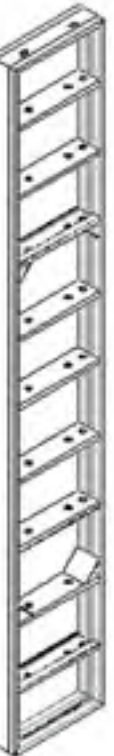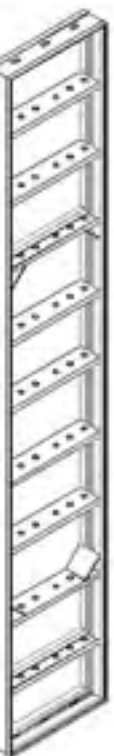	30	35	40	45	50	55	60	65	70	75	90
150											
300											

Panel Heights: 120 / 150 / 240 / 270 / 300 cm.

Panel Widths: 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 90 / 100 / 180 / 240 cm.

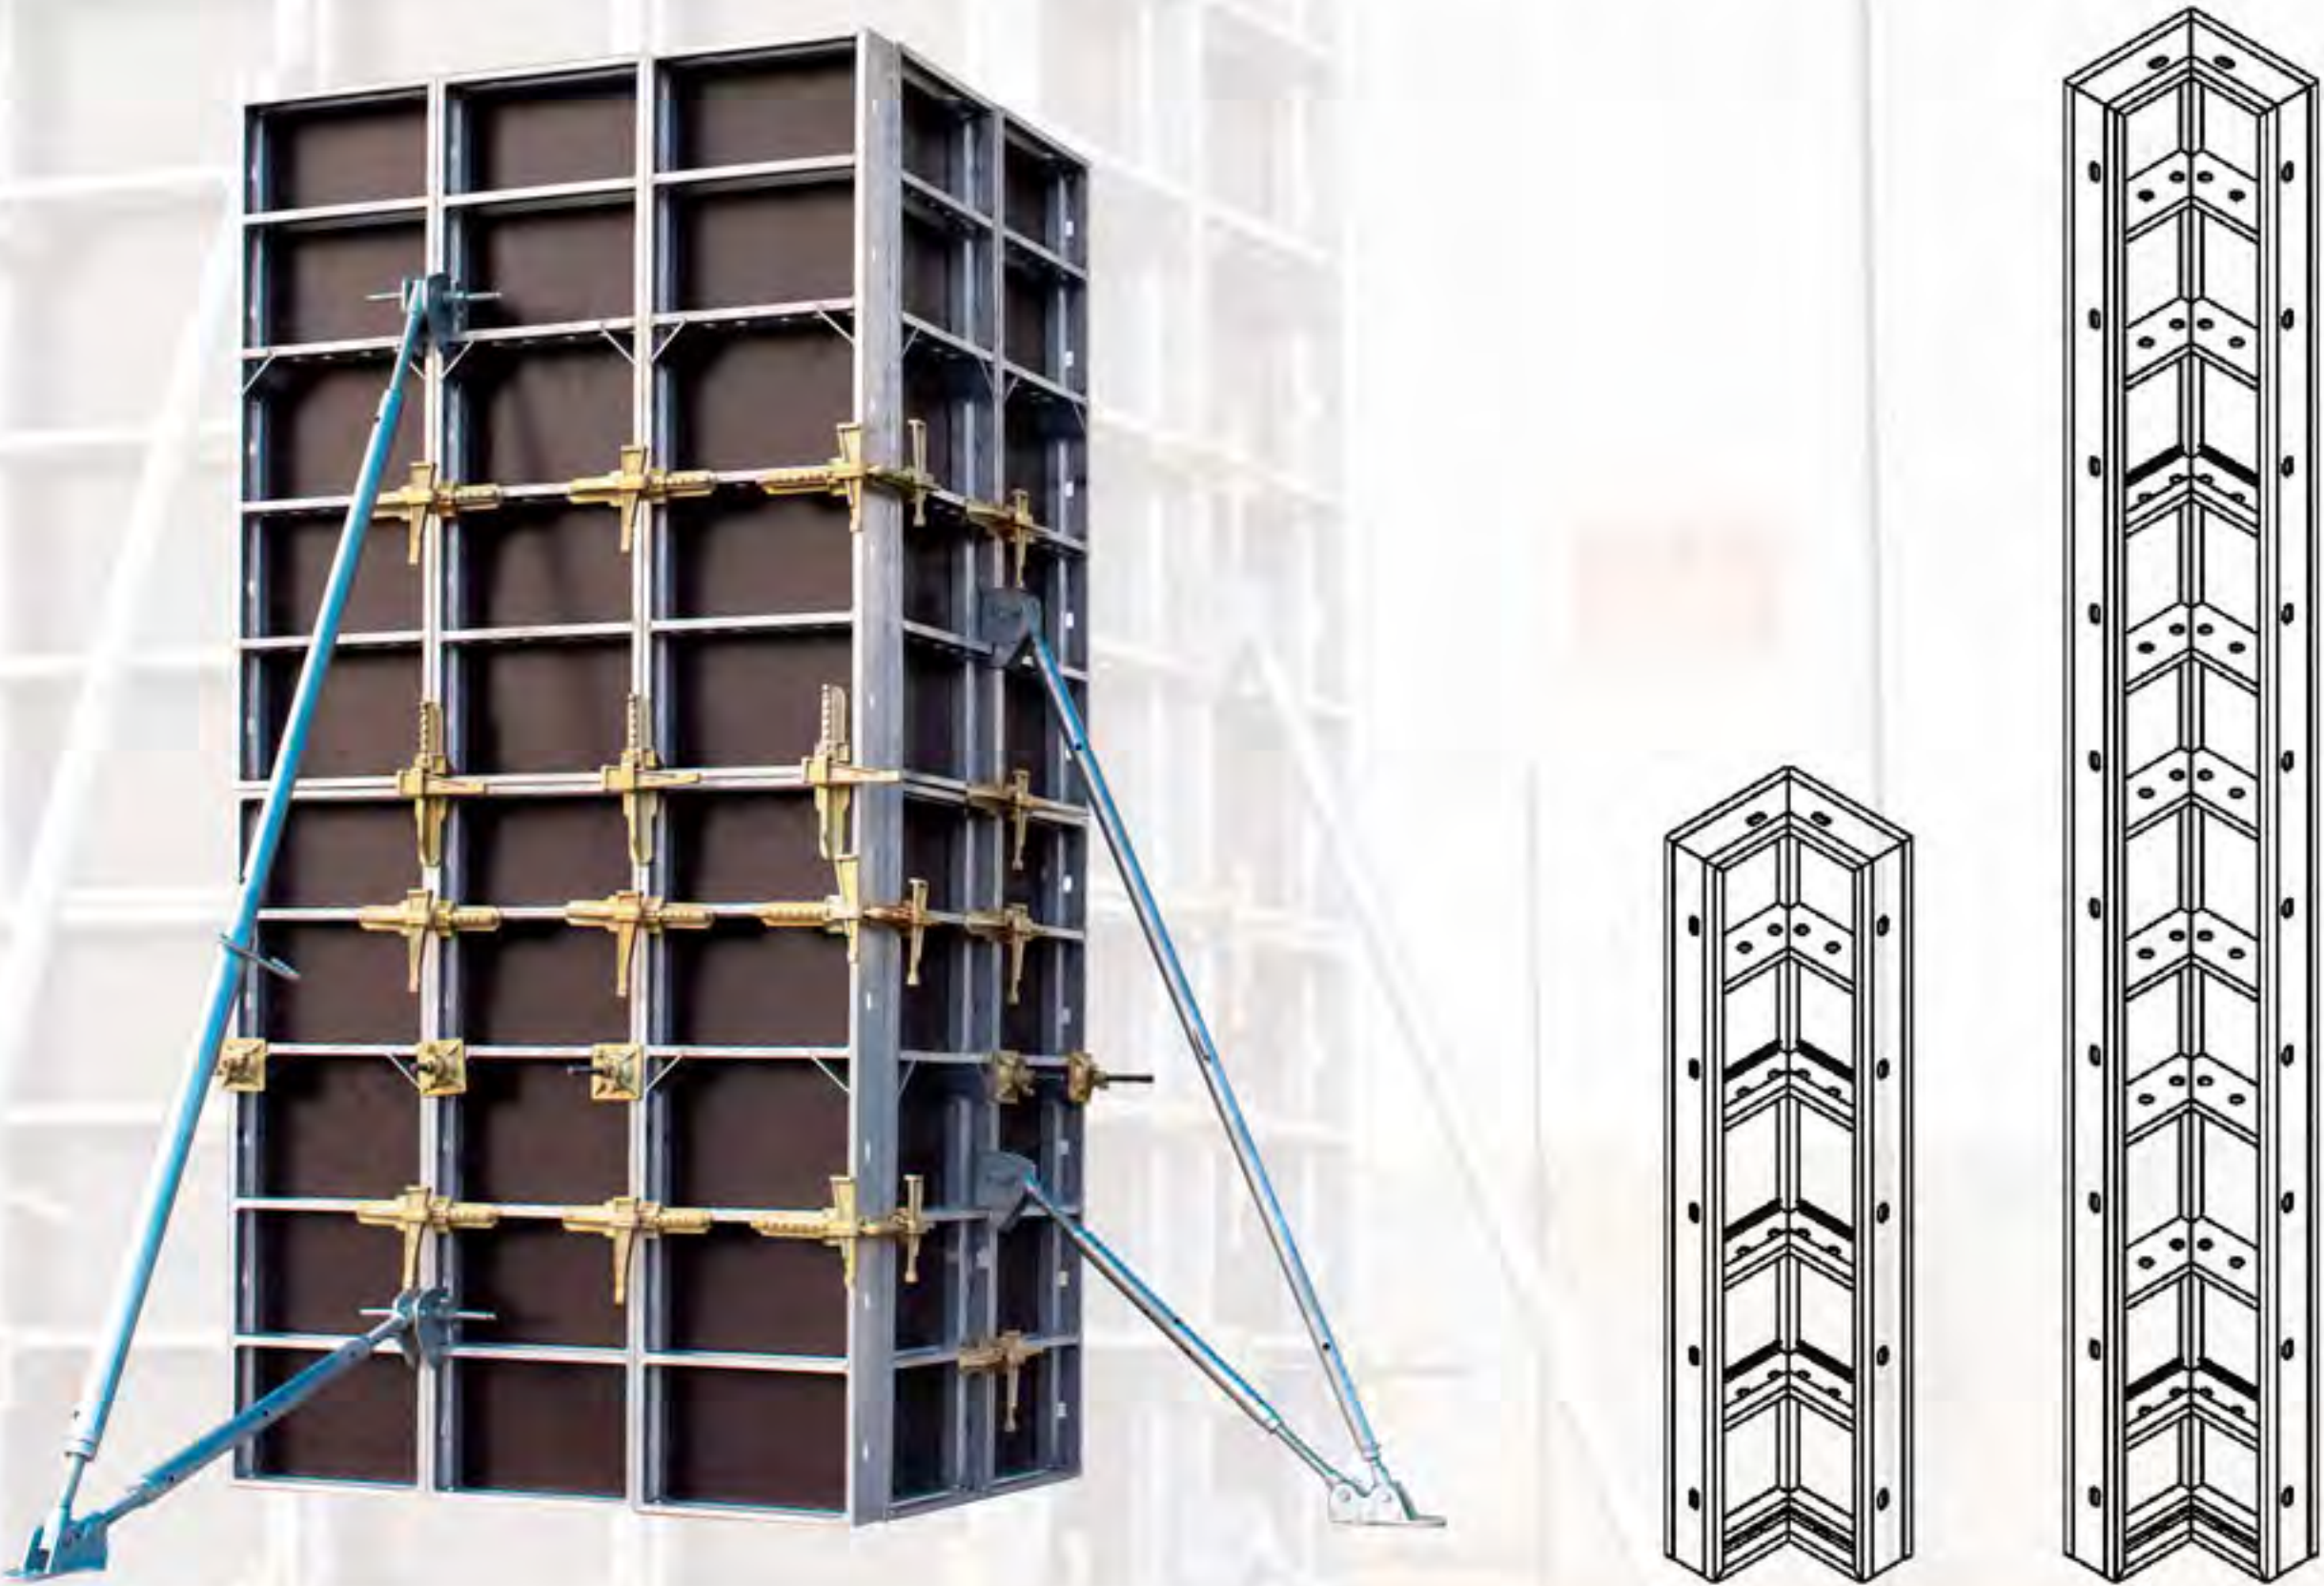

CONNECTION



ALU-RAS / ST-RAS formworks are joint together using KS/KR clamps.
The KS/KR clamps are used in case of two panels joined together, and in case of wood completion, up to 9cm.

The KS/KR clamp fulfill three main functions:
Join together two panels.
Straightening panels for a fix plain.
Enable to lift up a rigid panel, assembled of formworks up to 6m width.




CORNERS


For 90° corner use KRL/KSL clamps.
For story heights of 3m use three KRL/KSL clamps.
For two stories (when total height is more than 3.5m) use four KRL/KSL clamps for the lowest story and three KRL/KSL clamps for the top.

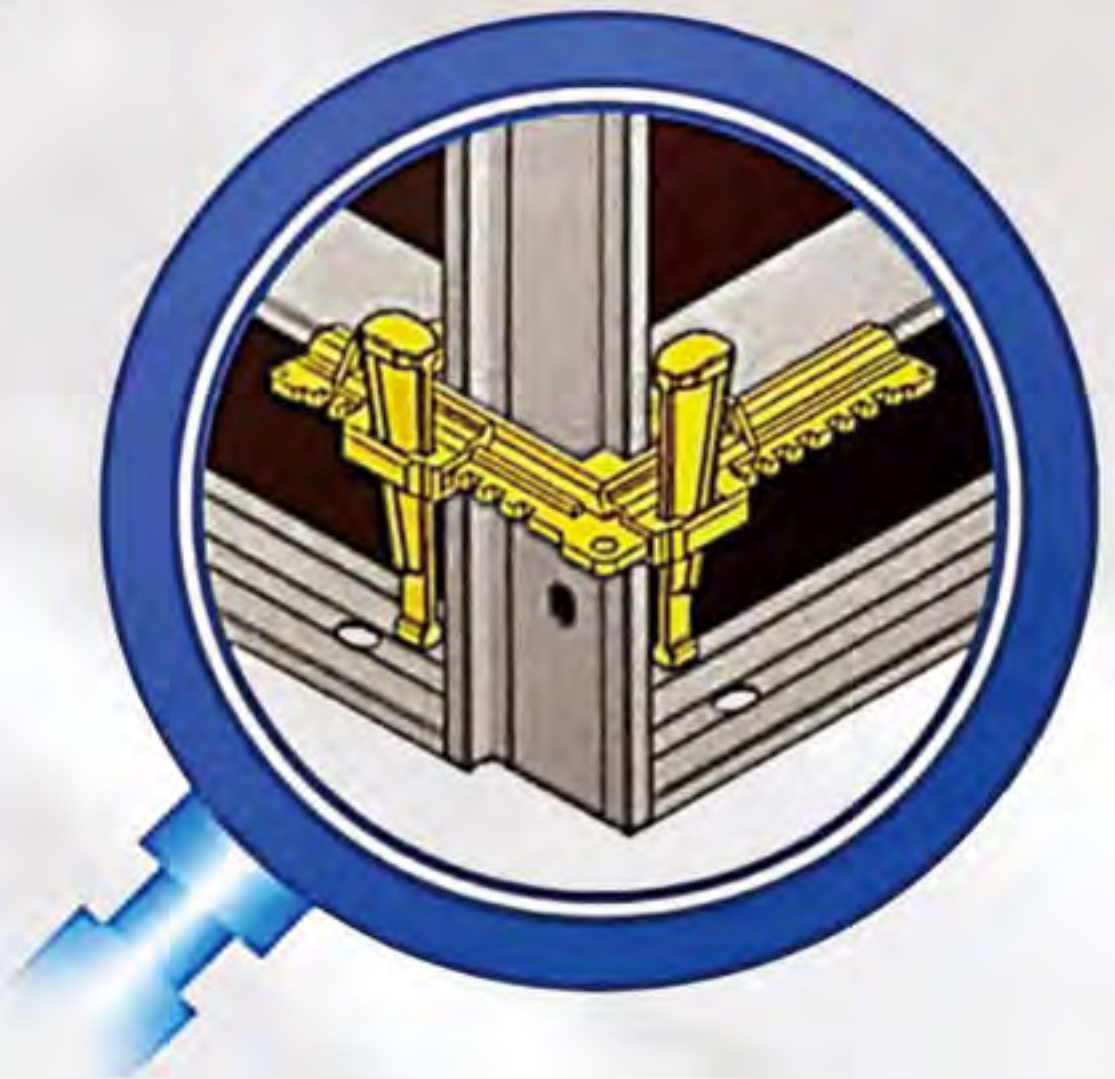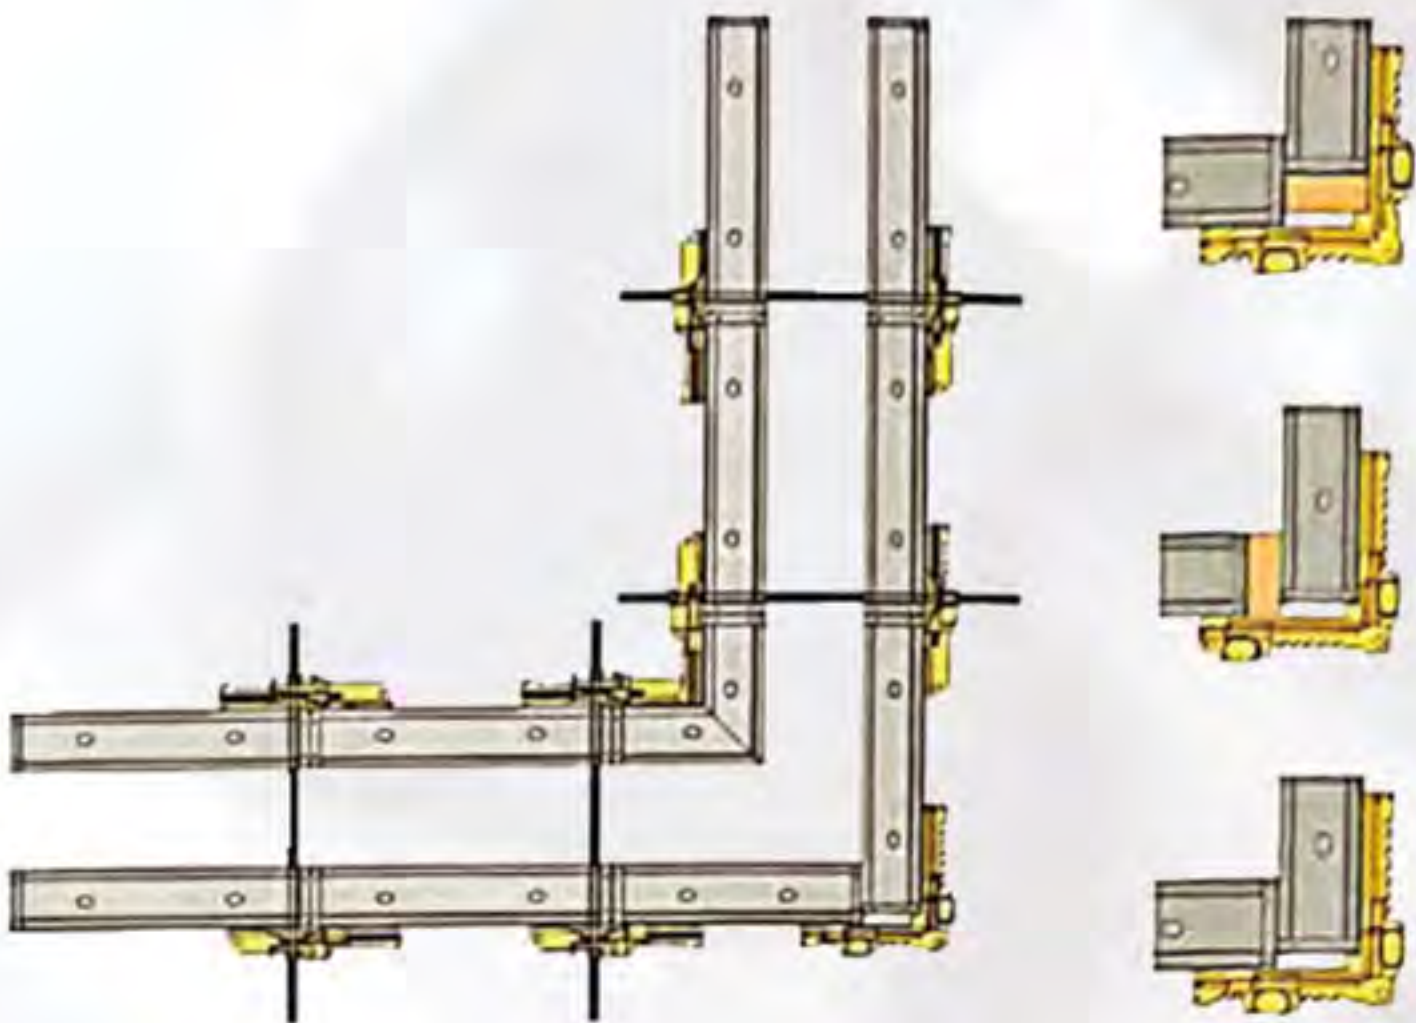

T junction and Cross junction with internal corners

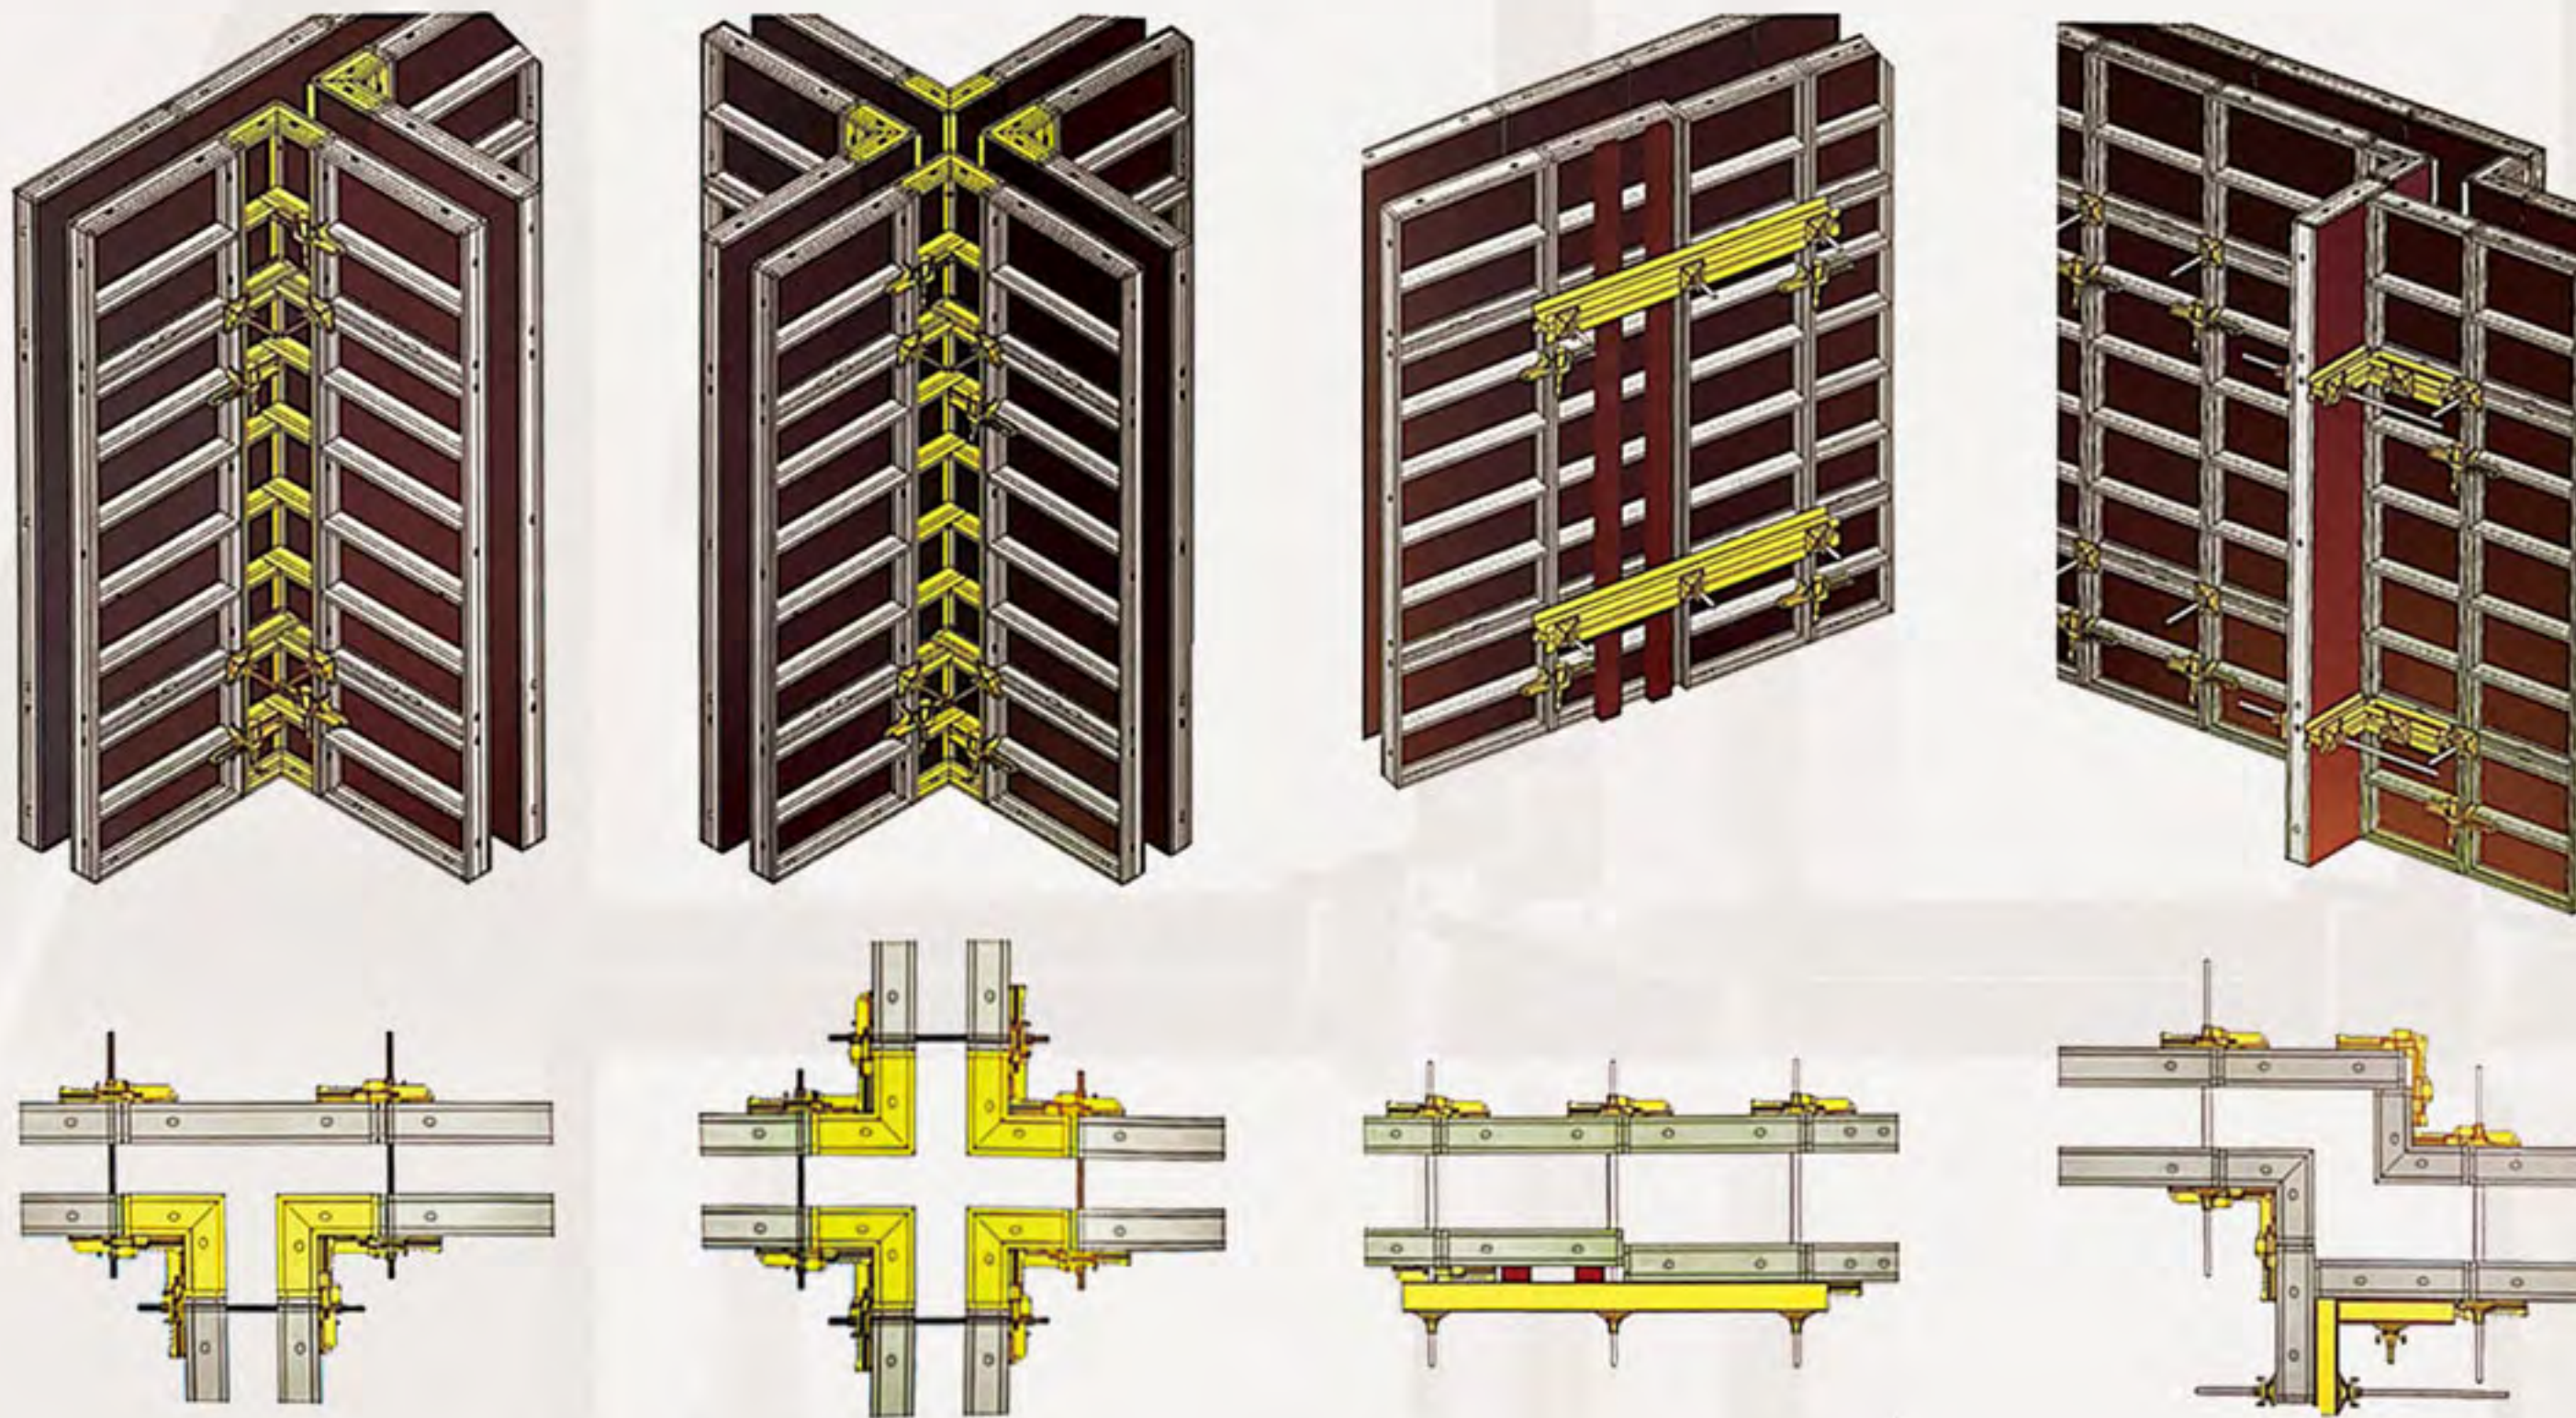


Wall thickness change with leveling elements and boards.
"Z" wall shape with affixing profile elements.

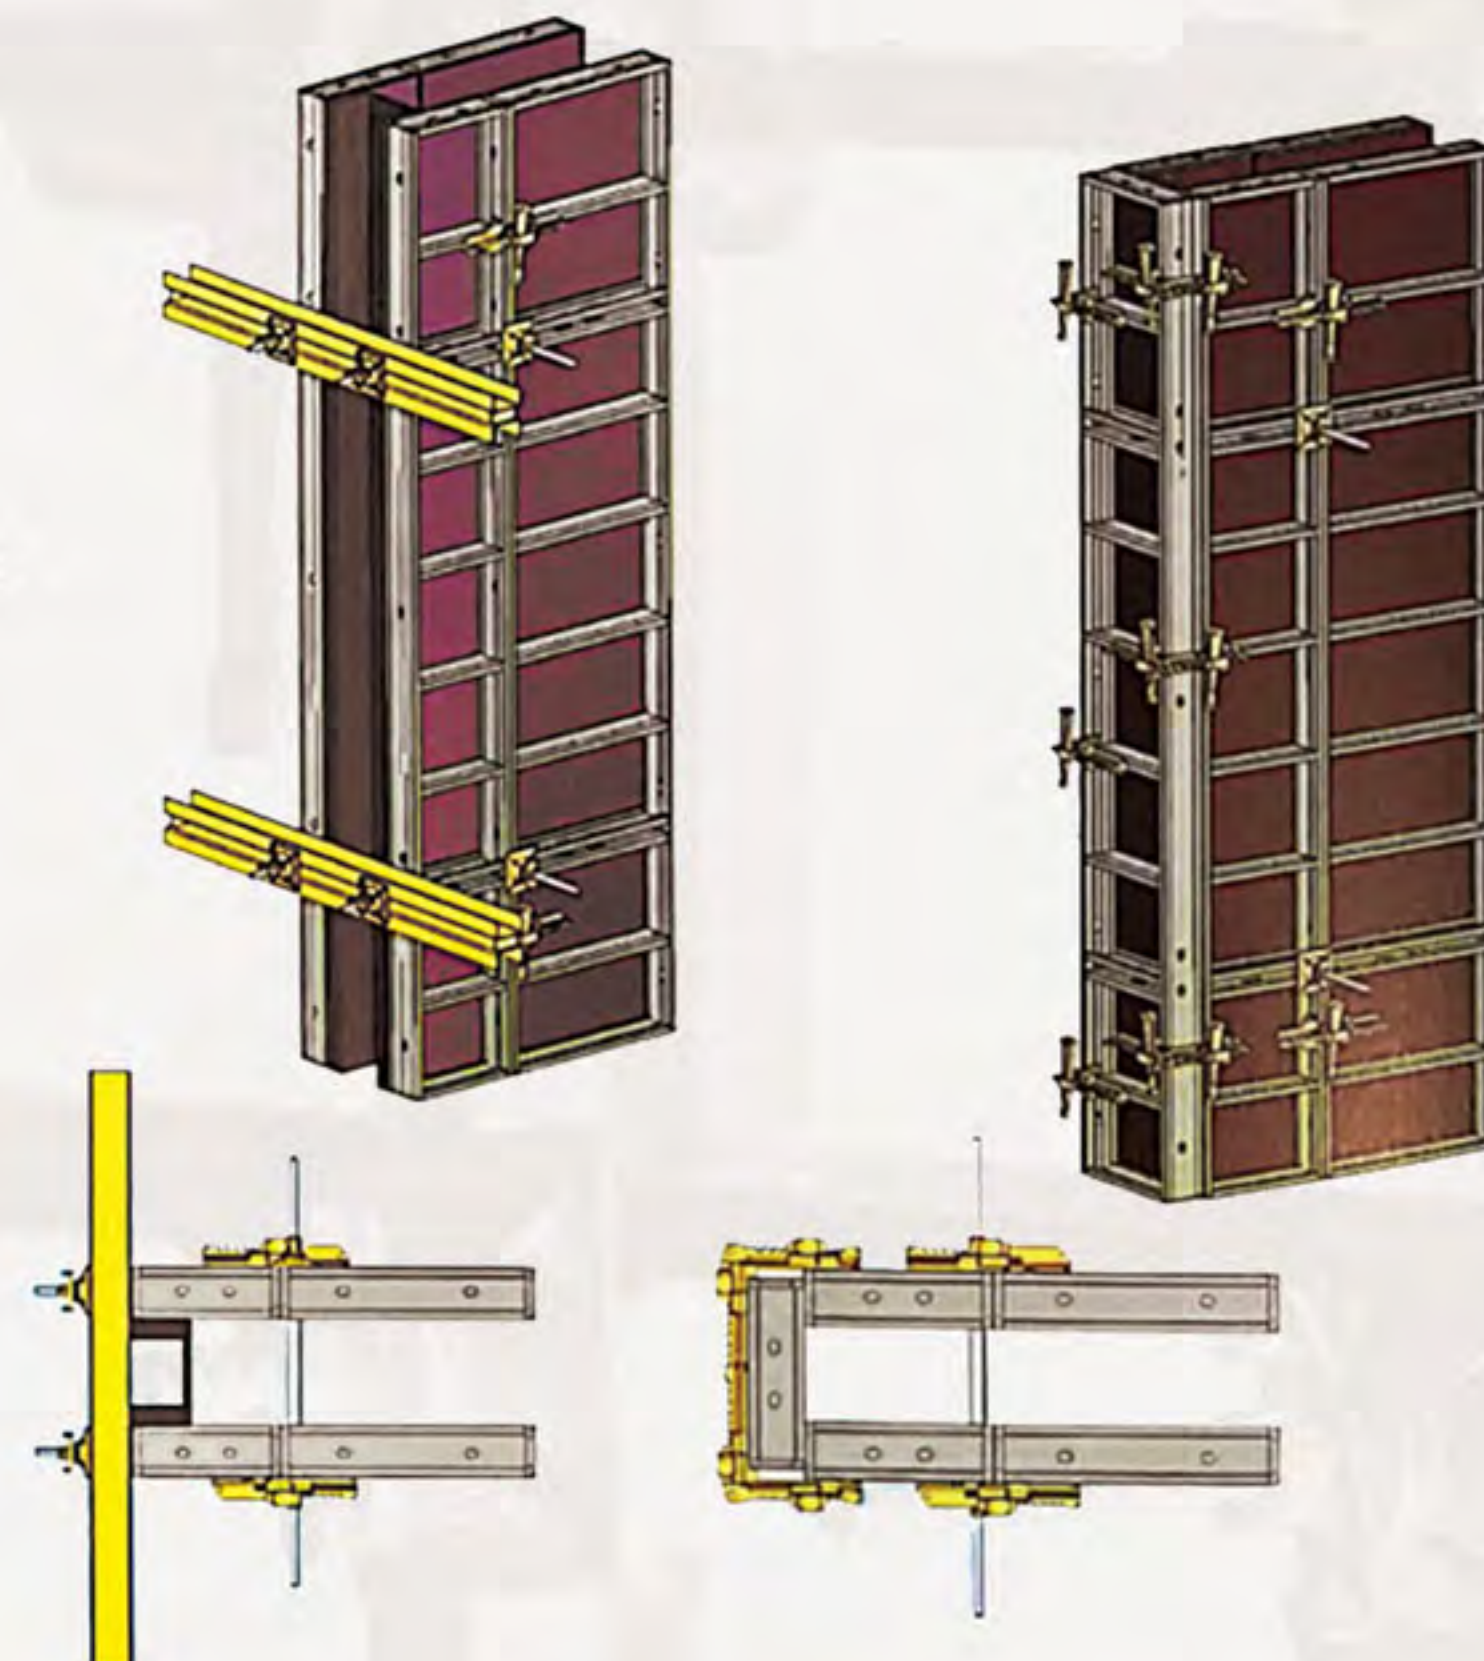

Wall Ends

Option 1:
Wall end with leveling elements
and boards.


Option 2:
Wall end with standard panel
and KS / KR clamps

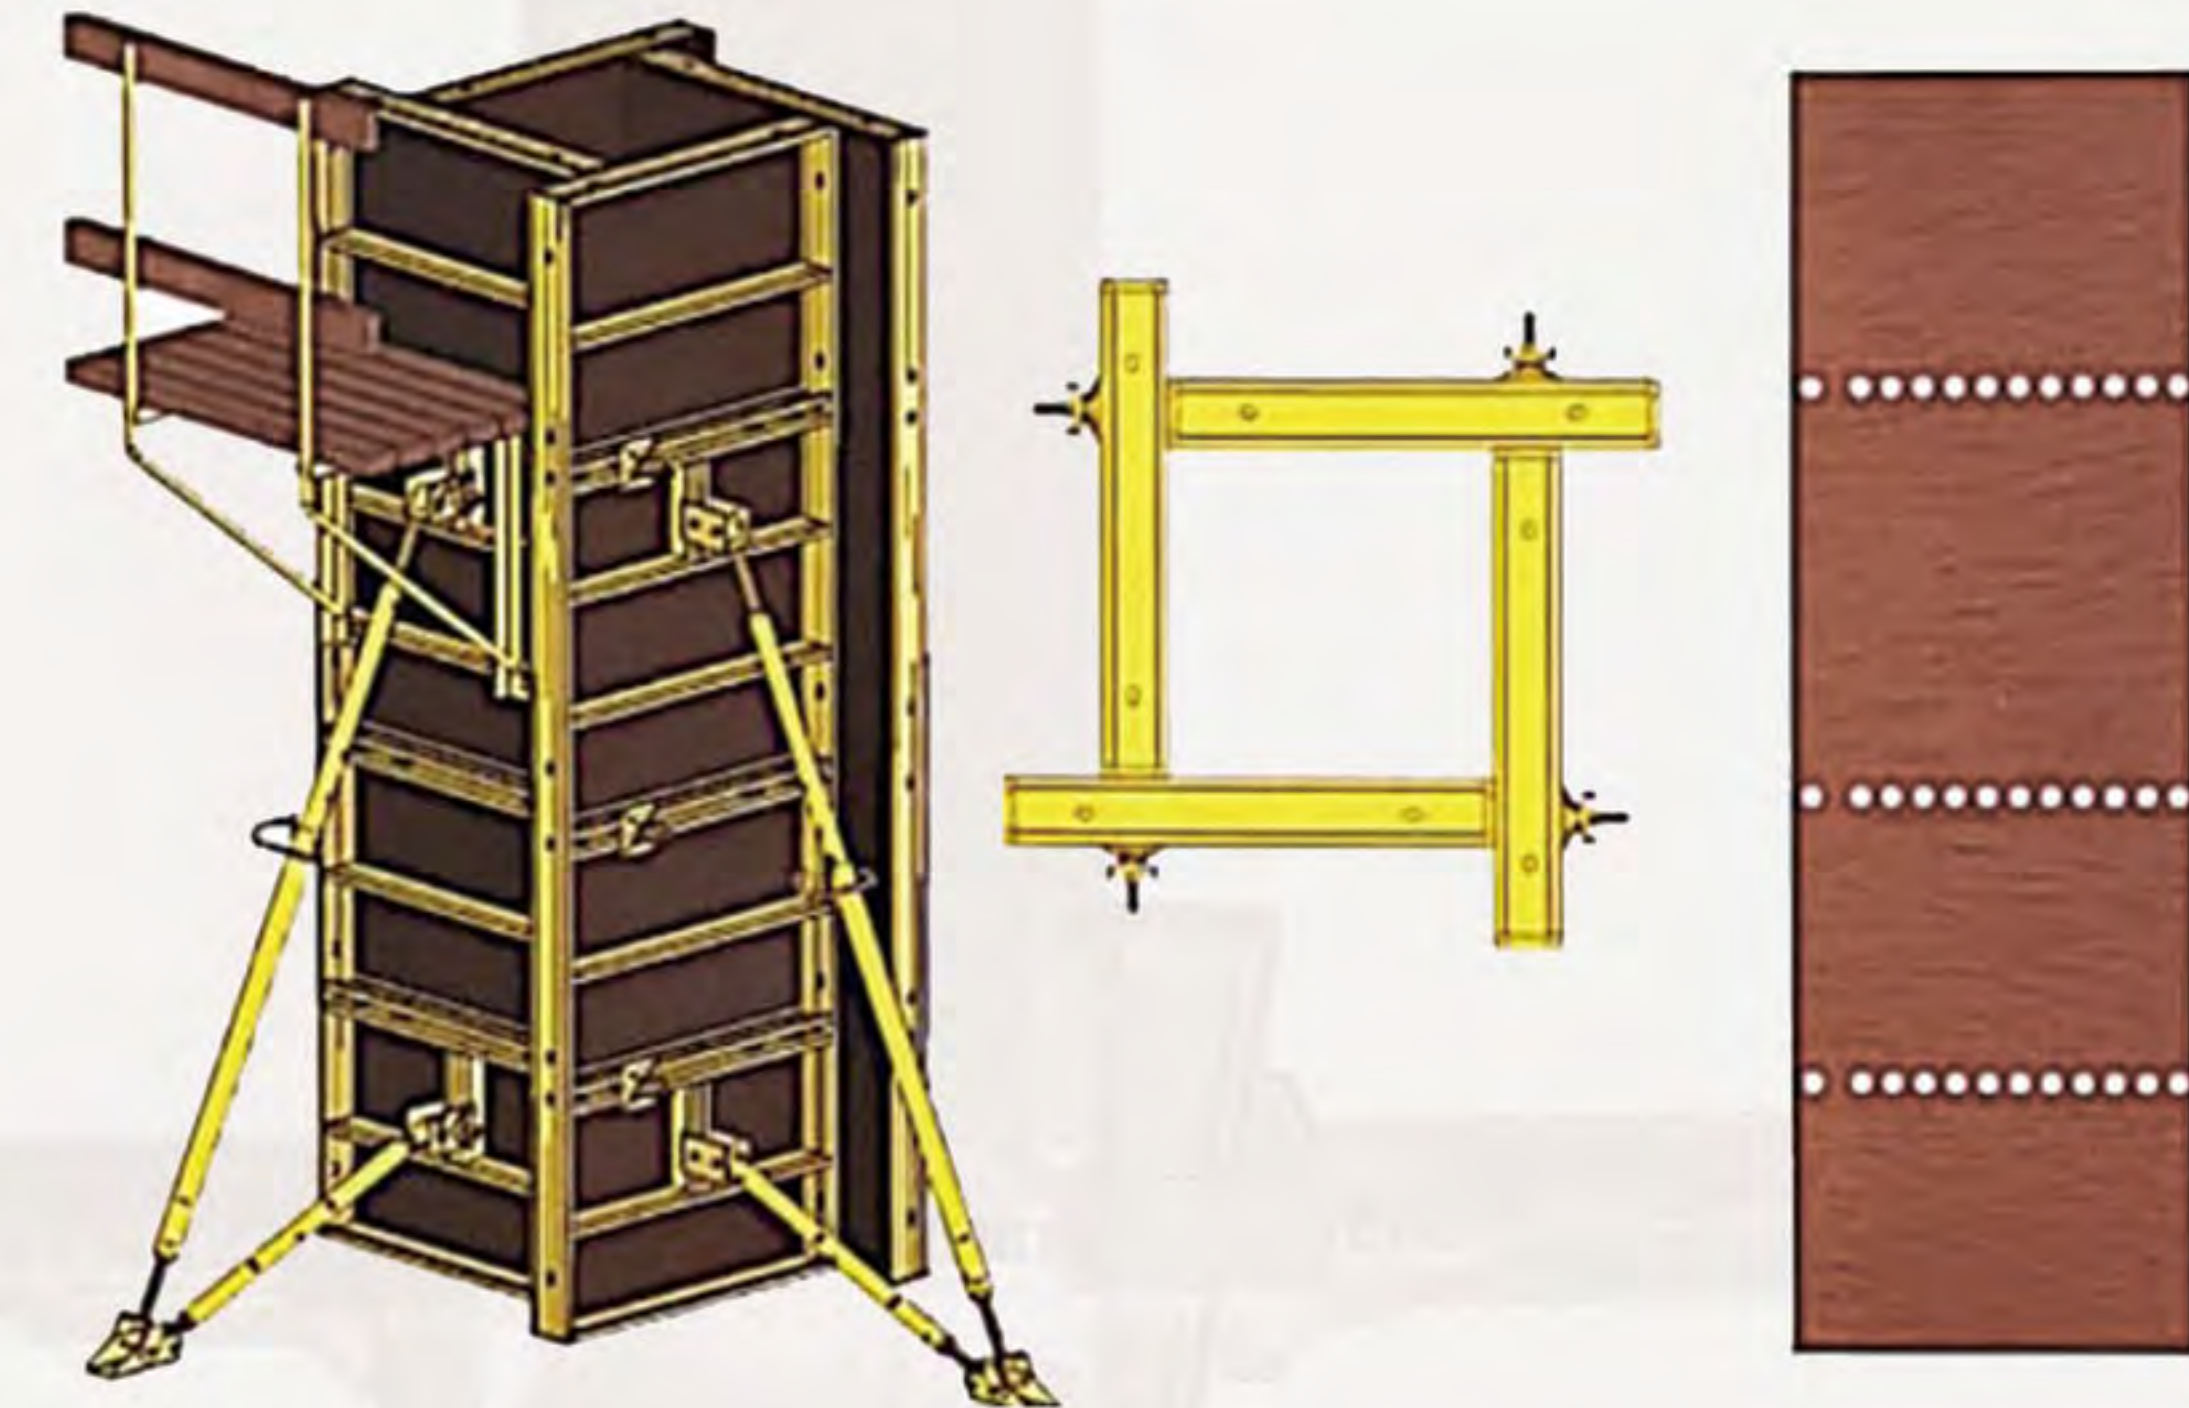

The universal panel is made specifically for columns. With only 4 panels, bolts and nuts the column will be ready in just few minutes for pouring.



A column form made of ALU-RAS / ST-RAS formwork panels can be simply and quickly assembled for a wide range of dimensions with the aid of the outer corner clamp.

By arranging the panels in pairs or offset, or by using an adjustment piece at the panel overlap, the form can yield column cross sections ranging in size from 20 cm to 55 cm max.

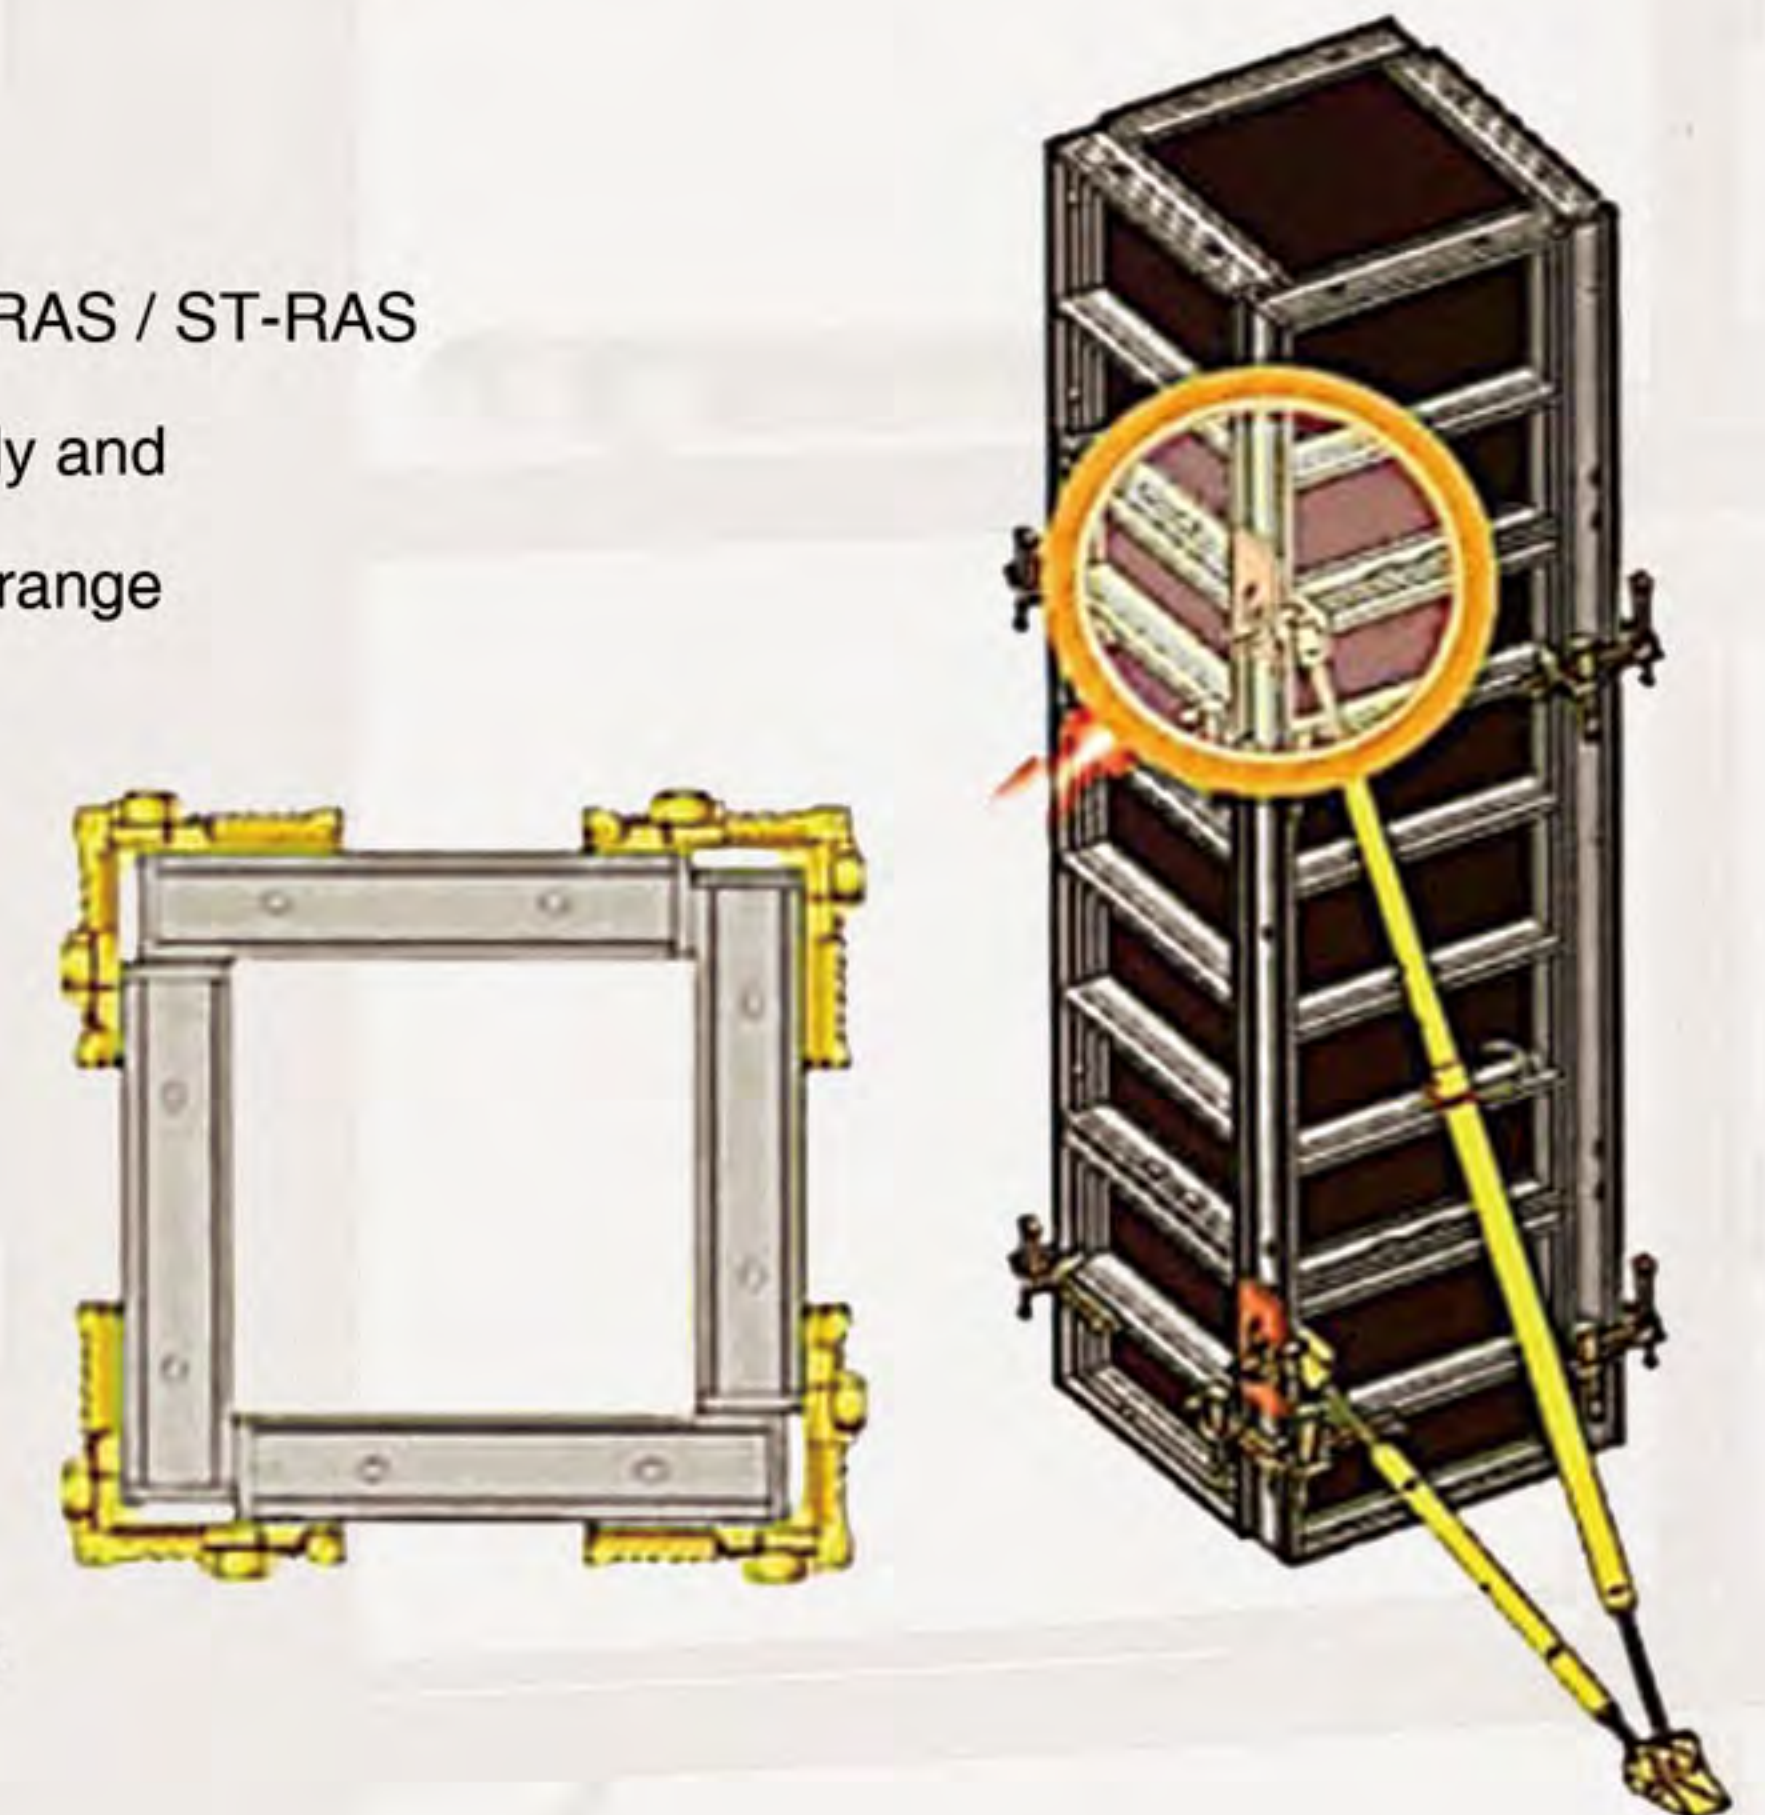

Adjustable Strut

The strut is used for formwork panels leveling. It connected to a frame beam of the formwork, by pair of metal cheeks.

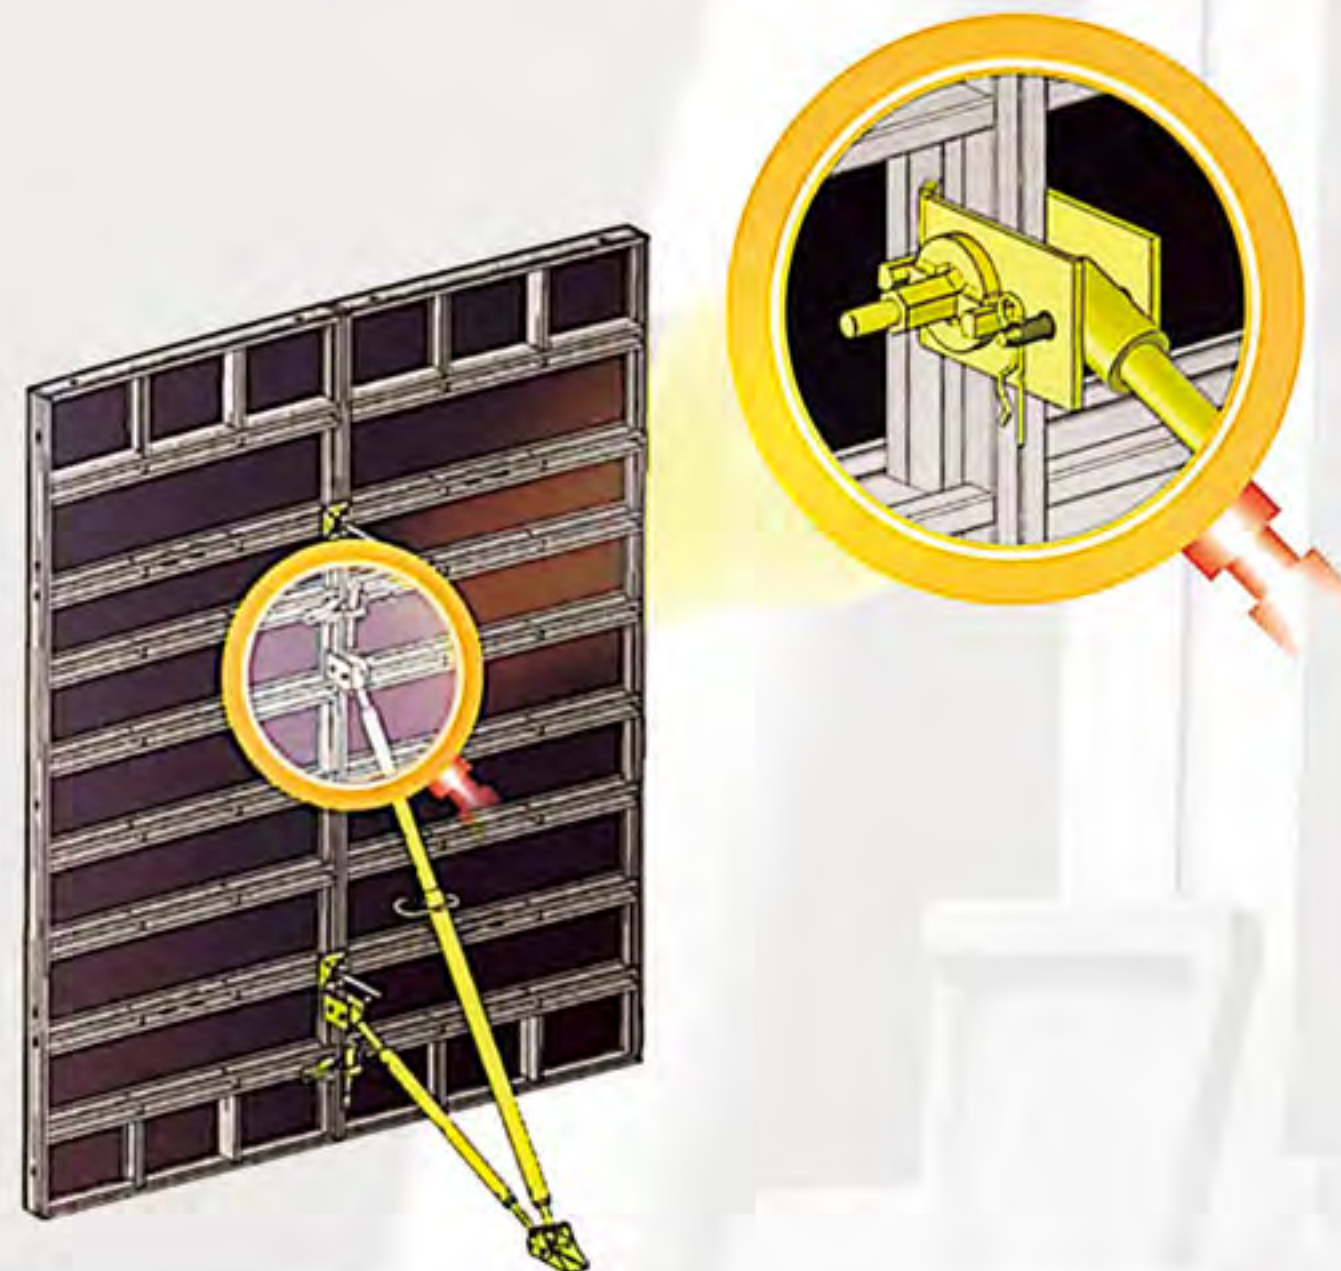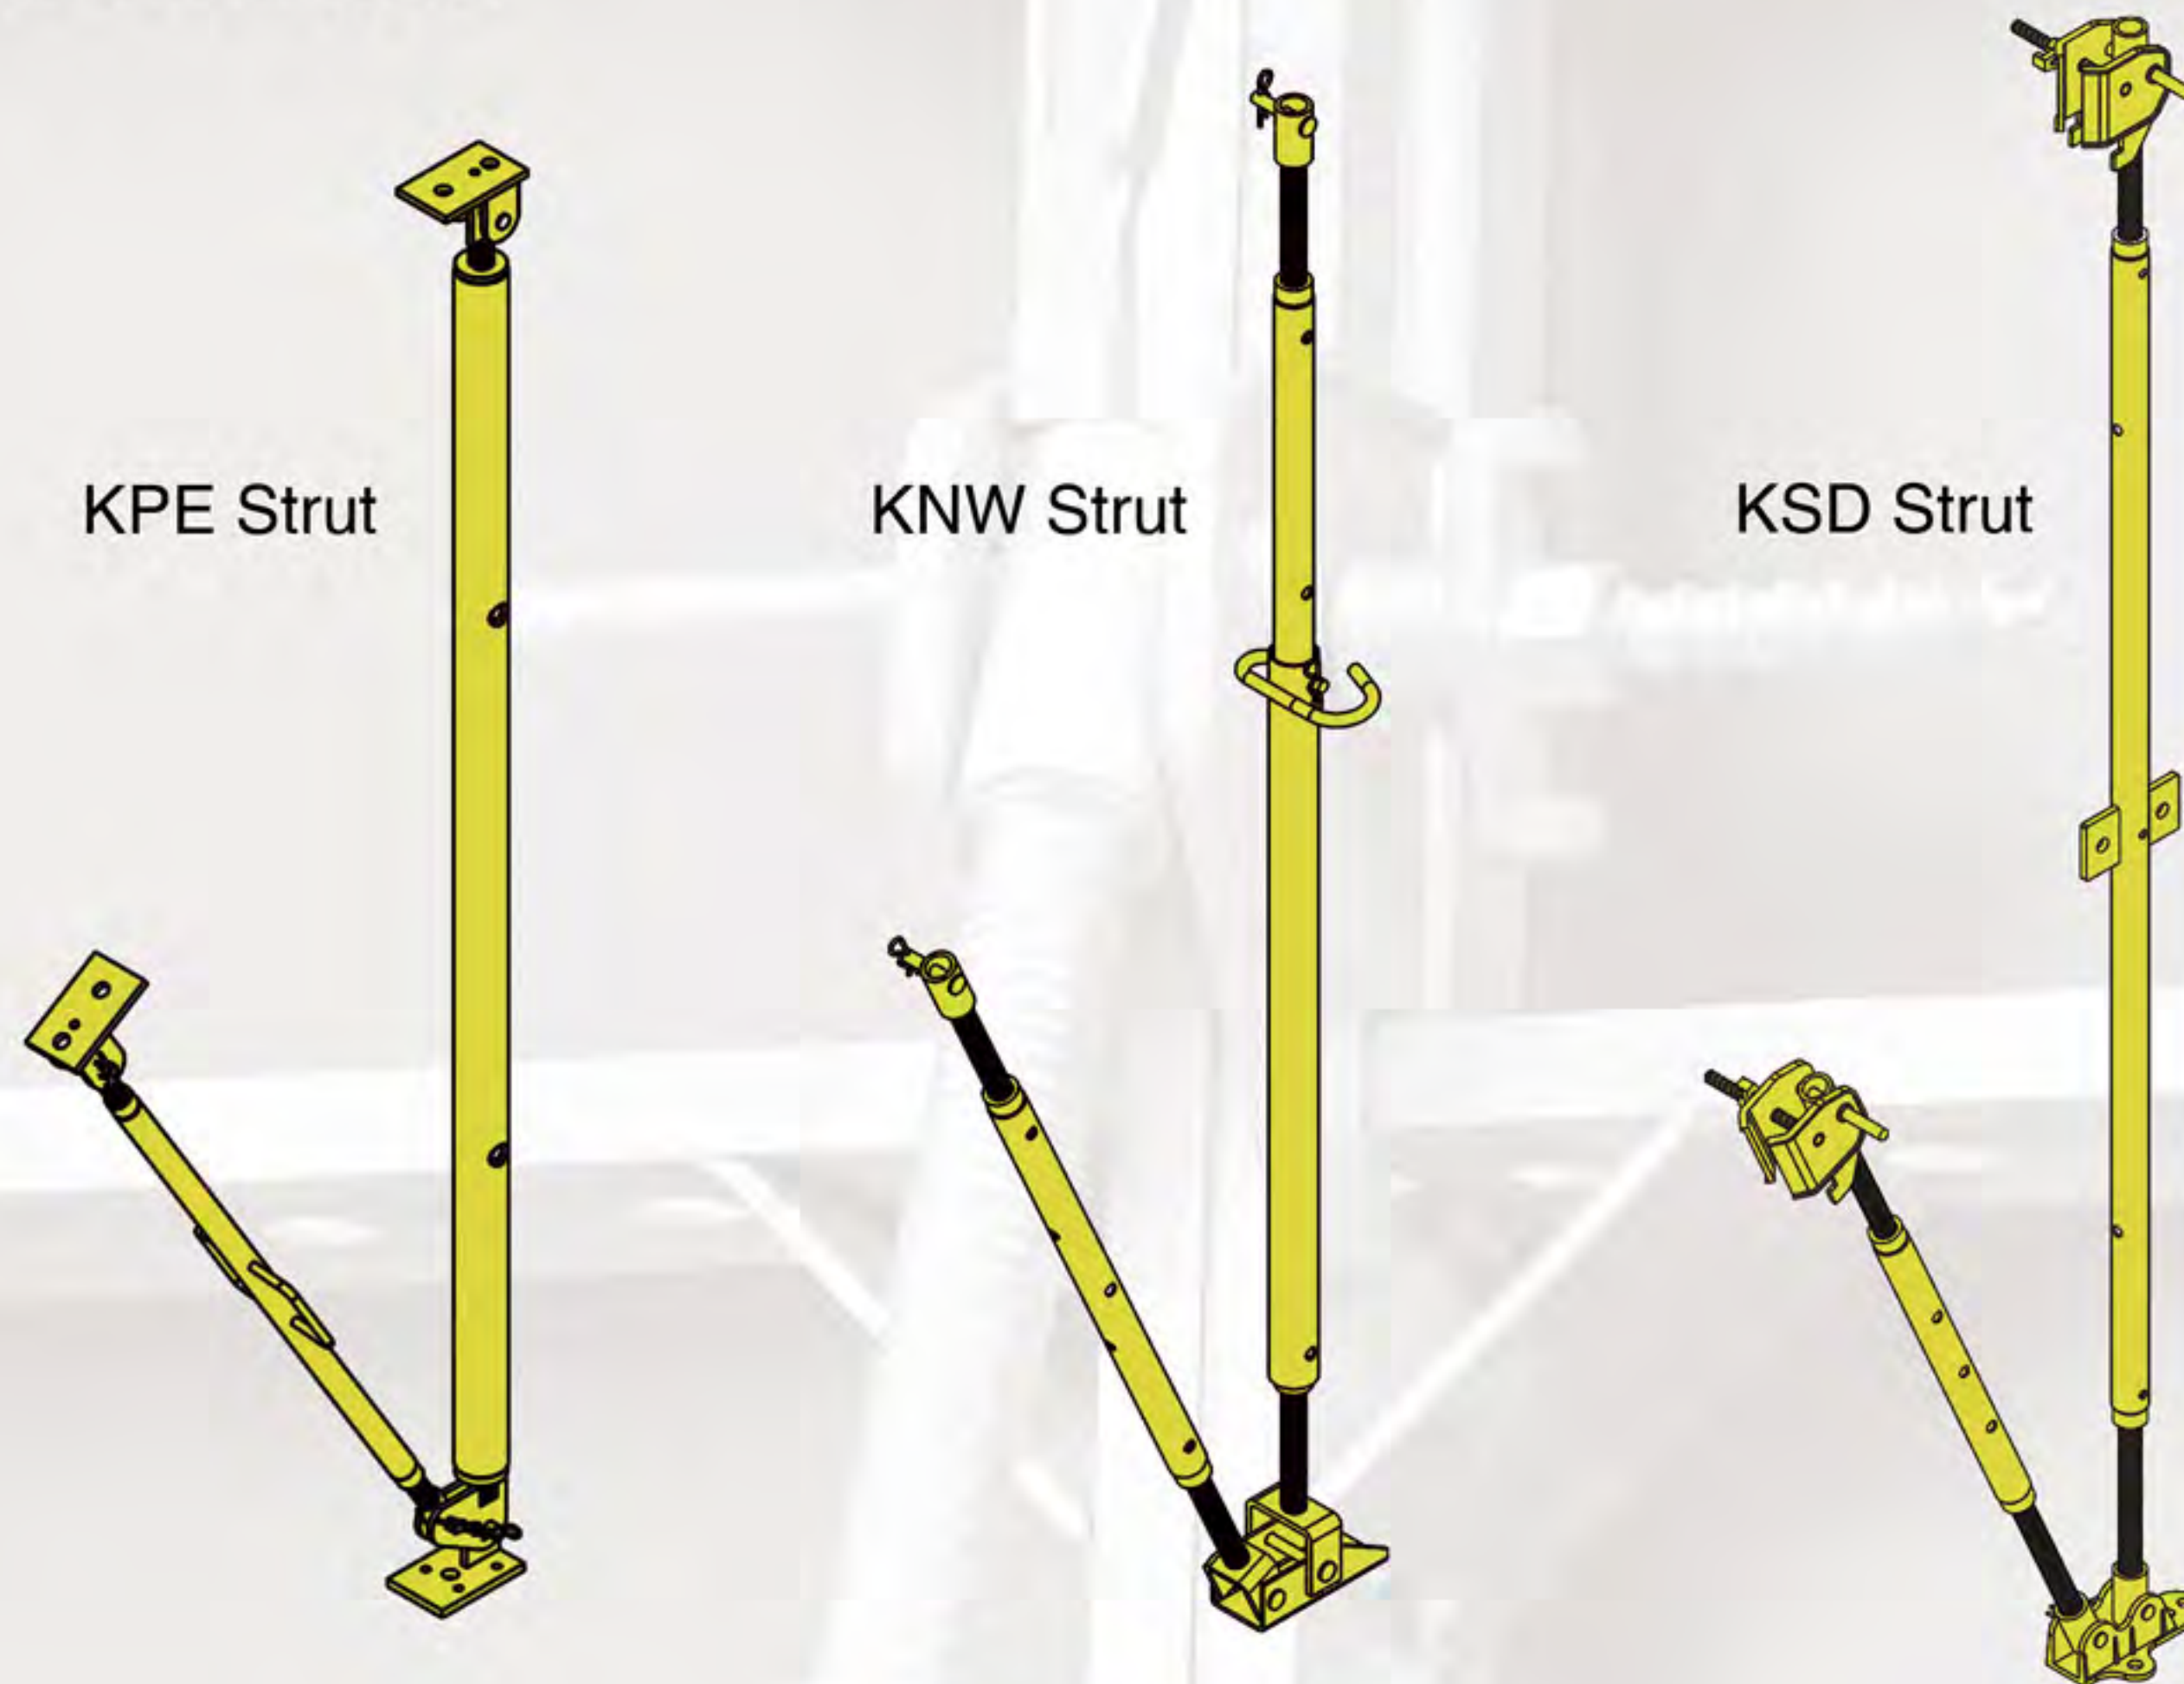


Adjustable Clamps



KR Clamp
3.9 KG




KS Clamp
3.5 KG

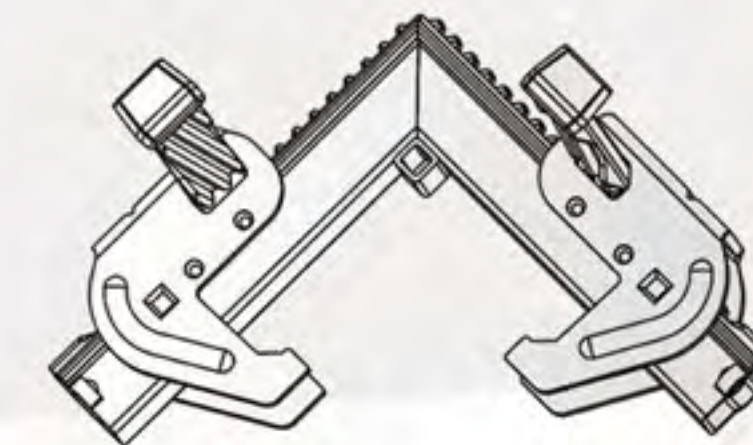

KRL Clamp
7.1 KG





KSL Clamp
5.6 KG

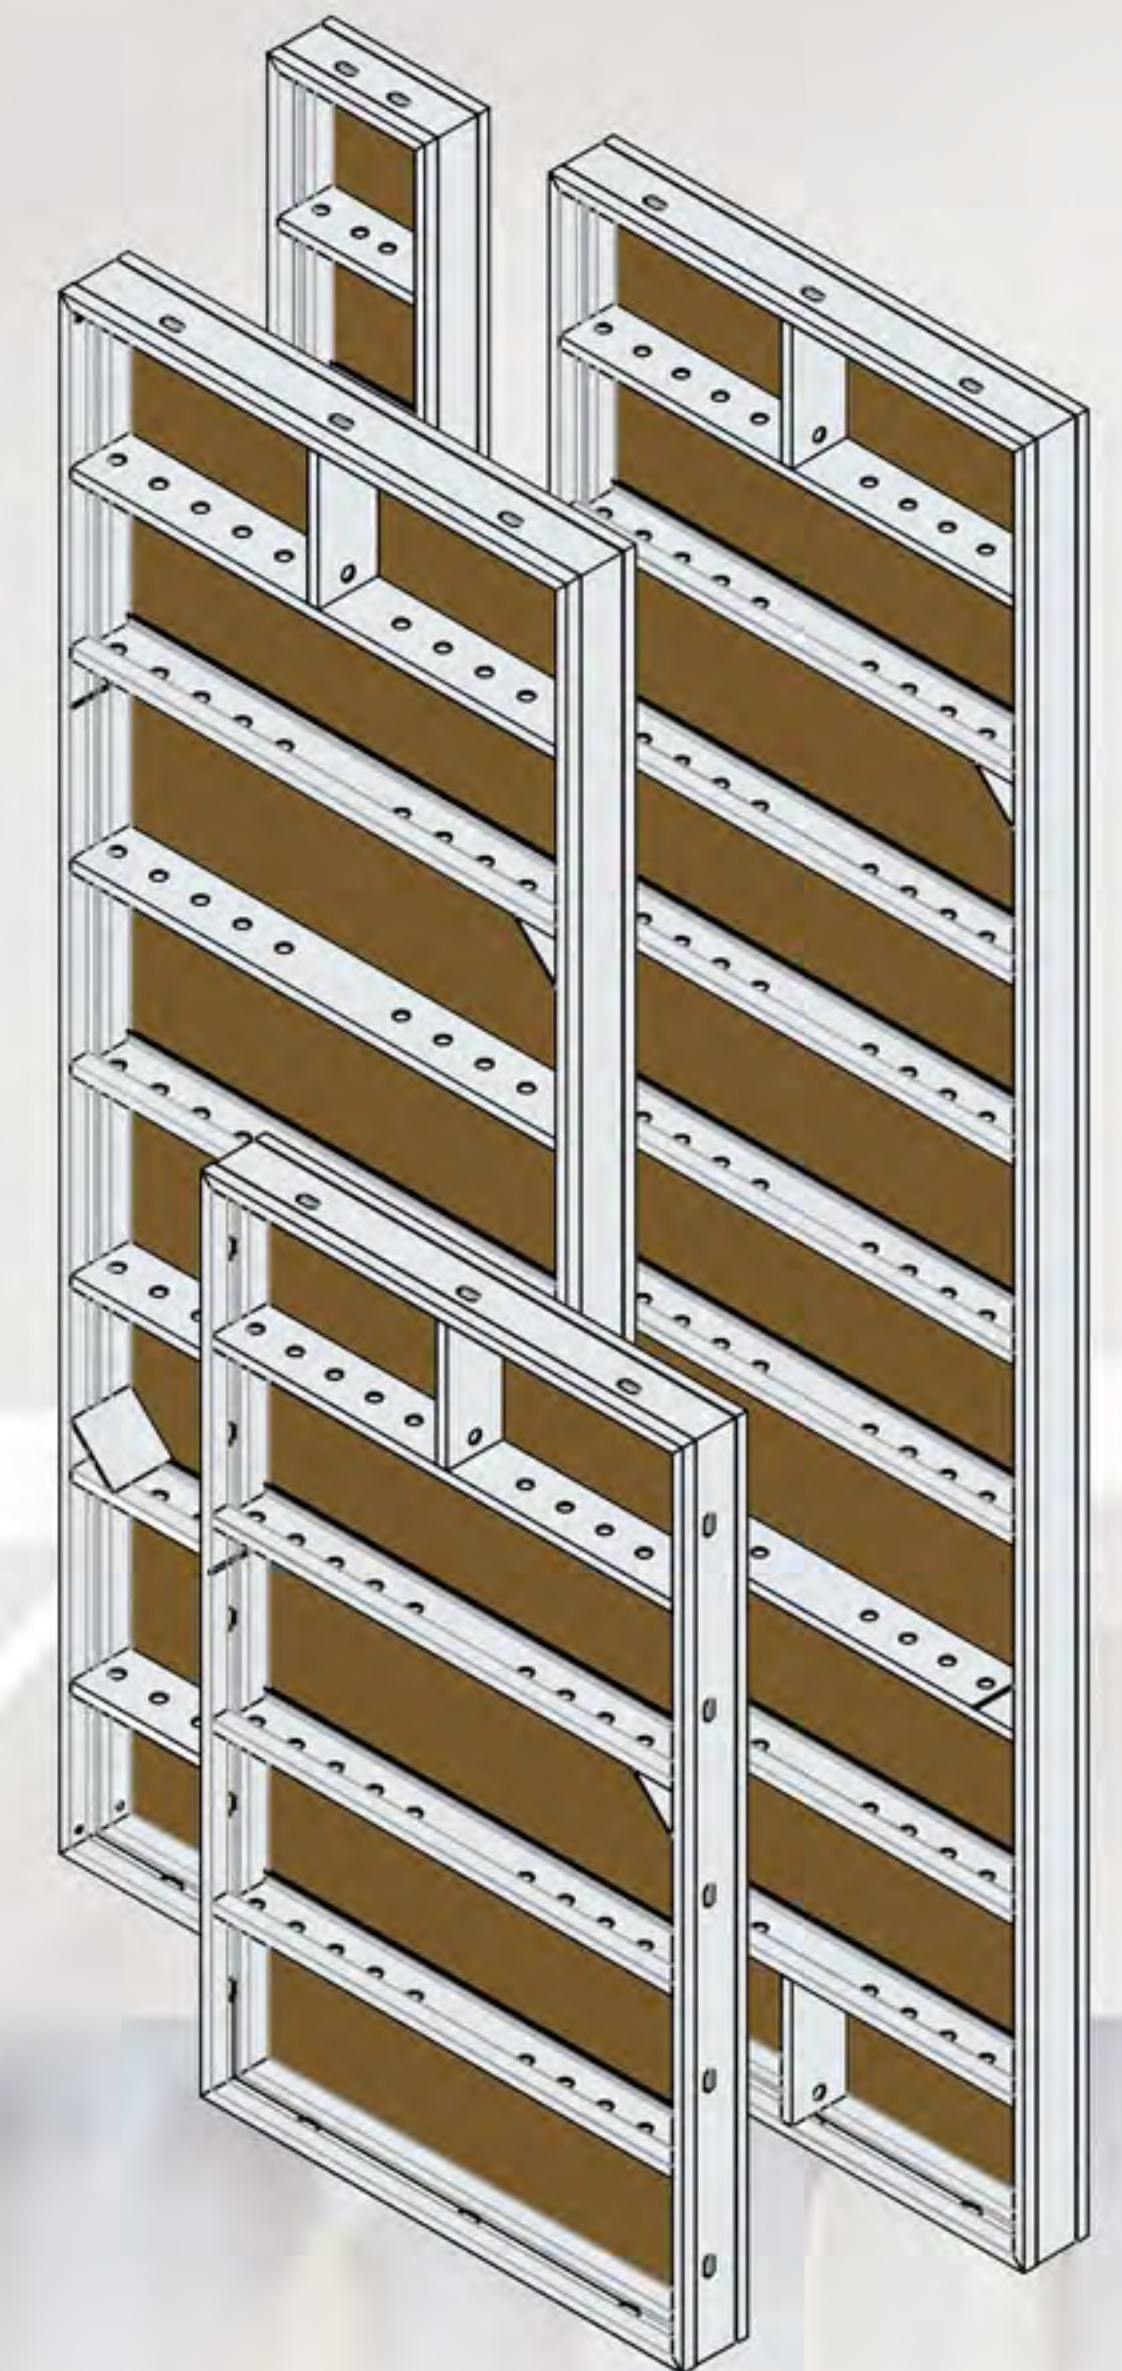

Bracket of Concrete Platform

The maximum distance between two brackets is 2.25 meters.


The permitted load is 150[kg/m²] and only for workers walking.

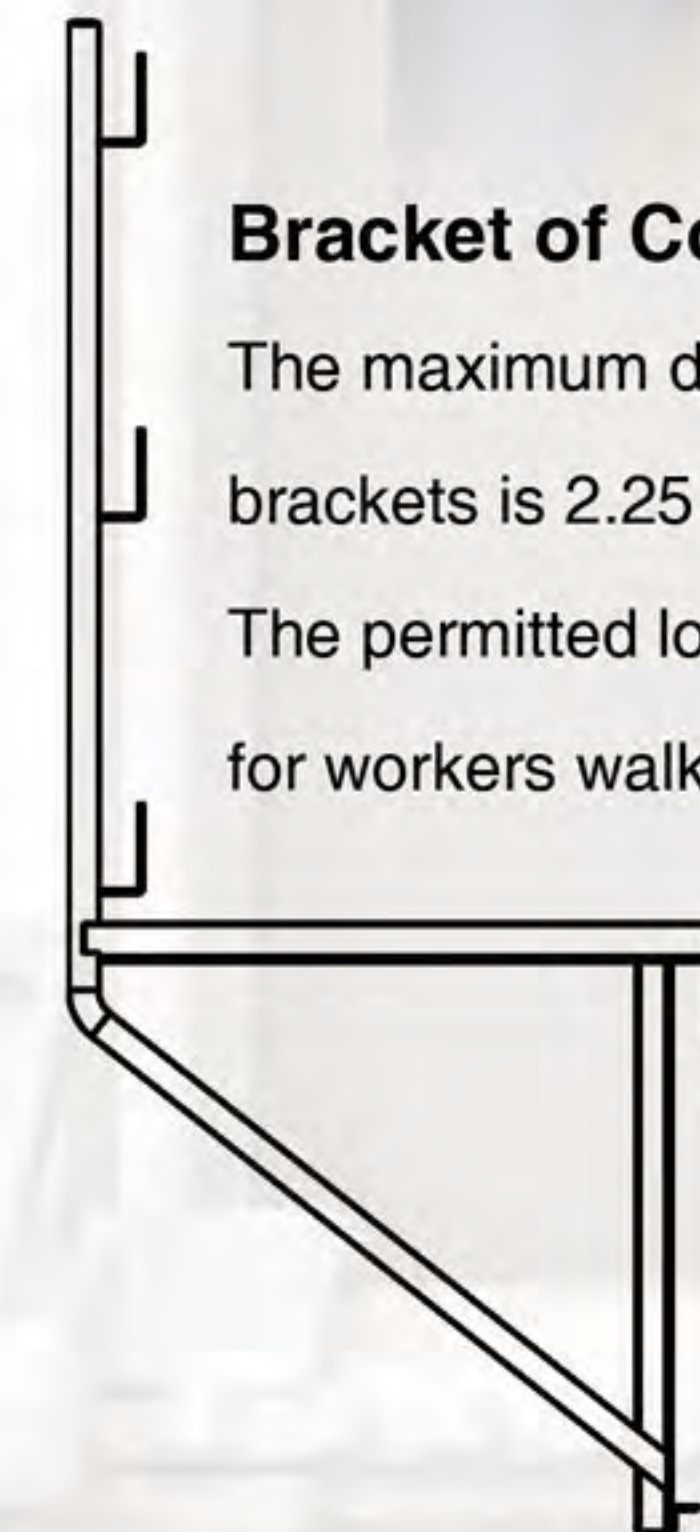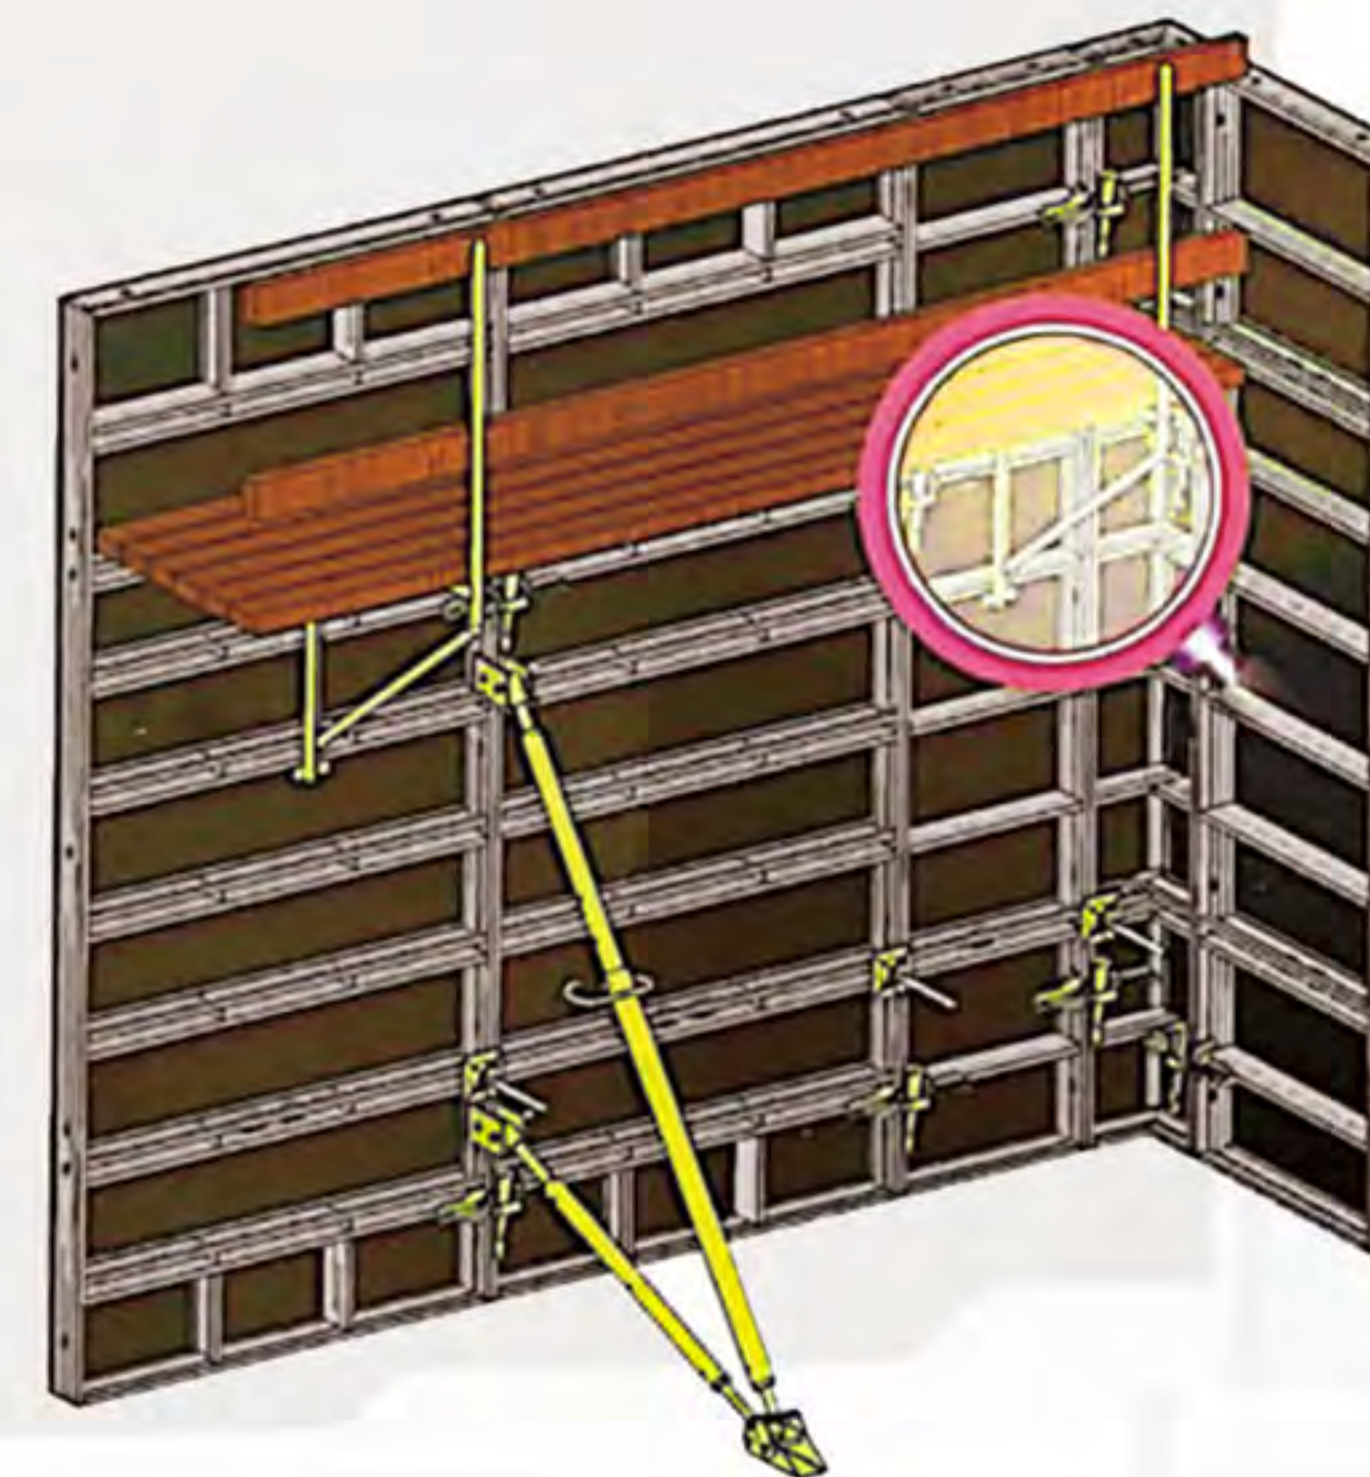



K-DECK has been designed for standard use in constructing slabs with thicknesses up to 43 cm. With the small panel span (75 cm) and, if required, a middle support under the main beam, slabs up to 109 cm thick can be formed. K-DECK's range of applications extends from residential construction through to industrial construction projects.

The systematic assembly sequence and lightweight system components made of aluminium accelerate working operations. In addition, the possibility of early striking with the drophead system reduces on-site material requirements.


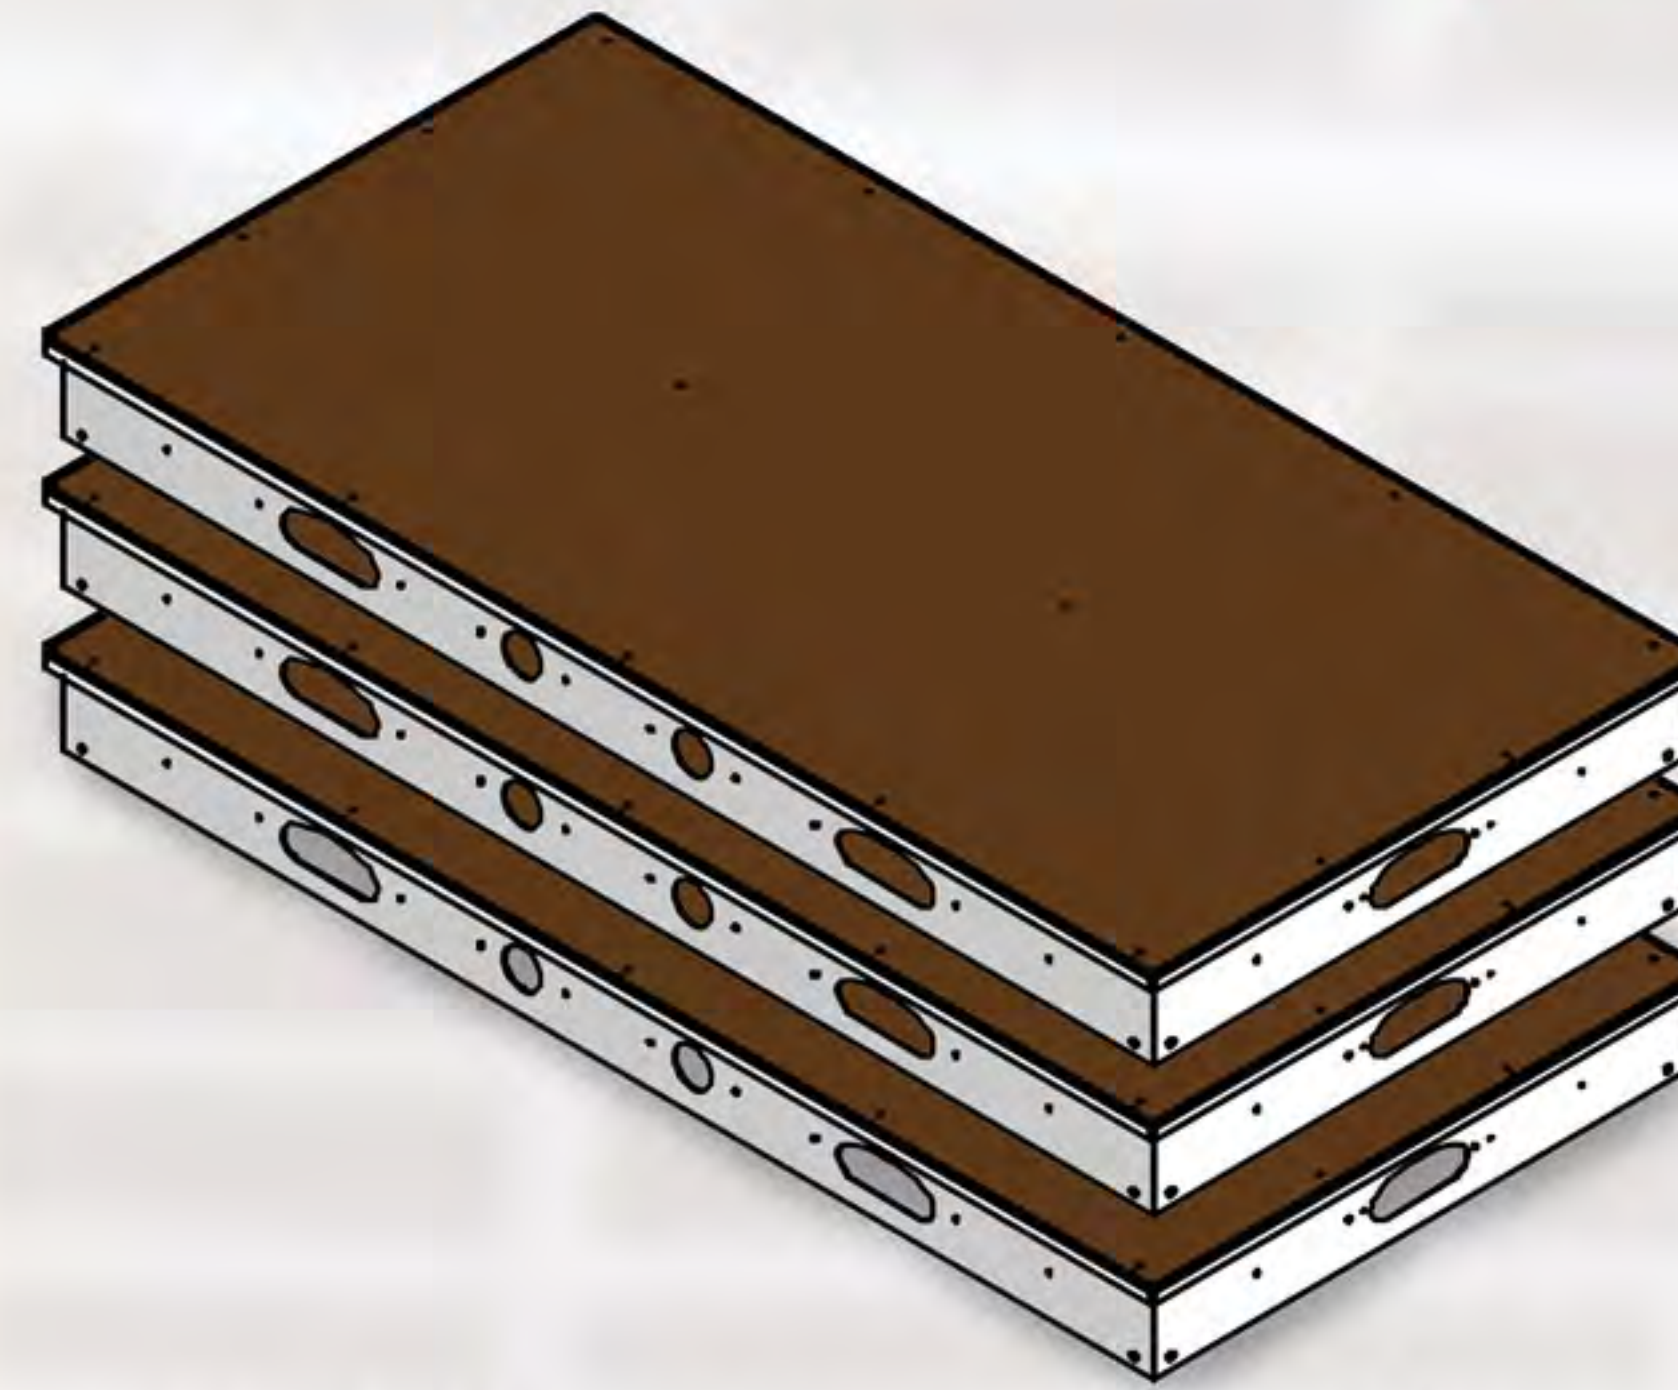


Panel Dimension


- 1500 x 375 mm
- 1500 x 500 mm
- 1500 x 750 mm
- 750 x 375 mm
- 750 x 500 mm
- 750 x 750 mm
- with 9mm Birch Plywood

Main Beam Dimension


- 1500 x 190 mm
- 2250 x 240 mm
- 3750 x 240 mm

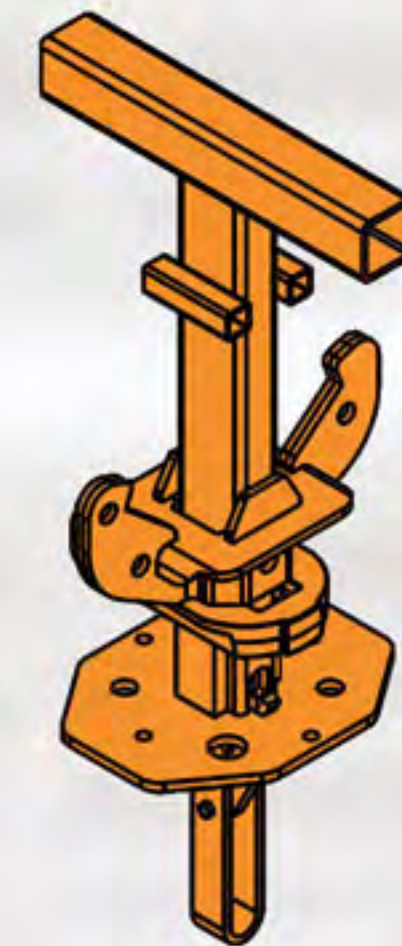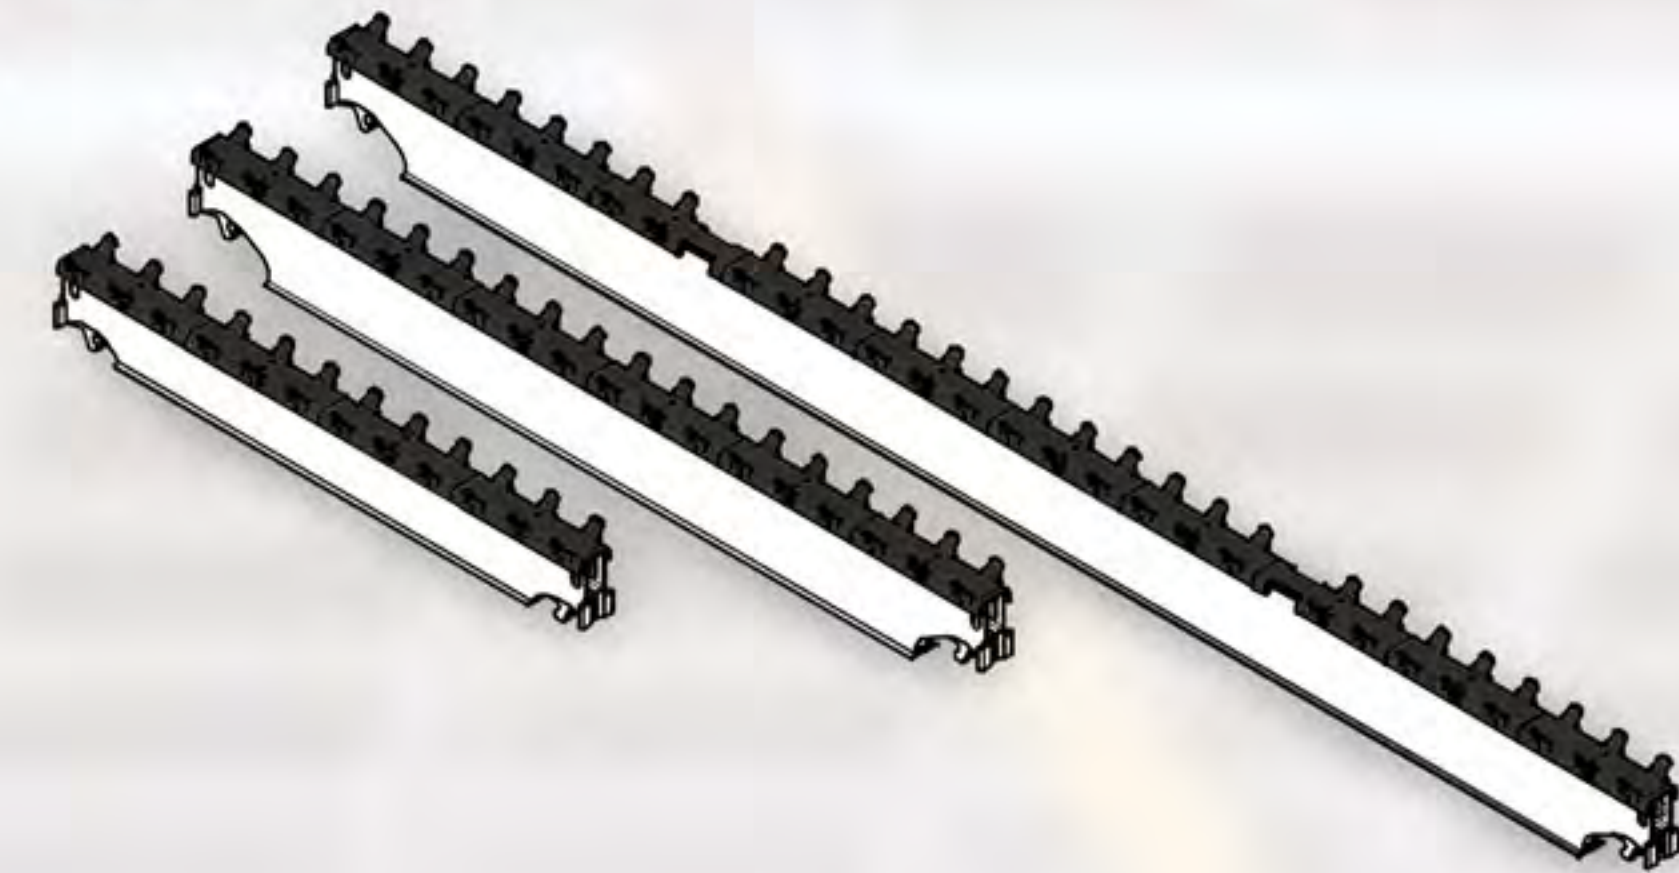

Drophead

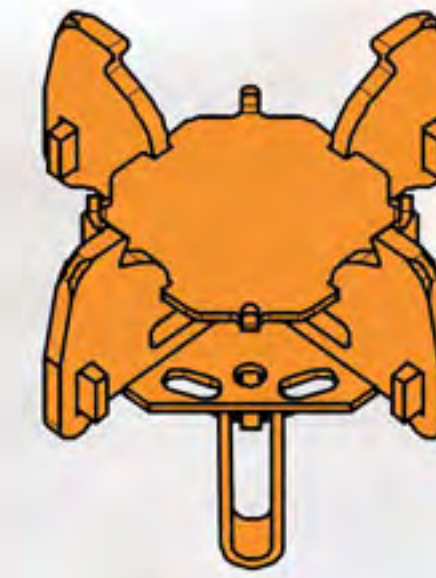

Prophead

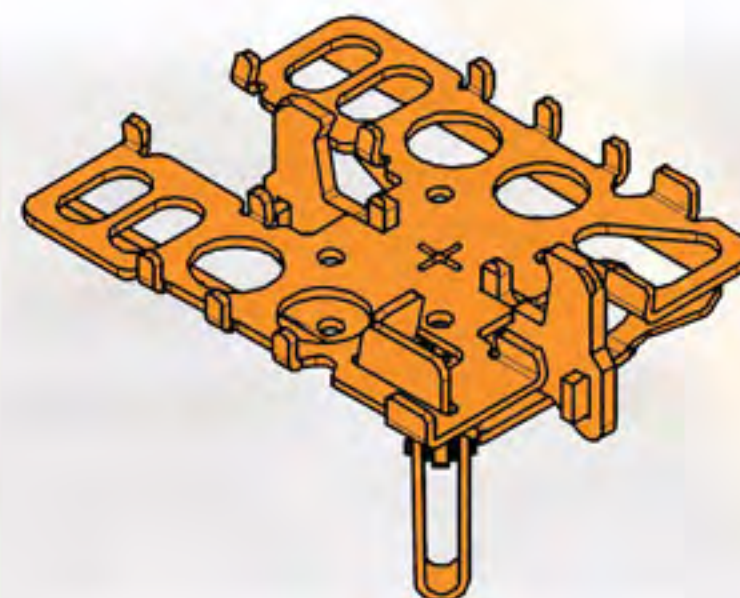


Combihead



Nylon Cover



Cover Strip

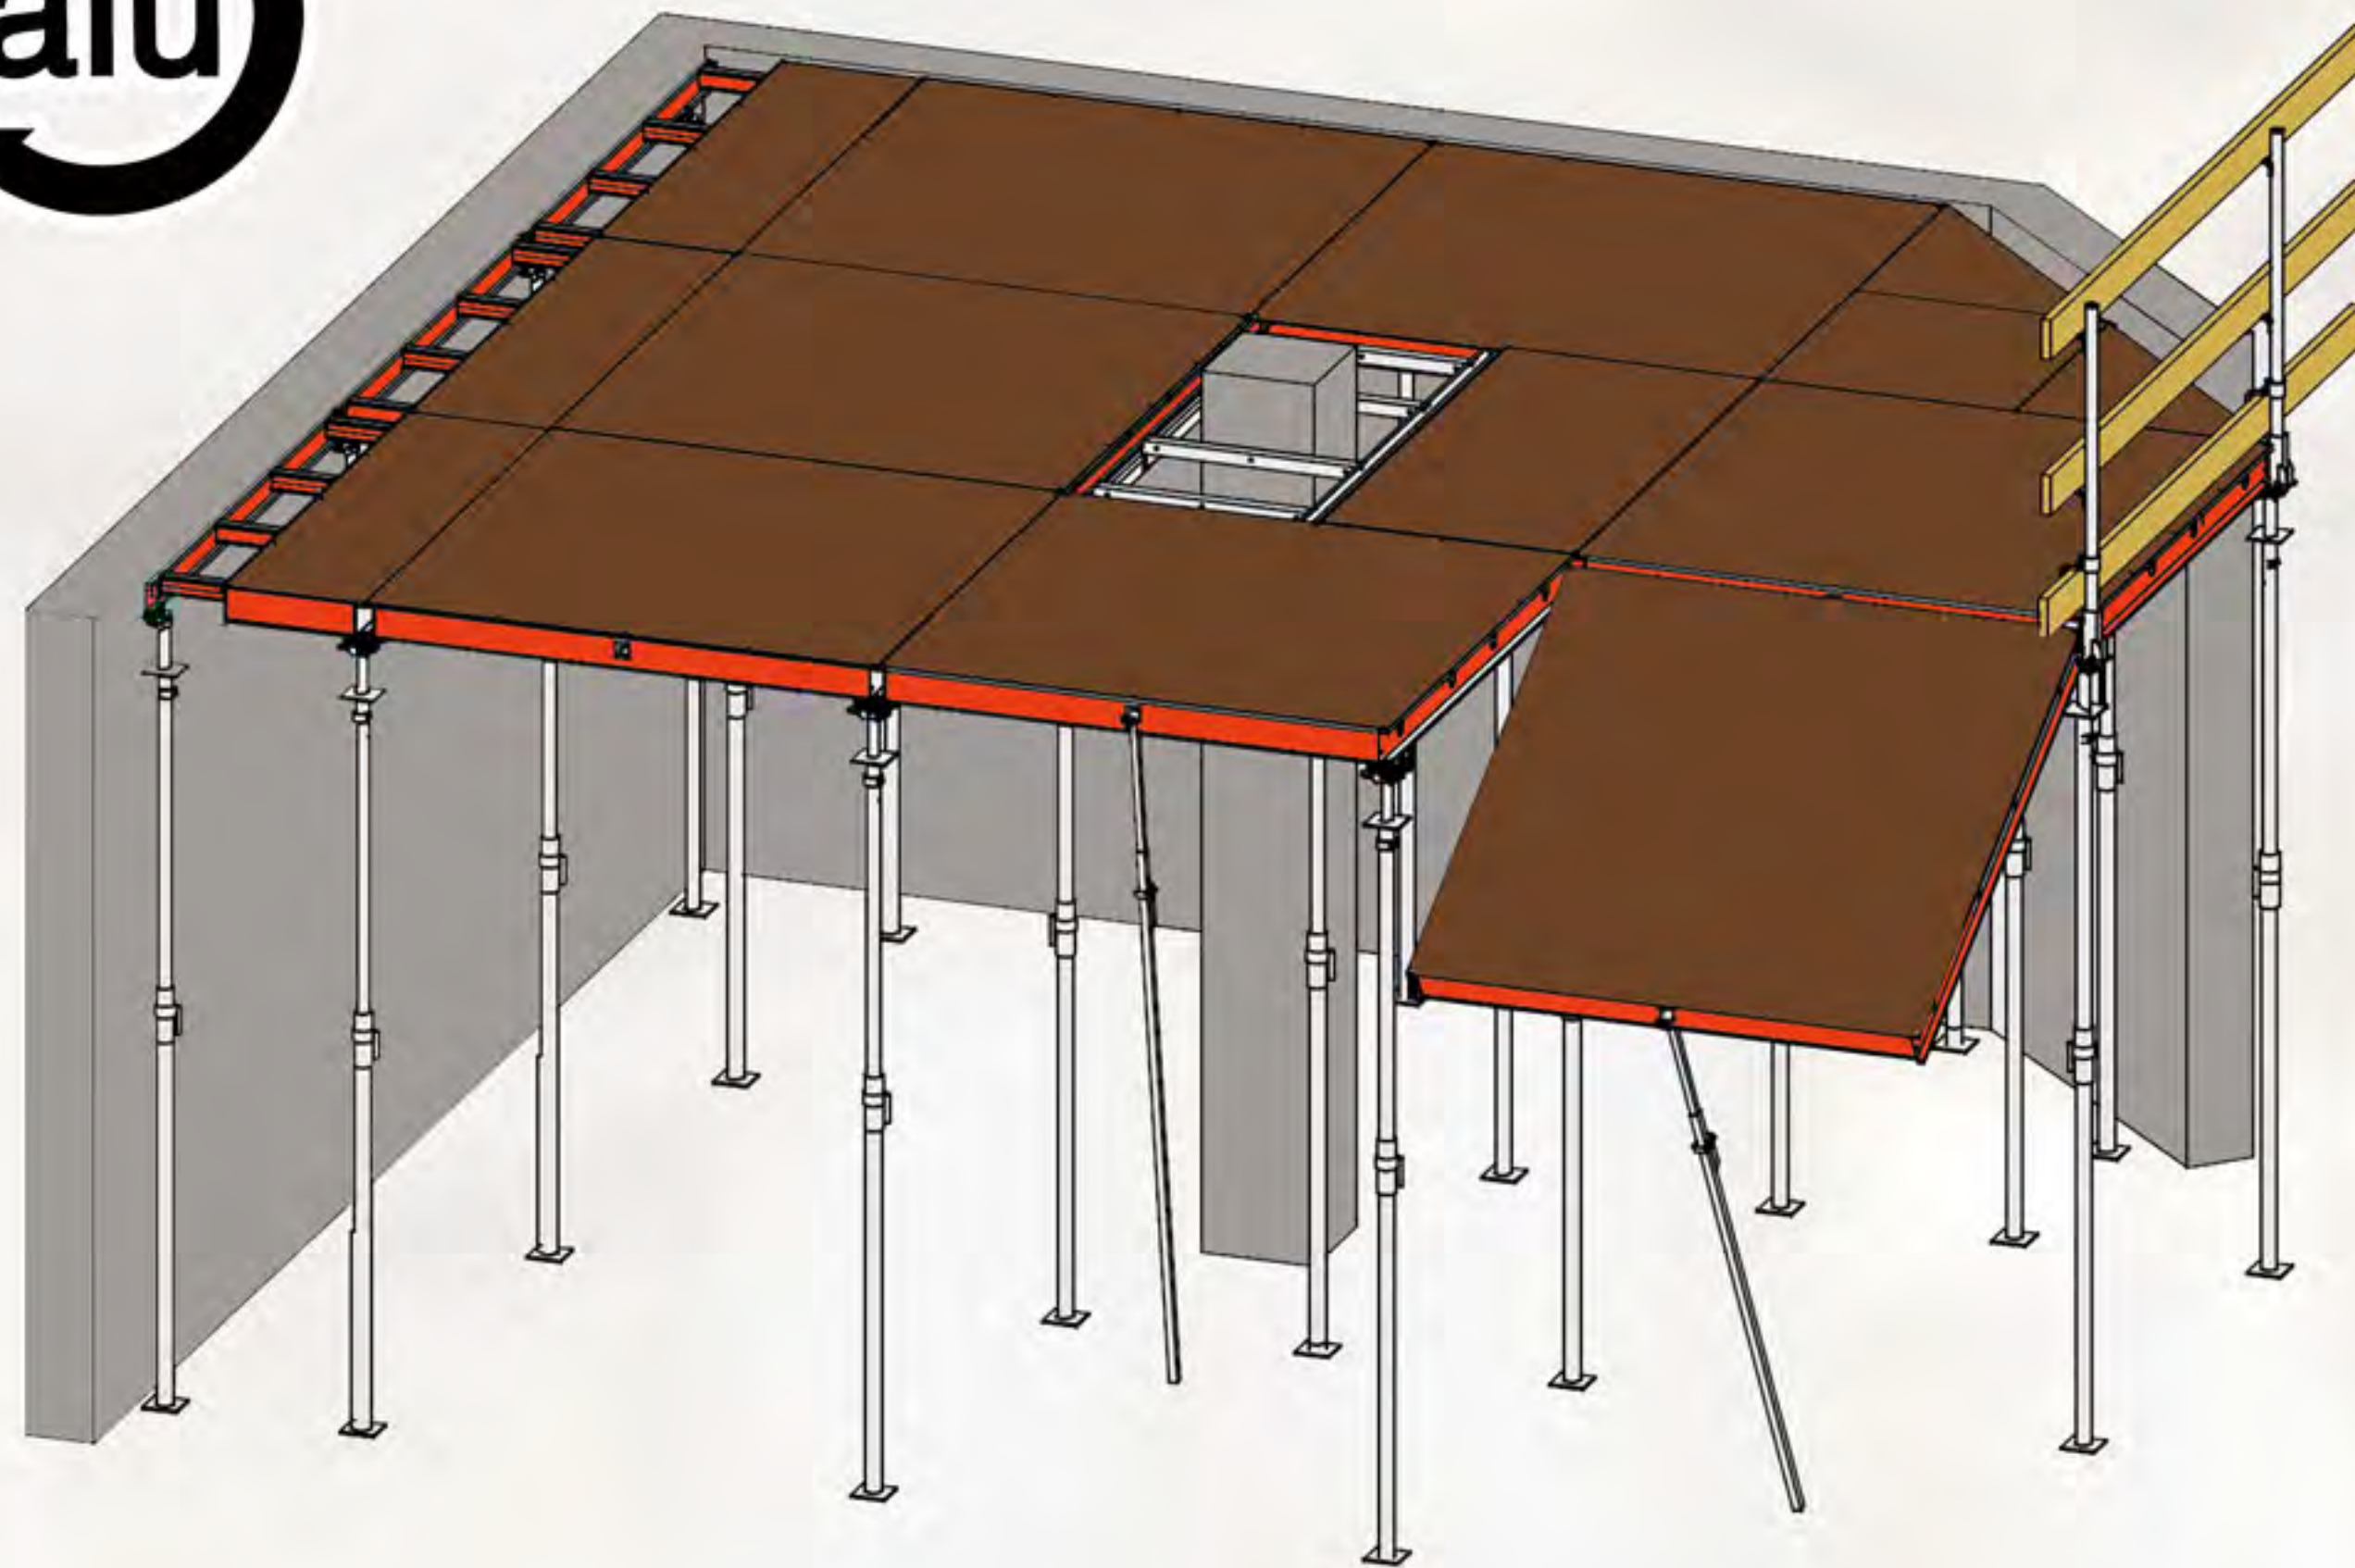


Panel Dimension

180 x 180 cm
180 x 90 cm
180 x 75 cm
180 x 60 cm
180 x 45 cm
90 x 90 cm
90 x 75 cm
90 x 60 cm
90 x 45 cm

Profile Thickness:


14 cm aluminium frame profile

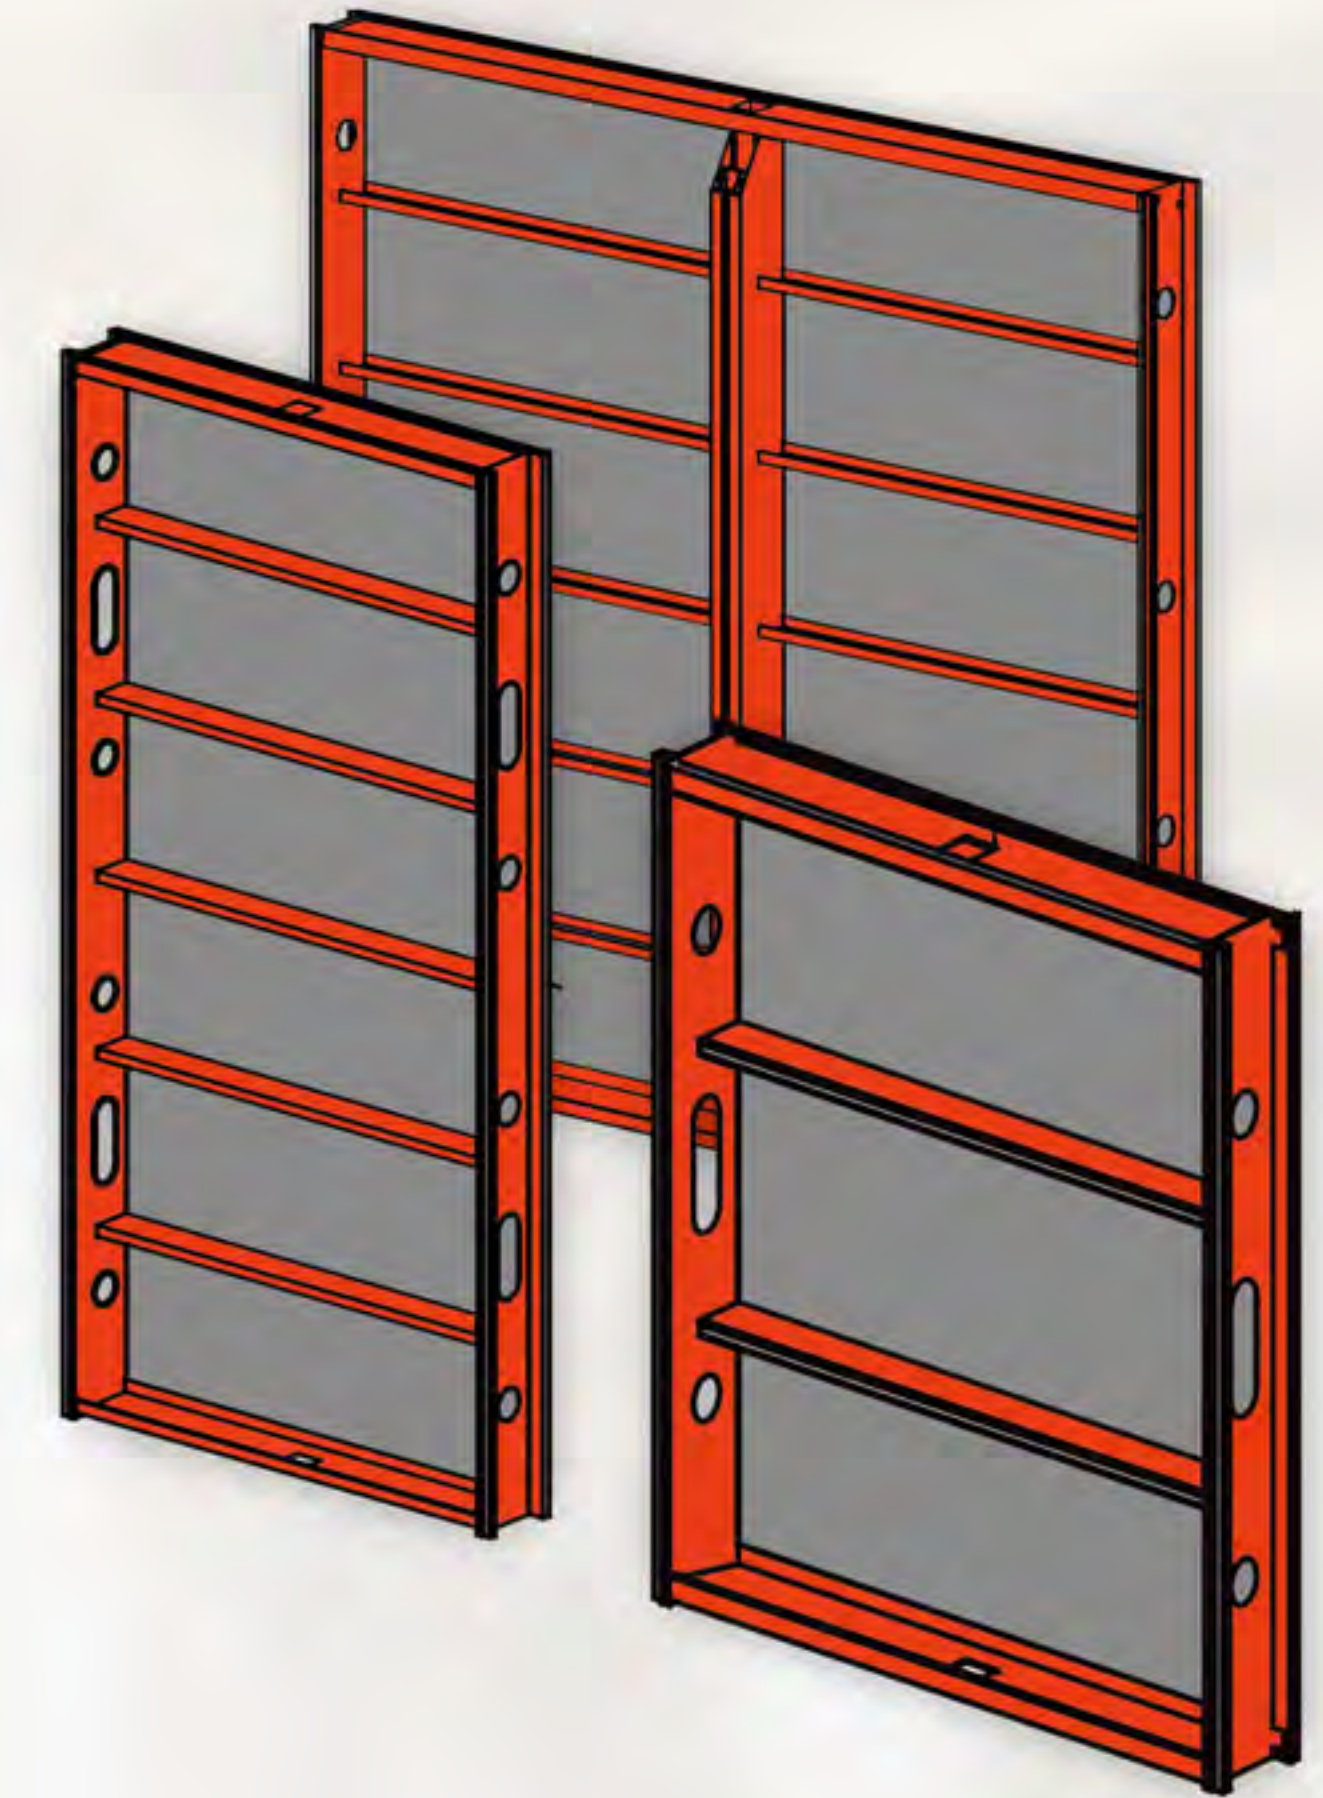


The K-TOP modular slab formwork provides fast forming times and a good safety during forming and stripping operations from the ground. The aluminum modular formwork system needs no beams. The up to 180 x 180 cm panels are erected by a maximum of two men. They are simply hooked into the bearing, lifted up, and propped.

PRODUCT ADVANTAGES


Robust yet lightweight aluminum design provides easy and ergonomic handling.
Safe forming and stripping up to a height of 3.5 m from the ground in 3 easy working steps.
Giant panel 180 x 180 cm covers a forming area of 3.24 m².
Flexible due to various adjustment parts and alternatives.
Integrated safety measures with the edge guard

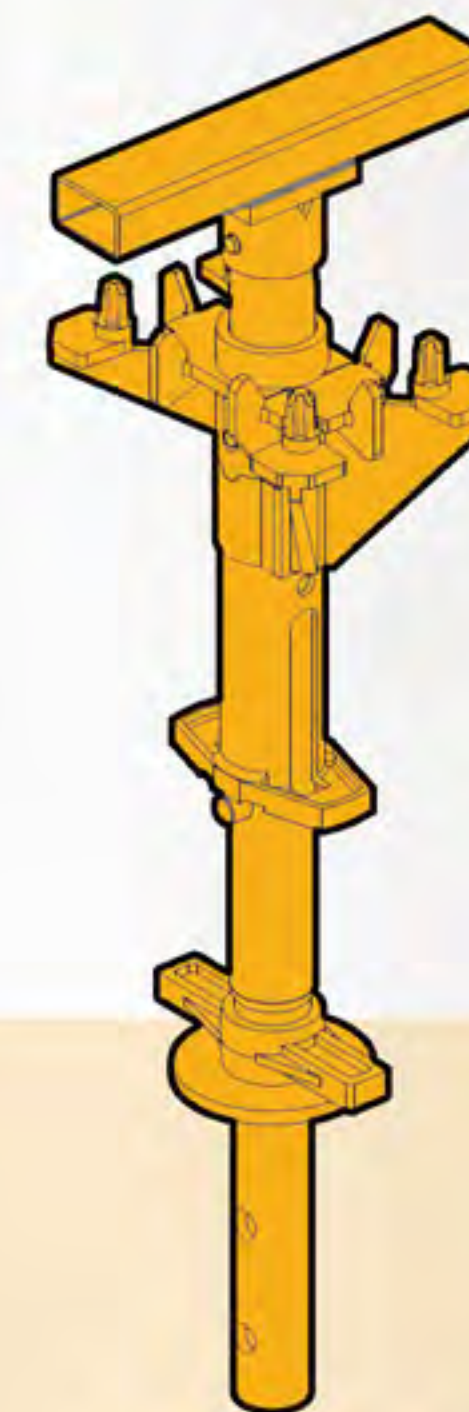


Drophead

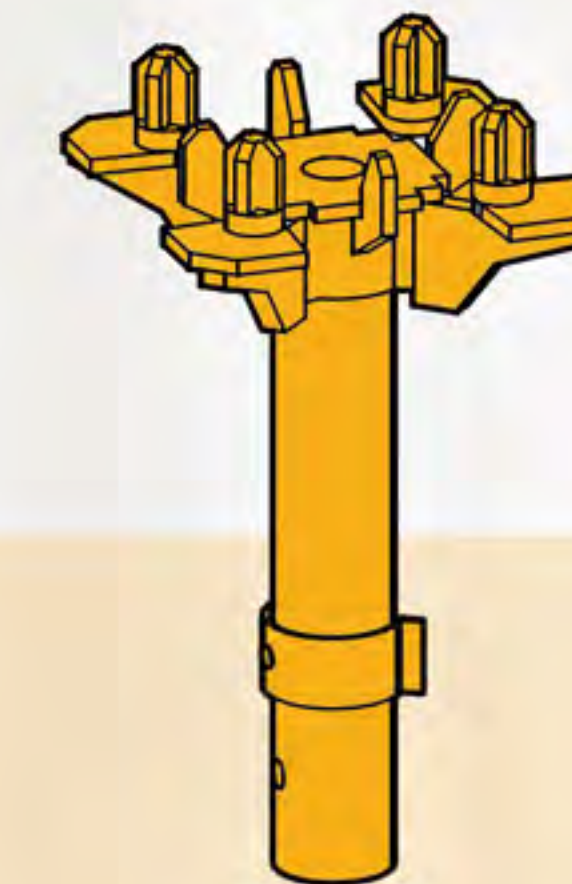

Prophead

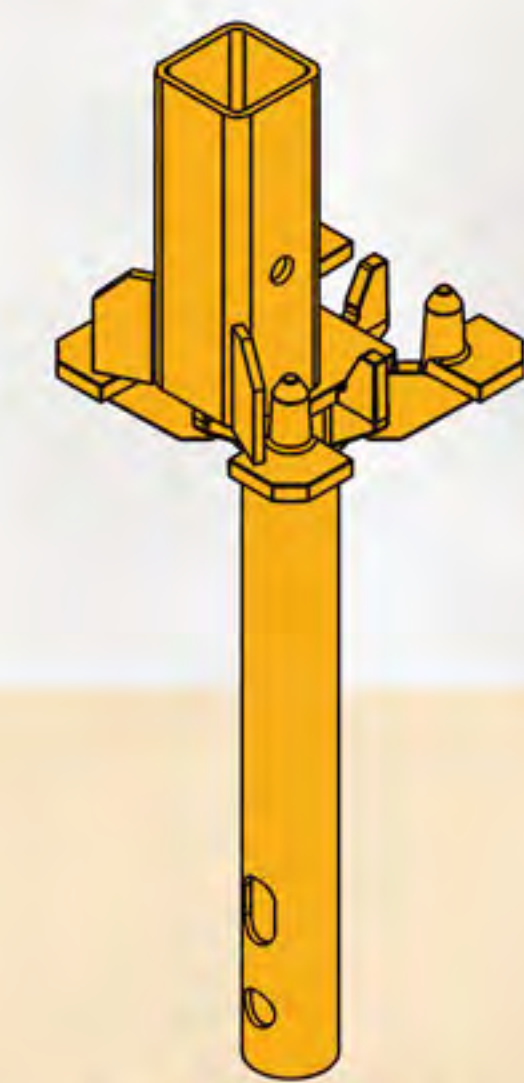

**Prophead
for Railing Post**

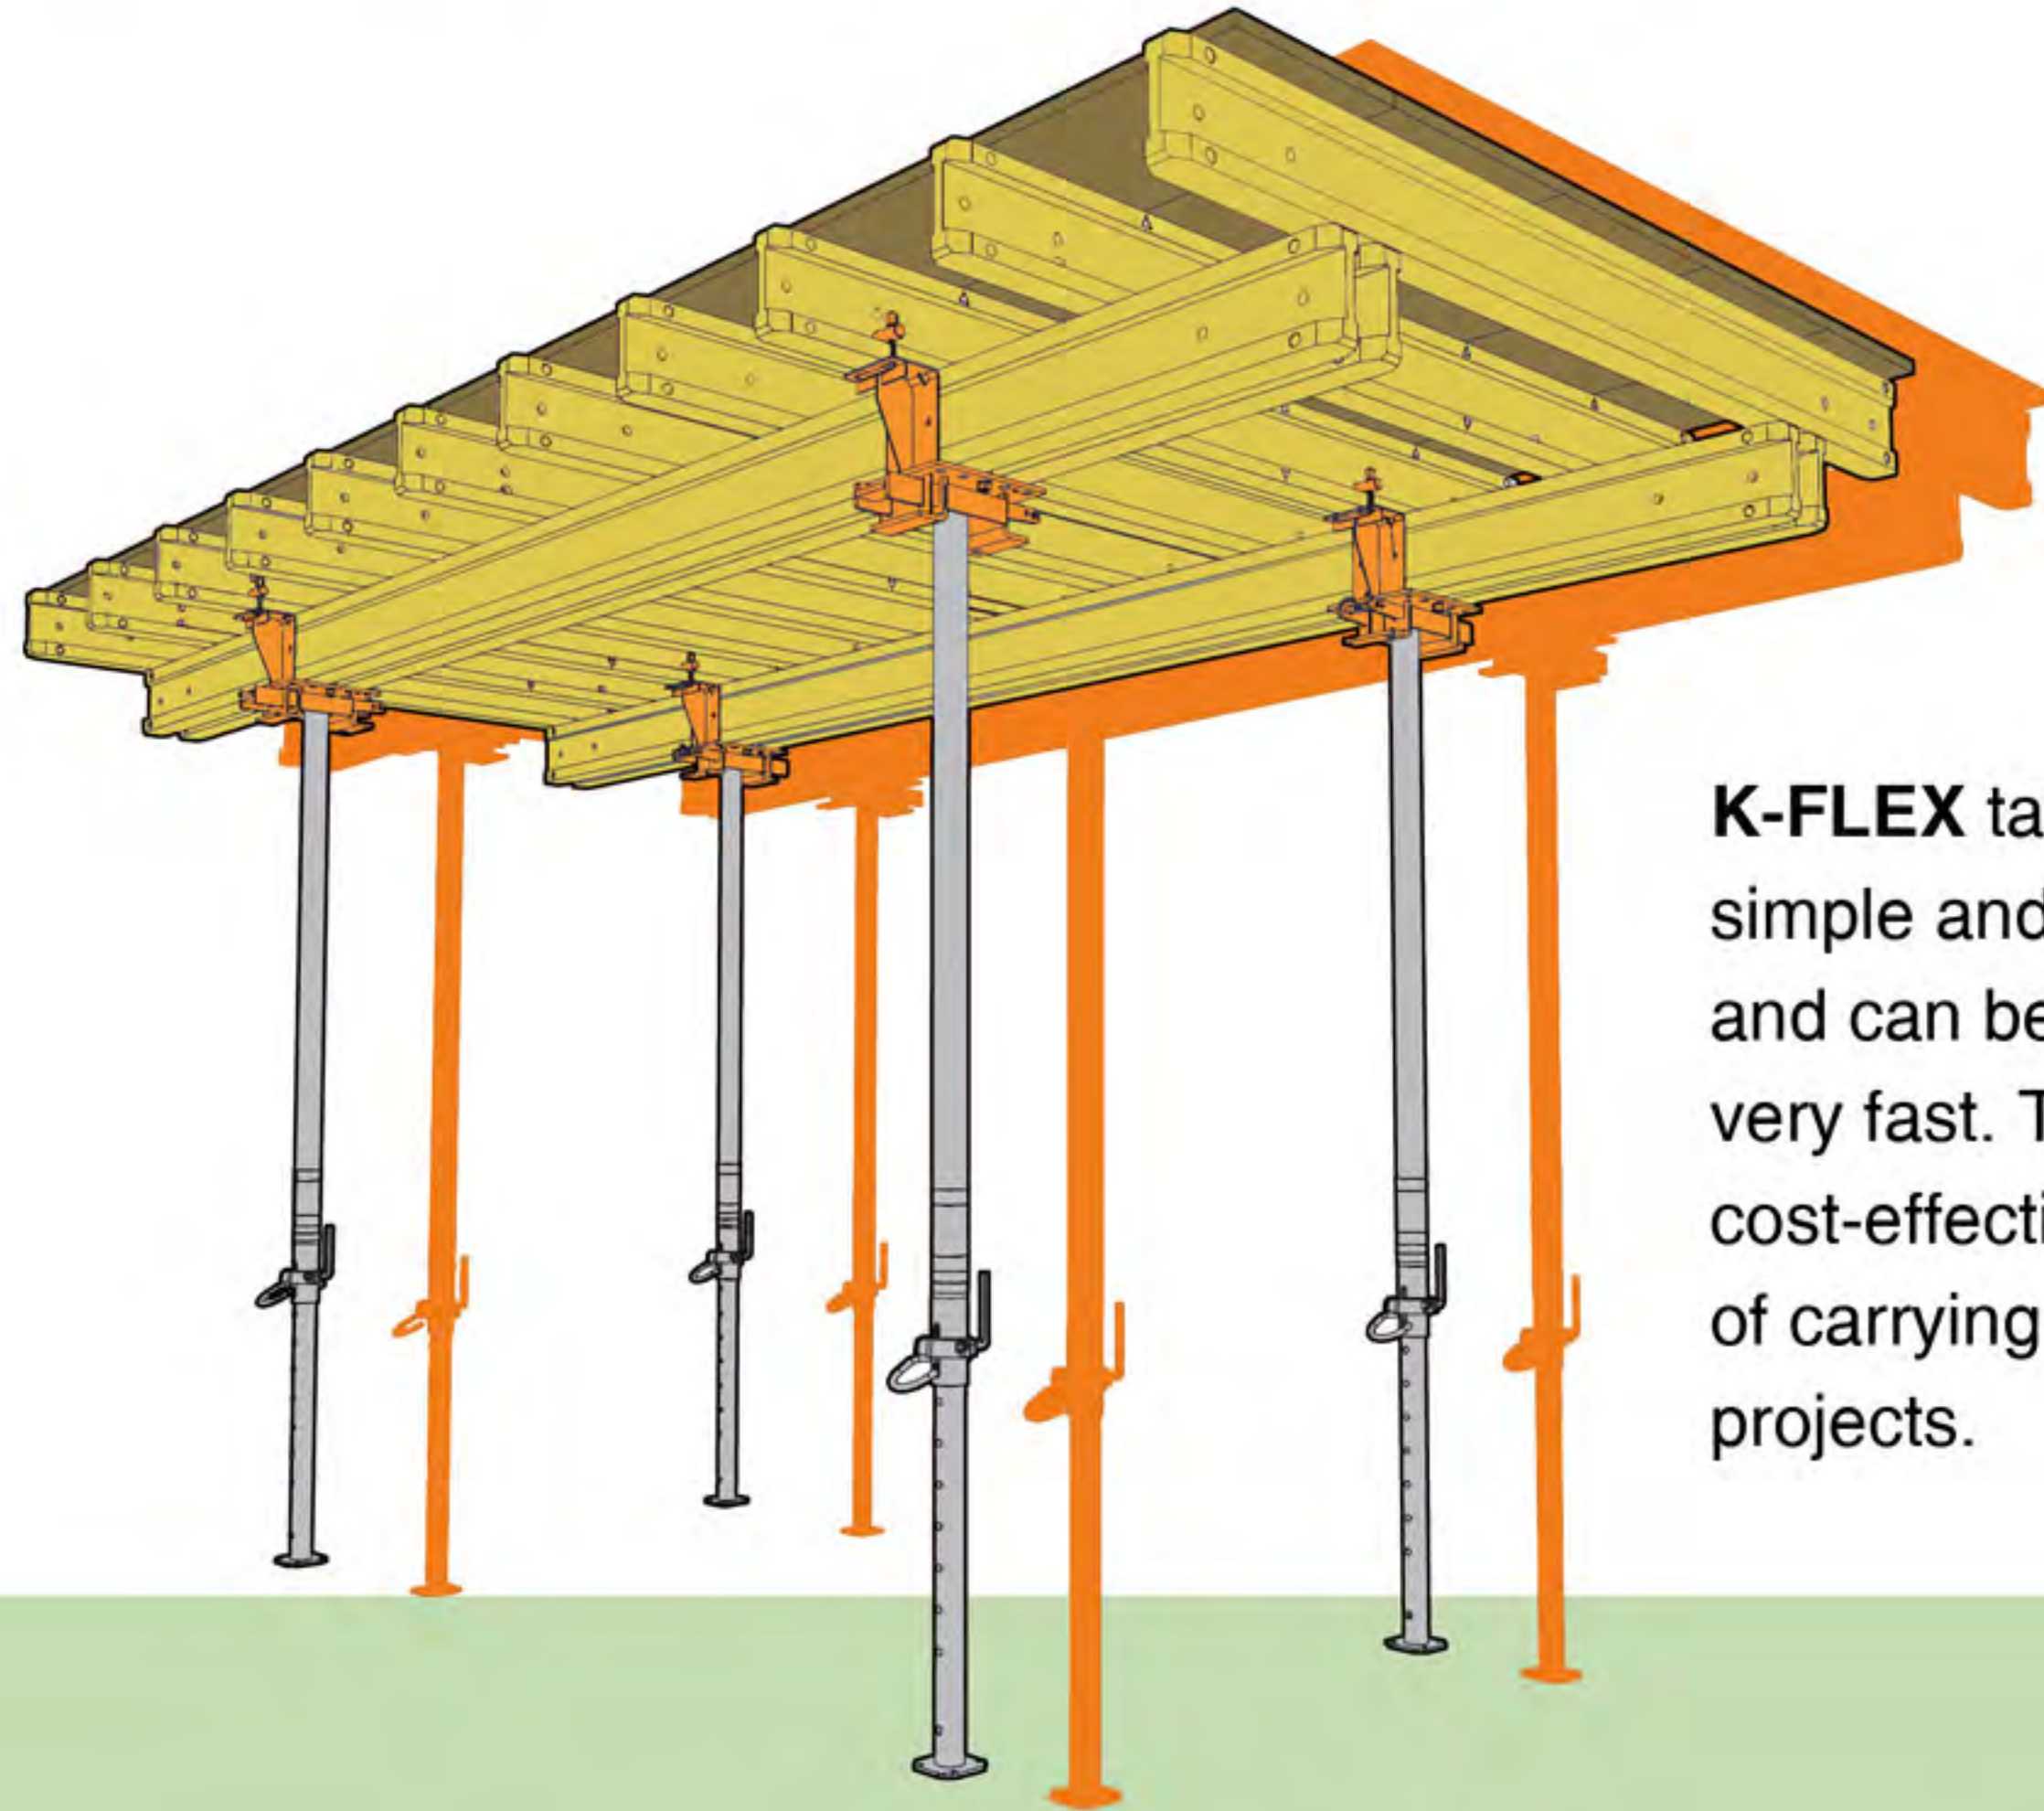

K-FLEX table formwork are simple and practical to install and can be cycled and adapted very fast. This makes them a cost-effective and efficient way of carrying out large-area slab projects.

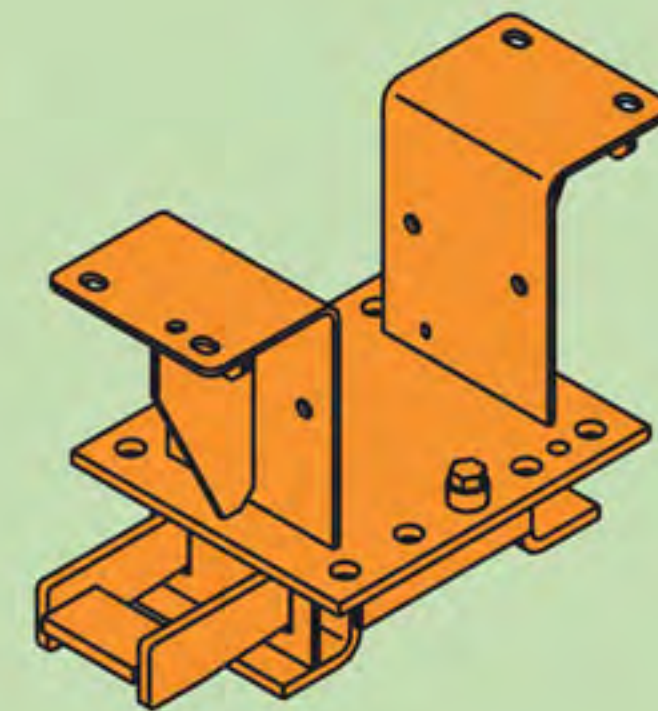


Table Head K3
Galvanized
Length: 44 cm
Width: 25 cm
Height: 30 cm

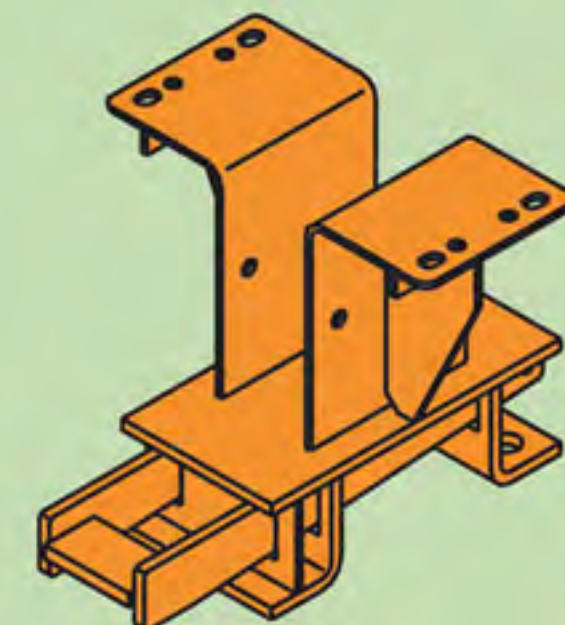


Table Head K2
Galvanized
Length: 41 cm
Width: 33 cm
Height: 30 cm




LENGTHS (CM)

180, 245, 265, 290, 330, 360, 390, 450, 490, 590
➤ special lengths on demand

DIMENSIONS & TOLERANCES

	P20 STANDARD	P20 PREMIUM	TOLERANCE
BEAM HEIGHT	200 mm	200 mm	± 1,0%
FLANGE HEIGHT	40 mm	40 mm	± 1,5%
FLANGE WIDTH	80 mm	80 mm	± 1,5%
WEB THICKNESS	27 mm	31 mm	± 3,0%
WEIGHT/METER	4,5 kg	4,7 kg	± 1,5%

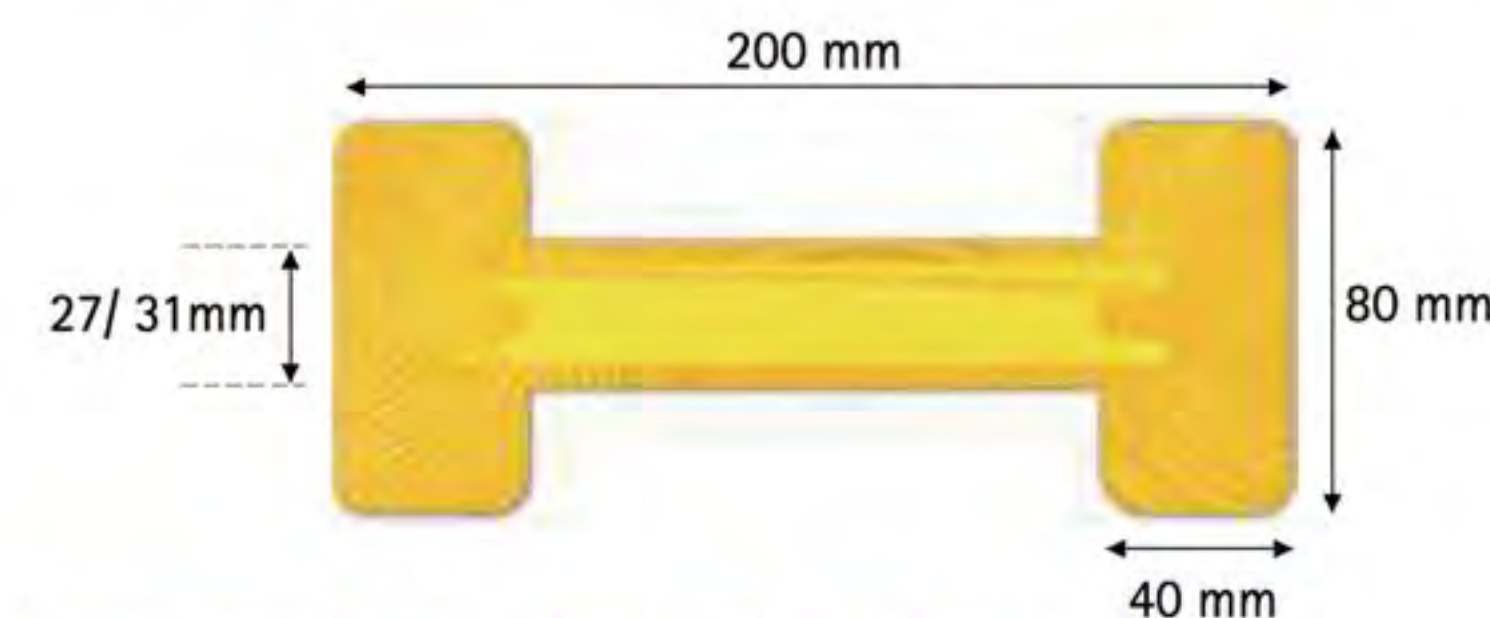

TECHNICAL SPECIFICATIONS

ACCORDING TO EN13377	CARRYING CAPACITY CHARACTERISTICS	
SHEARING FORCE	$V_k = 23,9 \text{ kN}$	zul. $Q = 11 \text{ kN}$
BENDING MOMENT	$M_k = 10,9 \text{ kNm}$	zul. $M = 5 \text{ kNm}$
SUPPORT	$R_{b,k} = 47,8 \text{ kN}$	

For the difficult working conditions at building sites Economical, safe and effective. 100% Solid & firm spruce timber. High loading bearing capacity at low weight. Firm gluing (according to gluing certificate C). Highest safety level due to automatic sorting of raw material.



KEVA heavy duty props are correspond with the European Norm EN 1065. To satisfy any request, comipont produces three different classes, depending on vairous load capacity:

B Class, the lightest, with variable load capacity,

D Class, with 20~30 kN of load capacity,

E Class, the heaviest, with up to 40 kN of load capacity.

Class B

B30 1800 x 3000 mm

B35 2000 x 3500 mm

B40 2300 x 4000 mm

B45 2500 x 4500 mm

B50 2800 x 5000 mm

B55 3100 x 5500 mm

Class D

D30 1800 x 3000 mm

D35 2000 x 3500 mm

D40 2300 x 4000 mm

D45 2500 x 4500 mm

D55 3100 x 5500 mm

Class E

E30 1800 x 3000 mm

E35 2000 x 3500 mm

E40 2300 x 4000 mm



FEATURES

- Compliant with the EN 1065 product standard.
- Hand safety system.
- Detachment of the inner tube.
- Adjusting nuts in forged steel, handles and pins are galvanized.
- External or hidden thread.
- Customizable with personal label.

Accessories of Props



Forged Prop Nut
D60 mm



Sleeve



G Pin



Fork Head
2.67 kg



Fork Head
2.5 kg



Heavy Duty Tripod



Construction Shoring Prop is a telescopic tubular steel piece of construction equipment. It is used as a temporary support. Shoring props are known by several names including: scaffolding prop, formwork prop, industrial prop, building prop, shore prop, acro prop, acro jack, acrow prop and post shores. They are height adjustable by a wide diameter screw thread, which is on the outside of the tube. The use of a screw thread means that the props are able to be tightened when already in place, which allows the user to adjust the load that each one bears.

Dimension:

Outer Tube Diameter: 60 / 56 / 48 mm

Inner Tube Diameter: 48 / 40mm

Thickness: 1.8 / 2.0 / 2.2 / 2.5 / 3.0 / 3.2mm

Steel Grade: Q235 / Q355

G Pin: 12 / 14 / 16 mm

Surface treatment: Painting / Powder Coated / Pre-galvanized / Hot-dip-galvanized



Advantages

Shoring Prop Specification available in different sizes covering a range from 800mm to 5000 mm, which is :

- Simple and flexible structure
- Strong and durable
- Easy to assemble and disassemble
- Versatile with variable height adjustment
- Convenient for storage and transportation
- Economic and practical.



Accessories of Universal Props



Casting Prop Nut
D60 mm



Casting Prop Nut
D76 mm



G Pin
14 mm



G Pin
16 mm



Cup Sleeve
D70 mm L130 mm



Cup Sleeve
D90 mm L140 mm



Sleeve



Fork Head



Tripod
H70 / H75 / H80




KP Clamp
Weight: 4.3kg



KD Clamp
Weight: 3.7kg



KR Clamp
Weight: 3.9kg

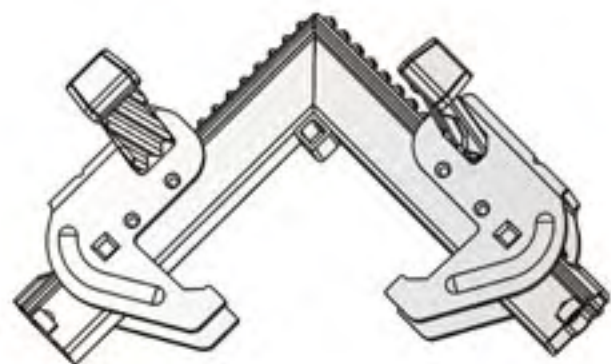

KRL Clamp
Weight: 7.1kg



KS Clamp
Weight: 3.5kg



KSL Clamp
Weight: 5.6kg



RAS Clamp
Weight: 2.9kg



Forged FMX Clamp
Weight: 3.3kg



Casting FMX Clamp
Weight: 2.9kg



Lite FMX Clamp
Weight: 2.35kg



FMI Clamp
Weight: 1.35kg



Adjustable Clamp
Weight: 5.5kg



NEV Clamp
Weight: 3.9kg



Beam Connector W100
Weight: 0.88kg



Beam Connector
Weight: 1.0kg



Size:D70mm Weight:0.41kg
Type:DW15



Size:D80mm Weight:0.59kg
Type:DW15



Size:D90mm Weight:0.57kg
Type:DW15



Size:D90mm Weight:0.46kg
Type:DW15



Size:D100mm Weight:0.6kg
Type:DW15



Size:D100mm Weight:0.56kg
Type:DW15



Size:D100mm Weight:0.7kg
Type:DW15



Size:D100mm Weight:0.6kg
Type:DW15



Size:D110mm Weight:0.83kg
Type:DW15



Swivel Nuts



Size:115X115mm Weight:1.25kg
Type:DW15-P



Size:140X100mm Weight:1.35kg
Type:DW15-F



Size:117X117mm Weight:1.6kg
Type:DW15-F



Size:113X113mm Weight:1.05kg
Type:DW15-C



Size:120X120mm Weight:1.36kg
Type:DW15-C



Size:D130mm Weight:1.61kg
Type:DW20-F



Size:120X120mm Weight:1.35kg
Type:DW15-F



Size:150X100mm Weight:1.23kg
Type:DW15-F



Size:D120mm Weight:1.1kg
Type:DW15-F


Anchor Nuts



Size:W90xH55mm Weight:0.32kg
Type:DW15



Size:W120xH70mm Weight:0.62kg
Type:DW20

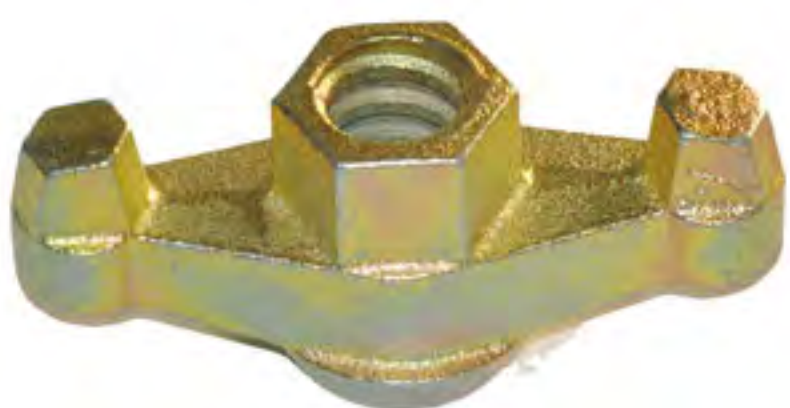

Size:W100xH45mm Weight:0.39kg
Type:DW15



Size:W100xH40mm Weight:0.35kg
Type:DW15



Weight:0.34kg
Type:DW15



Size:W80xH55mm Weight:0.28kg
Type:DW15



Weight:0.33kg
Type:DW15



Weight:0.32kg
Type:DW15



Formwork Cone & Hex Nuts



Size:L100
Weight:0.62kg
Type:DW15



Size&Weight: H30F/0.13kg, H50F/0.22kg,
H70F/0.32kg, H100C/0.39kg, H120C/0.5kg
Type: DW15

Formwork Nuts



Weight:0.52kg
Type:DW15



Weight:0.82kg
Type:DW20



Weight:0.89kg
Type:DW20



Weight:0.75kg
Type:DW20



Weight:0.48kg
Type:DW15



Weight:0.85kg
Type:DW20



Weight:0.68kg
Type:DW15



Weight:1.06kg
Type:DW20

Formwork Accessories



Formwork Corner
Weight:1.5kg



Formwork Corner
Weight:1.5kg



Formwork Corner
Weight:1.17kg



Lifting Base
Weight:3.76kg



Formwork Parts
Weight:0.65kg



Formwork Parts
Weight:2.55kg



Formwork Parts
Weight:0.7kg



Formwork Parts
Weight:1.29kg

Formwork Accessories



Formwork Parts
Weight:0.43kg



Formwork Parts
Weight:2.53kg



Formwork Parts
Weight:1.59kg



Formwork Parts
Weight:4.89kg

Water Stops



Size:L110xD65mm
Weight:0.53kg
Type:DW15



Size:L110xD60mm
Weight:0.44kg
Type:DW15



Size:L110xD65mm
Weight:0.58kg
Type:DW15,steel



Size:L110xD65mm
Weight:0.65kg
Type:DW15

Formwork Tie Rod and Formwork Bar



Size:DW15
Weight:1.5kg/m
Surface:E.G./Black




Size:DW15
Weight:1.48kg/m
Surface:E.G./Black



Size:L300
Weight:0.55kg
Type:DW15



Size:L330xL60xW22
Weight:0.8kg
Type:DW15

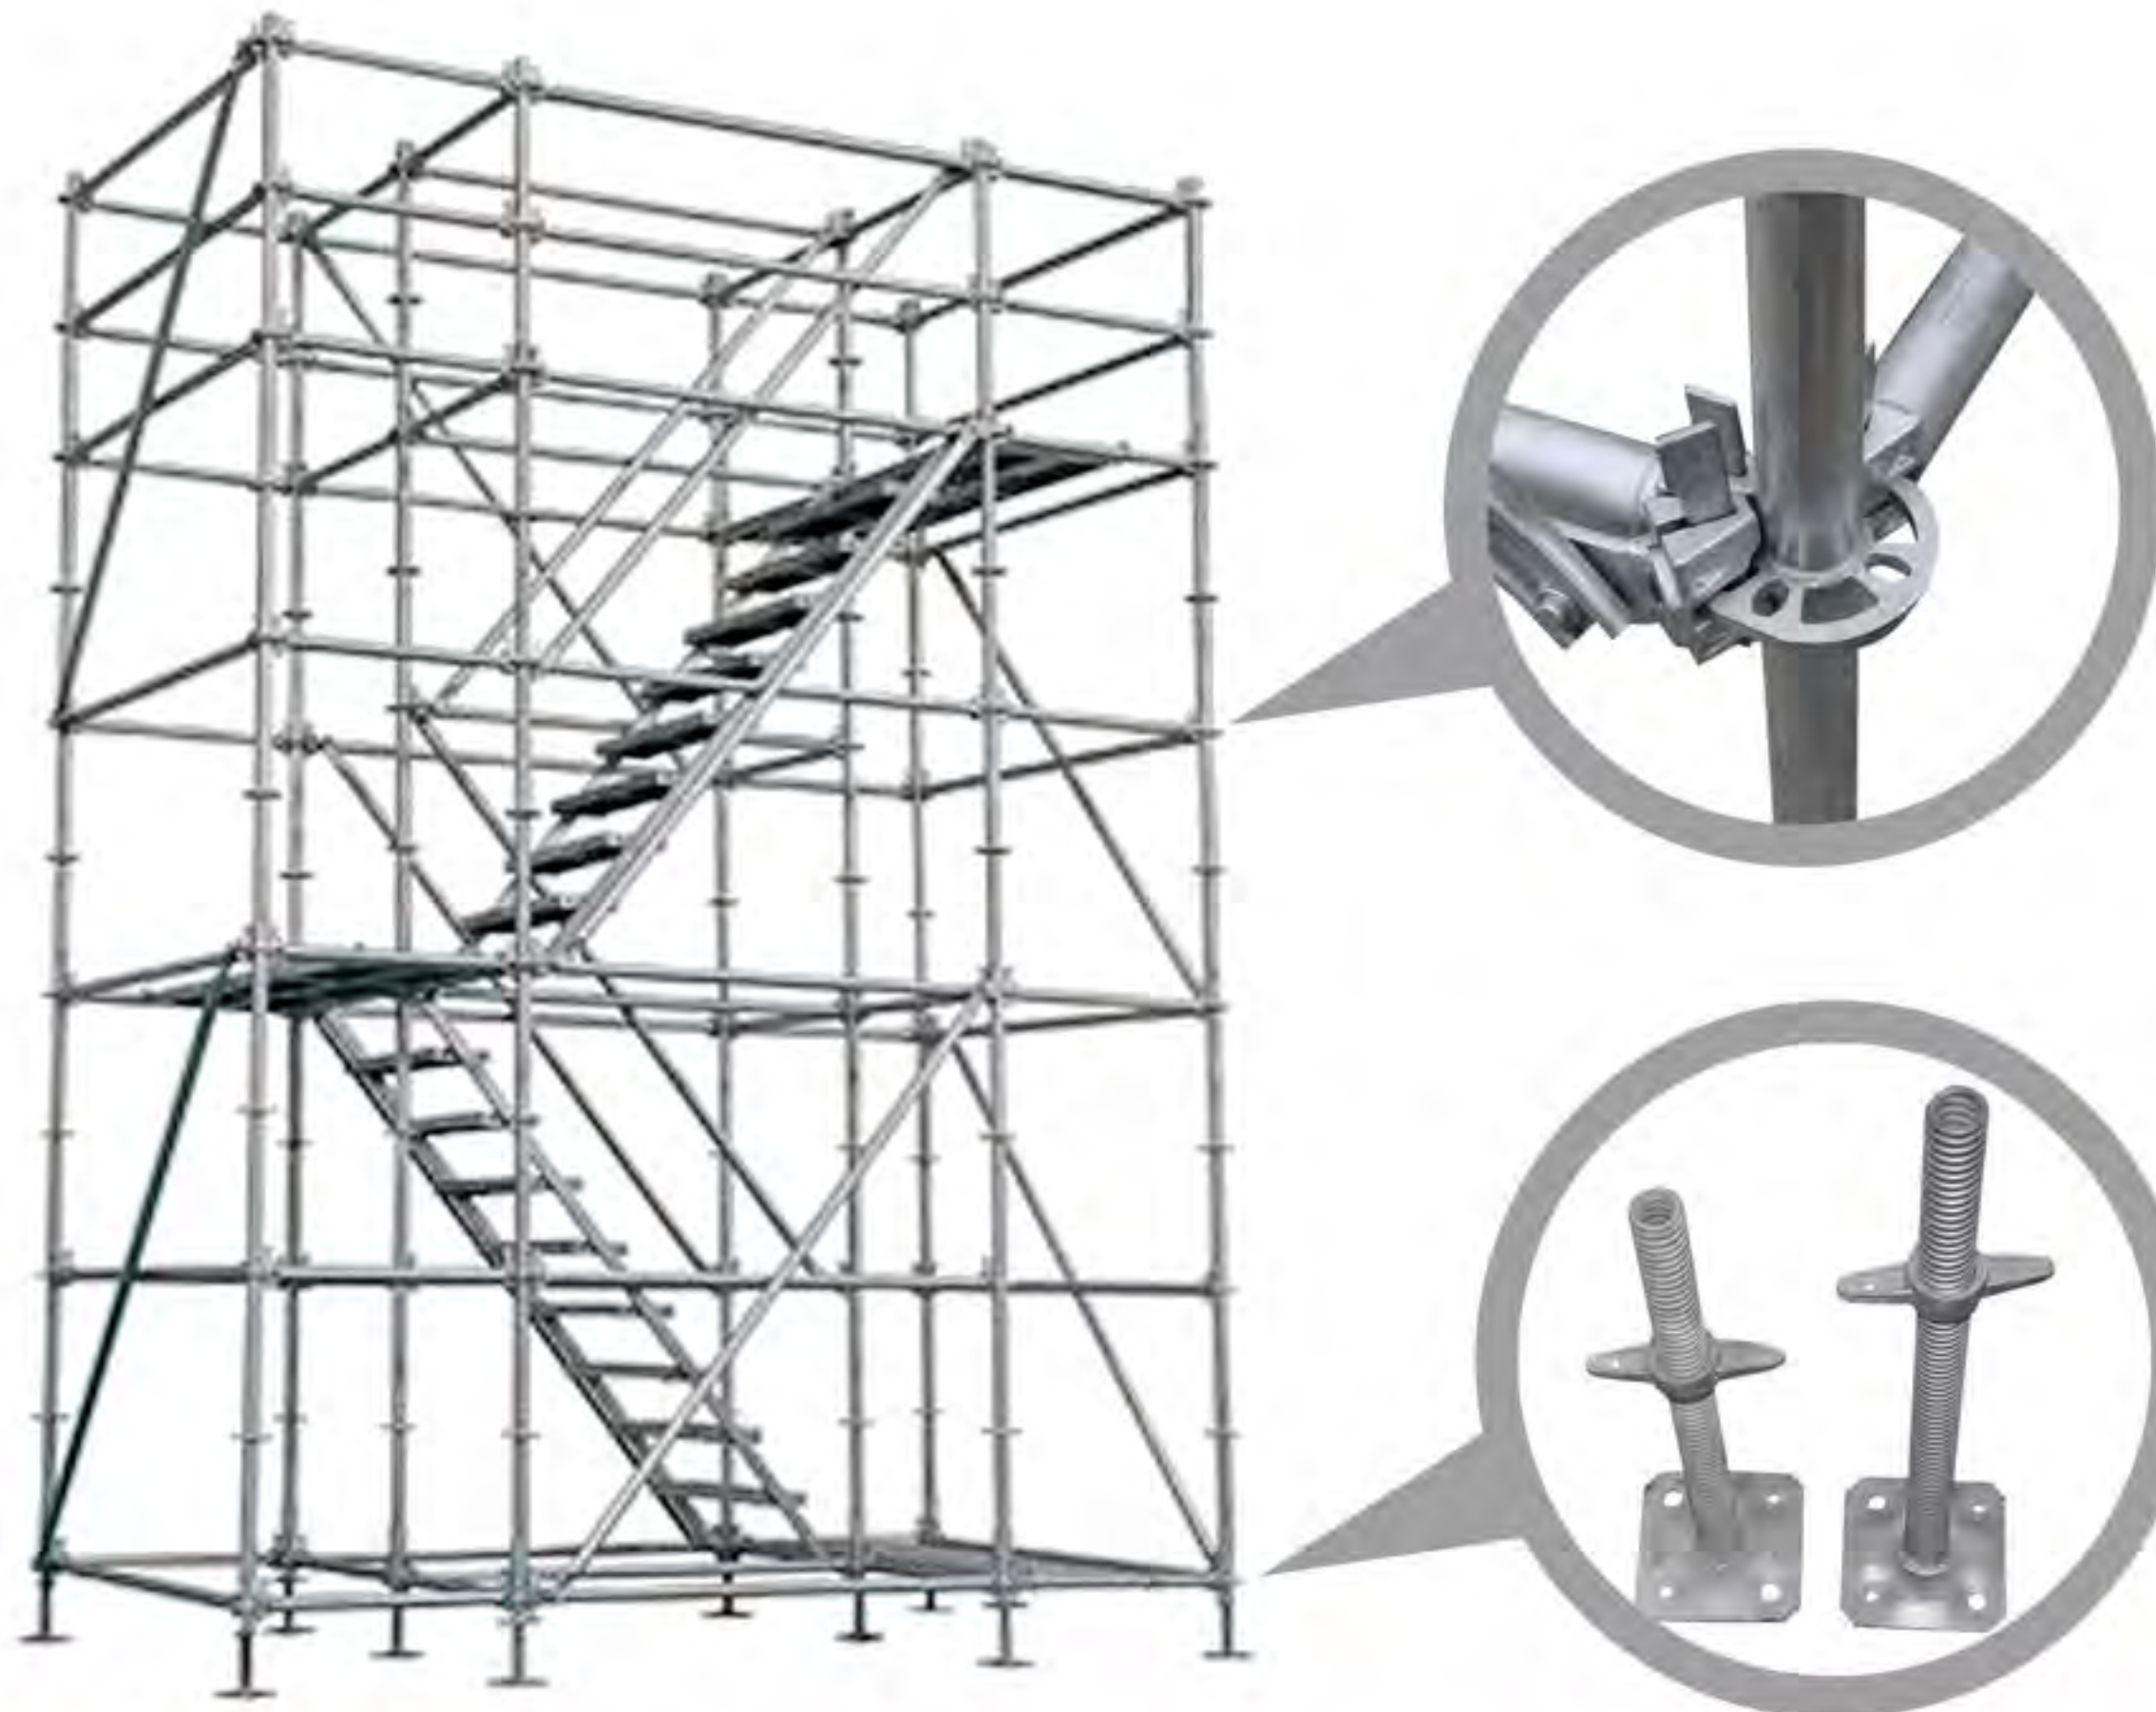

Rosette Weight: 0.49kg



Rosette Weight: 0.49kg



Rosette Weight: 0.49kg



Wedge Weight: 0.12kg



Ledger End Weight: 0.48kg



Ledger End Weight: 0.57kg



Ledger End Weight: 0.56kg



Ledger End Weight: 0.36kg



Ledger End Weight: 0.43kg



Ledger End Weight: 0.47kg



Ledger End Weight: 0.68kg



Brace End Weight: 0.99kg



Brace End Weight: 1.22kg



Brace End Weight: 1.27kg



Brace End Weight: 1.3kg



Side Brackets
Surface: H.D.G/E.G/Painted
Length: 730 Weight: 7.15kg



Steel Plank
Surface: H.D.G/E.G/Painted
Length: 1572mm,2072mm,2572mm



Ledger (Horizontal)
Size: 48.3*3mm Surface: H.D.G/E.G/Painted
Length: 730mm,1090mm,1572mm,2072mm,2572mm,3072mm



Standard (Vertical)
Size: 48.3*3.25mm Surface: H.D.G/E.G/Painted
Length: 500mm,1000mm,1500mm,2000mm,2500mm,3000mm,4000mm




Brace (Diagonal)
Size: 48.3*3mm Surface: H.D.G/E.G/Painted
Length: 2000*1570mm,2000*2072mm,2000*2572mm



Base Collar
Length: 240mm

Assemble Process

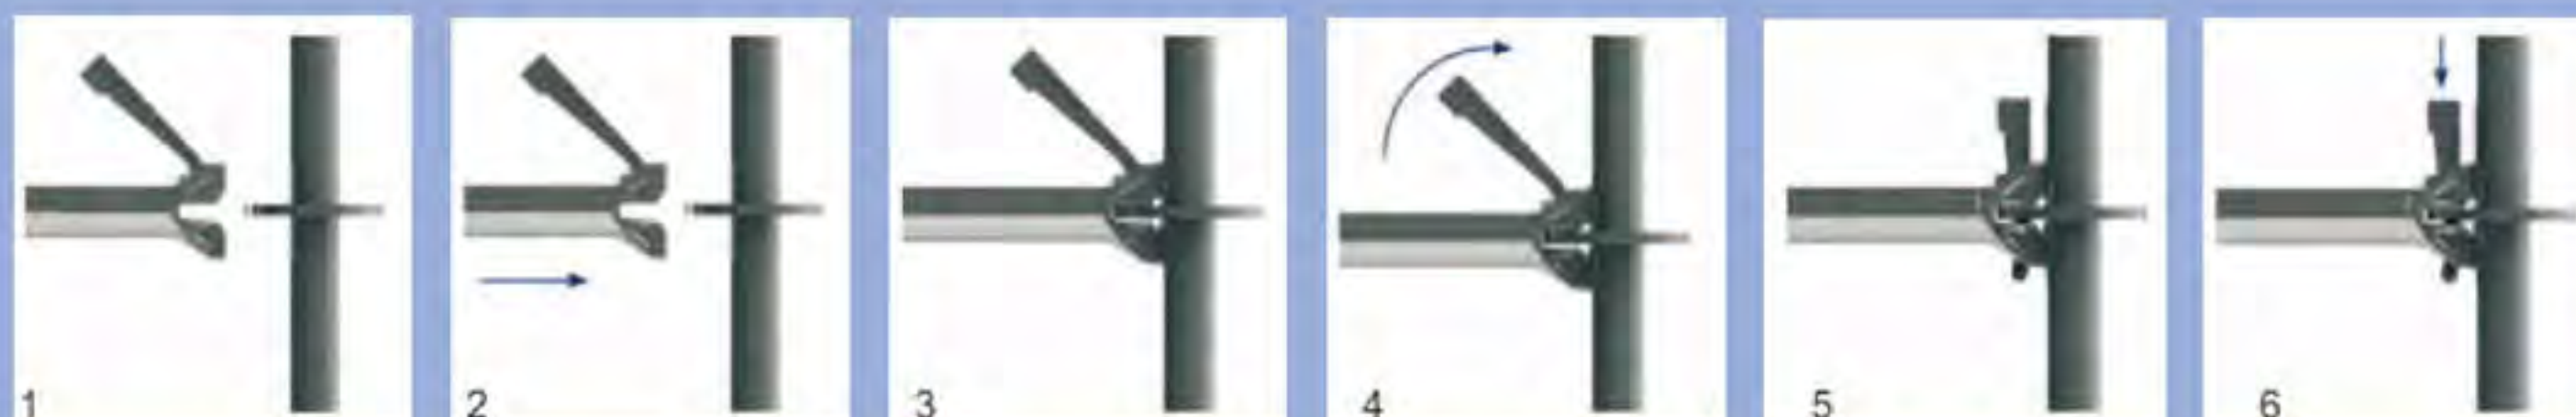


Advantages:

1. Stable structure and connection, the wedge lock system guarantees that all ledgers and diagonal braces are secured immediately they are placed.
2. Assembling easily with immediate, safe erection by just one person at any height.
3. The in built joint and the simple wedge connections guarantee a faster erection time.
4. SGS certified products with high precision and superior quality.
5. More than decade experience factory with automatic welding production line, meet timely delivery requirement for all customers.
6. Experienced engineer team to make sure stable quality.
7. Professional sales service with experienced sales team.



Components	Specifications	Surface
Frame	4FT - 1219x1219 mm	EG/HDG/Painting
	5FT - 1530x1219 mm	EG/HDG/Painting
	6FT - 1830x1219 mm	EG/HDG/Painting
	7FT - 2130x1219 mm	EG/HDG/Painting
Brace	1800 mm	EG/HDG/Painting
	2000 mm	EG/HDG/Painting
	2200 mm	EG/HDG/Painting
Base Jack	D38x4mmx600mm	EG/HDG/Painting
	D38x4mmx700mm	EG/HDG/Painting
U Head	D38x4mmx600mm	EG/HDG/Painting
	D38x4mmx700mm	EG/HDG/Painting


Components	Specifications	Surface
Frame	4FT - 1219x1219 mm	EG/HDG/Painting
	5FT - 1530x1219 mm	EG/HDG/Painting
	6FT - 1830x1219 mm	EG/HDG/Painting
	7FT - 2130x1219 mm	EG/HDG/Painting
Brace	1800 mm	EG/HDG/Painting
	2000 mm	EG/HDG/Painting
	2200 mm	EG/HDG/Painting
Base Jack	D48x4mmx800mm	EG/HDG/Painting
	D48x4mmx900mm	EG/HDG/Painting
	D48x6mmx1200mm	EG/HDG/Painting
U Head	D48x4mmx600mm	EG/HDG/Painting
	D48x6mmx700mm	EG/HDG/Painting
	D48x6mmx1200mm	EG/HDG/Painting

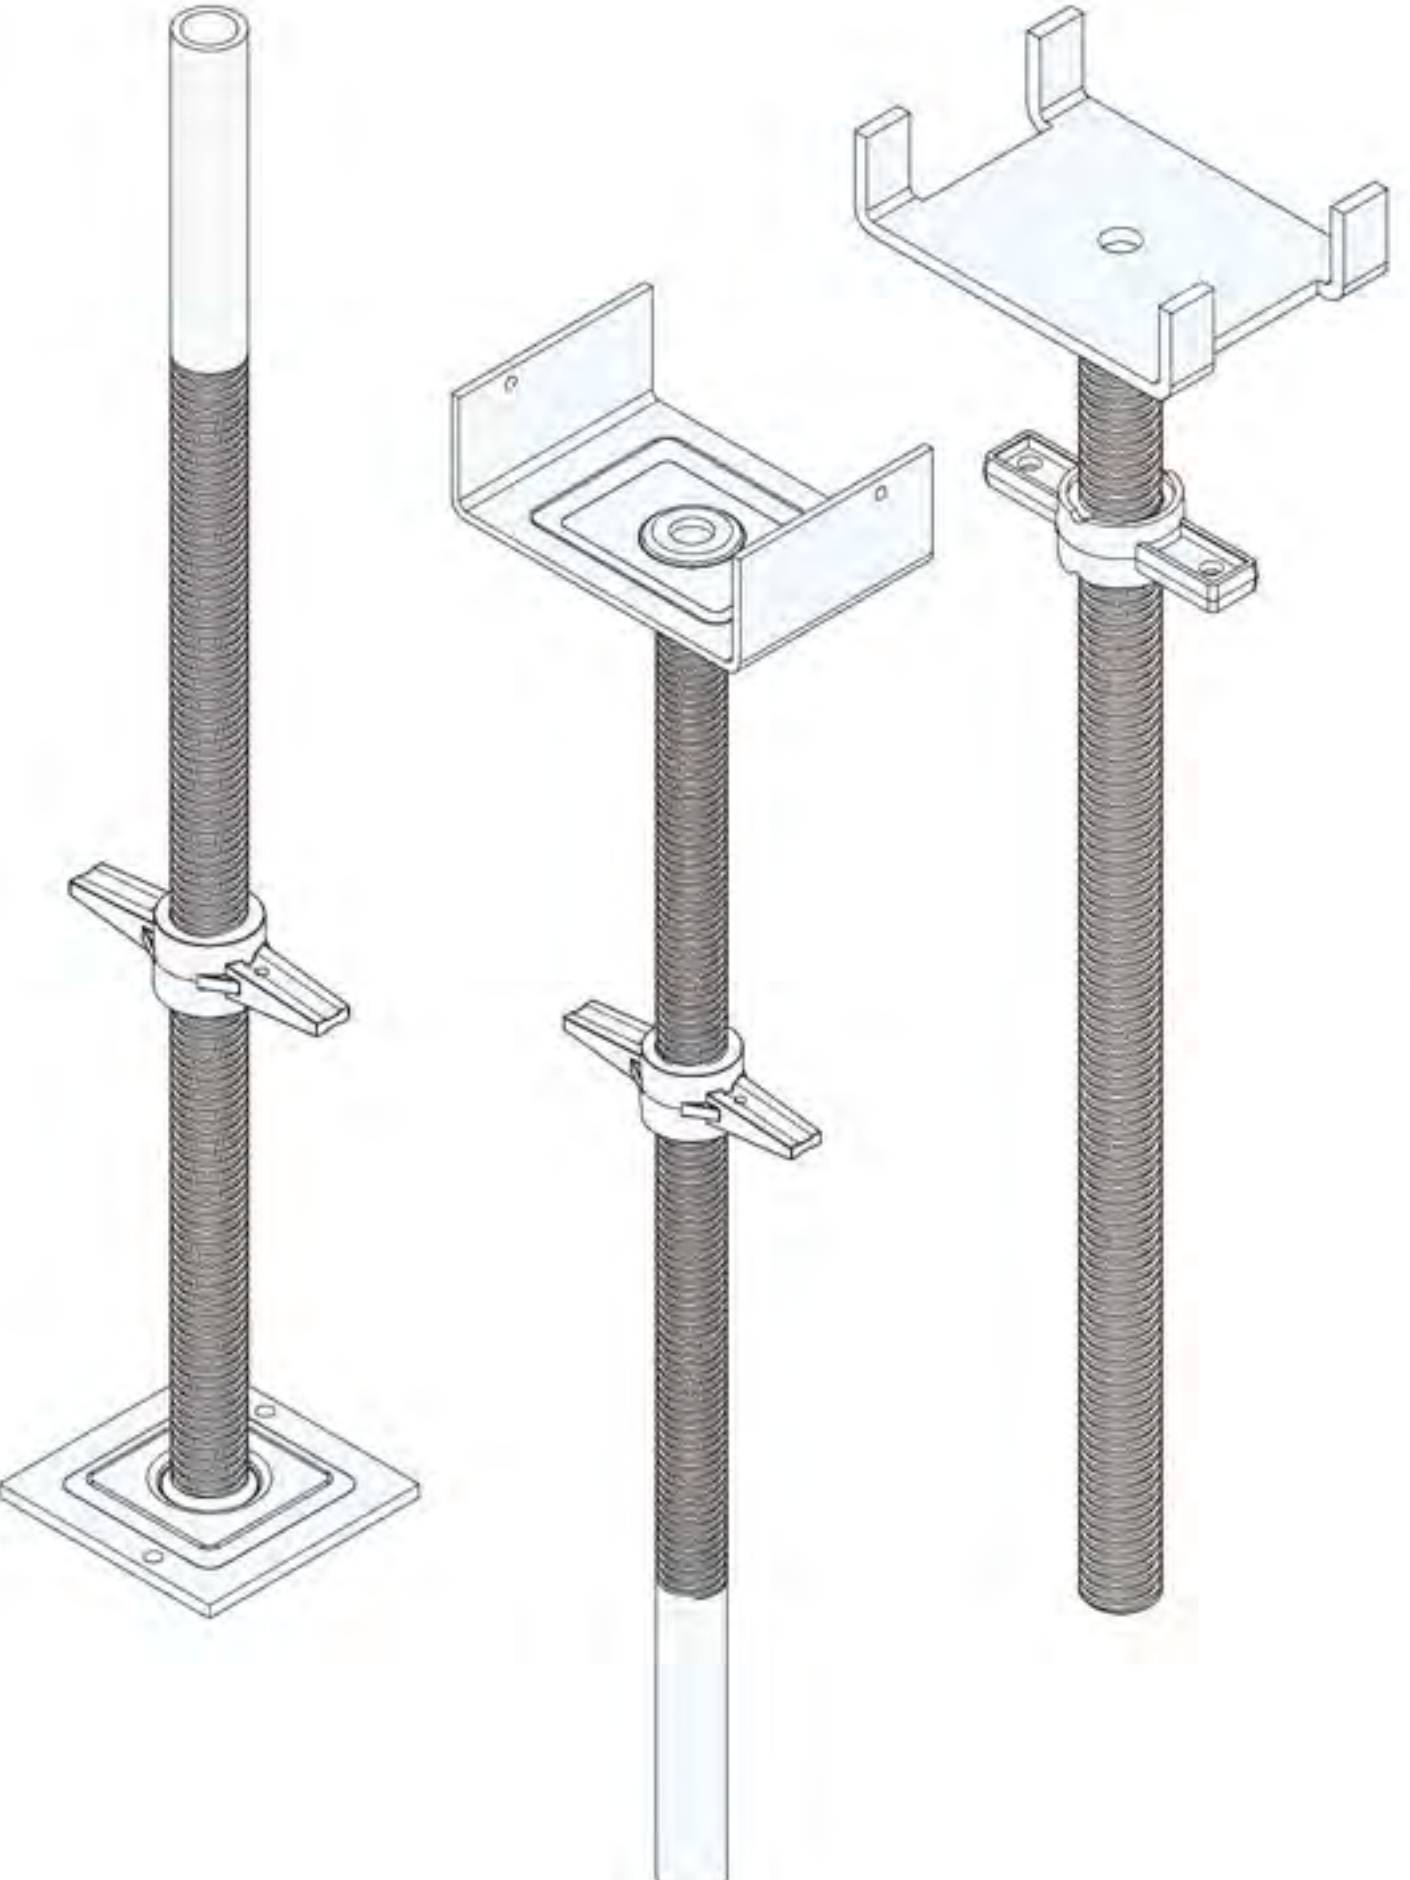

Base Jack
Jack Type: Hollow / Solid
Screw Rod: Seamless
Length: 300-1200mm
Tube Diameter: 30/32/34/35/38/48mm
Plate: 120x120x5mm / 150x150x6mm / 180x180x8mm
Surface: E.G. / H.D.G. / Painting

U Head Jack
Jack Type: Hollow / Solid
Screw Rod: Seamless
Length: 300-1200mm
Tube Diameter: 30/32/34/35/38/48mm
Plate: 150x120x50x5mm / 200x140x50x8mm
200x150x50x6mm / 200x150x55x8mm
220x150x80x8mm / 230x180x85x8mm
Surface: E.G. / H.D.G. / Painting

** All sizes are available for OEM under request.*

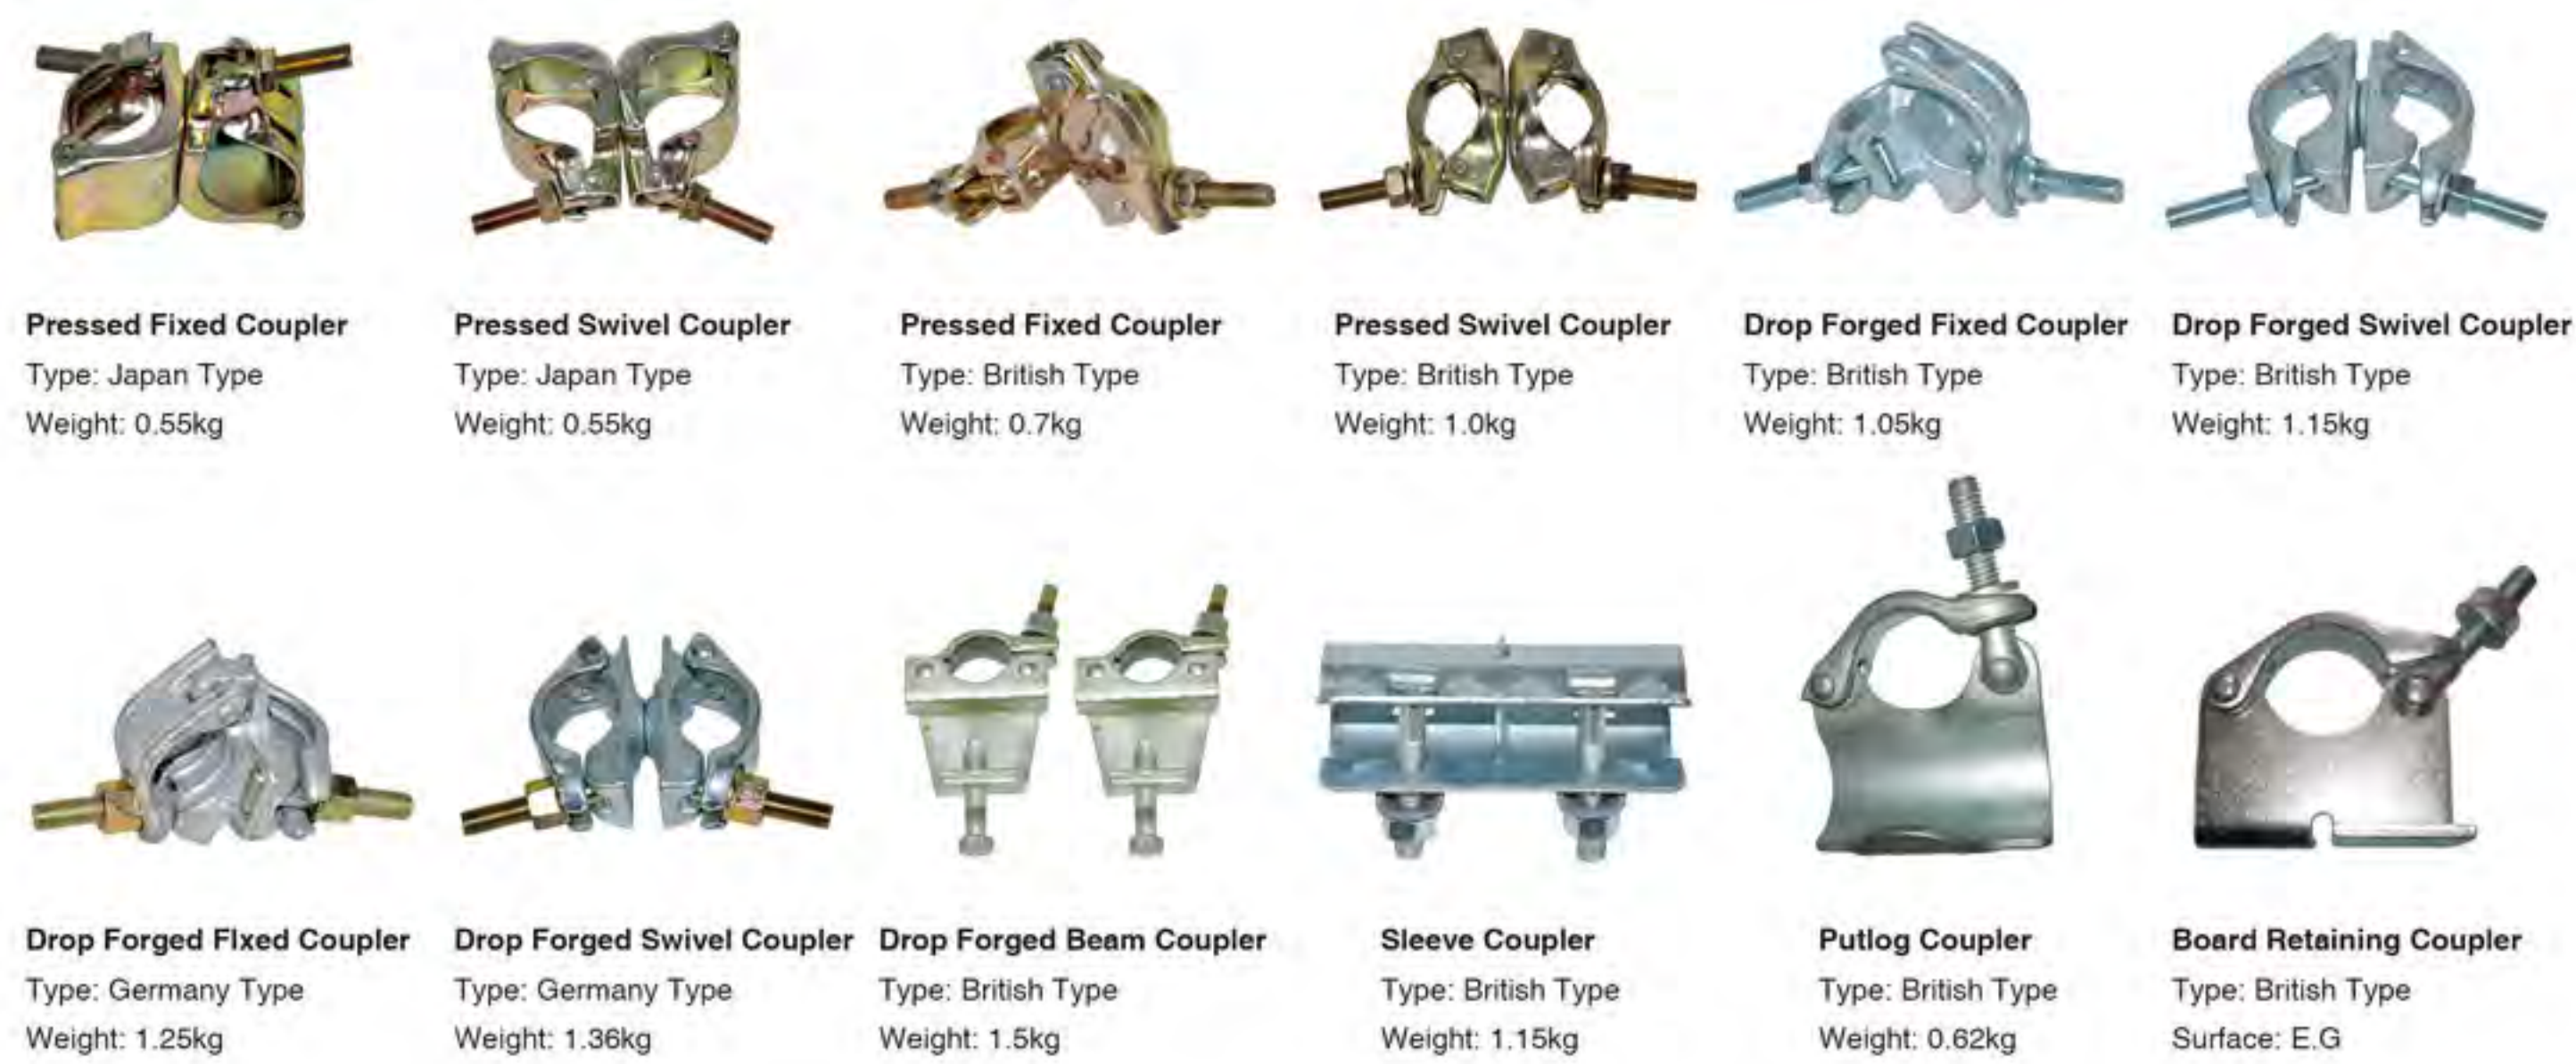

Tube Outer Diameter: 48.3mm, 48.6mm
Raw Material: Steel Q235, Steel Q355
Surface: Electro Galvanized, Hot Dip Galvanized, Painting, Black