




**TECON** | Slab Table Formwork  
Flex 20 Slab Formwork

Block A, Building 2, LEFO Commercial center, Wuzhong District,  
Suzhou, Jiangsu Province, China  
info@teconform.com  
0086-(0)512-65650586 0086-(0)512-65654586

[www.teconform.com](http://www.teconform.com)

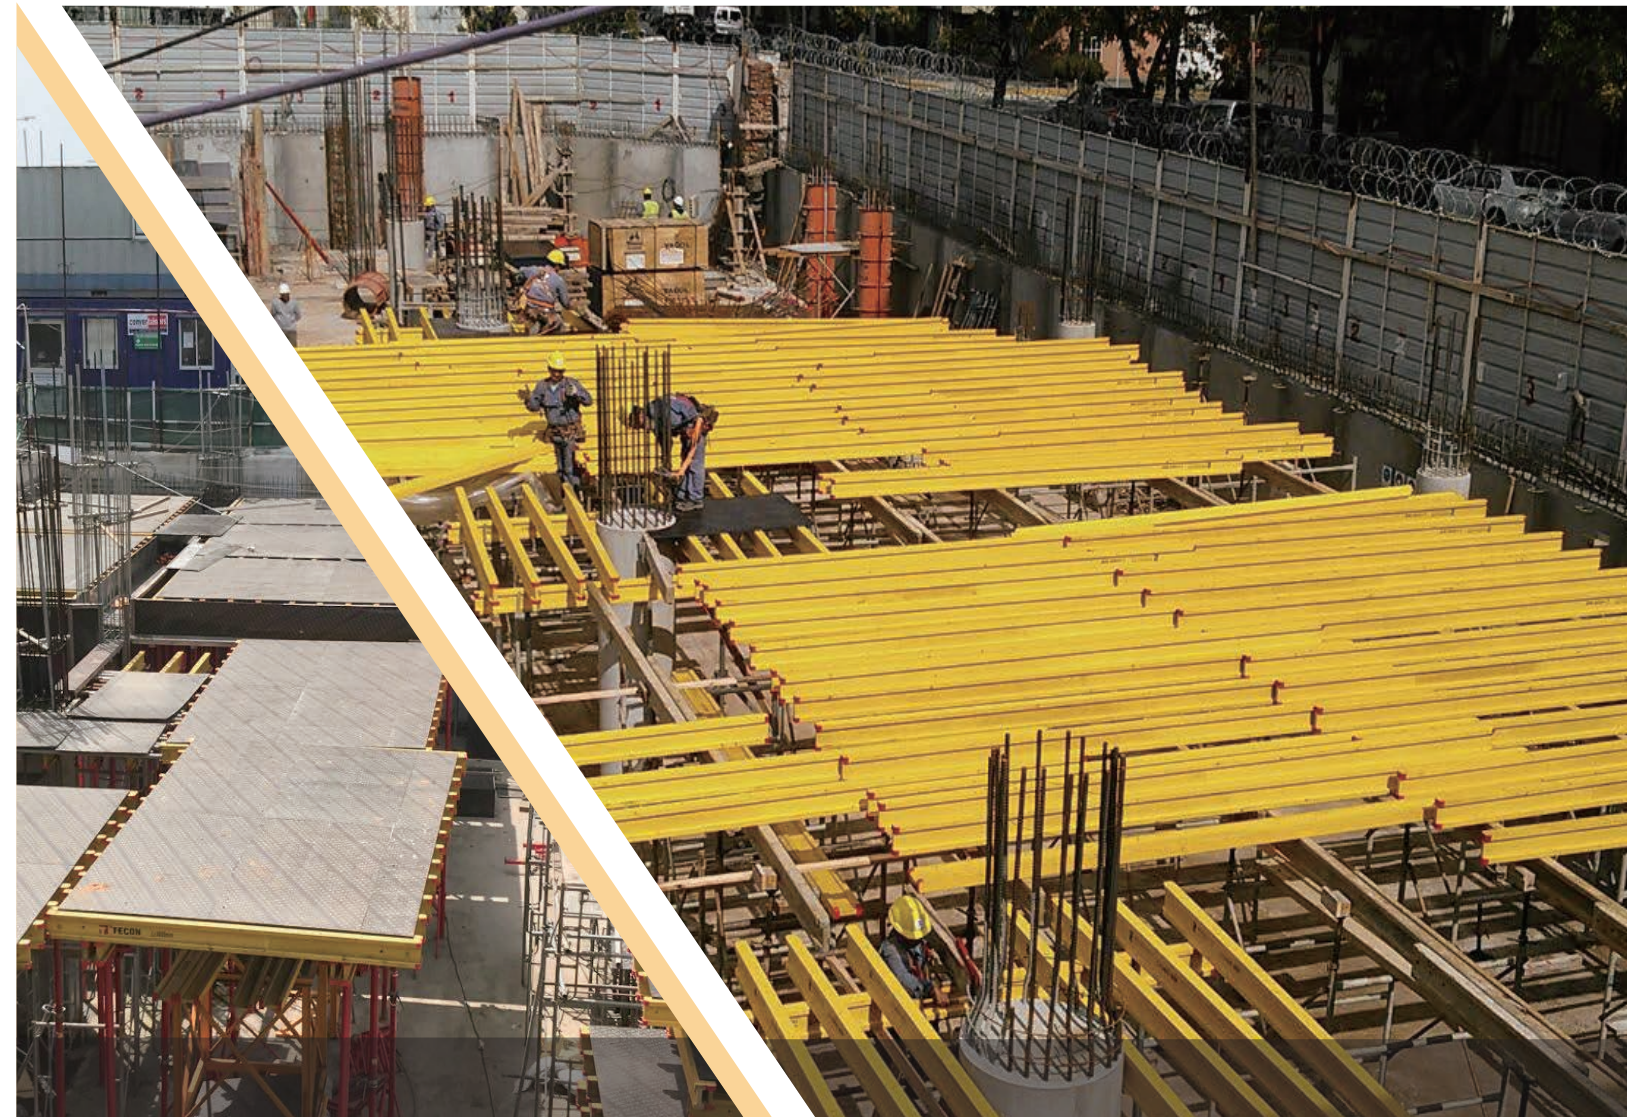




## Flex 20 Slab Formwork

TECON Flex 20 Slab formwork is the most flexible slab formwork. It is mainly consisted of H20 timber beam, shoring props and TECON-Form plywood. Their position and spacing can be freely arranged. Thus it provides maximum flexibility and ideal solution for most of complicated plans, slabs with drop beams or forming operation in narrow spaces.



## FEATURES

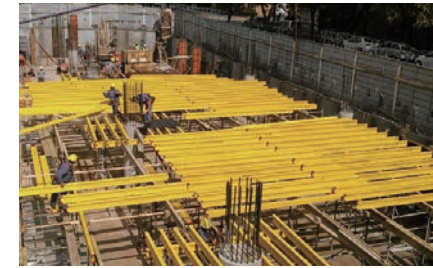

### Flexible for all plans by its components

- For any slab thickness & floor height
- For any layout even irregular plan
- For high density drop beams




### Cost efficiency

- Long service life of system components
- Most economic planning for specific project engineered by TECON specialist
- Easy transportation & storage from different job sites
- Without crane lift during erection

### Fast assembly saves time


- Free choice of several simple components include H20 girders and steel props

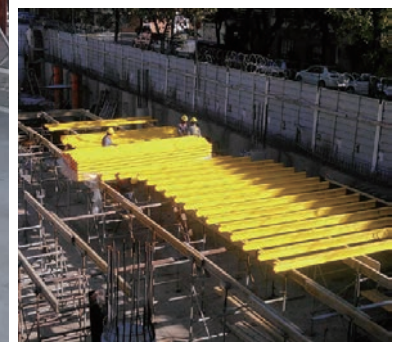



# SYSTEM DETAILS

## Overview

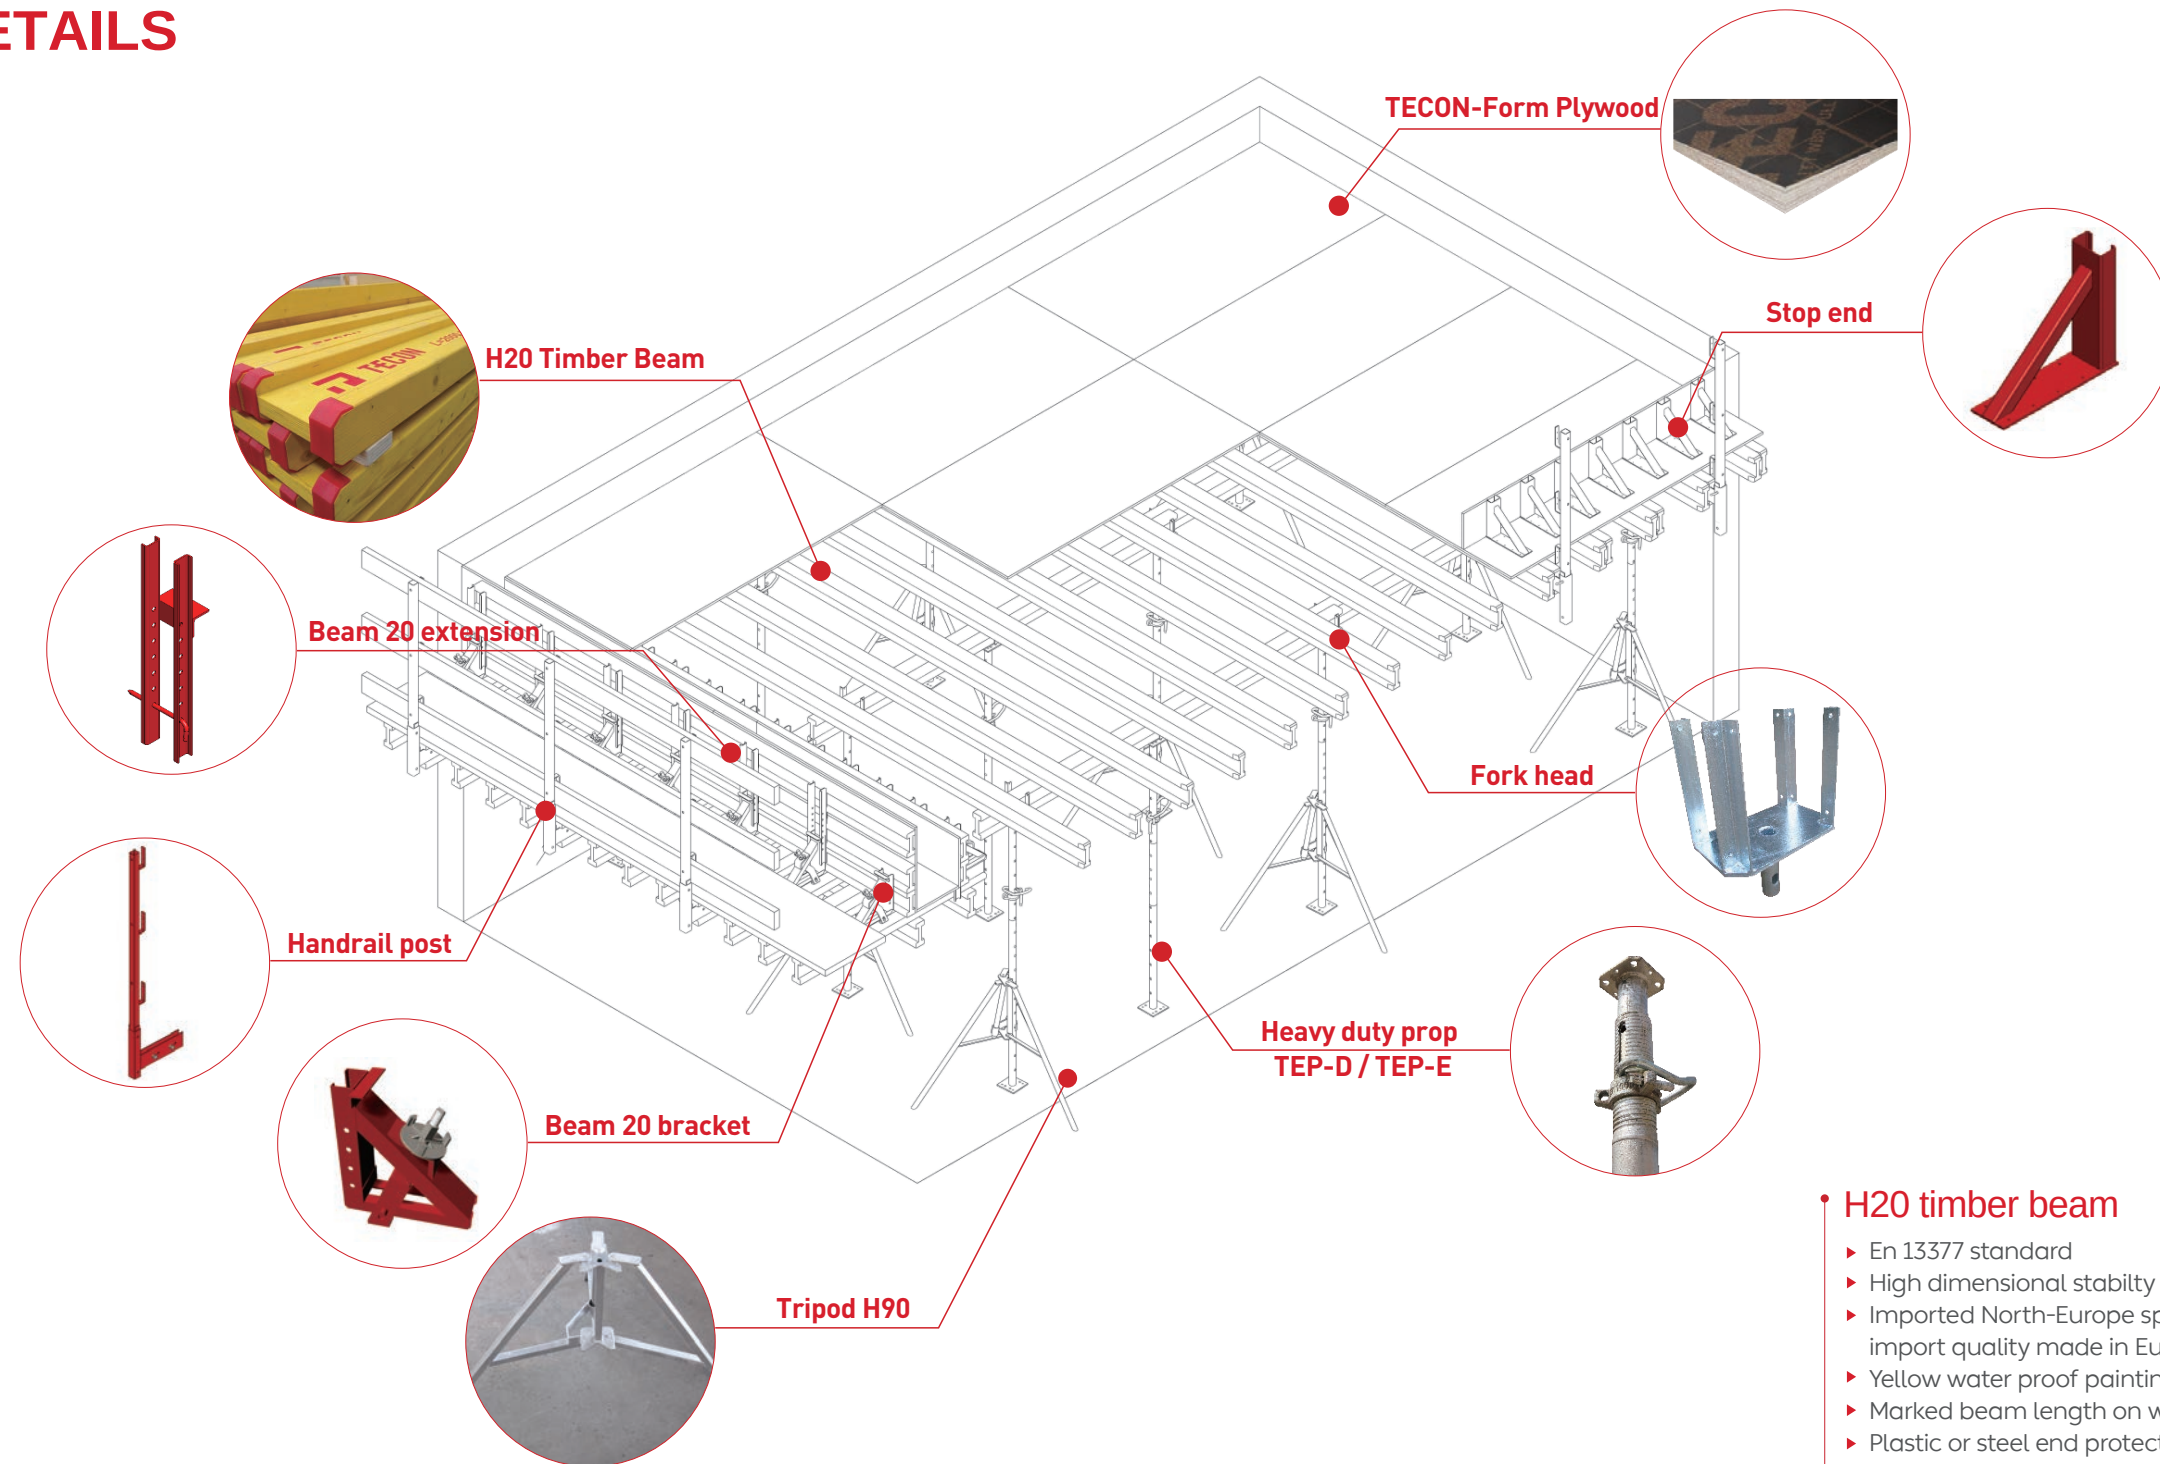

### TECON-Form Plywood

- ▶ High recycle usage times
- ▶ With 18mm & 21mm as option
- ▶ With TECON-Form Poplar, Hardwood and Birch as option

### TECON-Form Plas-tech

- ▶ Recycled material
- ▶ Smooth and flat concrete finishing without oil



### Beam 20 bracket

- ▶ Practical beam formwork support with effective height 300mm seated on H20 beam
- ▶ With easy tighten system by D15 rod & nut
- ▶ An extension height upto 900mm with assistance of H20 timber beam and wall tie system

### Heavy duty prop TEP-D, TEP-E

- ▶ High work load-bearing capacity at 20kN & 30kN
- ▶ Typical dimension: 76/63.5mm and 88.9/76mm
- ▶ 10cm safe zone design prevent hand hazard
- ▶ High tensile steel Q345 inner tube
- ▶ Cast steel nut
- ▶ Carved fabrication date or batch no. for easy tracking
- ▶ EN1065 standard; SGS tested
- ▶ Long service life guarantee

### H20 timber beam

- ▶ En 13377 standard
- ▶ High dimensional stability
- ▶ Imported North-Europe spruce as flange or complete import quality made in Europe
- ▶ Yellow water proof painting
- ▶ Marked beam length on web for easy recognition
- ▶ Plastic or steel end protection caps


### Aluminium beam

TECON Aluminium beam T150 or T165 is another type of formwork girder to replace H20 timber beam. It is much stronger and also with longer service life especially in the regions where rain a lot.



APPLICATION


Assembly Process

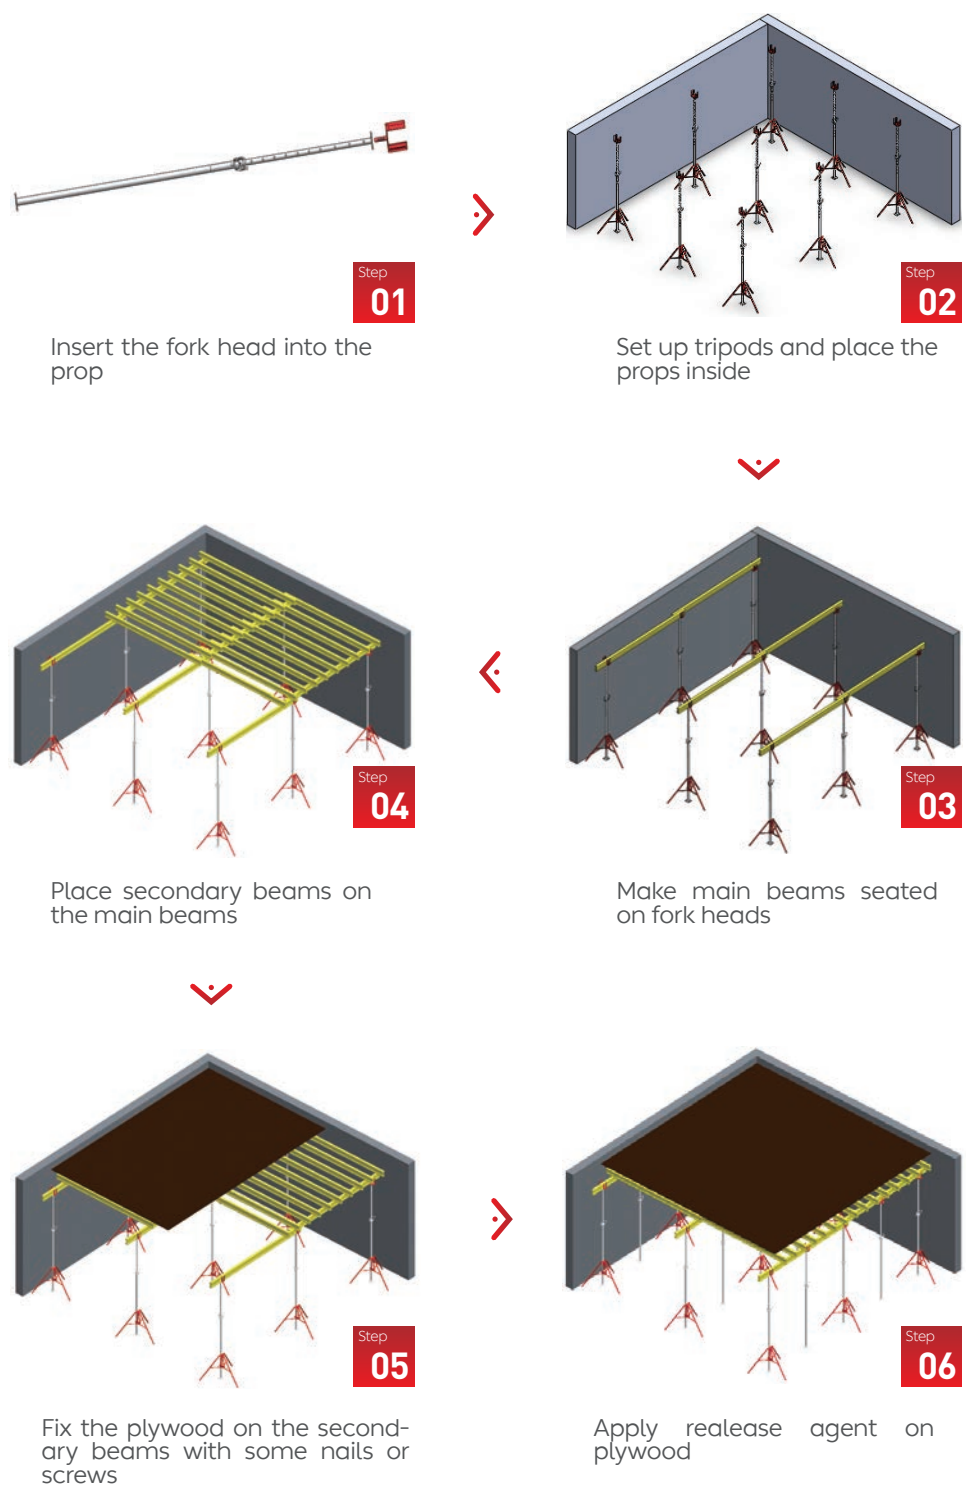


Step 07 Then set up handrail posts and toe-boards. Rebaring and pouring the concrete.

Measurement table

| Floor-thickness<br>[cm] | Total load<br>[kN/m <sup>2</sup> ] | Max.permitted spacing of Secondary beams[m] |       |       |      |      | Max.permitted spacing of floor props[m]      |      |      |      |      |      |      |      |      |  |  |  |
|-------------------------|------------------------------------|---------------------------------------------|-------|-------|------|------|----------------------------------------------|------|------|------|------|------|------|------|------|--|--|--|
|                         |                                    | For a secondary beam spacing[m] of:         |       |       |      |      | For a pre-selected main beam spacing [m] of: |      |      |      |      |      |      |      |      |  |  |  |
|                         |                                    | 0.50                                        | 0.625 | 0.667 | 0.75 | 1.00 | 1.25                                         | 1.50 | 1.75 | 2.00 | 2.25 | 2.50 | 2.75 | 3.00 | 3.50 |  |  |  |
| 10                      | 4.40                               | 3.63                                        | 3.97  | 3.29  | 3.17 | 2.88 | 2.67                                         | 2.46 | 2.28 | 2.13 | 2.01 | 1.82 | 1.65 | 1.52 | 1.30 |  |  |  |
| 12                      | 4.92                               | 3.43                                        | 3.19  | 3.12  | 3.00 | 2.72 | 2.53                                         | 2.33 | 2.16 | 2.02 | 1.81 | 1.63 | 1.48 | 1.36 | 1.16 |  |  |  |
| 14                      | 5.44                               | 3.27                                        | 3.04  | 2.97  | 2.86 | 2.60 | 2.41                                         | 2.21 | 2.05 | 1.84 | 1.63 | 1.47 | 1.34 | 1.23 | 1.05 |  |  |  |
| 16                      | 5.96                               | 3.14                                        | 2.92  | 2.85  | 2.74 | 2.49 | 2.31                                         | 2.12 | 1.92 | 1.68 | 1.49 | 1.34 | 1.22 | 1.12 | 0.96 |  |  |  |
| 18                      | 6.48                               | 3.03                                        | 2.81  | 2.75  | 2.65 | 2.40 | 2.22                                         | 2.03 | 1.76 | 1.54 | 1.37 | 1.23 | 1.12 | 1.03 | 0.88 |  |  |  |
| 20                      | 7.00                               | 2.93                                        | 2.72  | 2.66  | 2.56 | 2.32 | 2.14                                         | 1.90 | 1.63 | 1.43 | 1.27 | 1.14 | 1.04 | 0.95 |      |  |  |  |
| 22                      | 7.52                               | 2.84                                        | 2.64  | 2.58  | 2.48 | 2.26 | 2.06                                         | 1.77 | 1.52 | 1.33 | 1.18 | 1.06 | 0.97 | 0.89 |      |  |  |  |
| 24                      | 8.04                               | 2.76                                        | 2.57  | 2.51  | 2.42 | 2.19 | 1.99                                         | 1.66 | 1.42 | 1.24 | 1.11 | 1.00 | 0.90 | 0.83 |      |  |  |  |
| 26                      | 8.56                               | 2.70                                        | 2.50  | 2.45  | 2.35 | 2.14 | 1.87                                         | 1.56 | 1.34 | 1.17 | 1.04 | 0.93 | 0.85 |      |      |  |  |  |
| 28                      | 9.08                               | 2.63                                        | 2.44  | 2.39  | 2.30 | 2.09 | 1.76                                         | 1.47 | 1.26 | 1.10 | 0.98 | 0.88 | 0.80 |      |      |  |  |  |
| 30                      | 9.66                               | 2.57                                        | 2.39  | 2.34  | 2.25 | 2.03 | 1.66                                         | 1.38 | 1.18 | 1.04 | 0.92 | 0.83 | 0.75 |      |      |  |  |  |
| 35                      | 11.22                              | 2.45                                        | 2.27  | 2.23  | 2.14 | 1.78 | 1.43                                         | 1.19 | 1.02 | 0.89 | 0.79 | 0.71 |      |      |      |  |  |  |
| 40                      | 12.78                              | 2.35                                        | 2.18  | 2.13  | 2.04 | 1.56 | 1.25                                         | 1.04 | 0.89 | 0.78 | 0.70 | 0.63 |      |      |      |  |  |  |
| 45                      | 14.34                              | 2.26                                        | 2.10  | 2.04  | 1.93 | 1.39 | 1.12                                         | 0.93 | 0.80 | 0.70 | 0.62 | 0.56 |      |      |      |  |  |  |
| 50                      | 15.90                              | 2.18                                        | 2.01  | 1.94  | 1.83 | 1.26 | 1.01                                         | 0.84 | 0.72 | 0.63 | 0.56 |      |      |      |      |  |  |  |

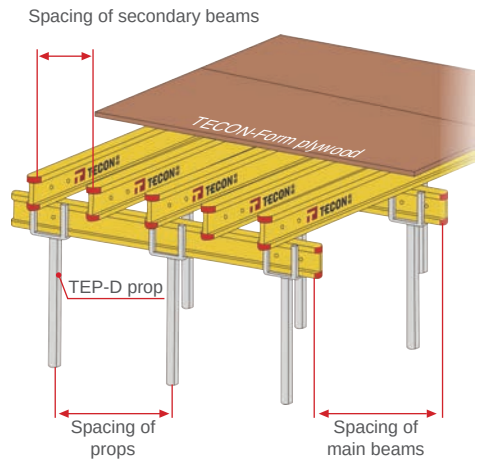

Beam solution



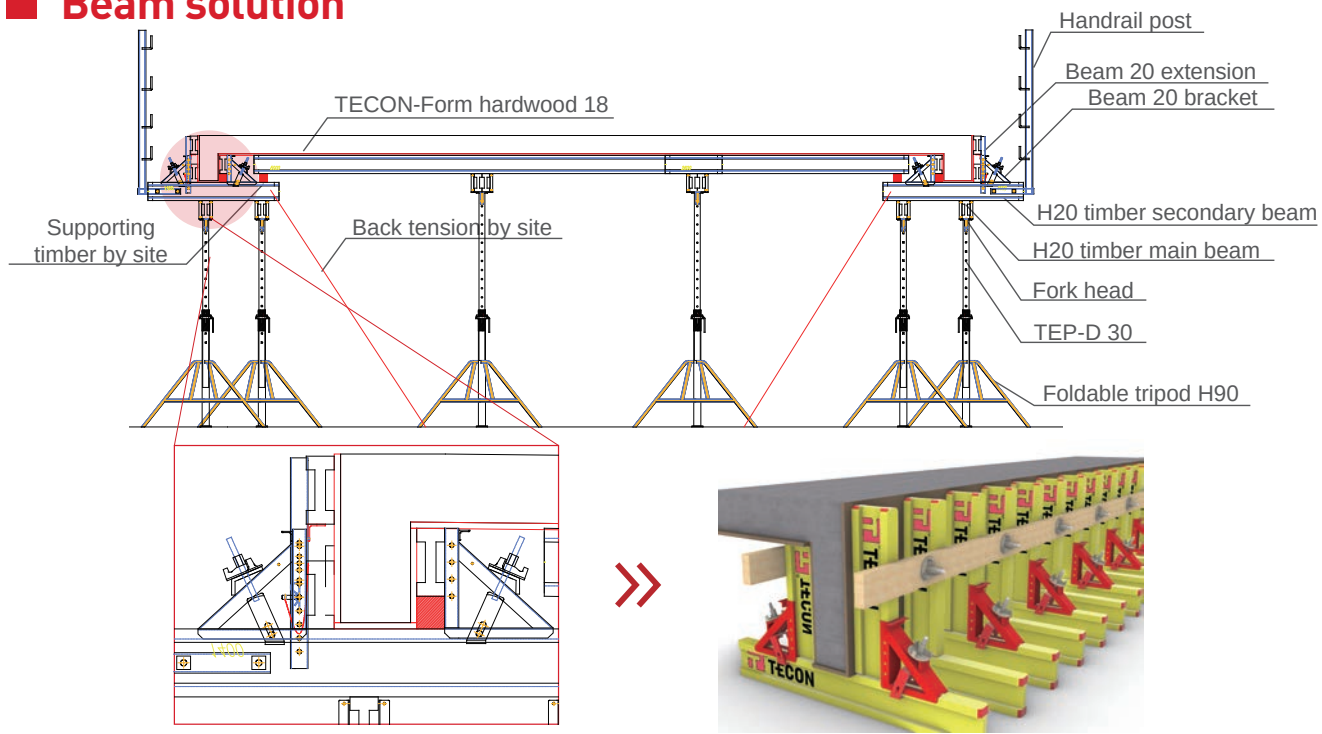


Beam 20 Bracket spacing chart


| Beam height H(cm) | Beam 20 Bracket space (m) |                             |                             |
|-------------------|---------------------------|-----------------------------|-----------------------------|
|                   | Without floor slab        | Floor slab thickness D=20cm | Floor slab thickness D=30cm |
| 30                | 1.5                       | 1.25                        | 1.25                        |
| 40                | 1.0                       | 0.85                        | 0.65                        |
| 50                | 1.0                       | 0.65                        | 0.50                        |
| 60                | 1.0                       | 0.65                        | 0.50                        |
| 70                | 0.65                      | 0.40                        | -                           |



## Early strip solution



## Site application

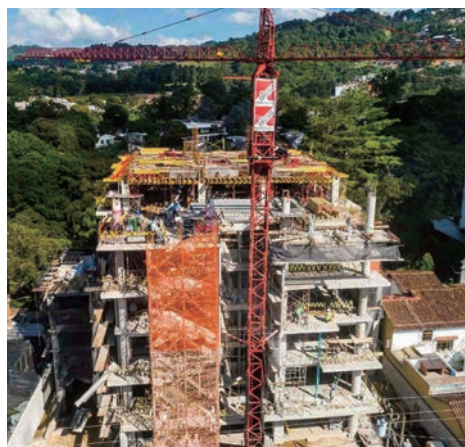





## Slab Table Formwork



TECON Slab Table formwork is one of the most efficient slab shuttering solution, especially for large area and multiple floors structure with few beams. Work as complete unit by combine H20 timber beams, plywood and heavy duty props. TECON Slab Table formwork provides a cost-effective and efficient solution for the slab concrete work on site.

## FEATURES



### Fast & efficient for large area floor project



- Once pre-assembled, no need dismantle and assemble repeatedly
- Big table unit up to 4x6m ensures efficiently set up and strip
- Good mobility, easy and fast to next position via trolley or tower crane



### Minimize your labor cost



- Avoid a lot of assembly and dismantle job
- 50% labors saved at least

### Clean & tidy site

- Improving site appearance to well organized condition

### Well compatible with scaffold for high floor


- Can be used together with TECON Shoring Tower ST60 for great height up to 20m





# SYSTEM DETAILS

## Overview

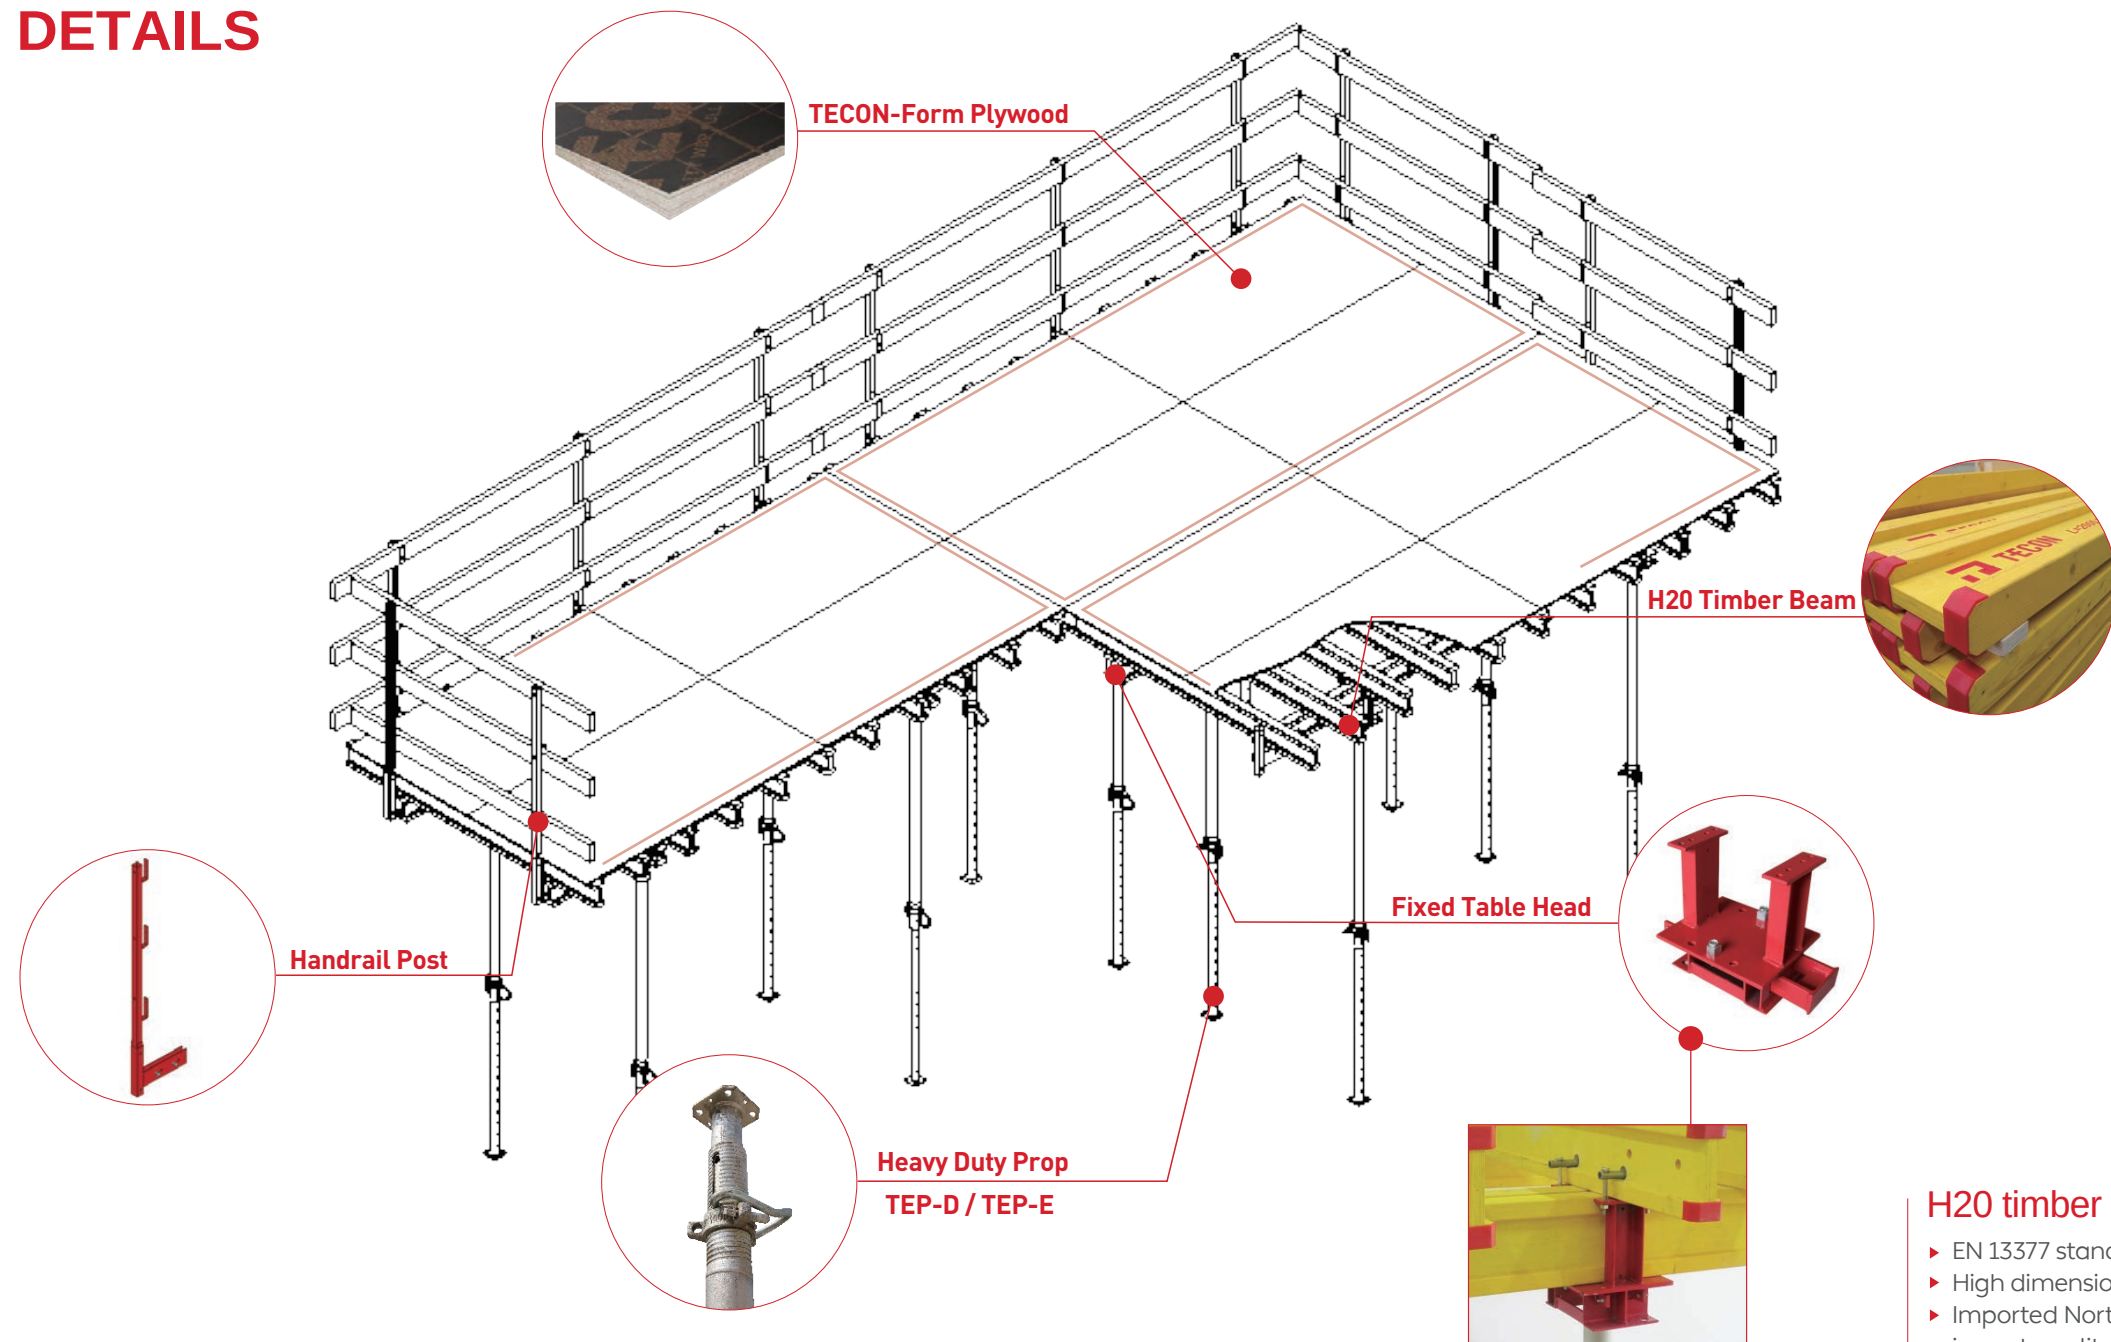

### TECON-Form Plywood

- ▶ High recycle usage
- ▶ With 18mm or 21mm thickness as option
- ▶ With TECON-Form Poplar, Hardwood and Birch as option

### TECON-Form Plas-tech

- ▶ Recycled material
- ▶ Smooth and flat concrete finishing and no need release agent



### Fixed Table Head

- ▶ The key part of table formwork to connect prop, main beam and secondary beam
- ▶ Ensures rigid connection
- ▶ Easy operation to fix up by using a single hammer

### Heavy duty prop TEP-D, TEP-E

- ▶ High work load-bearing capacity at 20kN or 30kN
- ▶ Typical dimension: 76/63.5mm and 88.9/76mm
- ▶ 10cm safe zone design to prevent hands
- ▶ High tensile steel Q345 inner tube
- ▶ Cast steel nut with high strength
- ▶ Carved fabrication date or batch no. for easy tracking
- ▶ EN1065 standard; SGS tested
- ▶ Long service life guarantee

### H20 timber beam

- ▶ EN 13377 standard
- ▶ High dimensional stability
- ▶ Imported North-Europe spruce as flange or complete import quality made in Europe
- ▶ Yellow water proof painting
- ▶ Mark beam length on web for easy recognition
- ▶ Plastic or steel end protection caps

### Aluminium beam

TECON Aluminium beam T150 or T165 is another option for formwork girder. It is much stronger and service life is longer, especially in the regions where rain a lot.



T150




T165

Standard size

Standard sizes are shown in below table, the biggest table size can up to 4x6m  
Customization is also available depending on different layout of projects.

| Description           | Weight (Kg) |
|-----------------------|-------------|
| Table form 2.00x4.00m | 350.95      |
| Table form 2.50x4.00m | 403.45      |
| Table form 2.00x5.00m | 420.45      |
| Table form 2.50x5.00m | 485.45      |

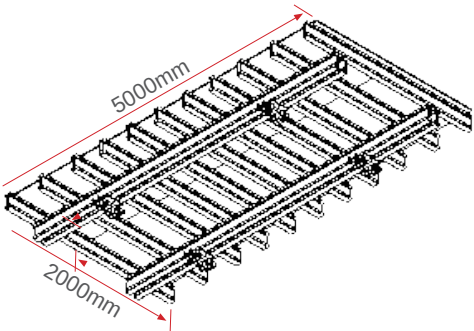


APPLICATION


Assembly process




Make installation platform with size indications

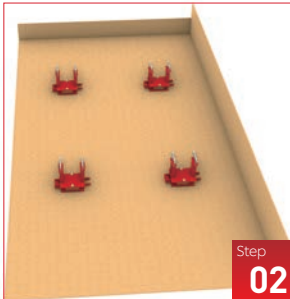


Place fixed table heads at right position

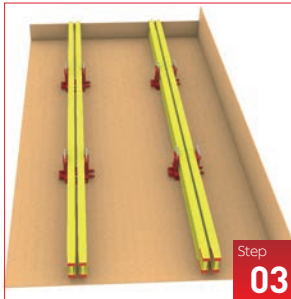

Put main beams into fixed table heads

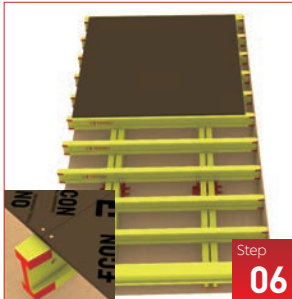

Fix plywood onto secondary beams by using screws or nails

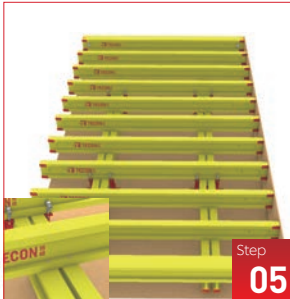

Fix other secondary beams onto main beams by using screws or nails at flange position until completion



Fix the first two secondary beams with fixed table head and main beam by U bolts




Insert props end to top into table heads and fasten them by hammer hitting on the wedge



Assembly completion



Set up between table formworks

To achieve easy set up and strip after concrete casting, the sliced plywood acts as formwork joints between different tables

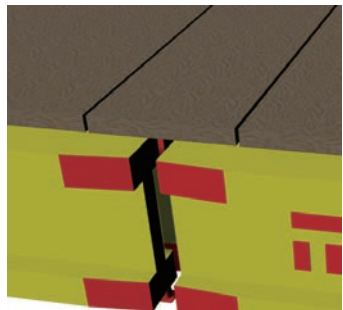

Safety around floor edges

- ▶ Necessary reinforcement to fasten table units onto the slab is a must to prevent them from possible accident especially at floor edge.
- ▶ With handrail post fixed along the floor edges on H20 beam , it provides your site crews with work platform as well as protection. No extra work platform or protection materials required

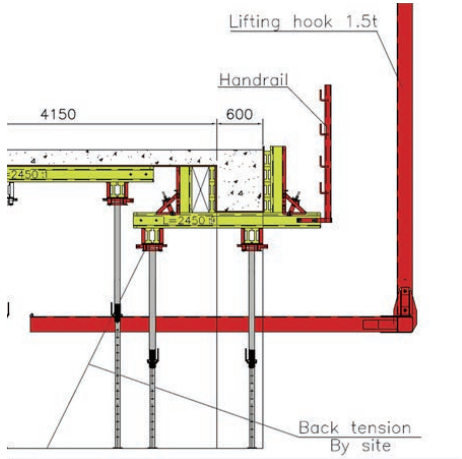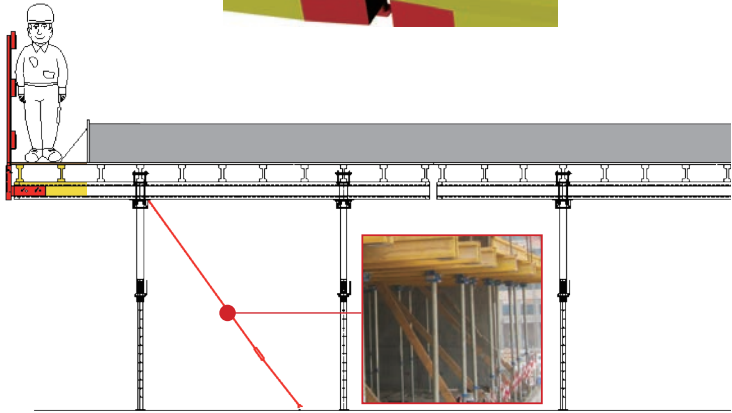

Beam solution

- ▶ For drop beams, TECON Beam Table formwork offers you the most optimum solution
- ▶ With TECON Beam 20 bracket, various sizes of beams can be formed easily

Great height solution with shoring tower up to 20m

- ▶ With TECON Heavy Duty Prop, the slab storey height can reach 5.5 meters
- ▶ With TECON Shoring Tower ST60, the slab storey height can reach more than 5.5 meters
- ▶ The work load capacity for TS60 is 60kN per leg, equals 240 kN work load per tower unit. By vertically setup, ST60 can reach higher position for those construction like lobby and overpass. Therefore, ST60 extends Slab Table formwork's(as well as Flex 20 slab formwork) application area into much higher load and greater height.





■ Transportation



Moving on the same floor can use transportation trolley





Moving from one floor to the upper floor need to use lifting fork












Moving from one site to another site need to use truck

■ Site application


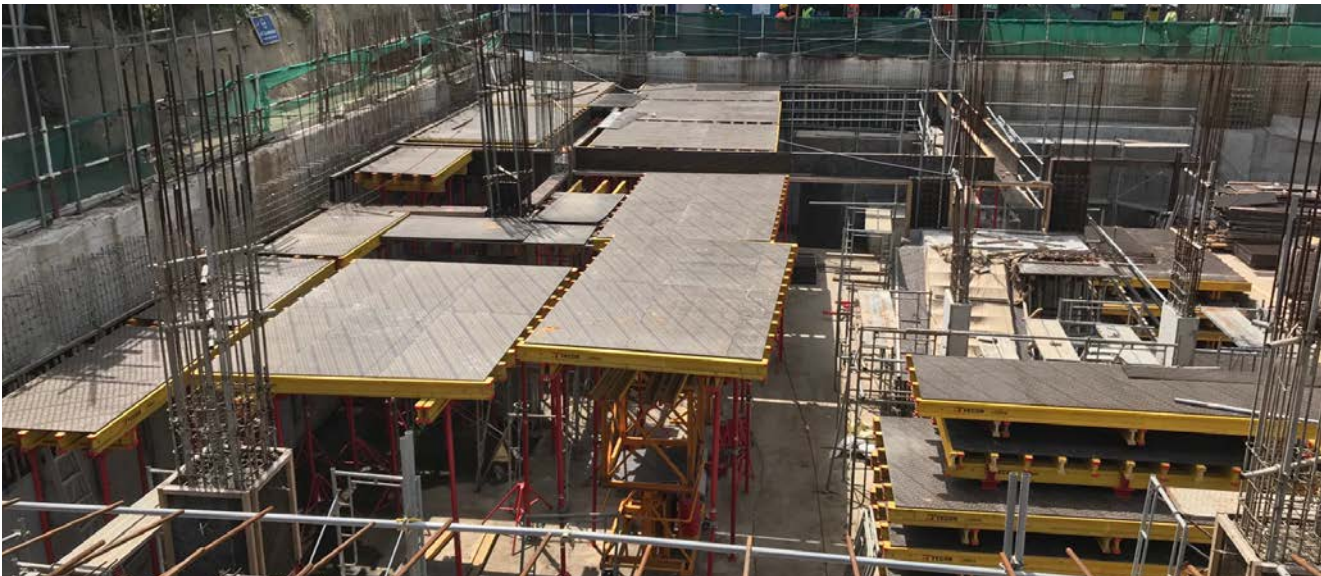



| Description                                                                                                | Unit Weight (kg) | Size (mm)    |
|------------------------------------------------------------------------------------------------------------|------------------|--------------|
|  TECON-Form Poplar 21   | 32.50            | 1220*2440*21 |
|  TECON-Form Hardwood 21 | 35.01            | 1220*2440*21 |
|  TECON-Form Birch 21  | 42.5             | 1220*2440*21 |
|  H20 Timber Beam      | 11.03            | 2.45m        |
|                                                                                                            | 14.85            | 3.0m         |

| Description                                                                                                | Unit Weight (kg) | Article Number |
|------------------------------------------------------------------------------------------------------------|------------------|----------------|
|  Handrail Post 1.8m   | 12.22            | 20801100       |
|  Stop End             | 2.68             | 20700300       |
|  Cross Beam Clamp H20 | 0.82             | 20700600       |
|  Slab Edge Clamp H20  | 1.2              | 51003200       |
|                                                                                                            | 2                | 51002700       |

| Description                                                                                                     | Unit Weight (kg) | Article Number |
|-----------------------------------------------------------------------------------------------------------------|------------------|----------------|
|  Fork Head                   | 2.83             | 20700100       |
|  Two Arm Head               | 1.37             | 20700200       |
|  Early Strip Head          | 7.72             | 20702000       |
|  Drop Head                 | 4.08             | 20700800       |
|  Fixed Table Head          | 17.98            | 30801000       |
|  Beam 20 Bracket H=300mm   | 8.01             | 20700400       |
|  Beam 20 Extension H=620mm | 3.8              | 20700500       |
|  Intermedia Head 20        | 3.53             | /              |
|  L pin                     | 0.15             | /              |



| Description                                                                                                                        |                           | Unit Weight (kg) | Article Number |
|------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------|----------------|
| <br>20kN work load<br><br>● Hot dip galvanization | Heavy Duty Prop TEP-D 25G | 17.19            | 72600100       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 30G | 19.55            | 72600200       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 35G | 21.65            | 72600300       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 40G | 25.13            | 72600400       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 45G | 27.35            | 72600500       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 50G | 28.90            | 72600600       |
|                                                                                                                                    | Heavy Duty Prop TEP-D 55G | 41.29            | 72600700       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |
| <br>30kN work load<br><br>● Hot dip galvanization | Heavy duty prop TEP-E 25G | 17.72            | 72602100       |
|                                                                                                                                    | Heavy duty prop TEP-E 30G | 20.86            | 72602200       |
|                                                                                                                                    | Heavy duty prop TEP-E 35G | 26.210           | 72602300       |
|                                                                                                                                    | Heavy duty prop TEP-E 40G | 31.10            | 72602400       |
|                                                                                                                                    | Heavy duty prop TEP-E 45G | 33.28            | 72601000       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |
|                                                                                                                                    |                           |                  |                |
| <br><br>● Hot dip galvanization                 | Extension Tube            | 5.76             | 72601500       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |
| <br>● Hot dip galvanization                     | Foldable Tripod H70       | 7.89             | 30701100       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |
| <br>● Hot dip galvanization                     | Foldable Tripod H90       | 11.07            | 30701200       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |
| <br>● Powder coated in red                      | Table Form Hook           | 5.05             | 30801400       |
| ● Powder coated in red                                                                                                             |                           |                  |                |
| <br>● Spray paint in yellow                     | Lifting Fork              | 1138.16          | 20801600       |
| ● Spray paint in yellow                                                                                                            |                           |                  |                |
| <br><br>● Hot dip galvanization                 | Transporting Trolley      | 531.94           | 20800400       |
| ● Hot dip galvanization                                                                                                            |                           |                  |                |

| Description                                                                                                  |                                        | Unit Weight (kg) | Article Number |
|--------------------------------------------------------------------------------------------------------------|----------------------------------------|------------------|----------------|
| <br>● Spray paint in yellow | Transporting Trolley Extension H=1.5m  | 124.08           | 20802000       |
|                                                                                                              | Transporting Trolley Extension H=0.75m | 77.76            | 20802100       |
| ● Spray paint in yellow                                                                                      |                                        |                  |                |
| <br>● Spray paint in blue   | Steel Pallet                           | 40.00            | 20701200       |
| ● Spray paint in blue                                                                                        |                                        |                  |                |