22.35

12.50

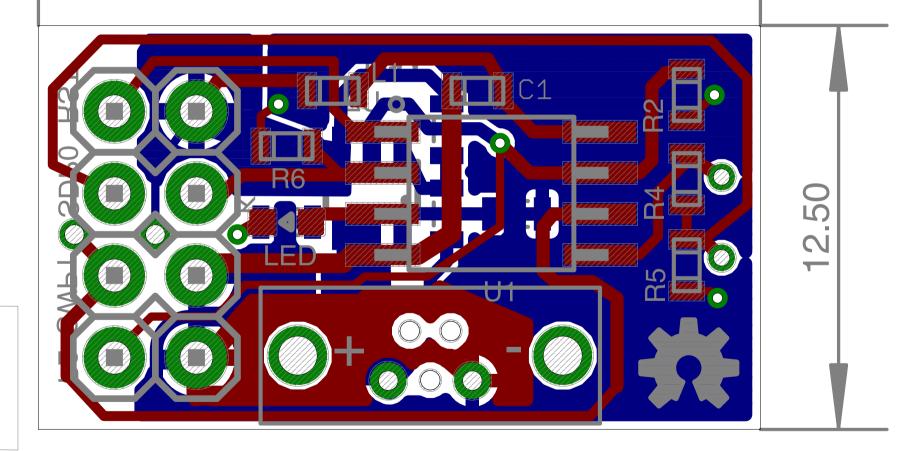| RST	+5V
P0/SD	KA
P1/SW	GND
P2	GND

R6

LED

C1

R2

R4

R5

U1

+

-

If you want to change the default program, plsease use four left pins (P2, P1, P0, RST)
When use "Arduino as ISP", P2->13, P1->12, P0->11, and RST->10, +V->5V, GND->GND