



1 roll Polyimide tape 3/8" wide 6' length or greater. Electrical insulator and place assist. P/N 3057 from Arrow or equivalent



Sheet:1/2
File: uno shield v.6 project SMD.sch

Size: A2	Date: 30-07-2019(c) Copyright Kenneth L. Anderson 2018-2019	Rev: 6
----------	-------------------------------------------------------------	--------

KiCad E.D.A.	kiCad 5.1.2-f72e74a84ubuntu16.04.1	Id: 1/2
--------------	------------------------------------	---------

201

NOTE: These symbols are required to generate an accurate BOM. To use them in that way, copy them and paste them anywhere into the main page. They do not have to show within any sheet boundary. Generate the new BOM and delete the symbol copies from the main page, and main page only, when finished, always leaving the original symbols in this sheet. If the copies are left in the main page when later updating the PCB, they will interfere with the generation of the PCB Gerber files because these have no residencies on the PCB.

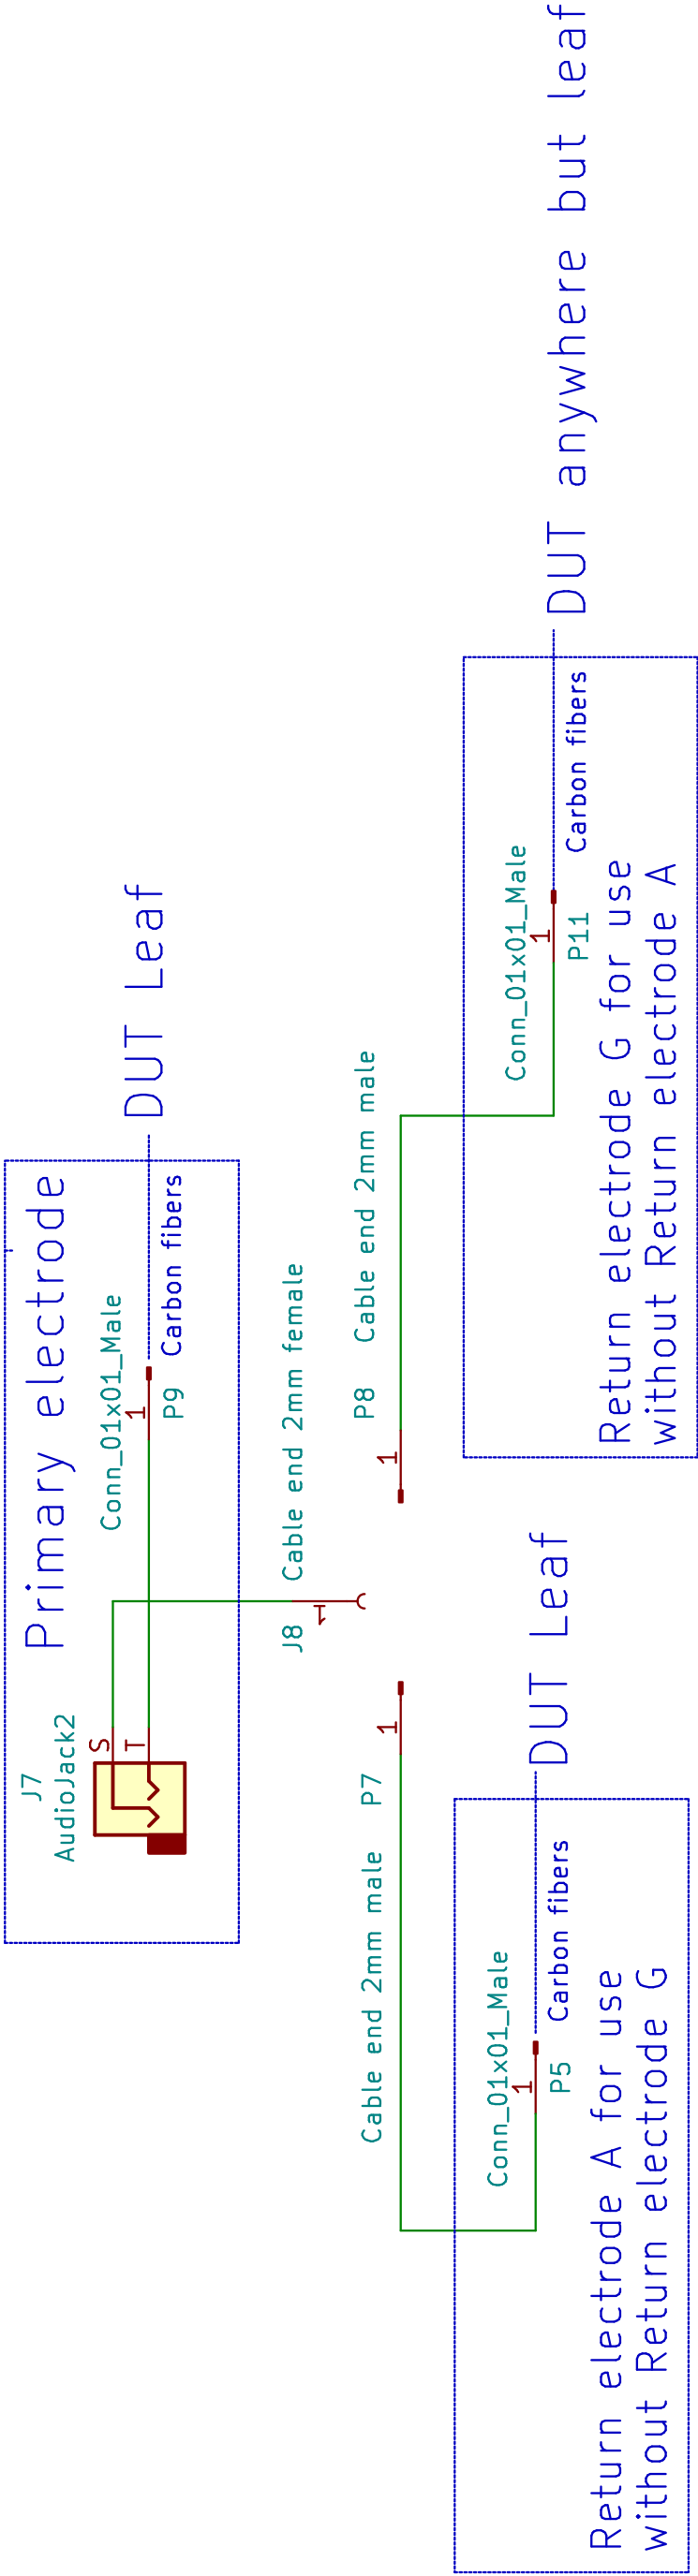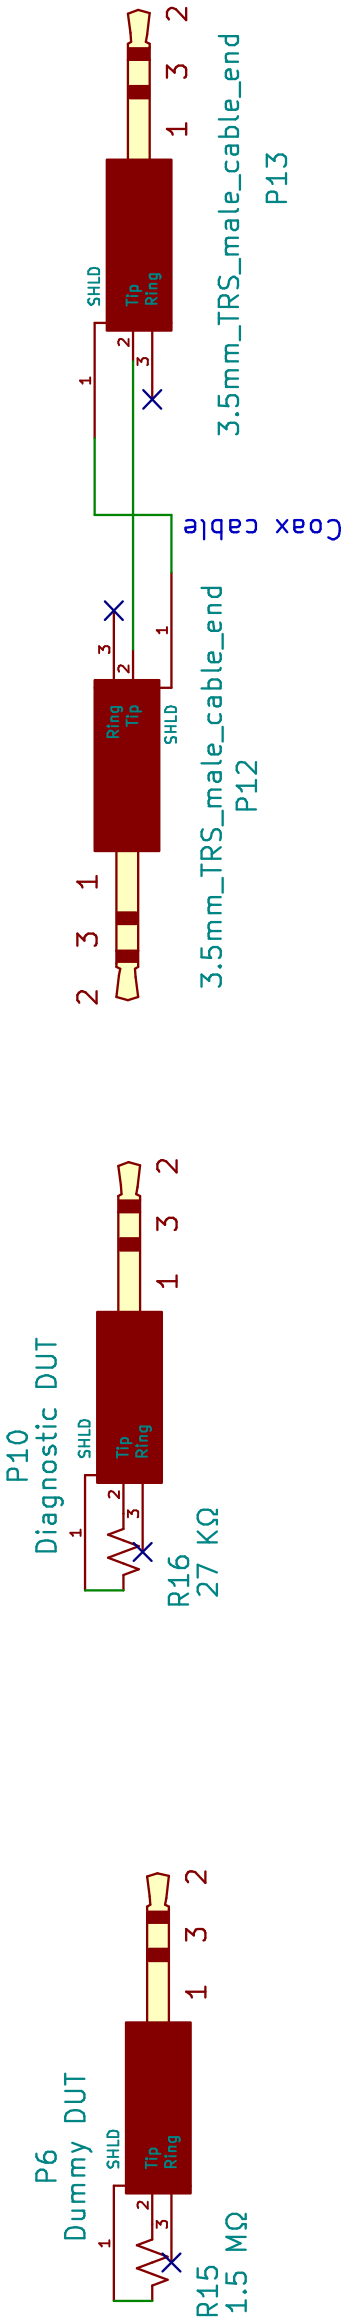

The pins inside the electrodes are to enable gold compatible finish electrical contact in the electrode assemblies for the carbon fiber. One pin belongs in each electrode assembly.