FALCUTÉ DES SCIENCES ET TECHNOLOGIES (FST)

Licence 3

TD 3 portant sur les adressages IPv4 et IPv6 avec Cisco Packet Tracer

Prénom et nom : Kensley GABRIEL

Cours : Reseaux I

Professeur : M. Ismael SAINT AMOUR

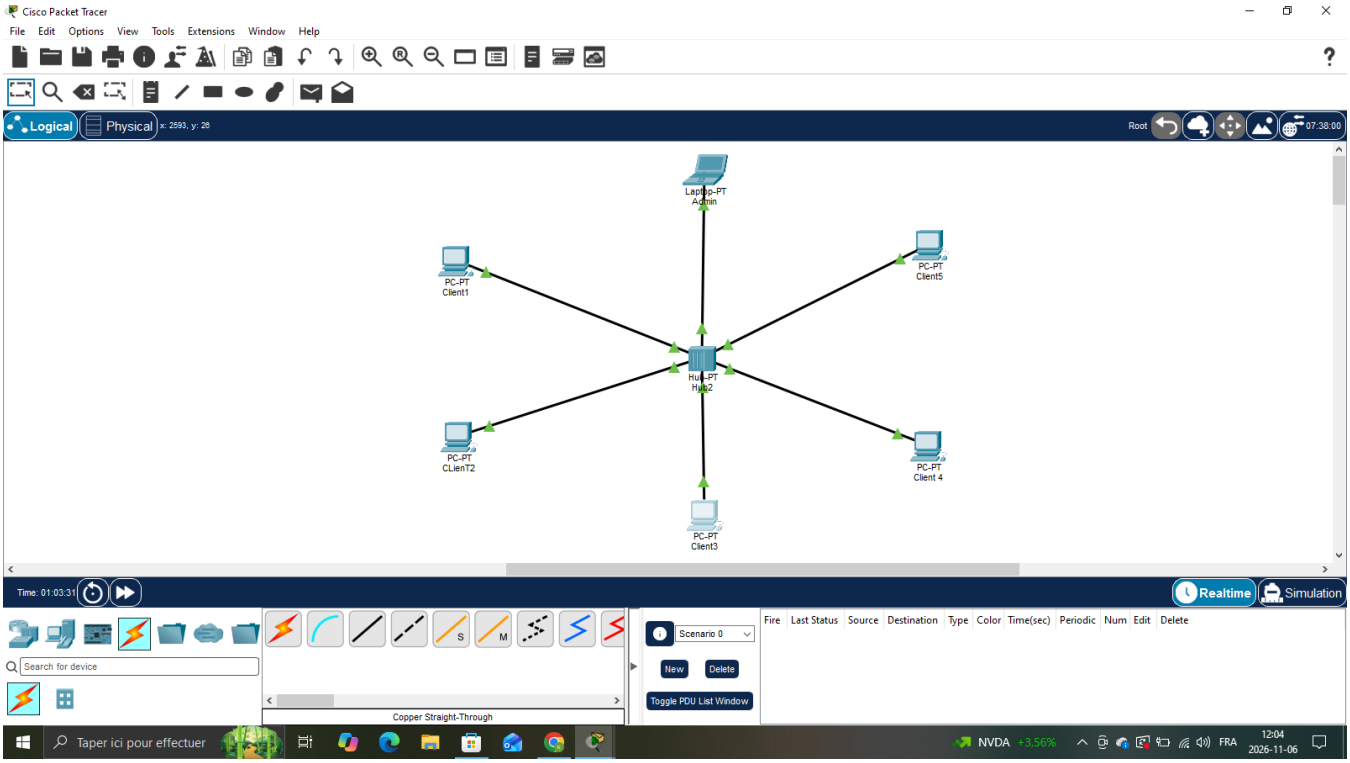
LE 07 NOVEMBRE 2026

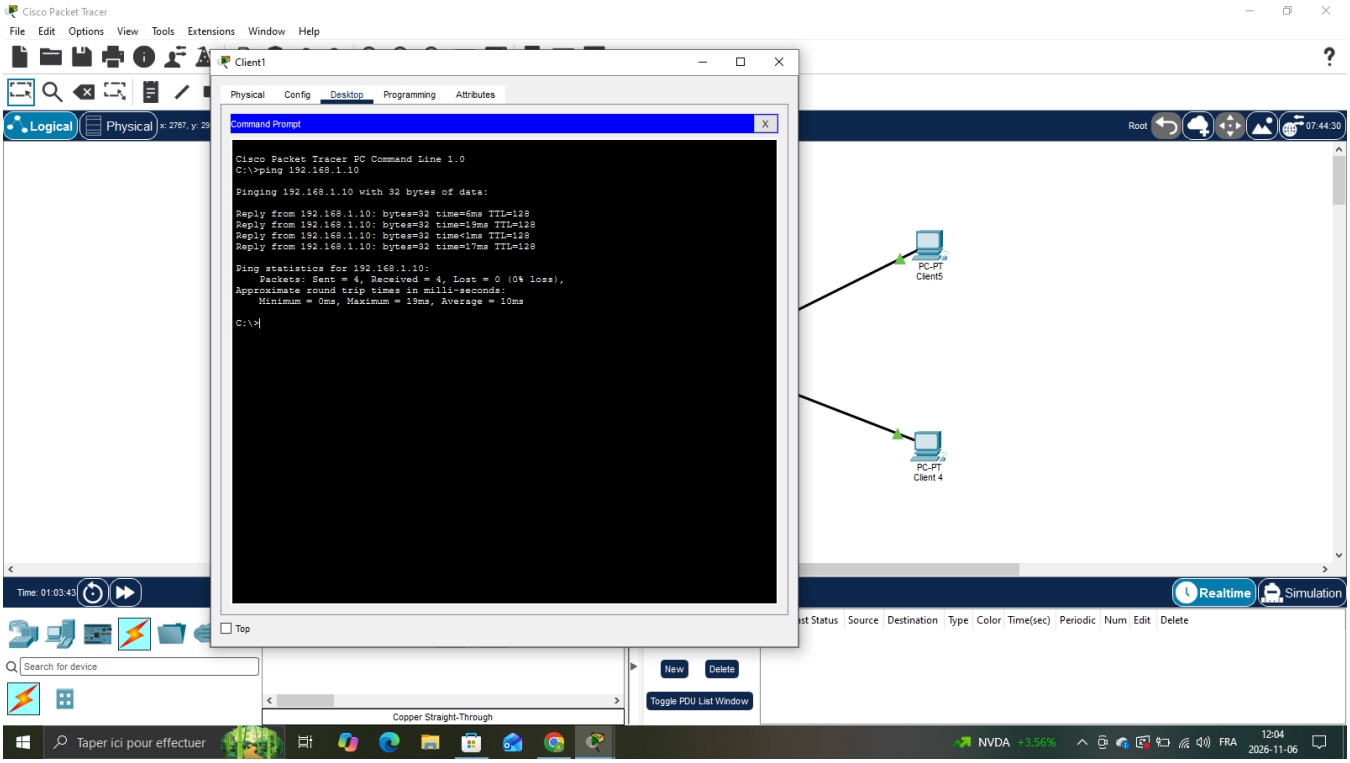
Objectif :

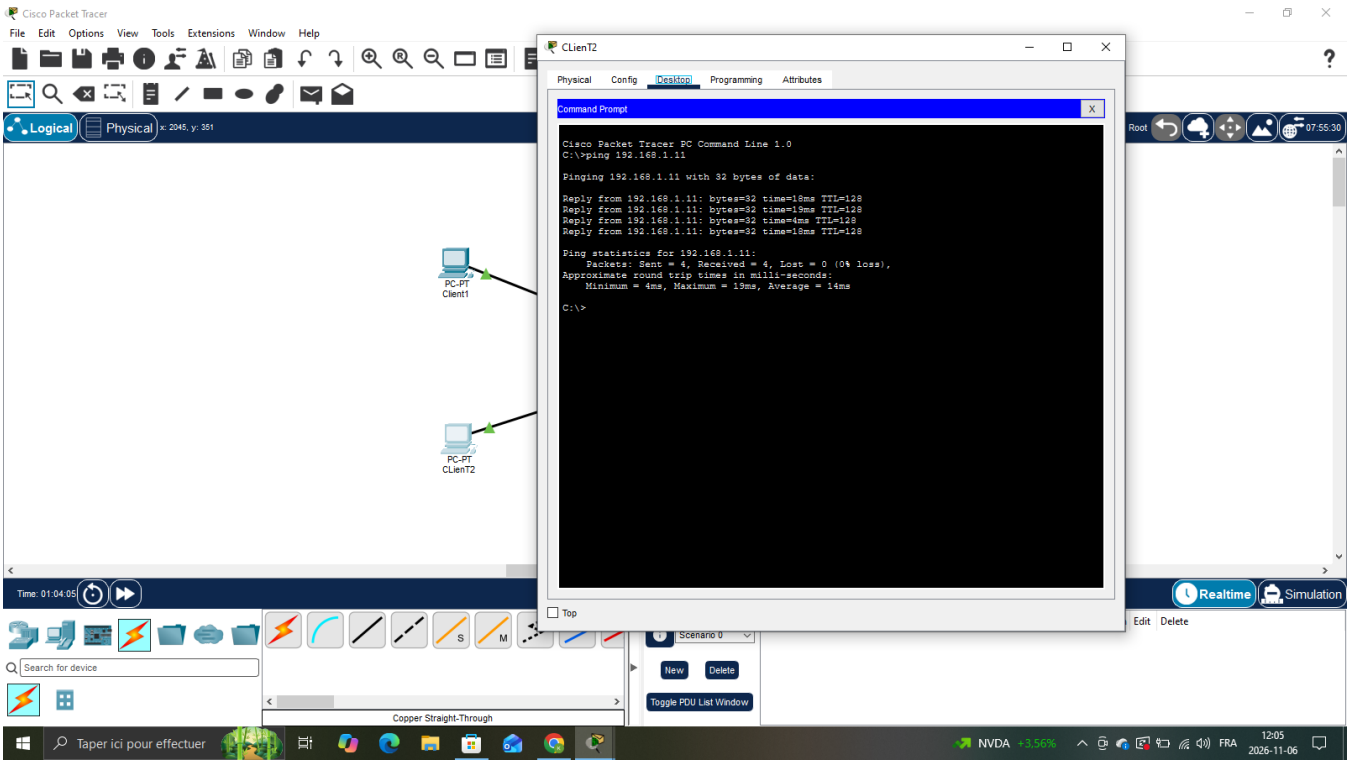
Configurer des adresses statiques IPv4 et IPv6 sur différents équipements réseaux (ordinateurs portables, postes de travail et serveurs) interconnectés par un Hub puis par un Switch sous Cisco Packet Tracer, et valider la connectivité locale à l'aide de tests d'accessibilité.

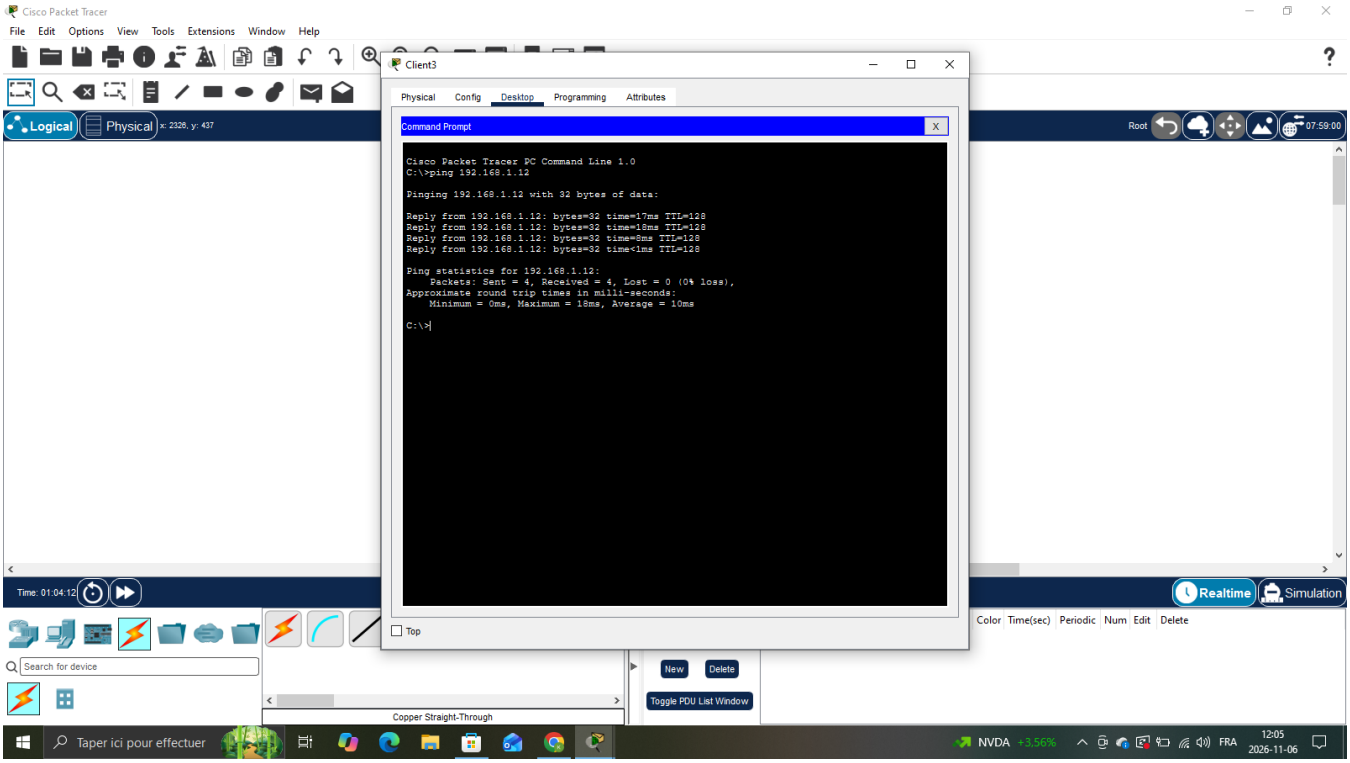
Explication globale des résultats

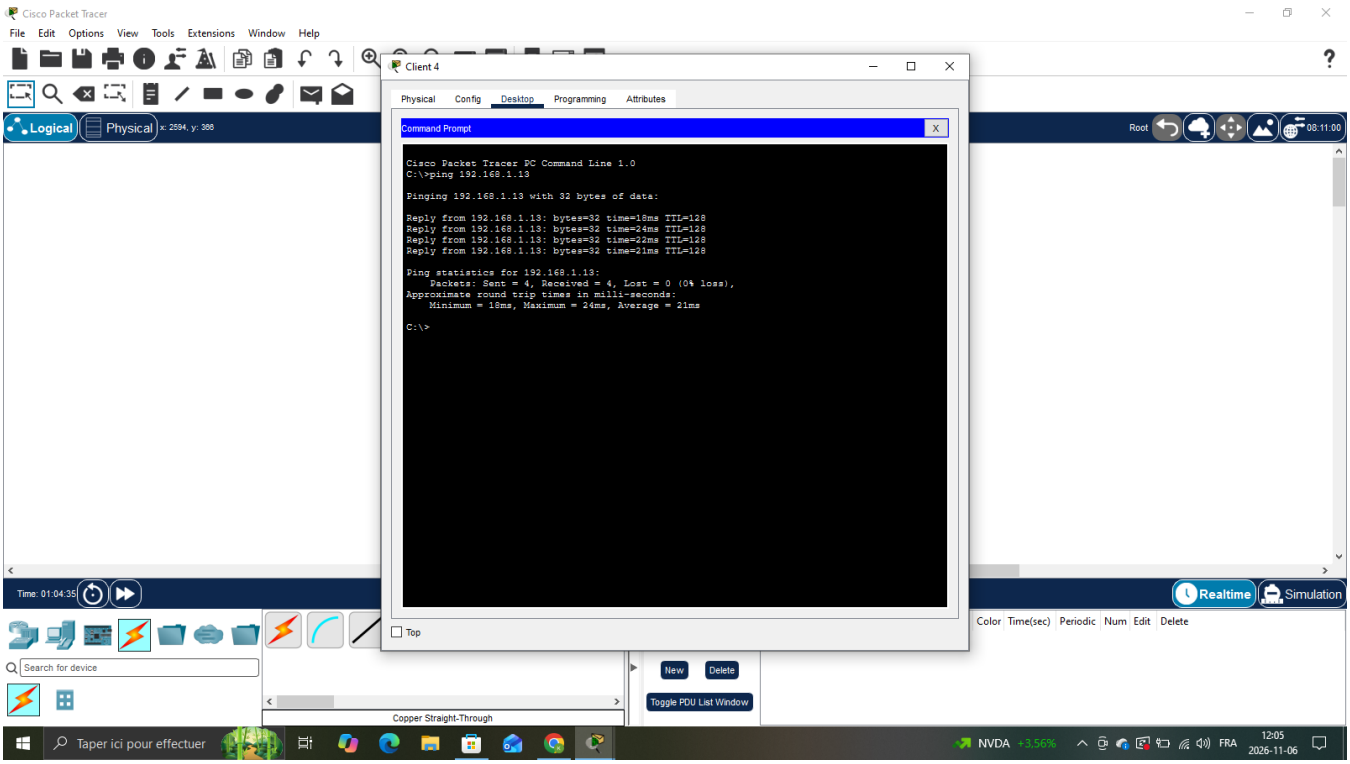
Après avoir modélisé les topologies réseau sous Cisco Packet Tracer, l'adressage statique a été appliqué sur chaque hôte pour le protocole IPv4 (réseau 192.168.1.0/24) et pour le protocole IPv6 (réseau 3000:159:1::/64) ; les tests d'interconnexion effectués depuis l'invite de commande (Command Prompt) avec la commande ping affichent une transmission réussie de 4 paquets sur 4 avec 0 % de perte, ce qui confirme la validité du plan d'adressage et le bon acheminement des données à travers les équipements d'interconnexion.

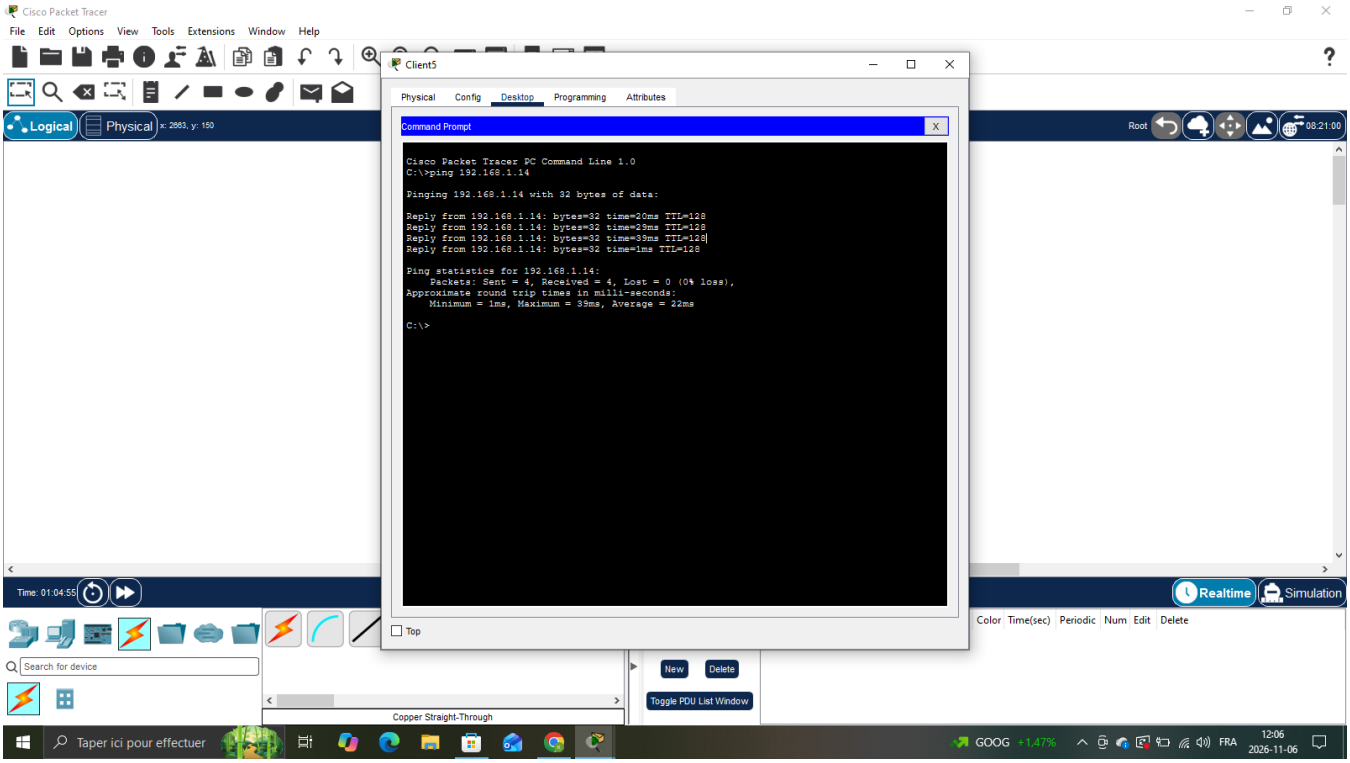

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
Laptop-PT Admin
PC-PT Client1
PC-PT Client5
Hub-PT Hub2
PC-PT CLienT2
PC-PT Client 4
PC-PT Client3
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
Taper ici pour effectuer
NVDA +3.56%
FRA
12:04
2026-11-06

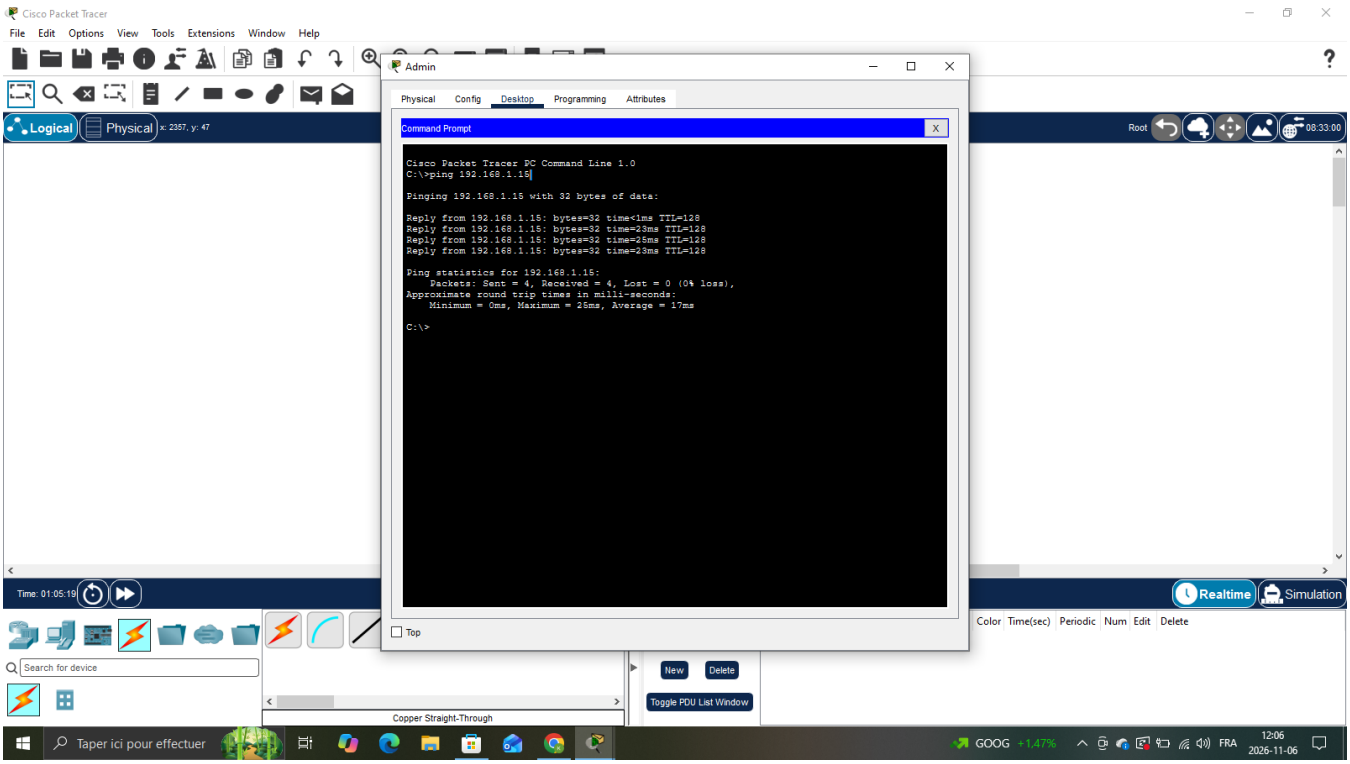

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10
Pinging 192.168.1.10 with 32 bytes of data:
Reply from 192.168.1.10: bytes=32 time=6ms TTL=128
Reply from 192.168.1.10: bytes=32 time=19ms TTL=128
Reply from 192.168.1.10: bytes=32 time<1ms TTL=128
Reply from 192.168.1.10: bytes=32 time=17ms TTL=128
Ping statistics for 192.168.1.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 19ms, Average = 10ms
C:\>
Top
Logical Physical
Root
PC-PT Client5
PC-PT Client 4
Realtime Simulation
Source Destination Type Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
NVDA +3,56%
FRA
12:04
2026-11-06

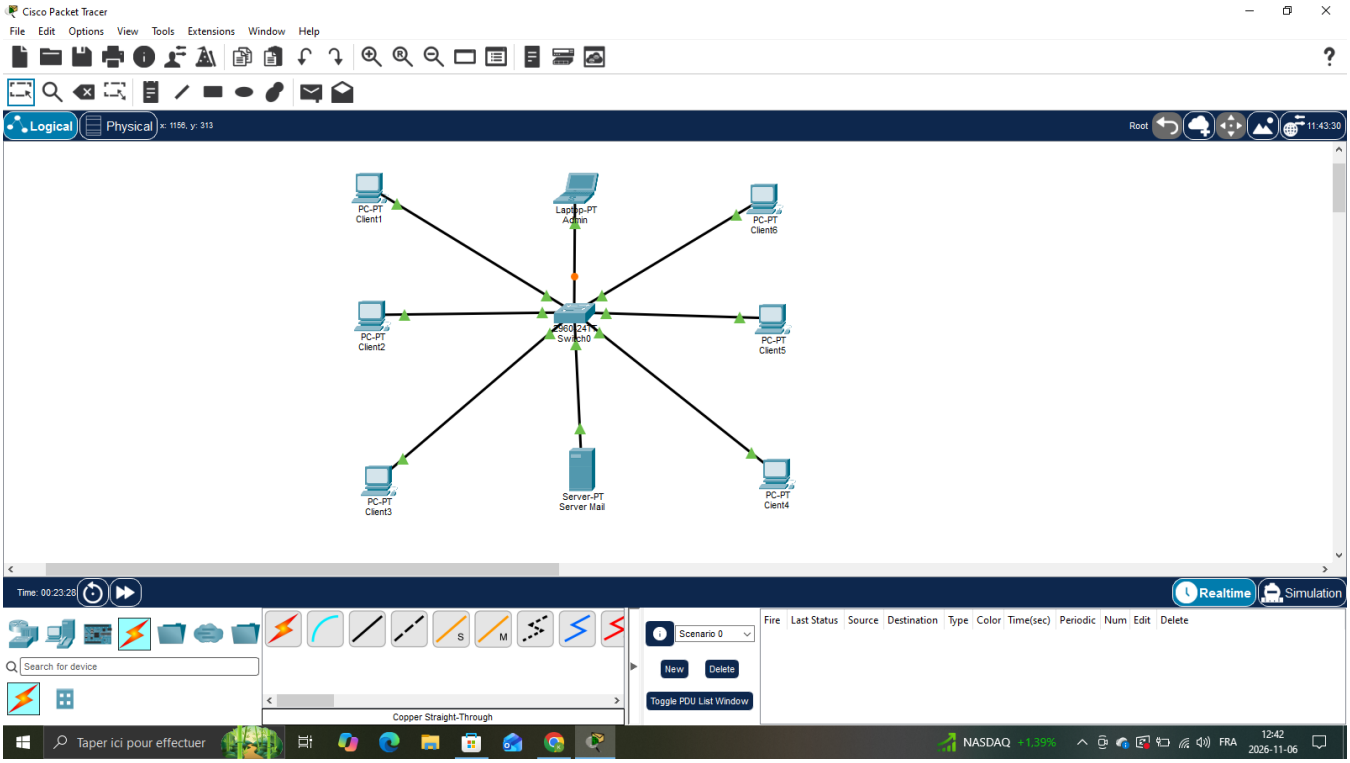

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
CLienT2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time=18ms TTL=128
Reply from 192.168.1.11: bytes=32 time=19ms TTL=128
Reply from 192.168.1.11: bytes=32 time=4ms TTL=128
Reply from 192.168.1.11: bytes=32 time=18ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 4ms, Maximum = 19ms, Average = 14ms
C:\>
Top
Logical Physical
Root
PC-PT Client1
PC-PT CLienT2
Realtime Simulation
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
NVDA +3,56%
FRA
12:05
2026-11-06

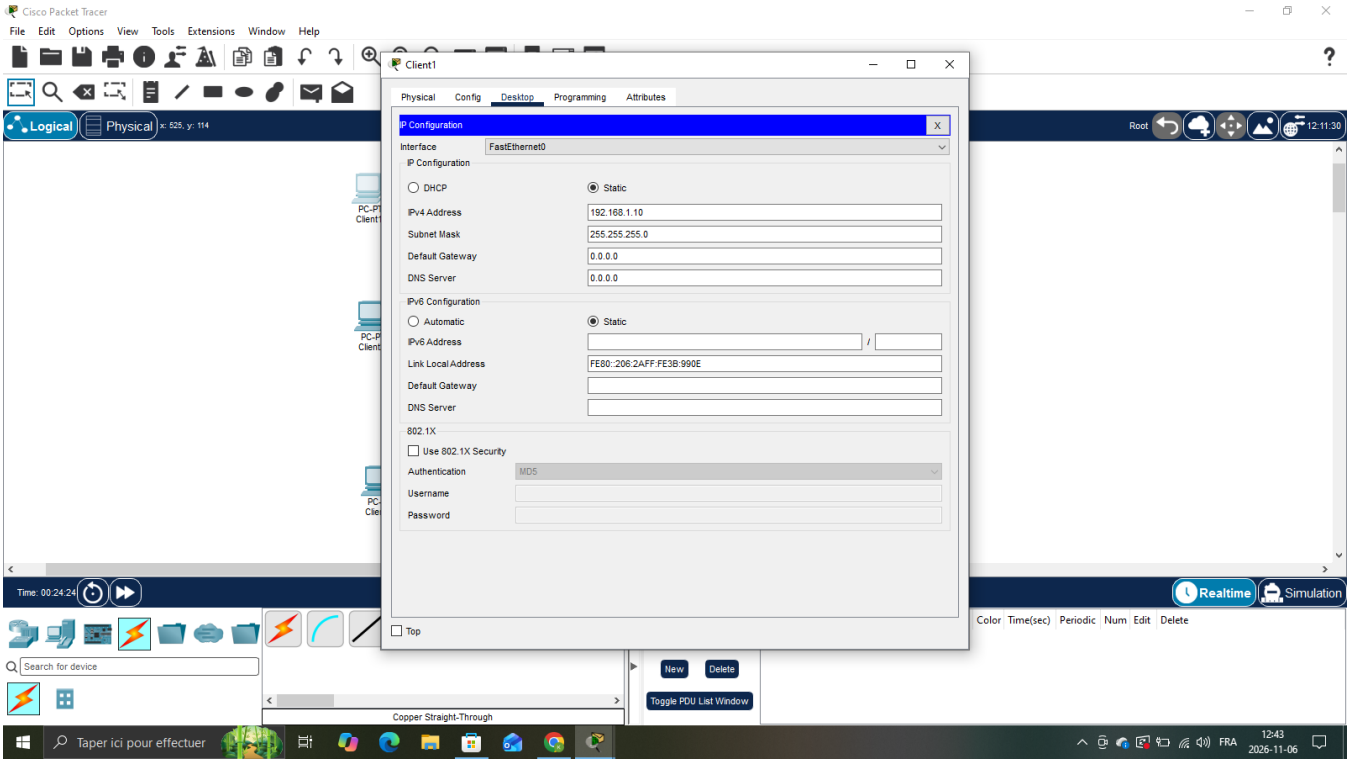

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12
Pinging 192.168.1.12 with 32 bytes of data:
Reply from 192.168.1.12: bytes=32 time=17ms TTL=128
Reply from 192.168.1.12: bytes=32 time=18ms TTL=128
Reply from 192.168.1.12: bytes=32 time=8ms TTL=128
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 18ms, Average = 10ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
NVDA +3,56%
FRA
12:05
2026-11-06

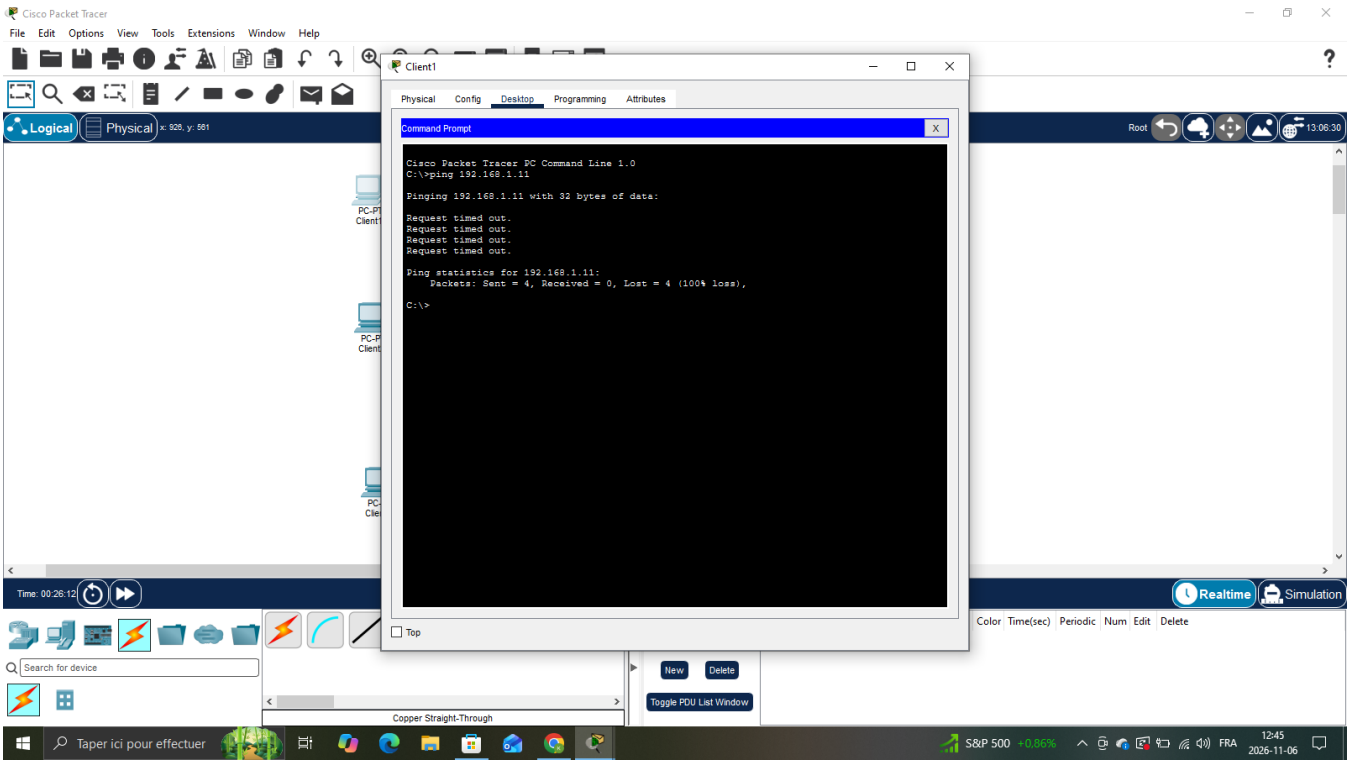

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client 4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time=18ms TTL=128
Reply from 192.168.1.13: bytes=32 time=24ms TTL=128
Reply from 192.168.1.13: bytes=32 time=22ms TTL=128
Reply from 192.168.1.13: bytes=32 time=21ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 18ms, Maximum = 24ms, Average = 21ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
NVDA +3,56%
FRA
12:05
2026-11-06

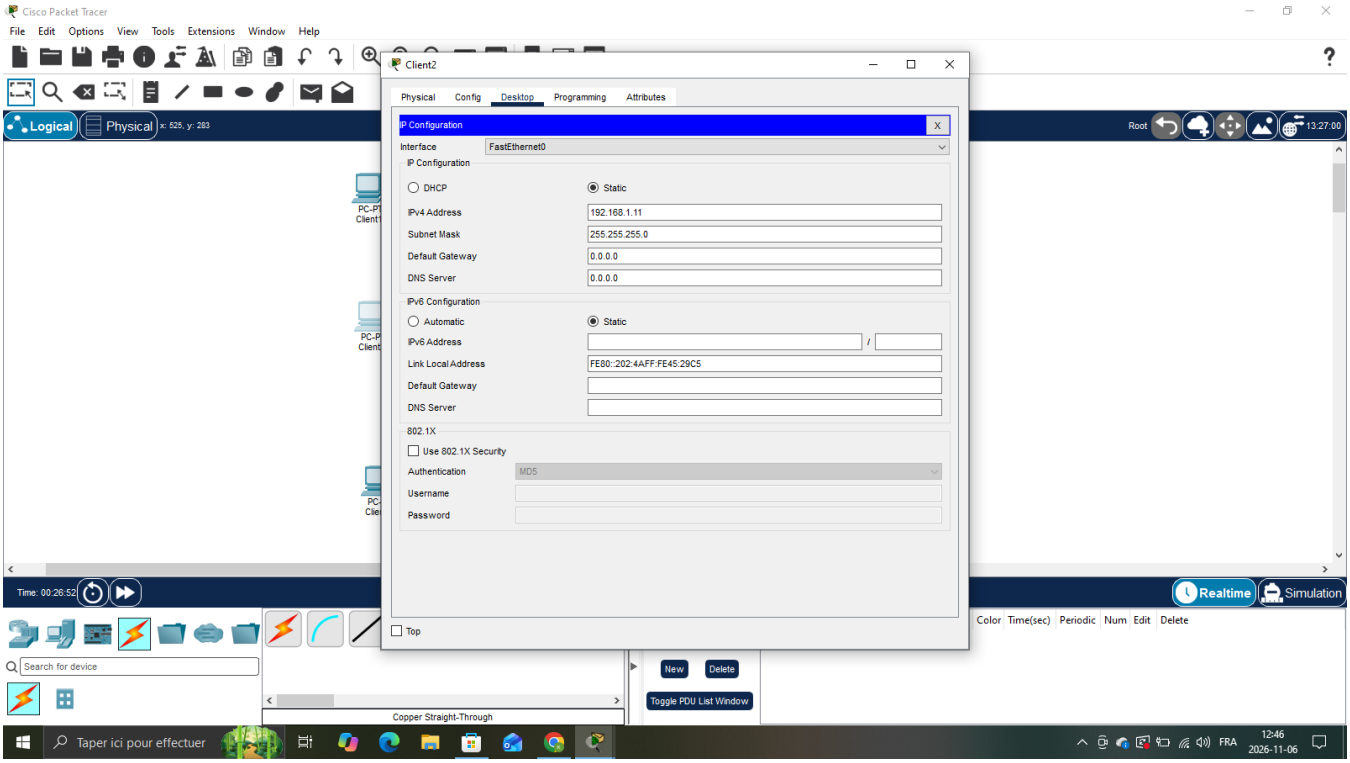

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client5
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.14
Pinging 192.168.1.14 with 32 bytes of data:
Reply from 192.168.1.14: bytes=32 time=20ms TTL=128
Reply from 192.168.1.14: bytes=32 time=29ms TTL=128
Reply from 192.168.1.14: bytes=32 time=39ms TTL=128
Reply from 192.168.1.14: bytes=32 time=1ms TTL=128
Ping statistics for 192.168.1.14:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 39ms, Average = 22ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
GOOG +1.47%
FRA
12:06
2026-11-06

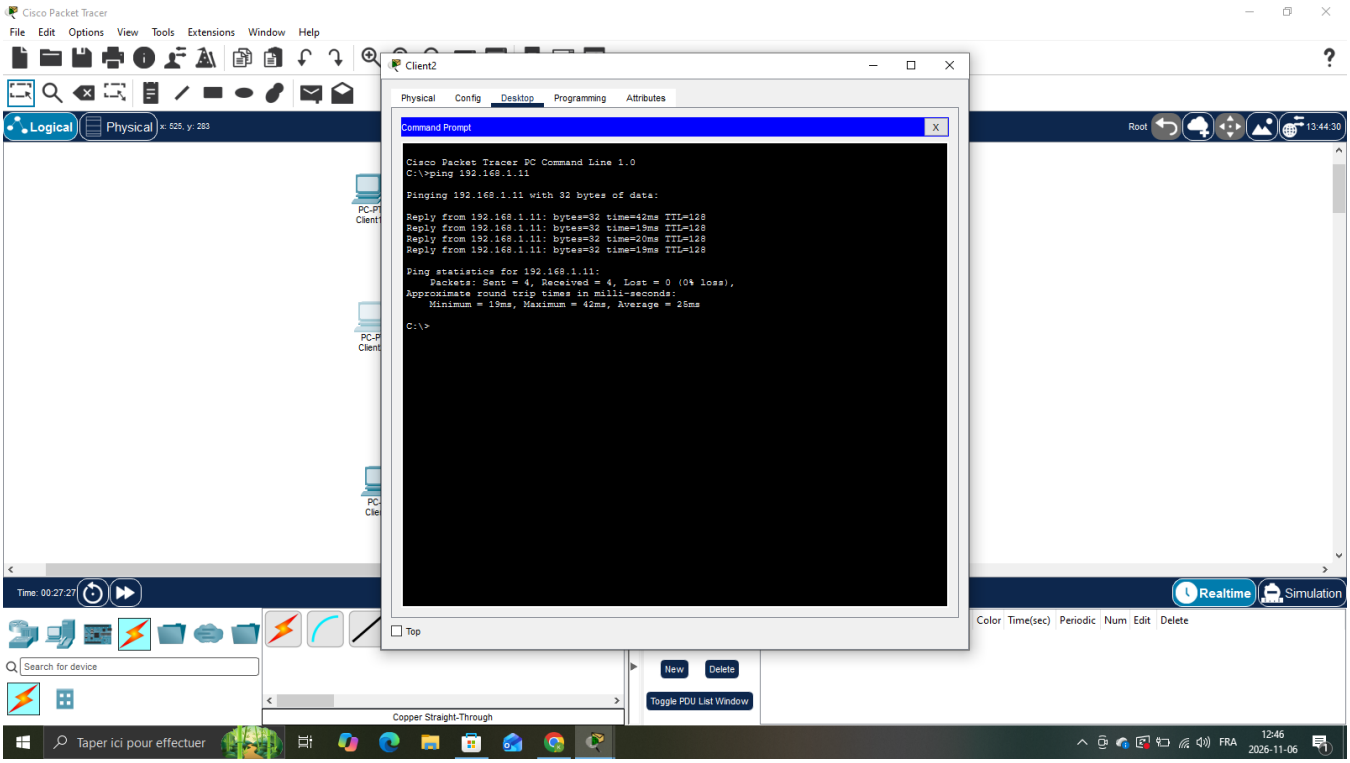

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Admin
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.15
Pinging 192.168.1.15 with 32 bytes of data:
Reply from 192.168.1.15: bytes=32 time<1ms TTL=128
Reply from 192.168.1.15: bytes=32 time=23ms TTL=128
Reply from 192.168.1.15: bytes=32 time=25ms TTL=128
Reply from 192.168.1.15: bytes=32 time=23ms TTL=128
Ping statistics for 192.168.1.15:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 25ms, Average = 17ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
GOOG +1.47%
FRA
12:06
2026-11-06

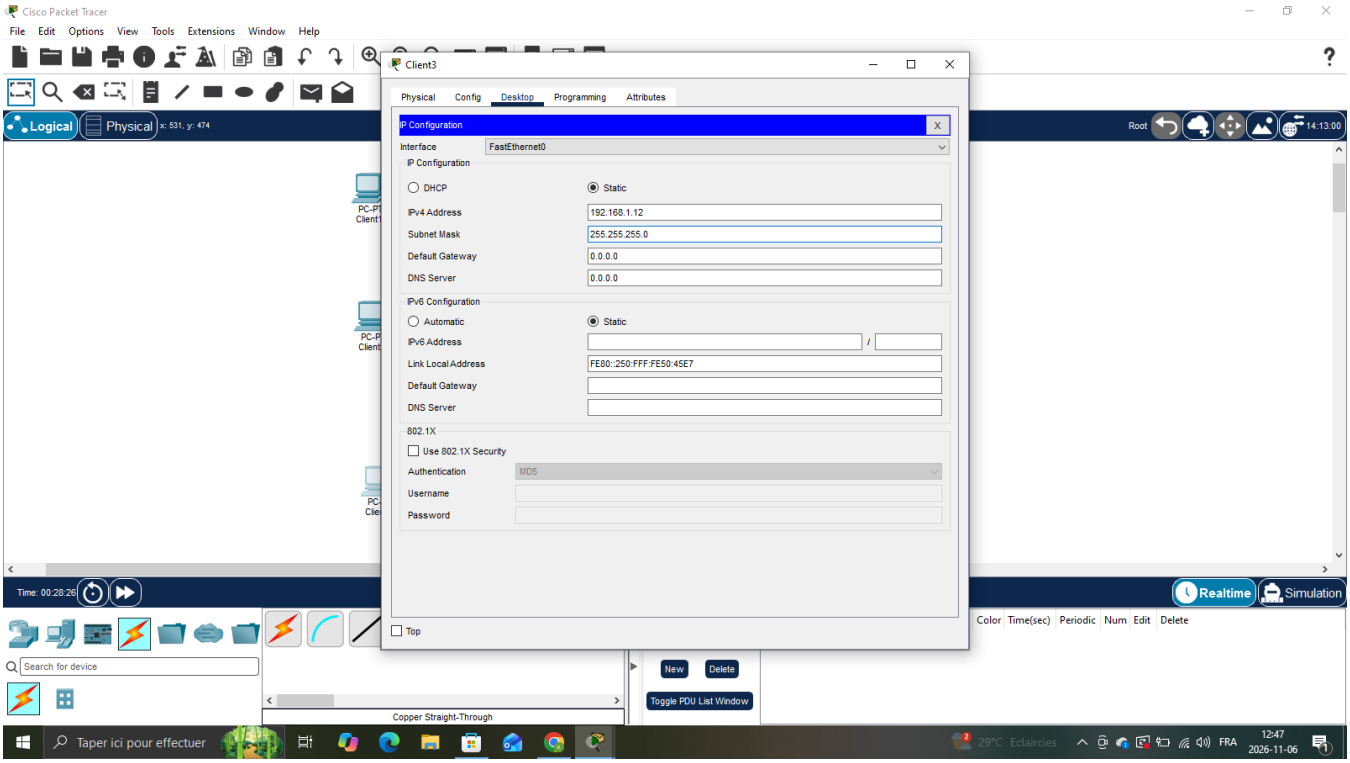

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
PC-PT Client1
Laptop-PT Admin
PC-PT Client6
PC-PT Client2
2960-24TT Switch0
PC-PT Client5
Server-PT Server Mail
PC-PT Client3
PC-PT Client4
Realtime
Simulation
Search for device
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
NASDAQ +1.39%
FRA
12:42
2026-11-06

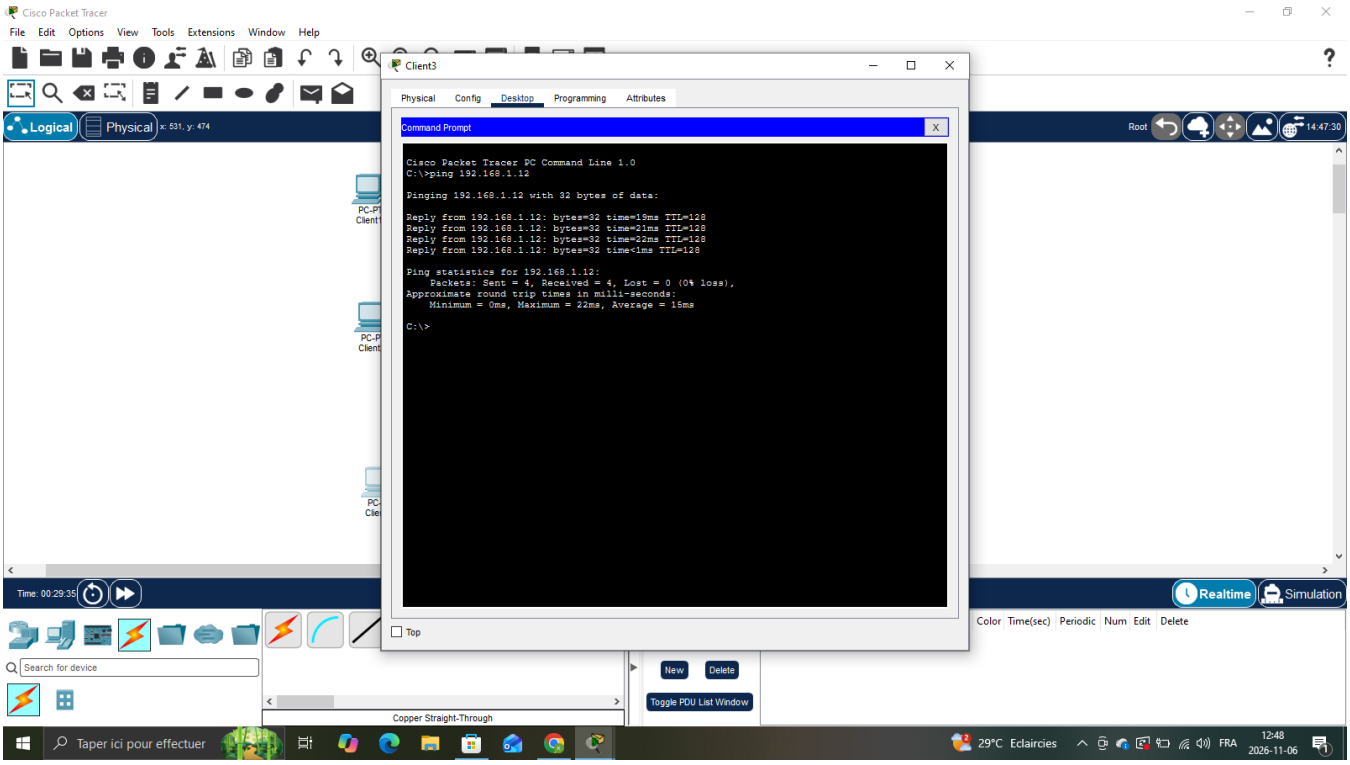

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.10
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::206:2AFF:FE3B:990E
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
FRA
12:43
2026-11-06

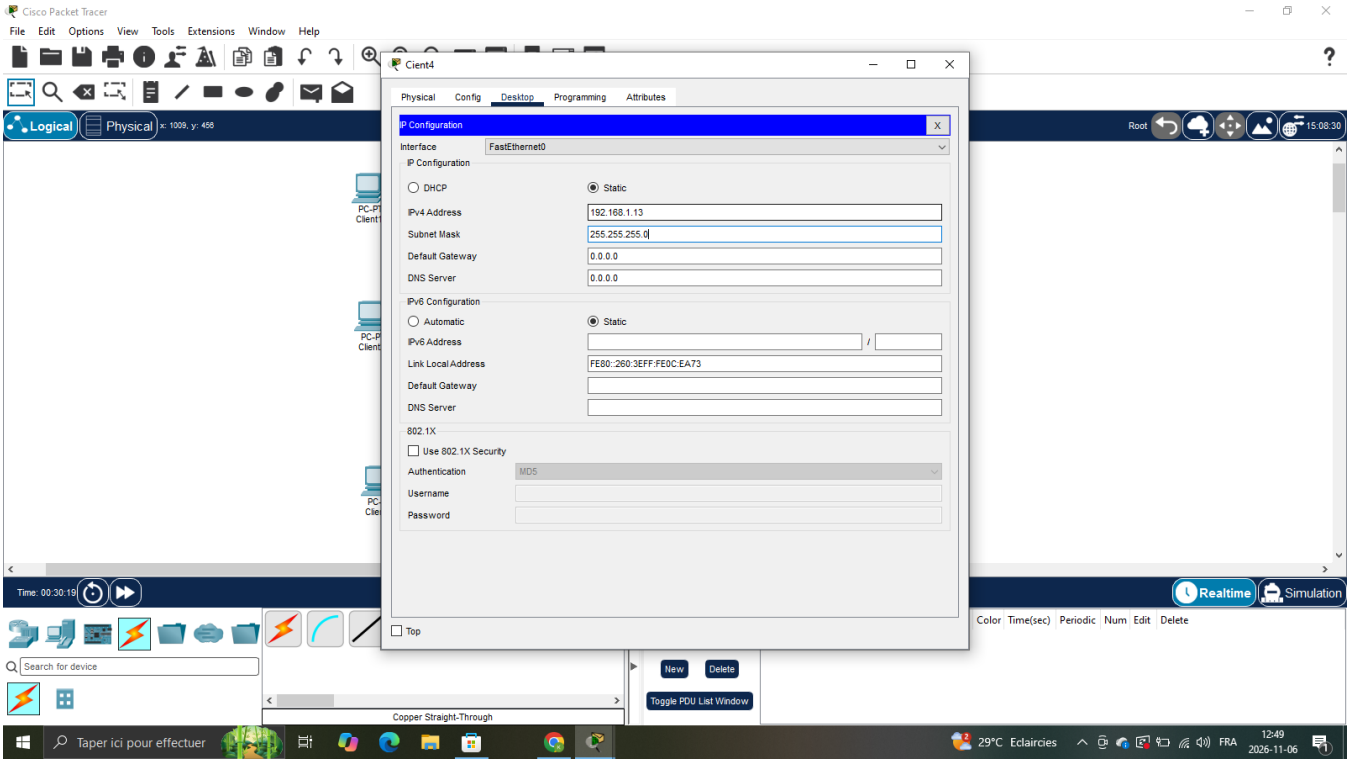

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
S&P 500 +0,86%
FRA
12:45
2026-11-06

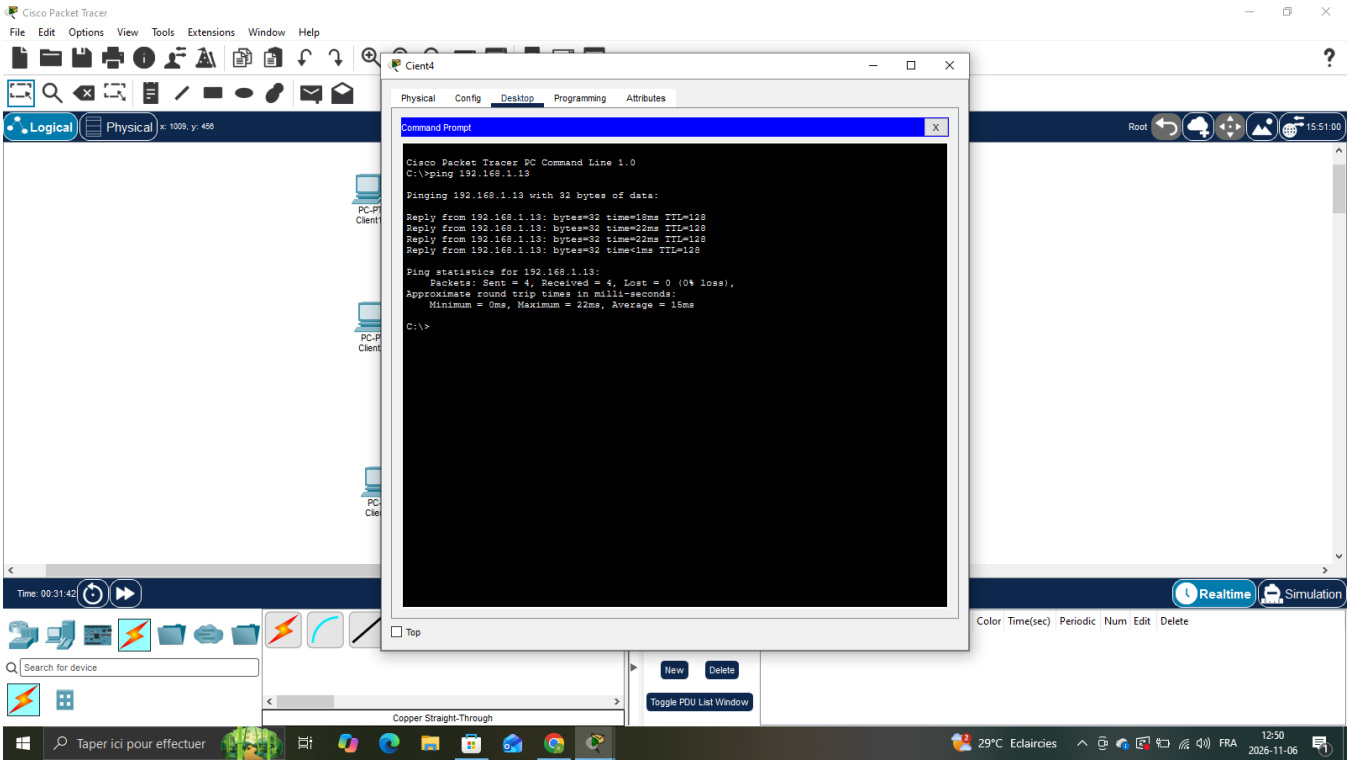

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.11
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::202:4AFF:FE45:29C5
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
FRA
12:46
2026-11-06

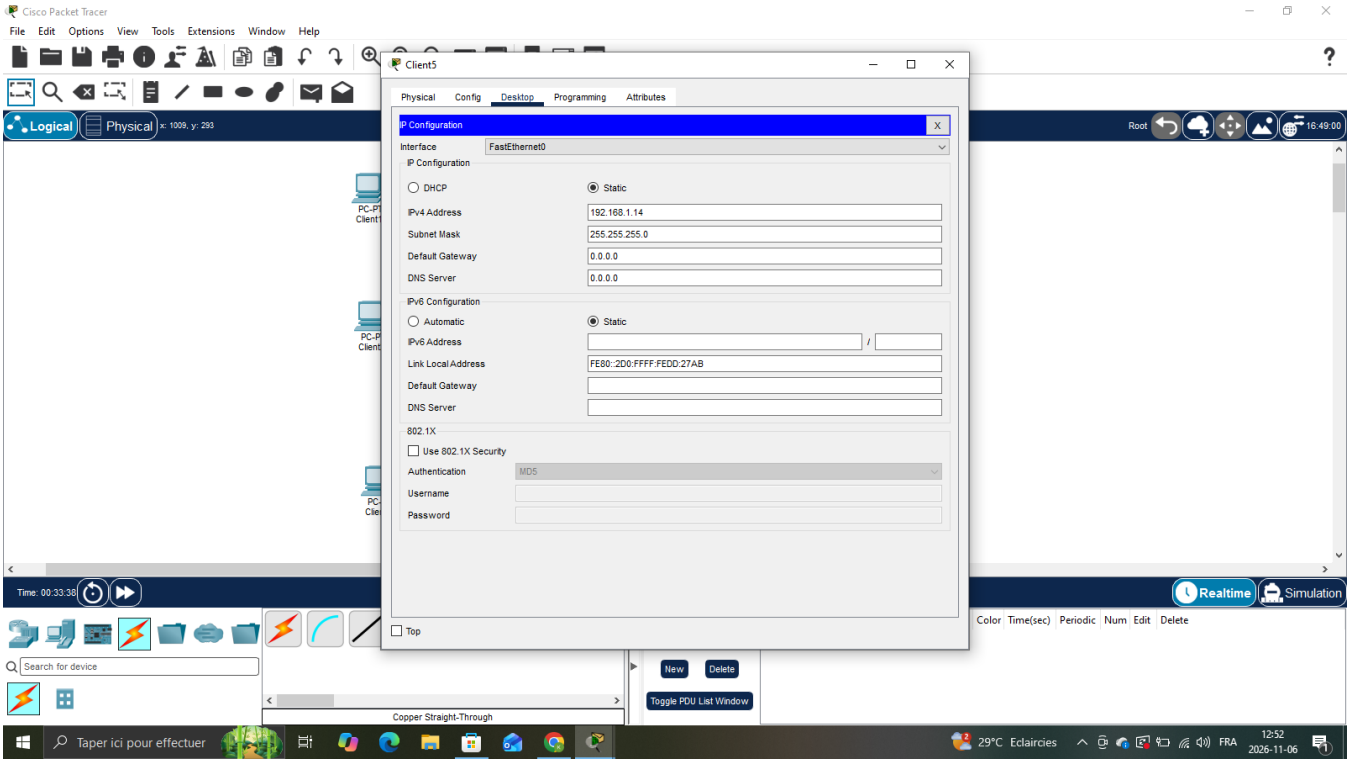

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.11
Pinging 192.168.1.11 with 32 bytes of data:
Reply from 192.168.1.11: bytes=32 time=42ms TTL=128
Reply from 192.168.1.11: bytes=32 time=19ms TTL=128
Reply from 192.168.1.11: bytes=32 time=20ms TTL=128
Reply from 192.168.1.11: bytes=32 time=19ms TTL=128
Ping statistics for 192.168.1.11:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 19ms, Maximum = 42ms, Average = 25ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
FRA
12:46
2026-11-06

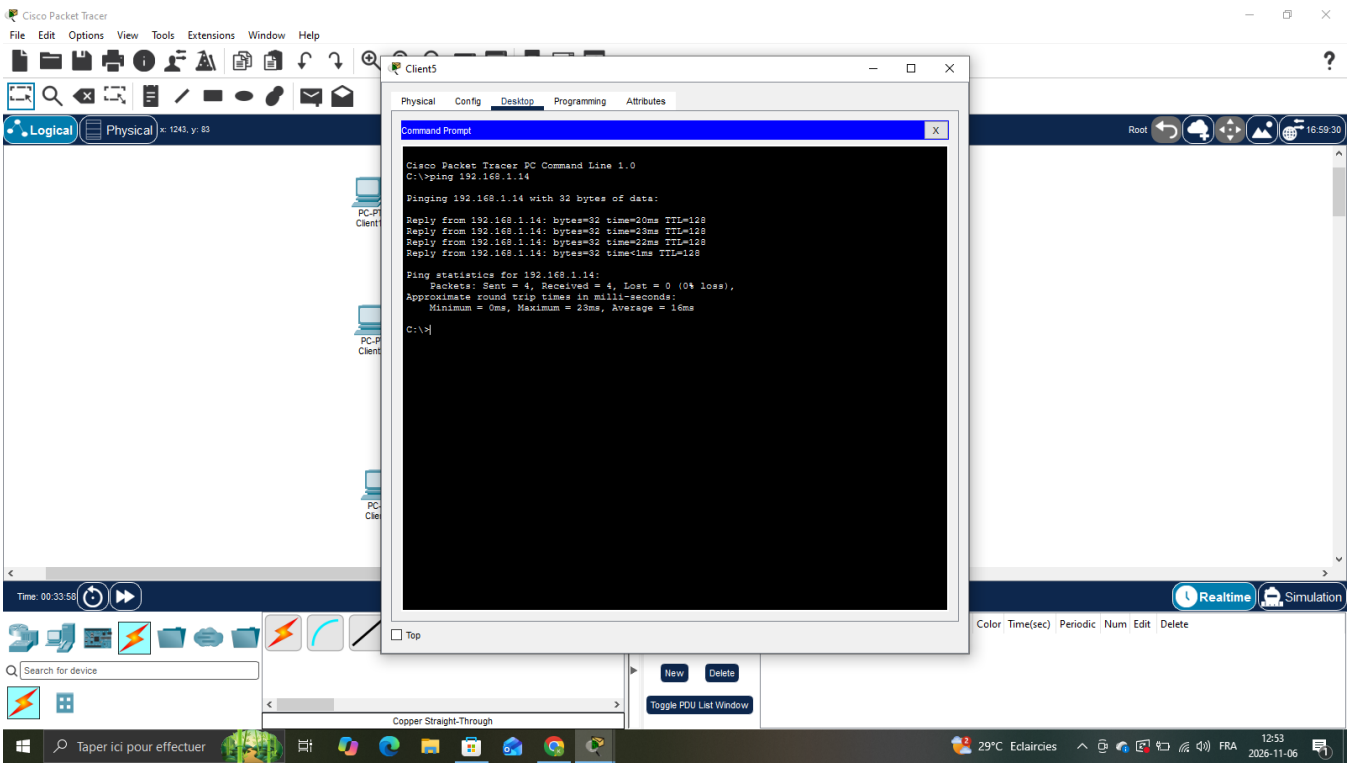

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.12
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::250:FFF:FE50:45E7
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
29°C Eclaircies
FRA
12:47
2026-11-06

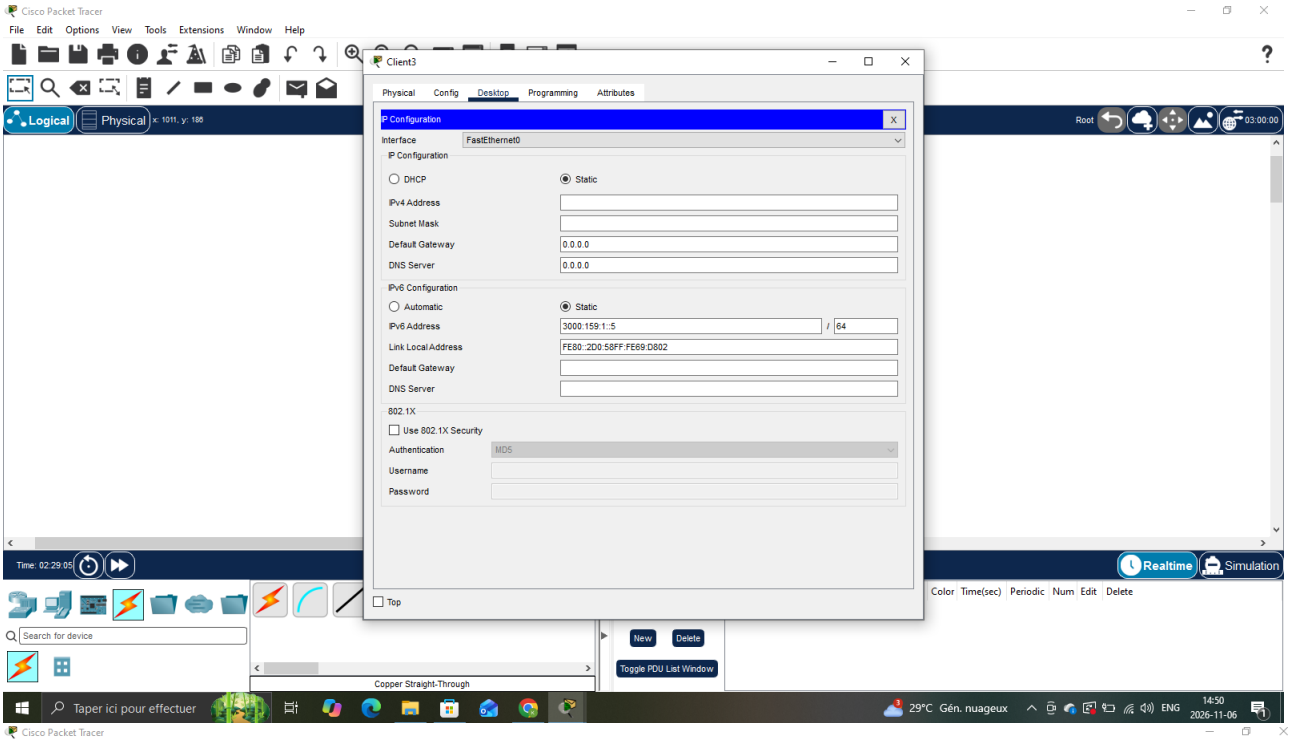

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.12
Pinging 192.168.1.12 with 32 bytes of data:
Reply from 192.168.1.12: bytes=32 time=19ms TTL=128
Reply from 192.168.1.12: bytes=32 time=21ms TTL=128
Reply from 192.168.1.12: bytes=32 time=22ms TTL=128
Reply from 192.168.1.12: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.12:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 22ms, Average = 15ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
29°C Eclaircies
FRA
12:48
2026-11-06

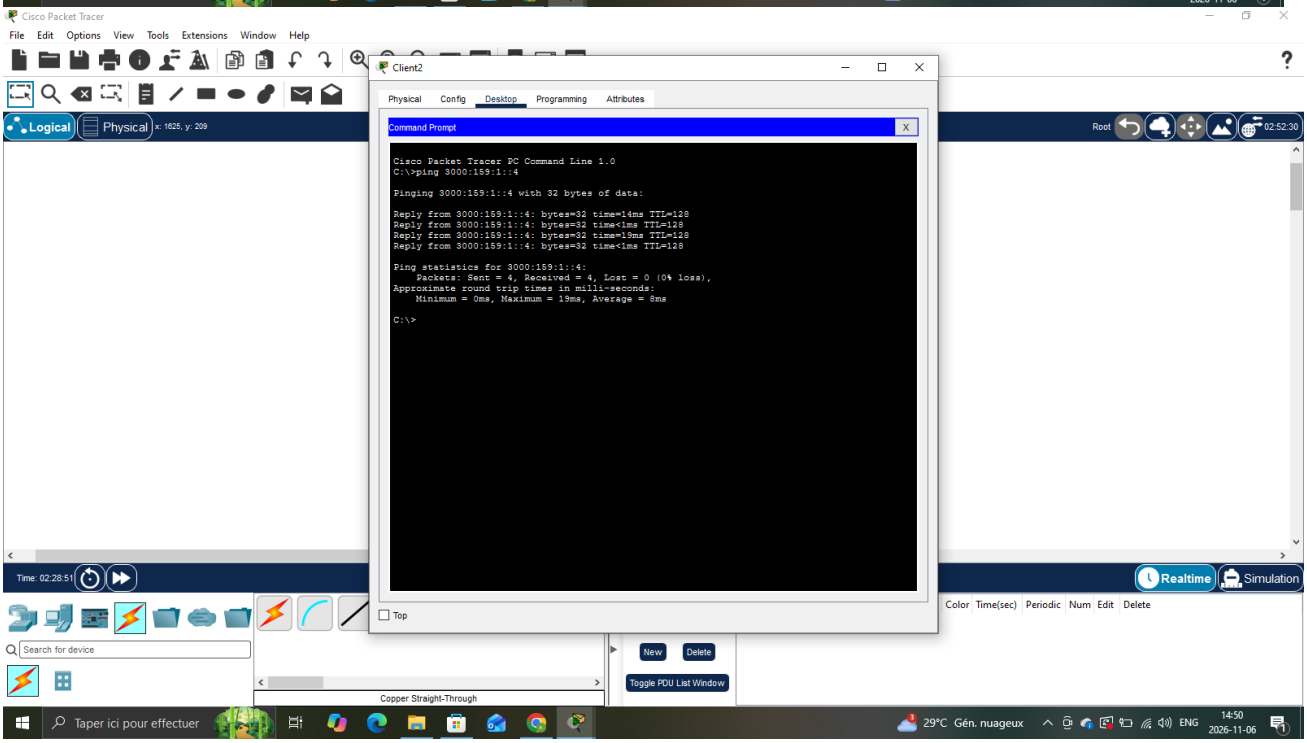

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Cient4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.13
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::260:3EFF:FE0C:EA73
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window

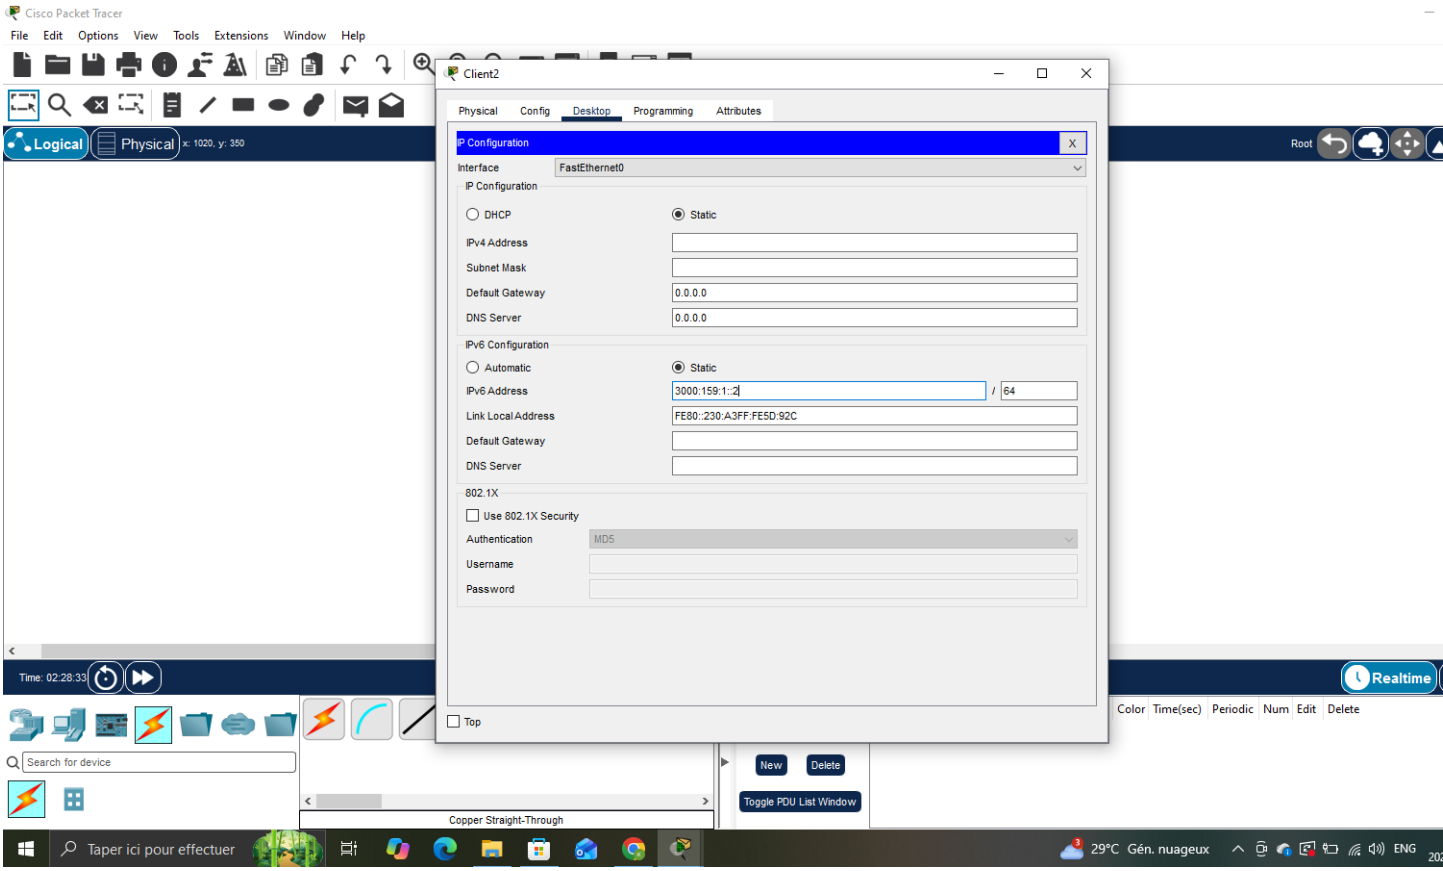

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Cient4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.13
Pinging 192.168.1.13 with 32 bytes of data:
Reply from 192.168.1.13: bytes=32 time=18ms TTL=128
Reply from 192.168.1.13: bytes=32 time=22ms TTL=128
Reply from 192.168.1.13: bytes=32 time=22ms TTL=128
Reply from 192.168.1.13: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.13:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 22ms, Average = 15ms
C:\>
Top
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window

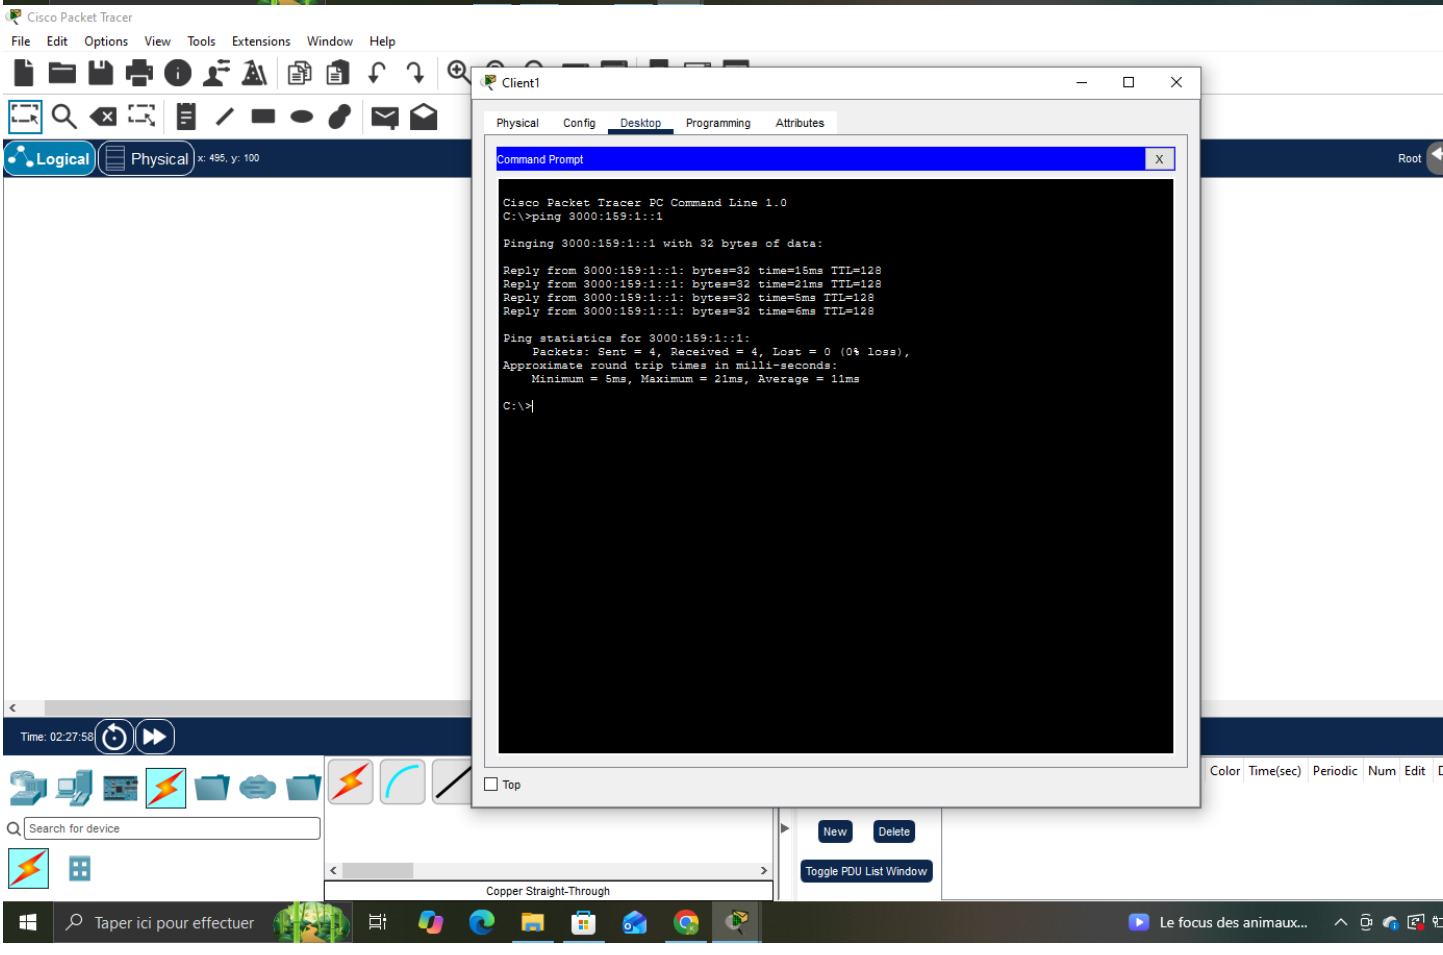

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client5
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.14
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::2D0:FFFF:FEDD:27AB
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
29°C Eclaircies
FRA
12:52
2026-11-06

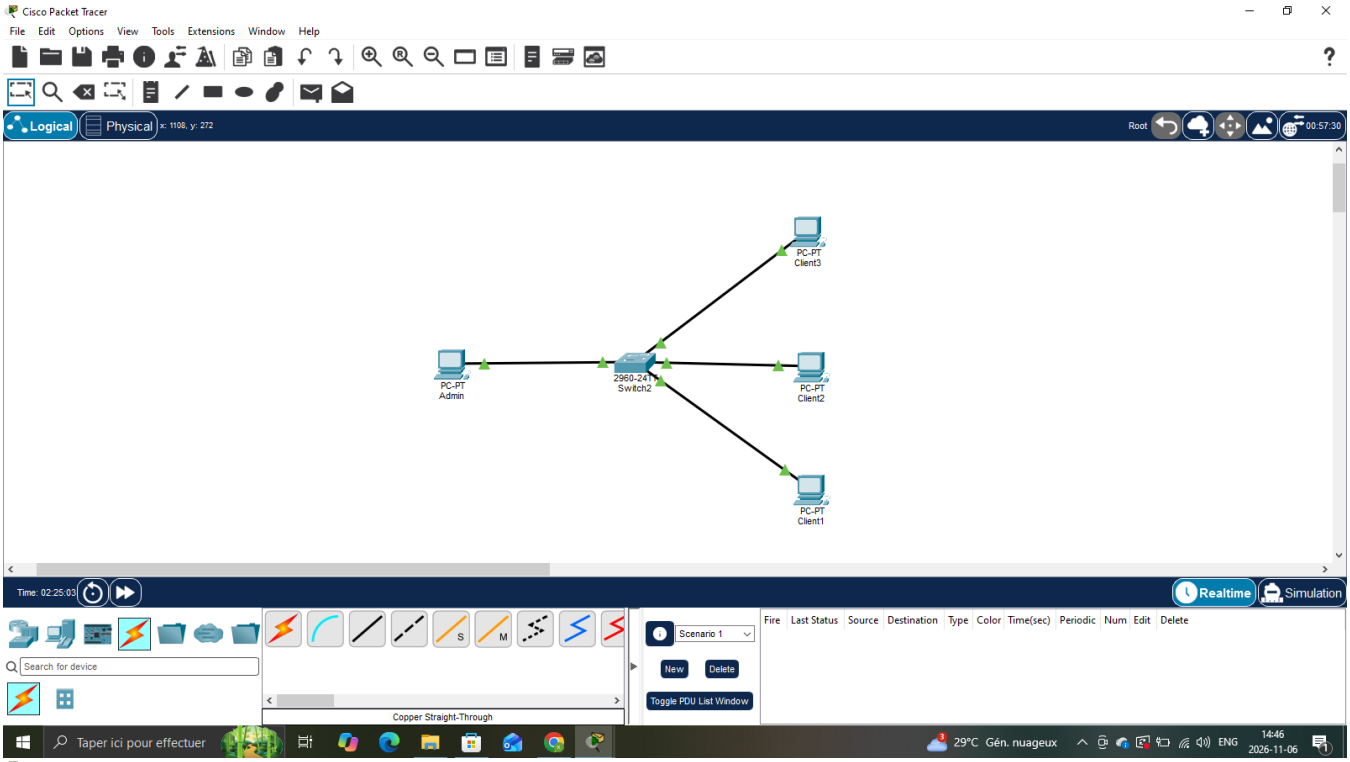

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client5
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.14
Pinging 192.168.1.14 with 32 bytes of data:
Reply from 192.168.1.14: bytes=32 time=20ms TTL=128
Reply from 192.168.1.14: bytes=32 time=23ms TTL=128
Reply from 192.168.1.14: bytes=32 time=22ms TTL=128
Reply from 192.168.1.14: bytes=32 time<1ms TTL=128
Ping statistics for 192.168.1.14:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 23ms, Average = 16ms
C:\>
Top
Logical Physical
Root
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
New Delete
Toggle PDU List Window
Copper Straight-Through
Search for device
Taper ici pour effectuer
29°C Eclaircies
FRA
12:53
2026-11-06

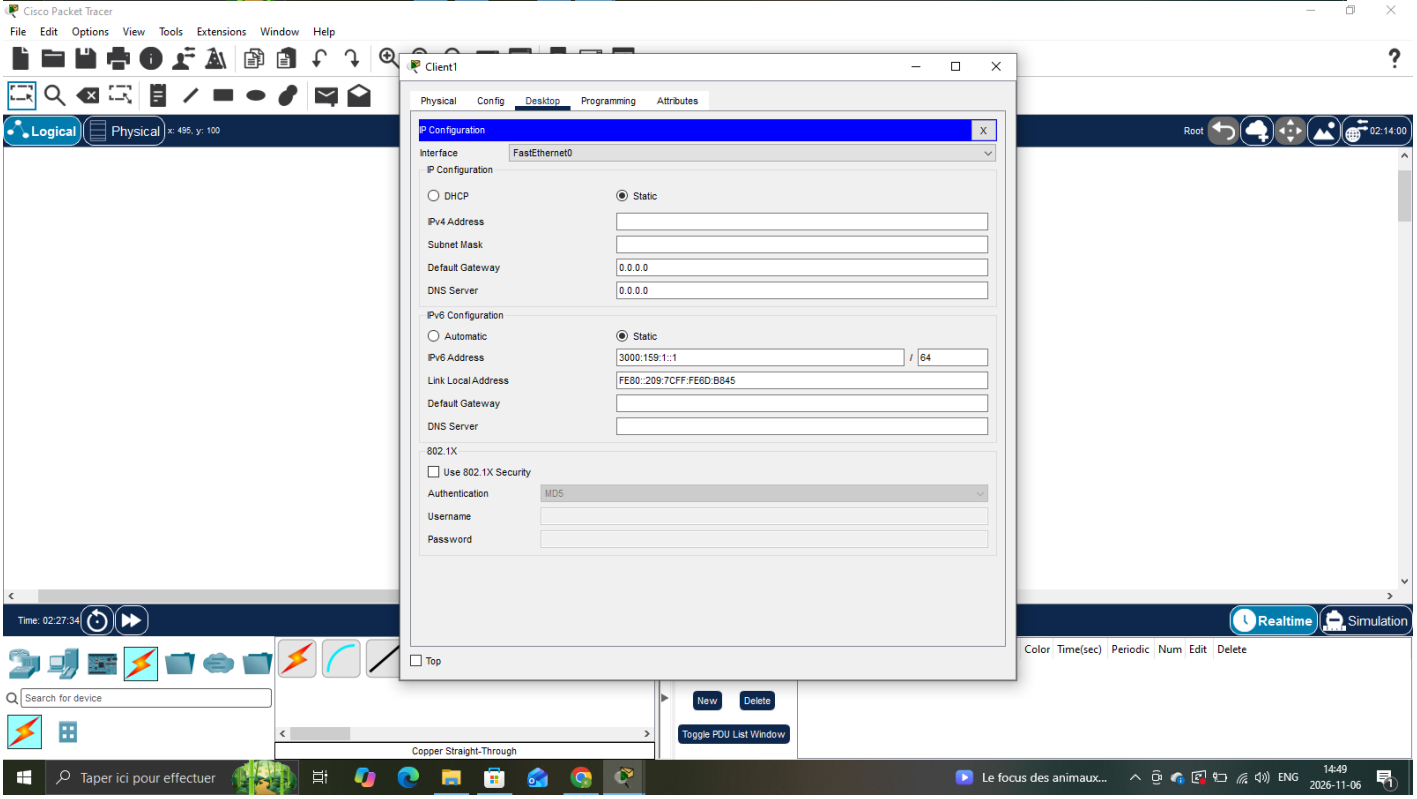

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::5 / 64
Link Local Address FE80::2D0:58FF:FE69:D802
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Search for device
Taper ici pour effectuer
29°C Gén. nuageux
ENG
14:50
2026-11-06

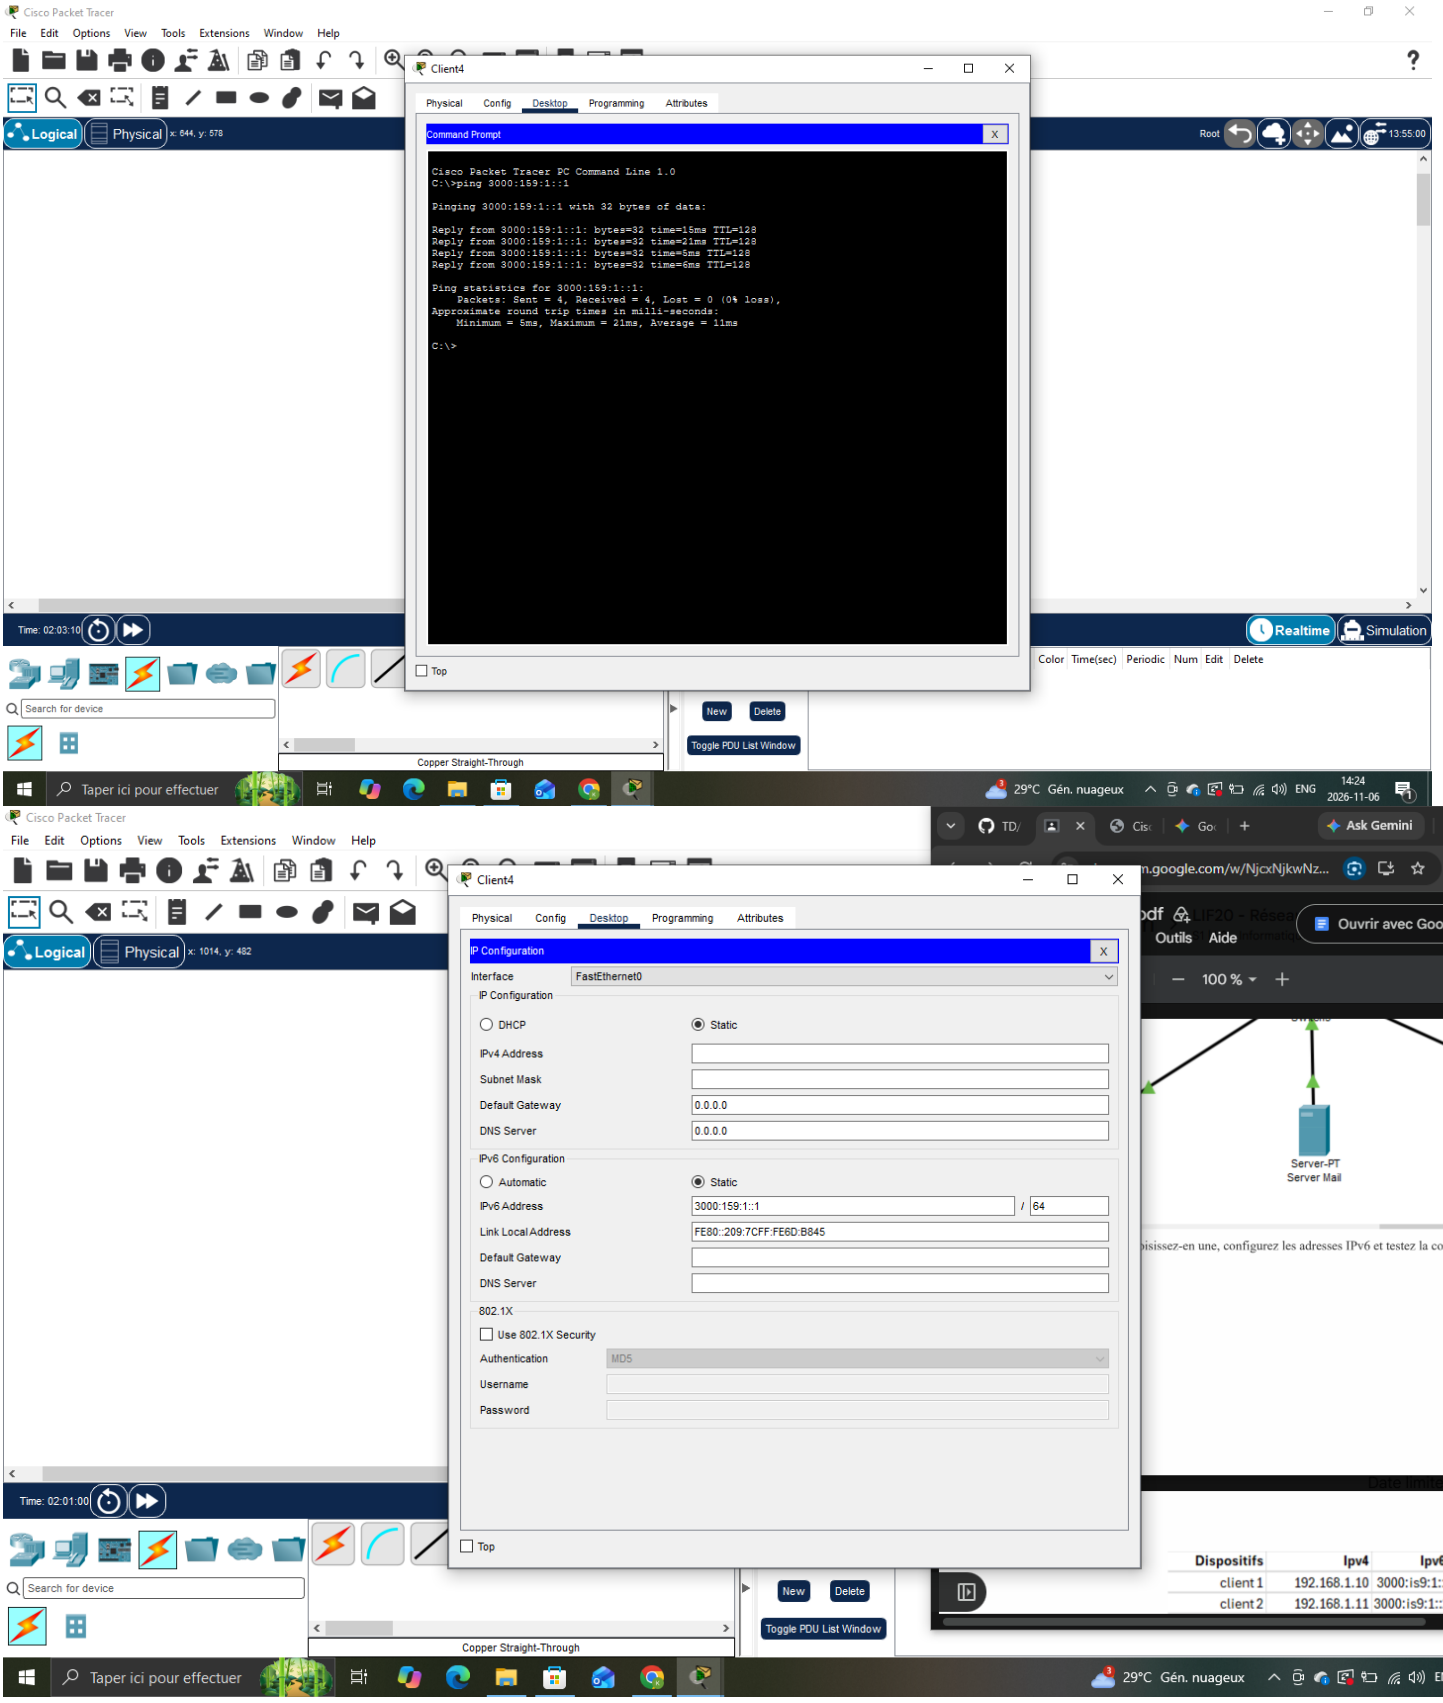

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time=14ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=19ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 19ms, Average = 8ms
C:\>
Top
Logical
Physical
Root
Realtime
Simulation
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Search for device
Taper ici pour effectuer
29°C Gén. nuageux
ENG
14:50
2026-11-06

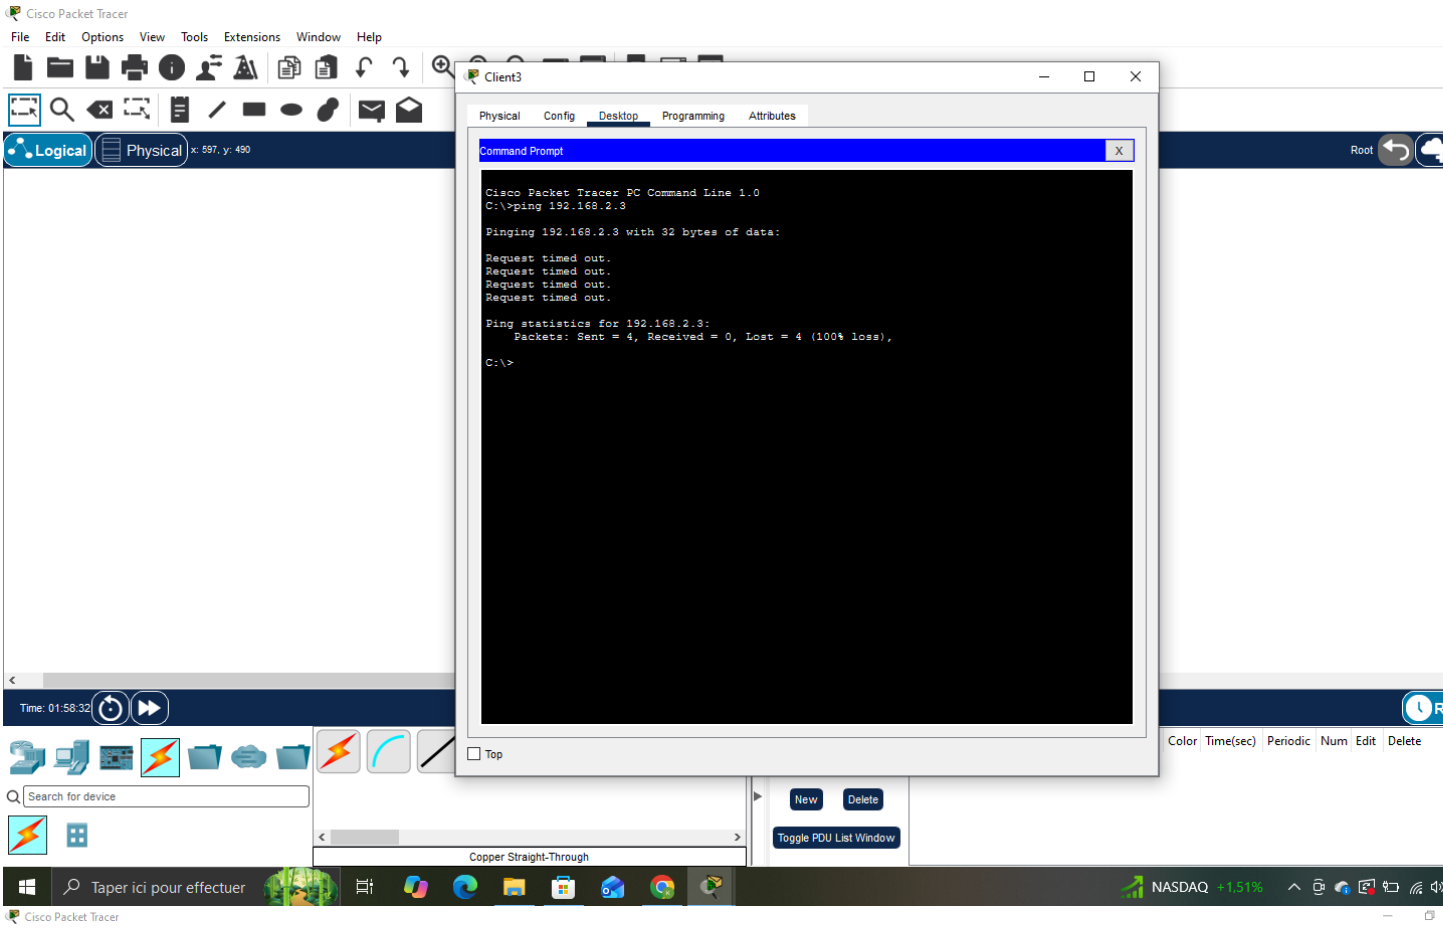

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 1020, y: 350
Root
Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::230:A3FF:FE5D:92C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 02:28:33
Realtime
Color Time(sec) Periodic Num Edit Delete
Search for device
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
29°C Gén. nuageux
ENG

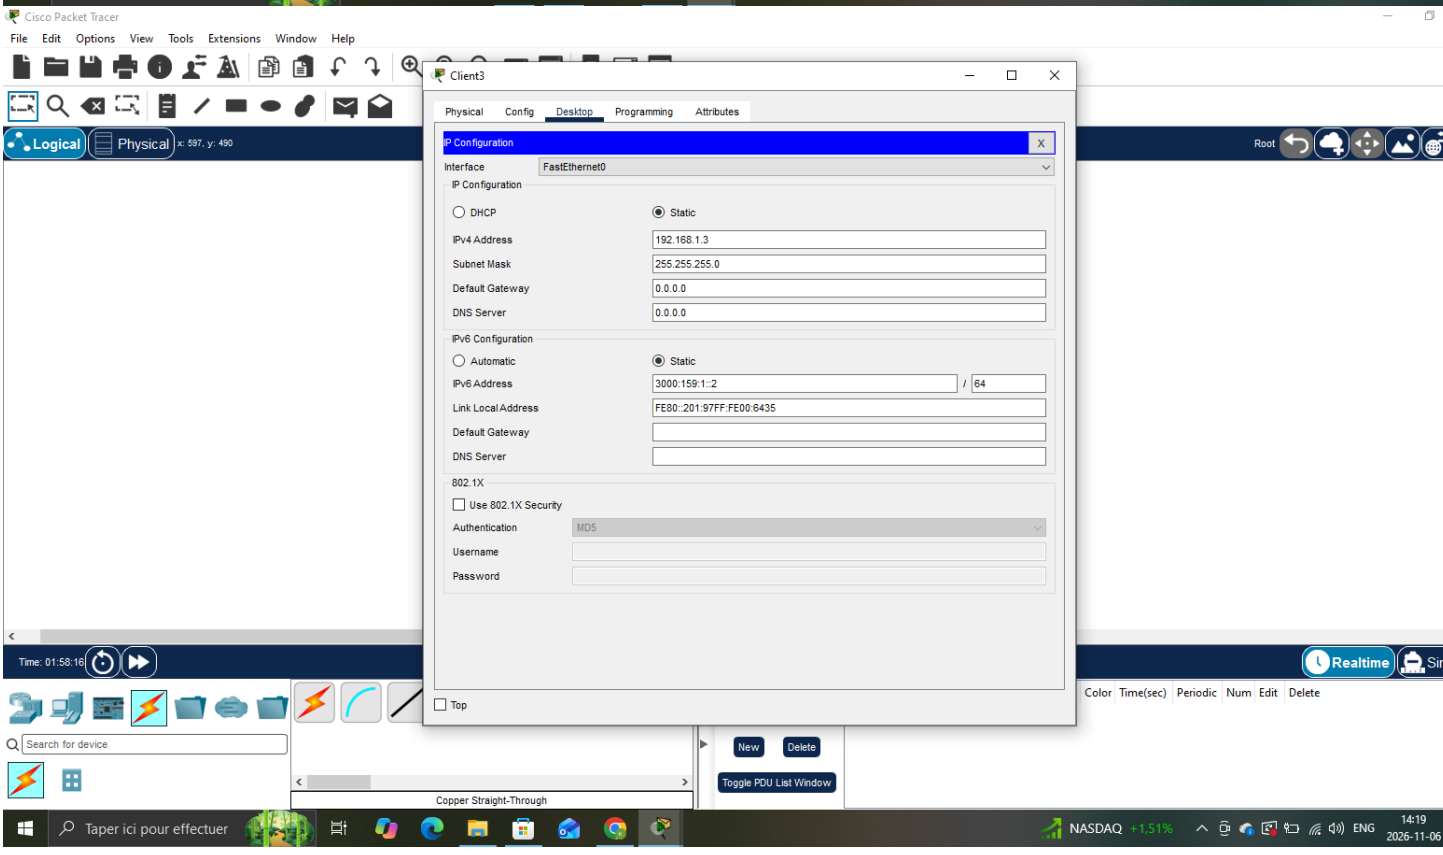

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 495, y: 100
Root
Client1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=21ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=5ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=6ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 5ms, Maximum = 21ms, Average = 11ms
C:\>
Top
Time: 02:27:58
Color Time(sec) Periodic Num Edit
Search for device
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
Le focus des animaux...

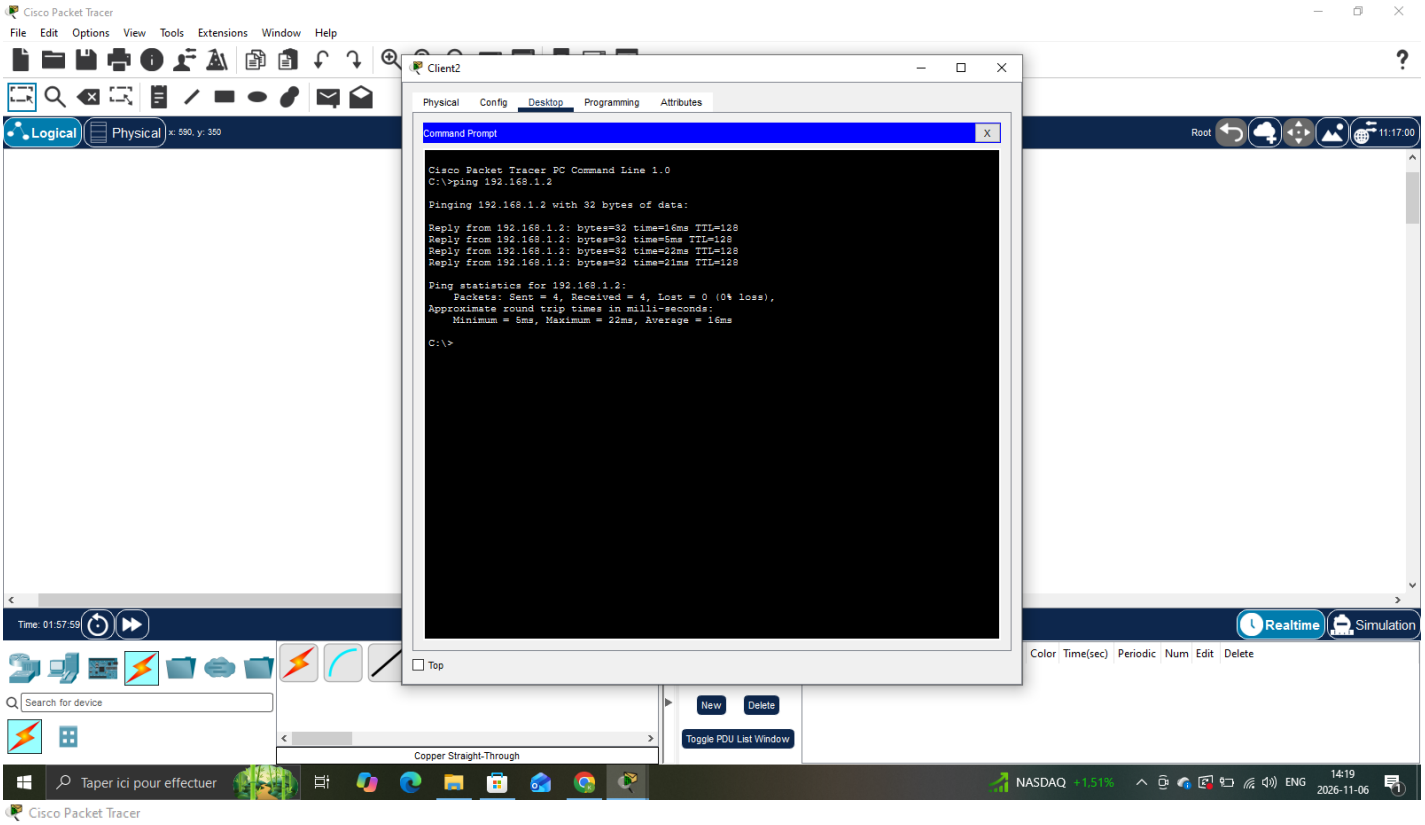

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Root
PC-PT Client3
PC-PT Admin
2960-24TT Switch2
PC-PT Client2
PC-PT Client1
Realtime
Simulation
Scenario 1
New
Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Copper Straight-Through
Taper ici pour effectuer
29°C Gén. nuageux
ENG
14:46
2026-11-06

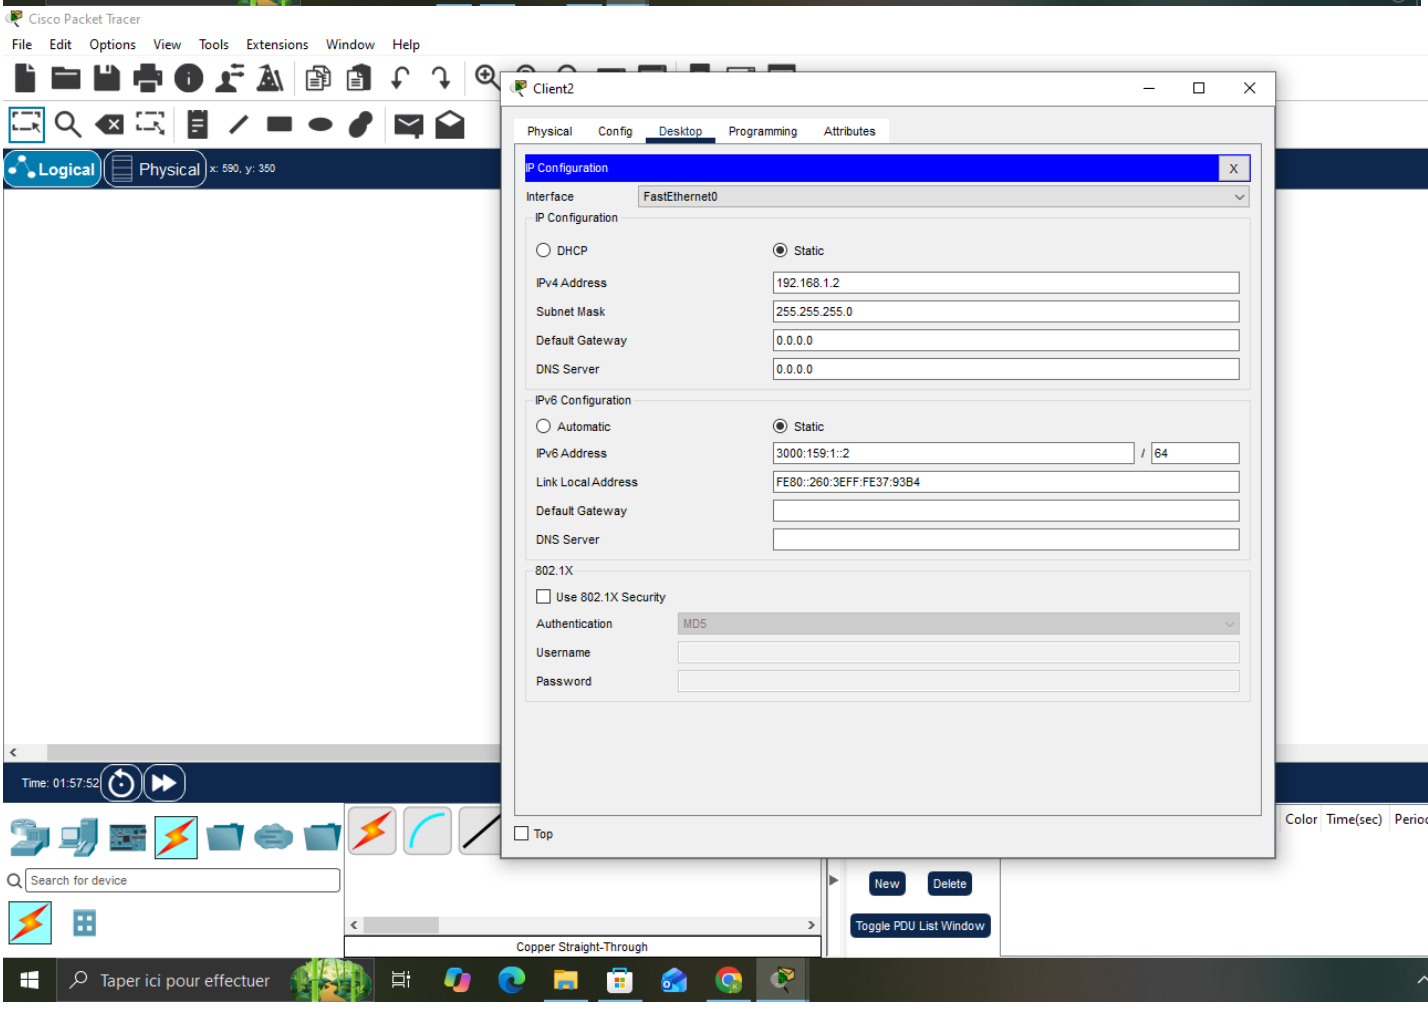

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::1 / 64
Link Local Address FE80::209:7CFF:FE6D:B845
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical
Physical
Root
Realtime
Simulation
New
Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
Le focus des animaux...
ENG
14:49
2026-11-06

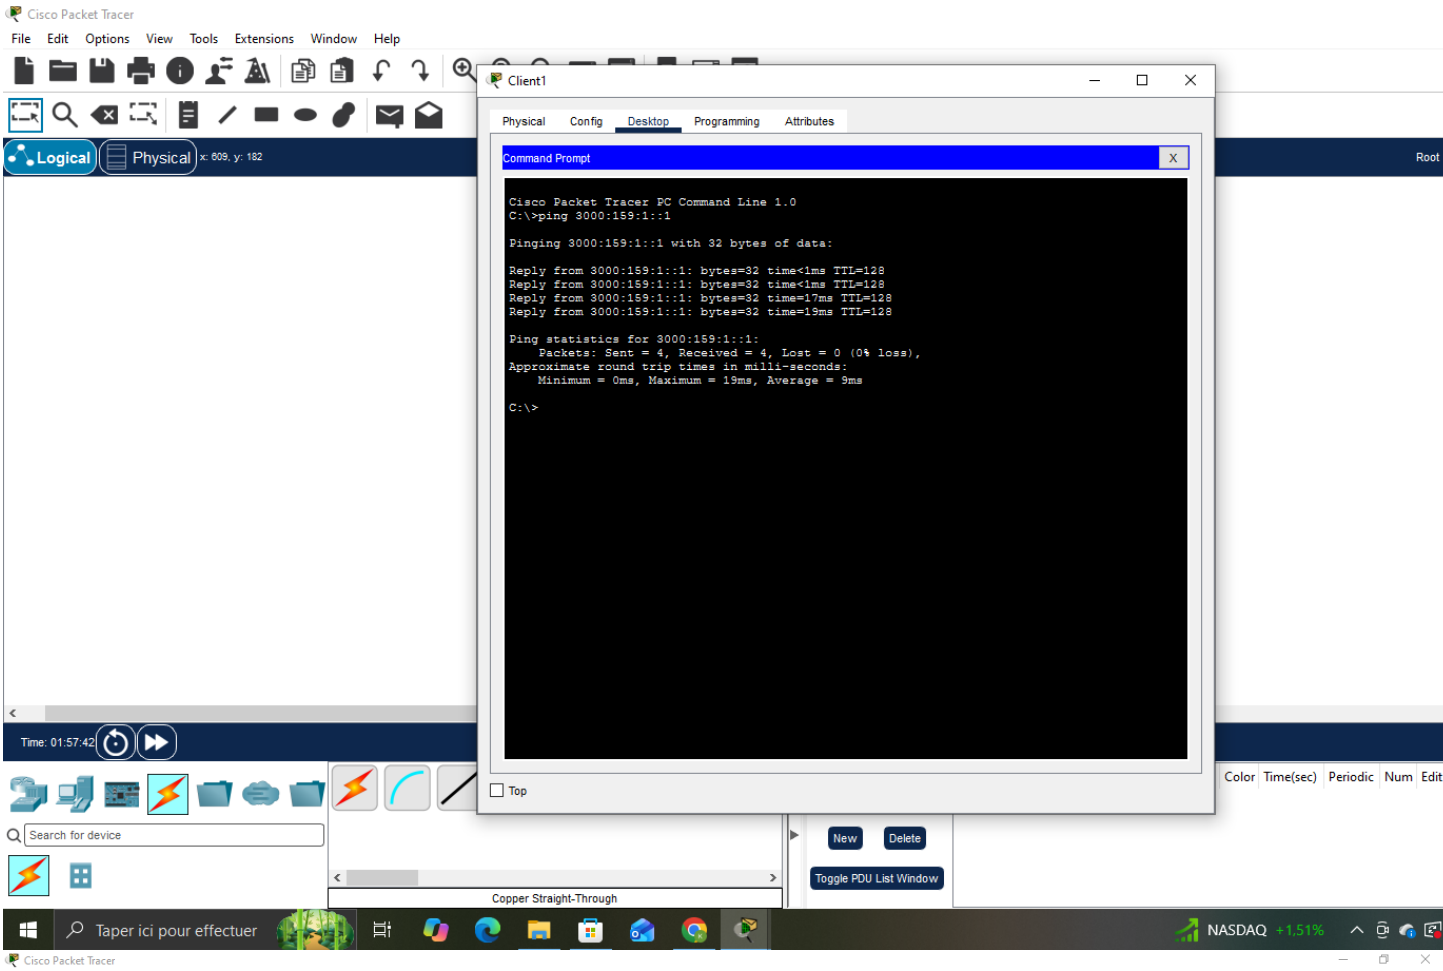

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Client4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time=15ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=21ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=5ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=6ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 5ms, Maximum = 21ms, Average = 11ms
C:\>
Top
Realtime
Simulation
Copper Straight-Through
Taper ici pour effectuer
29°C Gén. nuageux
Client4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::1 / 64
Link Local Address FE80::209:7CFF:FE6D:B845
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Server-PT
Server Mail
Dispositifs Ipv4 Ipv6
client 1 192.168.1.10 3000:is9:1:
client 2 192.168.1.11 3000:is9:1:

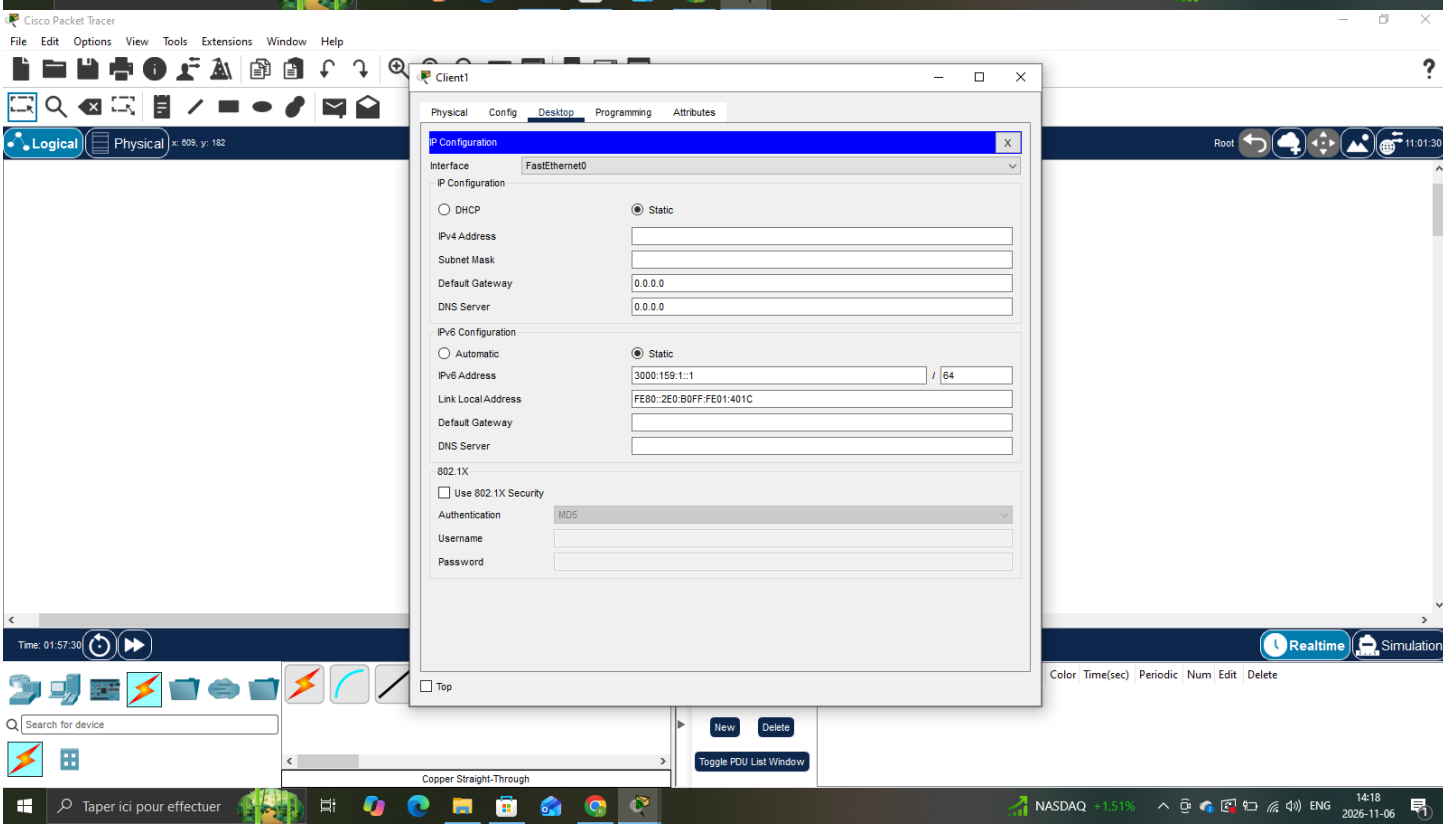

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 597, y: 490
Root
Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Time: 01:58:32
Color Time(sec) Periodic Num Edit Delete
Search for device
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
NASDAQ +1,51%

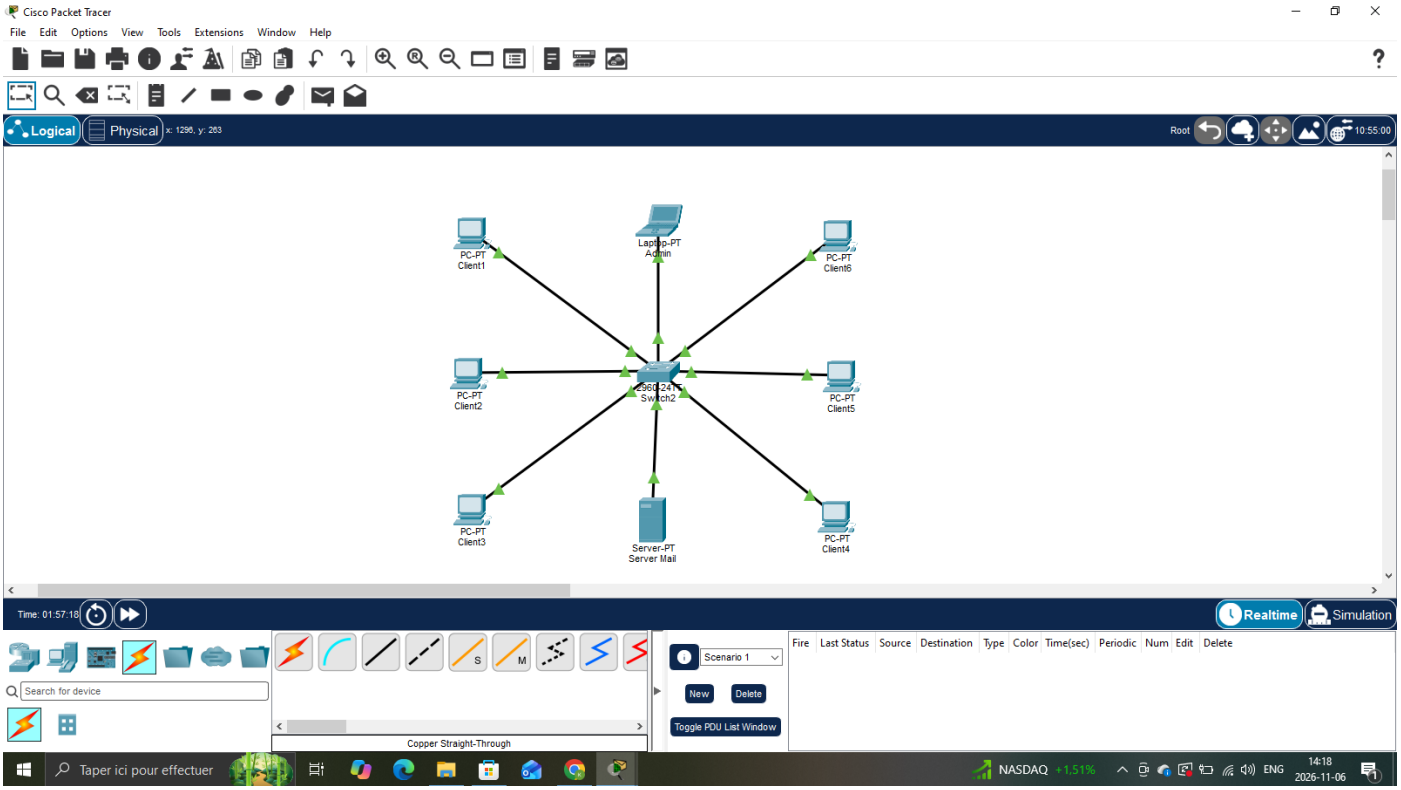

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 597, y: 490
Root
Client3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::201:97FF:FE00:6435
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 01:58:16
Realtime
Color Time(sec) Periodic Num Edit Delete
Search for device
New Delete
Toggle PDU List Window
Copper Straight-Through
Taper ici pour effectuer
NASDAQ +1,51%
ENG
14:19
2026-11-06

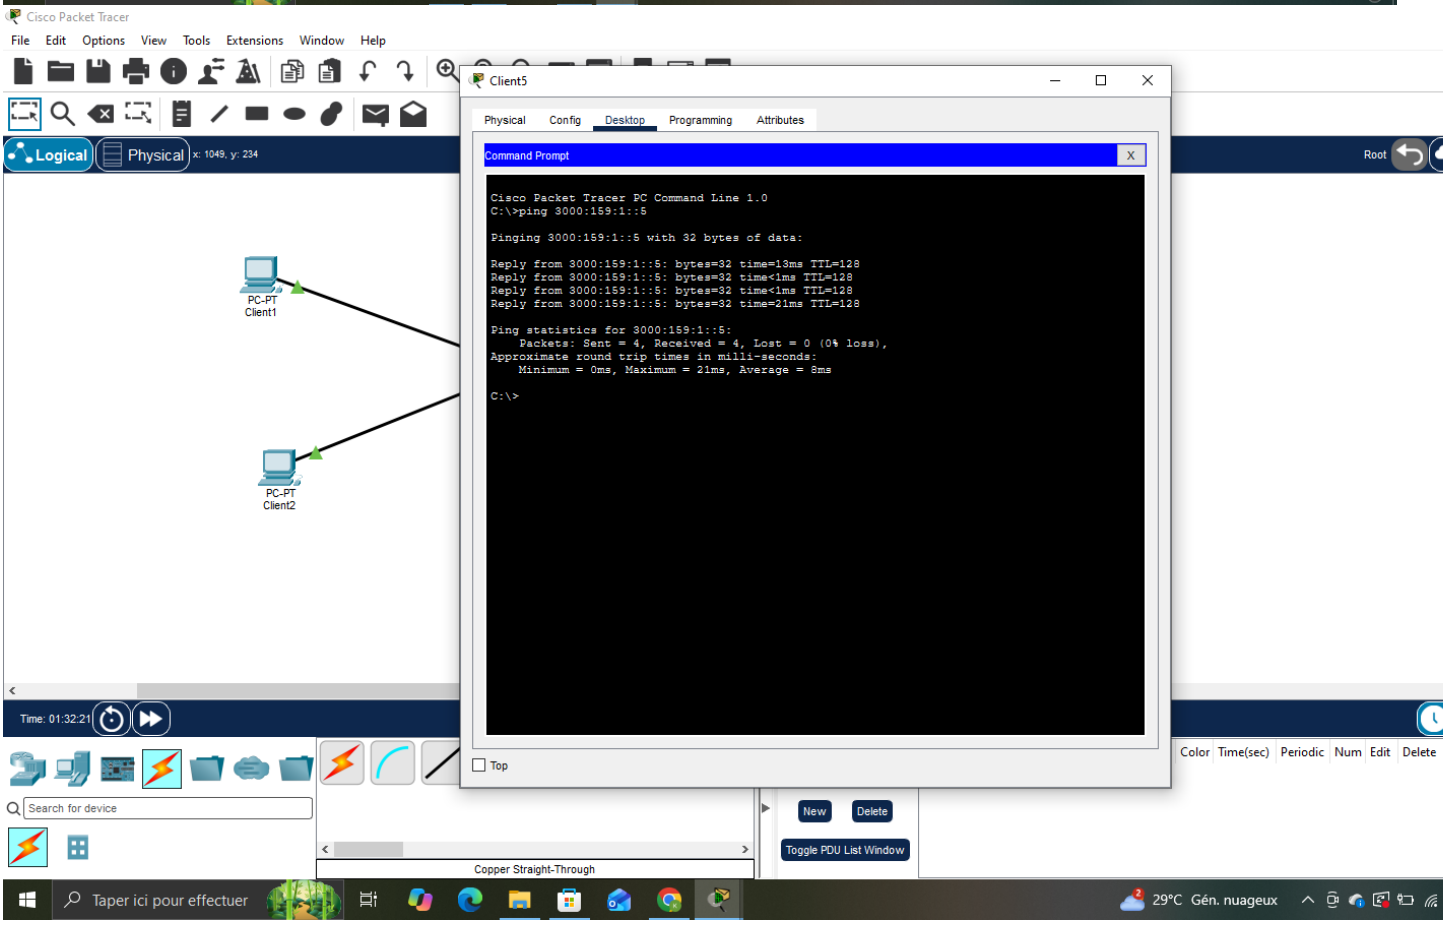

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=16ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time=22ms TTL=128
Reply from 192.168.1.2: bytes=32 time=21ms TTL=128
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 5ms, Maximum = 22ms, Average = 16ms
C:\>
Top
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
NASDAQ +1.51%
ENG
14:19
2026-11-06

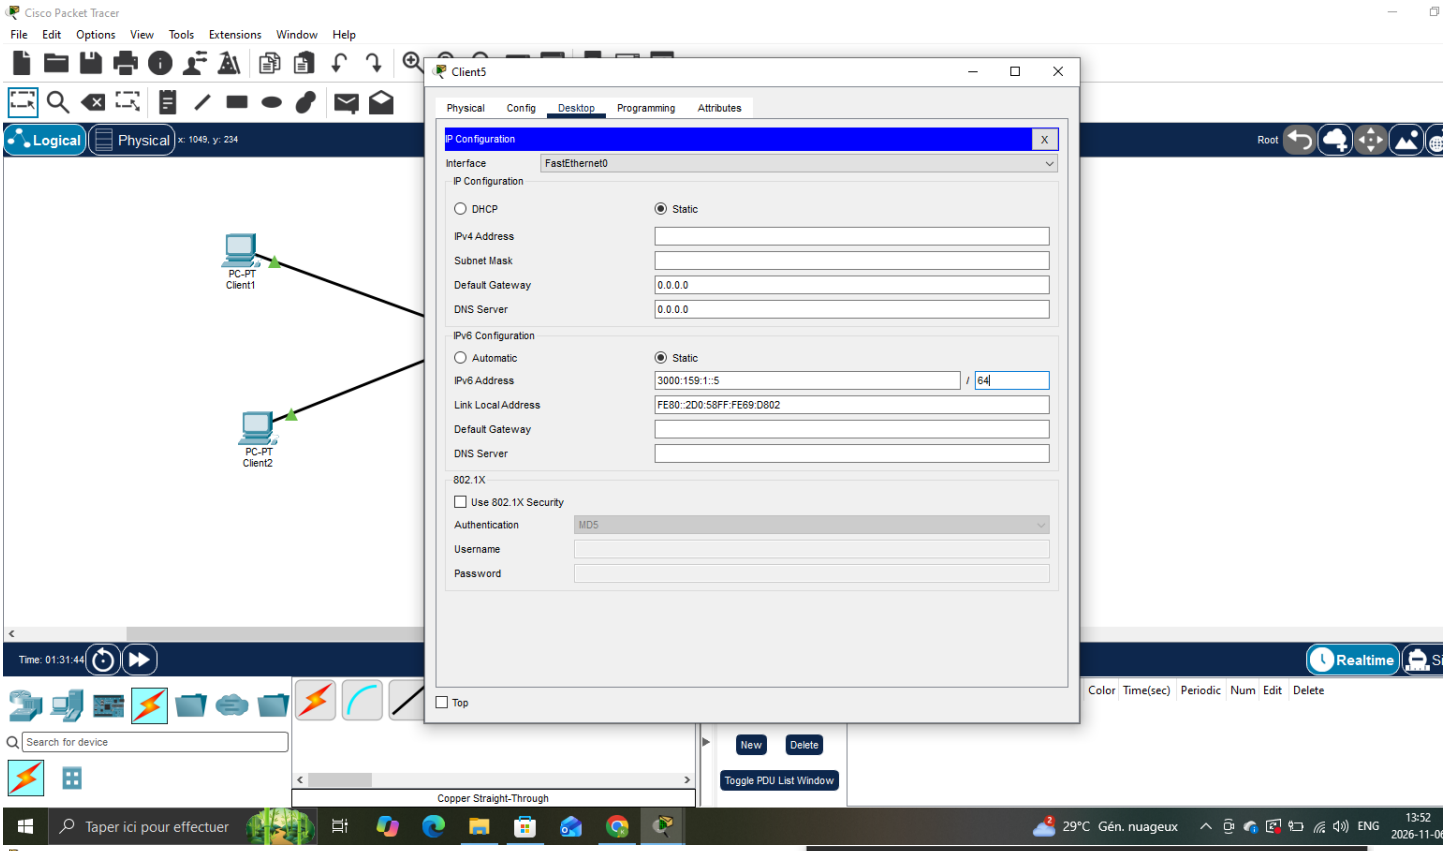

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.2
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::260:3EFF:FE37:93B4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer

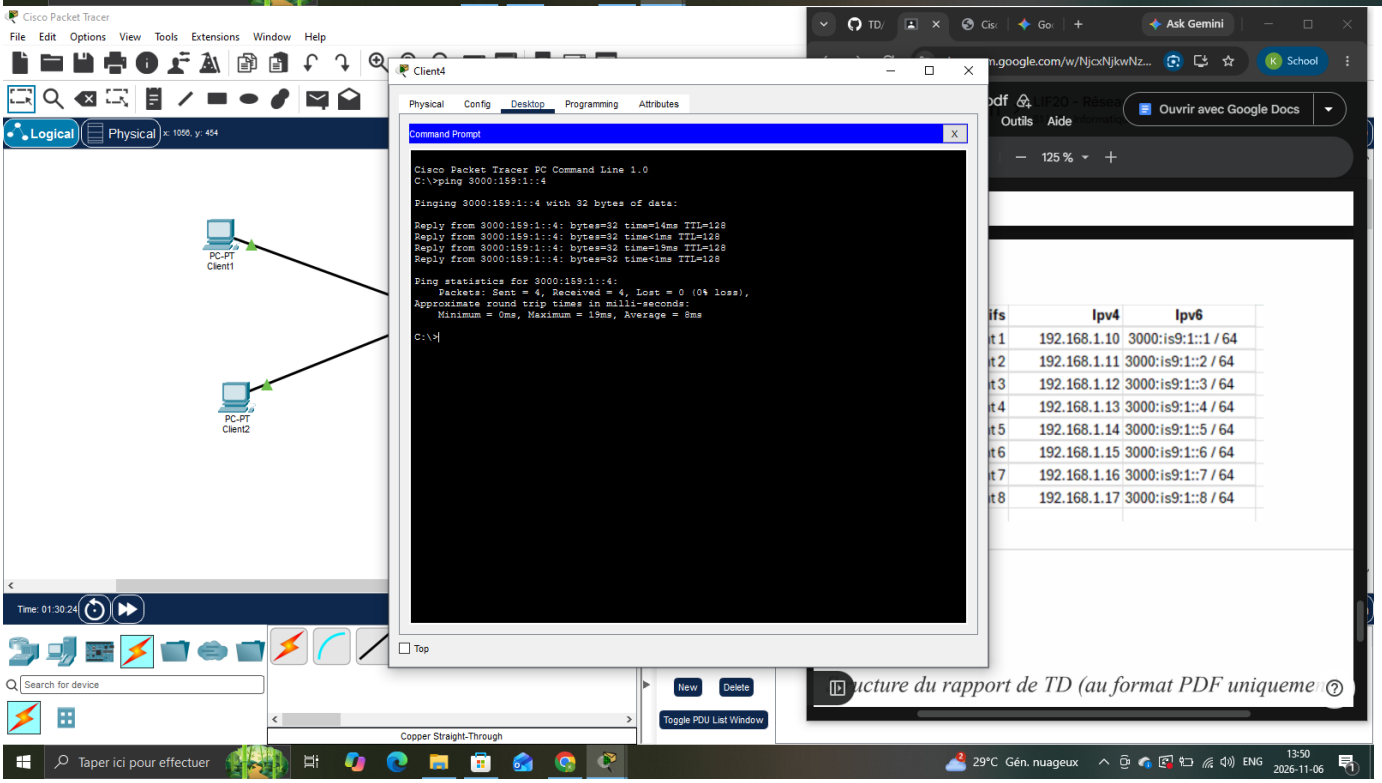

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=17ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=19ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 19ms, Average = 9ms
C:\>
Top
Logical
Physical
Root
Time: 01:57:42
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit
Taper ici pour effectuer
NASDAQ +1,51%

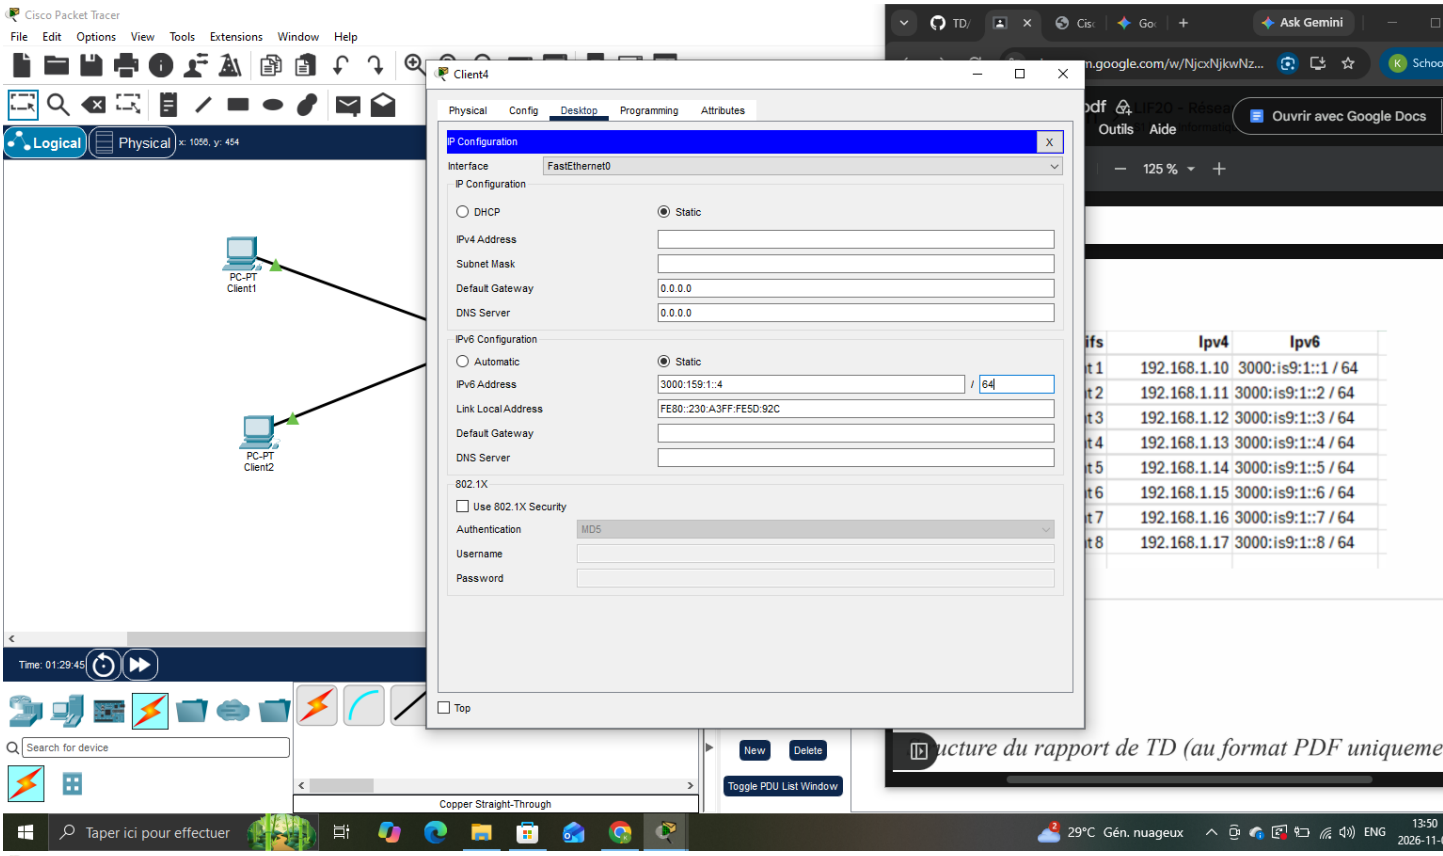

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address 3000:159:1::1 / 64
Link Local Address FE80::2E0:B0FF:FE01:401C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical
Physical
Root
Time: 01:57:30
Realtime
Simulation
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
NASDAQ +1.51%
ENG
14:18
2026-11-06

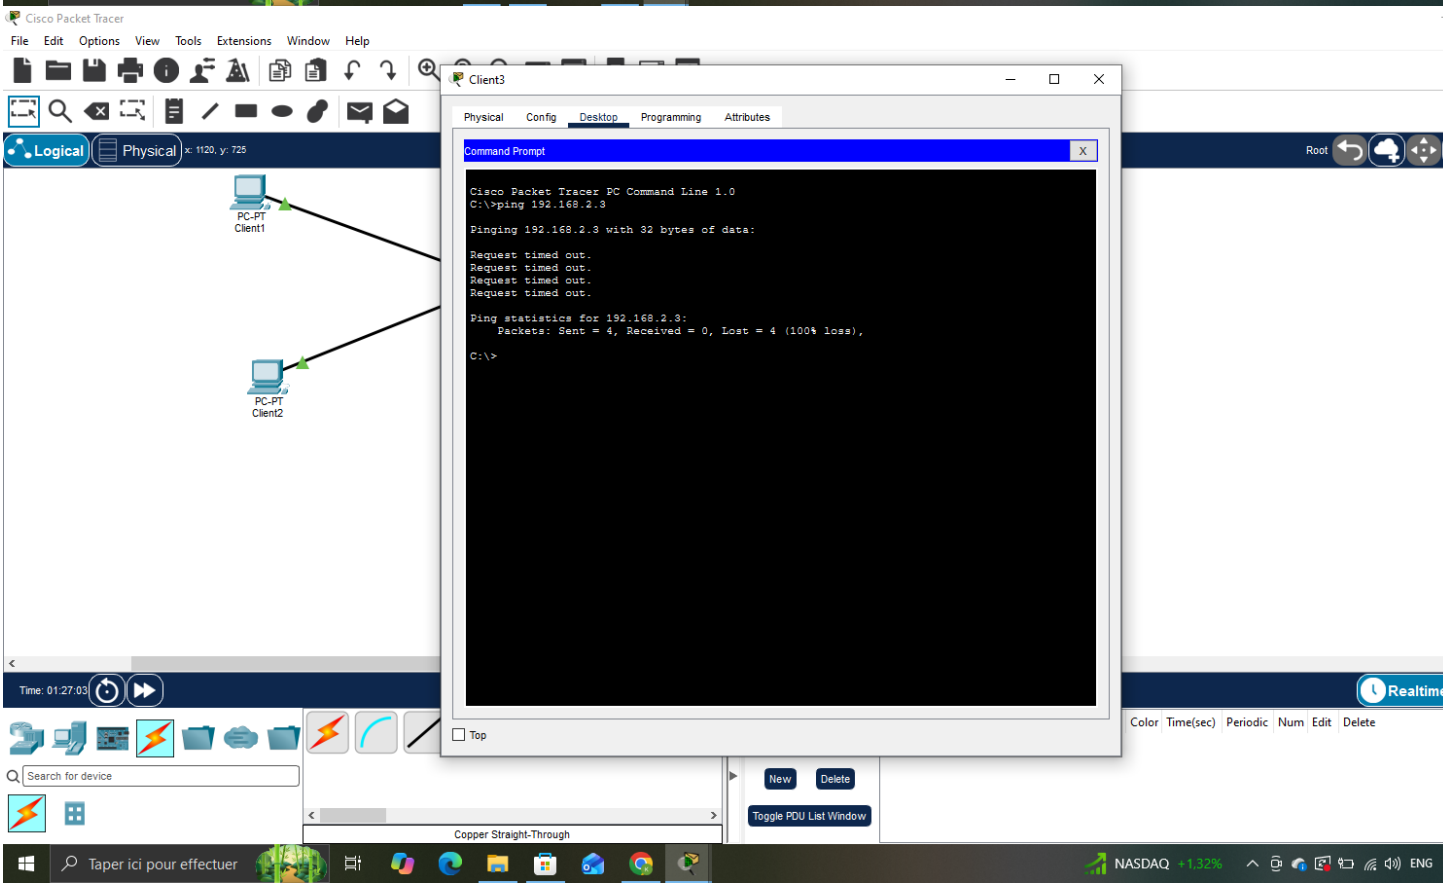

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Root
PC-PT Client1
Laptop-PT Admin
PC-PT Client6
PC-PT Client2
2960-24TT Switch2
PC-PT Client5
PC-PT Client3
Server-PT Server Mail
PC-PT Client4
Time: 01:57:18
Realtime Simulation
Search for device
Copper Straight-Through
Scenario 1
New Delete
Toggle PDU List Window
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
NASDAQ +1.51%
ENG
14:18
2026-11-06

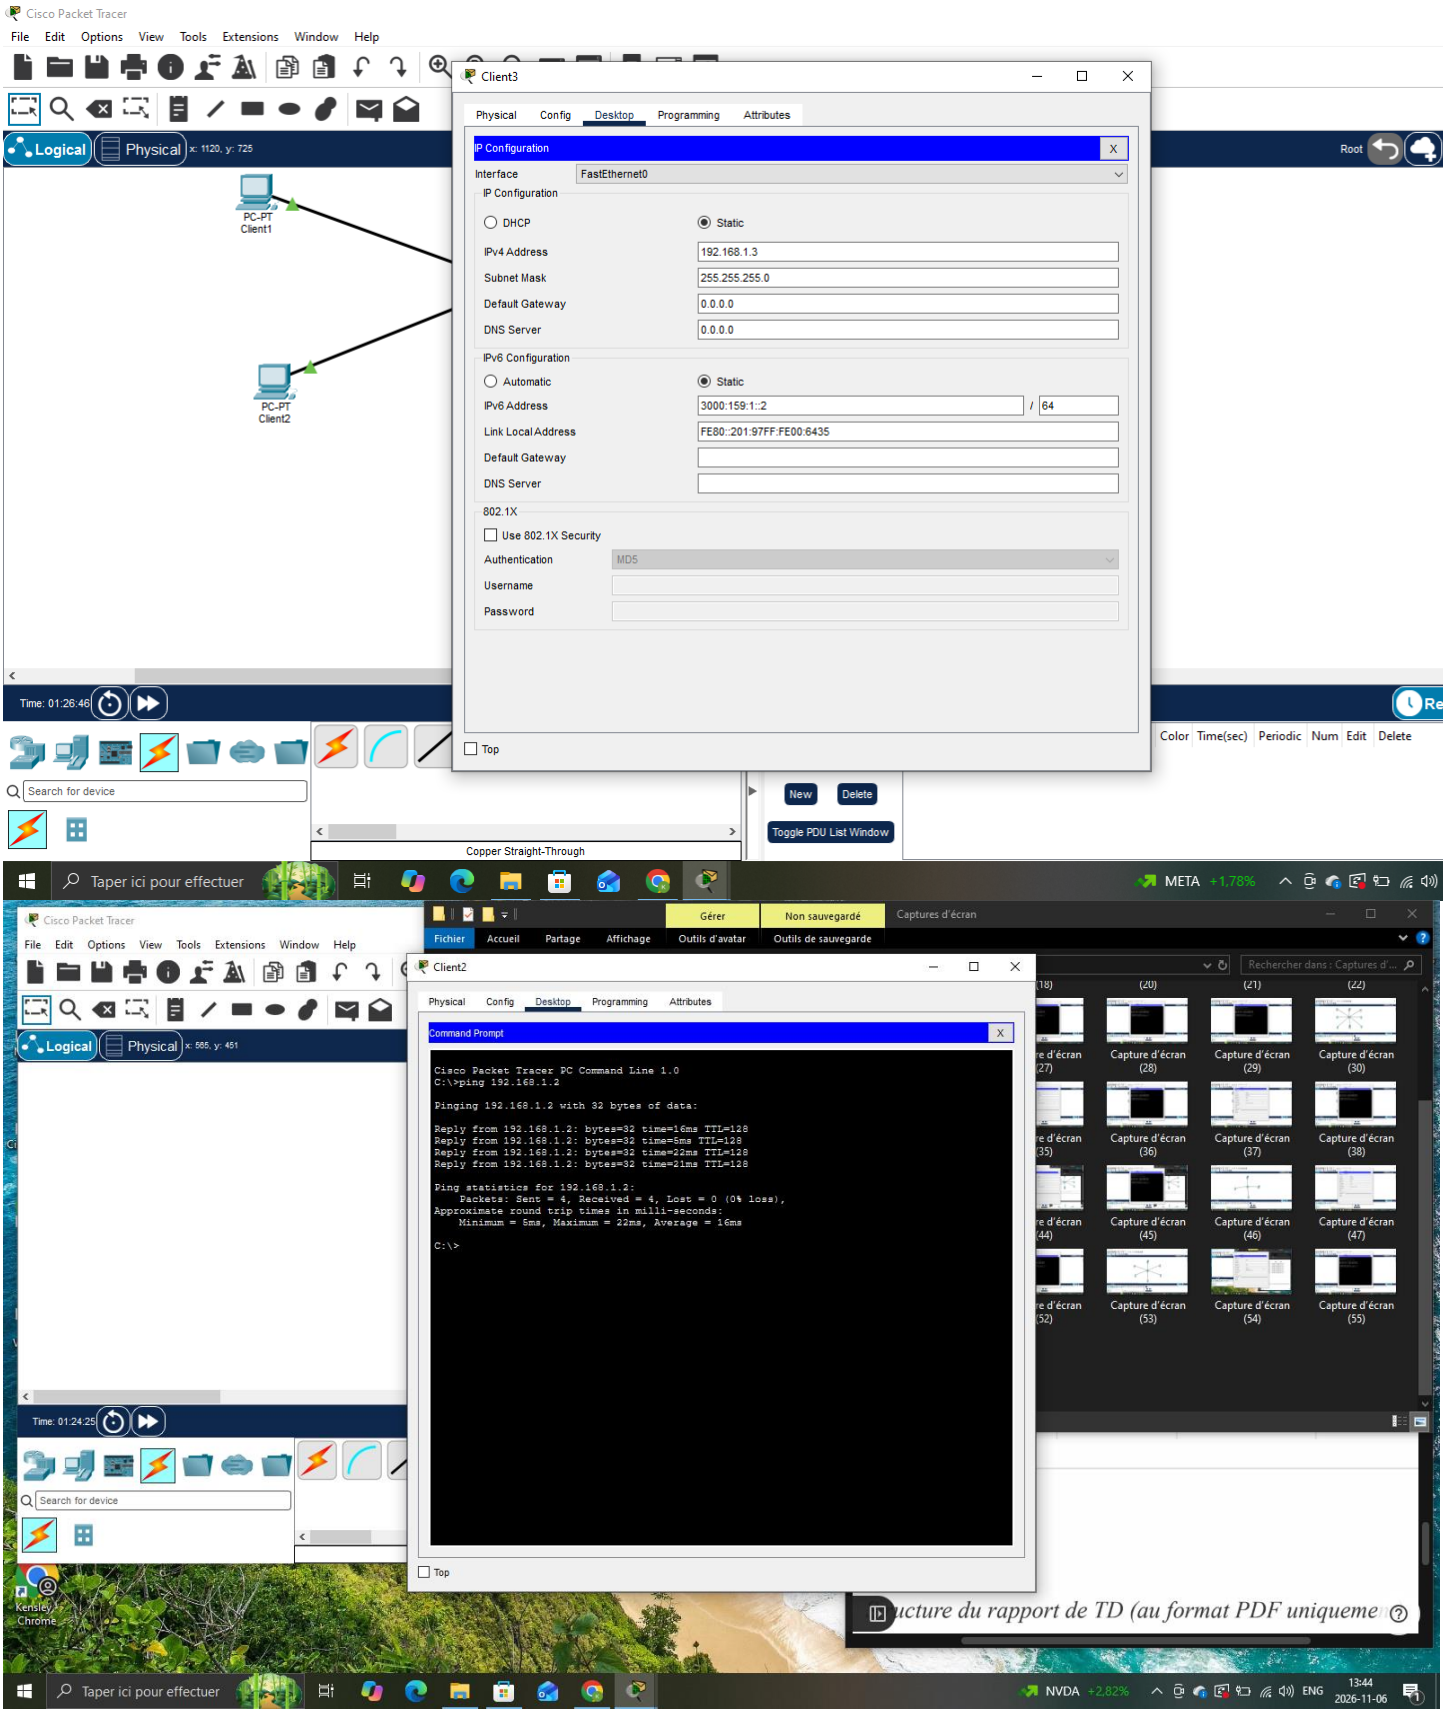

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client5
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::5
Pinging 3000:159:1::5 with 32 bytes of data:
Reply from 3000:159:1::5: bytes=32 time=13ms TTL=128
Reply from 3000:159:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=21ms TTL=128
Ping statistics for 3000:159:1::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 21ms, Average = 8ms
C:\>
Top
Logical Physical
Root
PC-PT Client1
PC-PT Client2
Time: 01:32:21
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
29°C Gén. nuageux

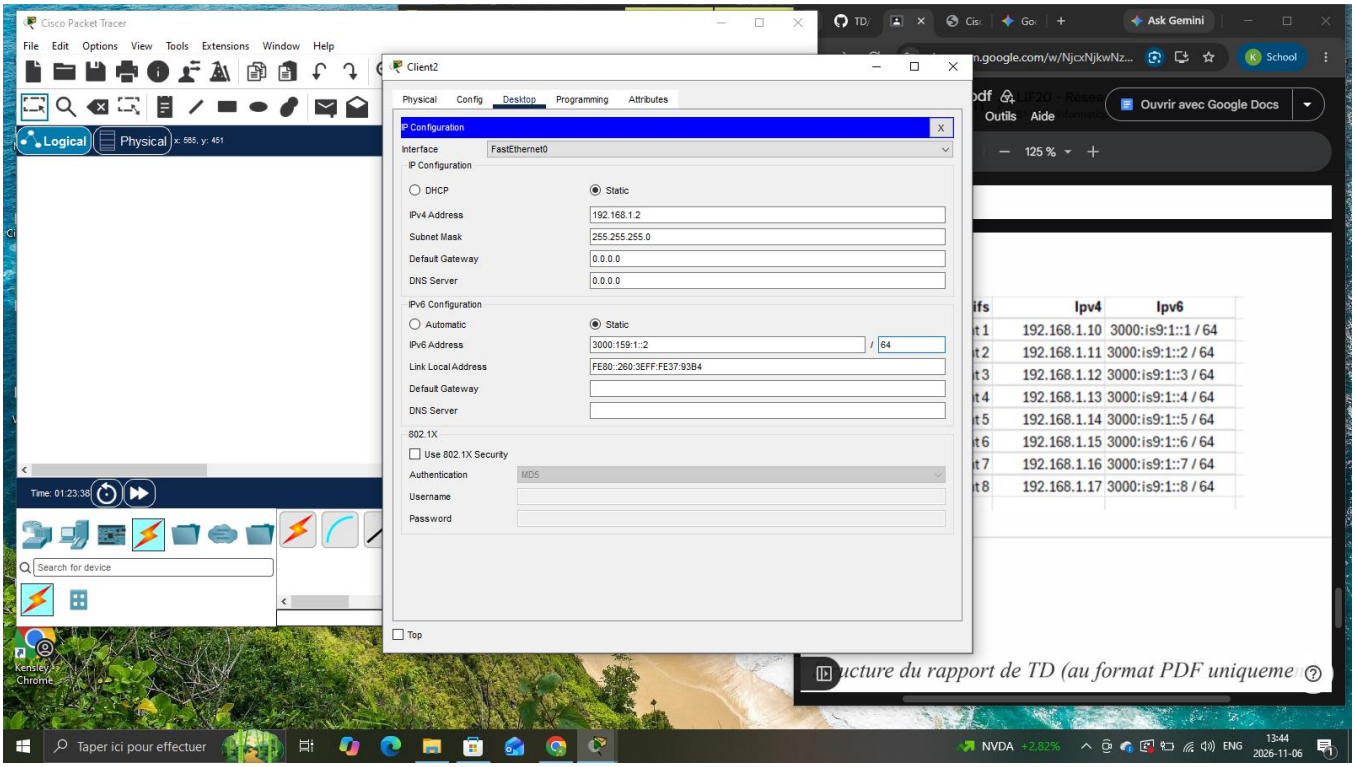

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client5
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::5 / 64
Link Local Address FE80::2D0:58FF:FE69:D802
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
PC-PT Client1
PC-PT Client2
Copper Straight-Through
New Delete
Toggle PDU List Window
Realtime
Color Time(sec) Periodic Num Edit Delete
Search for device
Taper ici pour effectuer
29°C Gén. nuageux
ENG
13:52
2026-11-06

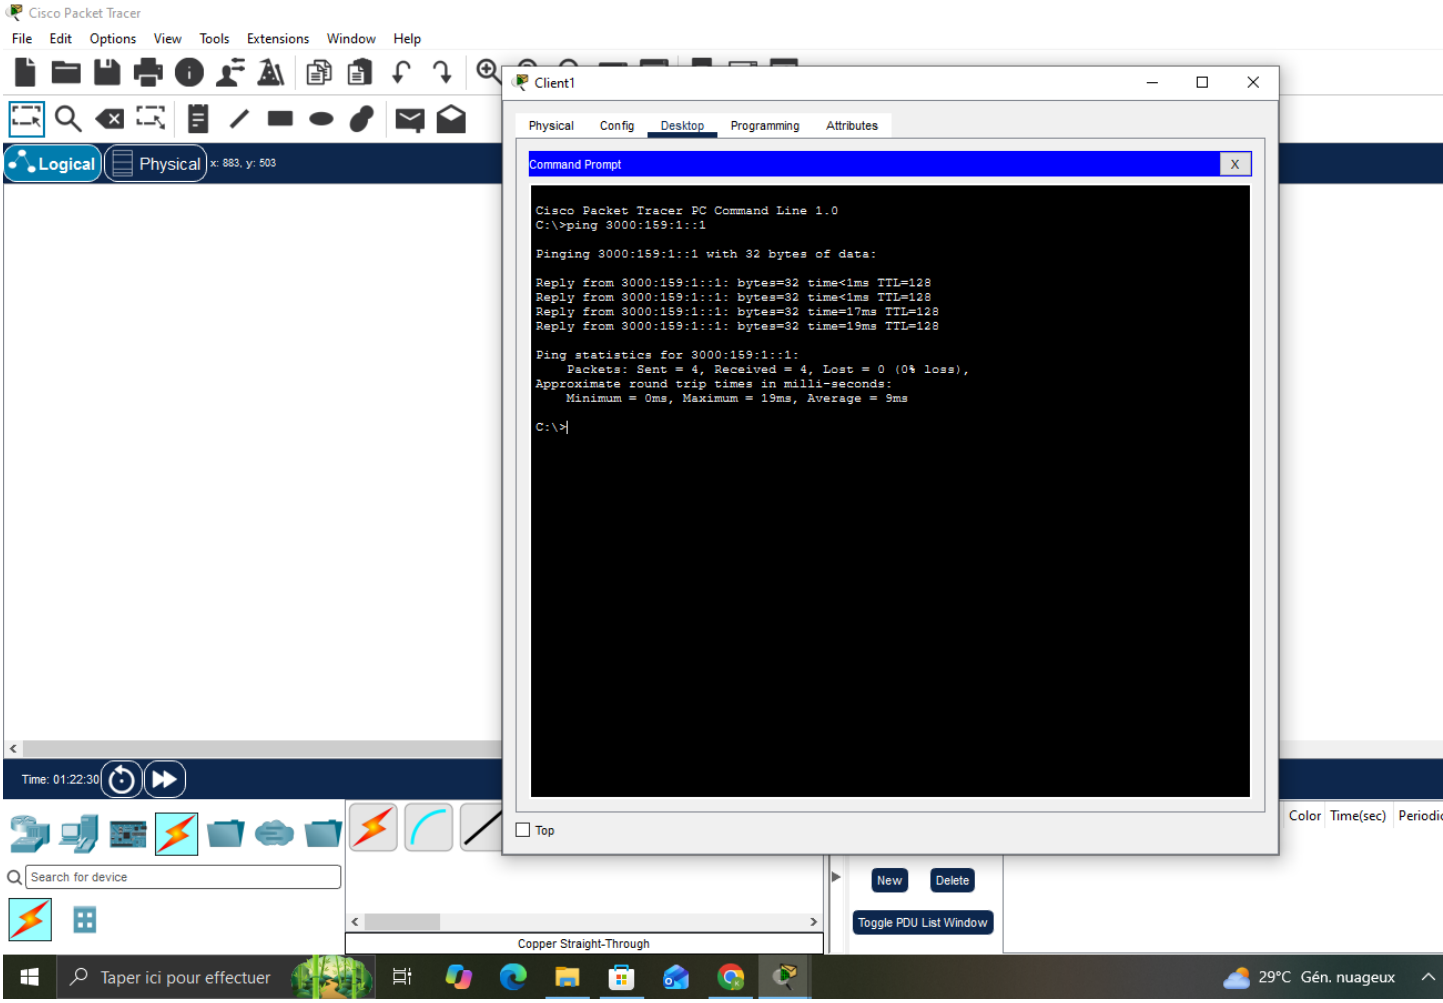

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client4
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::4
Pinging 3000:159:1::4 with 32 bytes of data:
Reply from 3000:159:1::4: bytes=32 time=14ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::4: bytes=32 time=19ms TTL=128
Reply from 3000:159:1::4: bytes=32 time<1ms TTL=128
Ping statistics for 3000:159:1::4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 19ms, Average = 8ms
C:\>
Top
PC-PT Client1
PC-PT Client2
Copper Straight-Through
New Delete
Toggle PDU List Window
Ask Gemini
Ouvrir avec Google Docs
Outils Aide
125 %
Ipv4 Ipv6
192.168.1.10 3000:is9:1::1 / 64
192.168.1.11 3000:is9:1::2 / 64
192.168.1.12 3000:is9:1::3 / 64
192.168.1.13 3000:is9:1::4 / 64
192.168.1.14 3000:is9:1::5 / 64
192.168.1.15 3000:is9:1::6 / 64
192.168.1.16 3000:is9:1::7 / 64
192.168.1.17 3000:is9:1::8 / 64
Search for device
Taper ici pour effectuer
29°C Gén. nuageux
ENG
13:50
2026-11-06

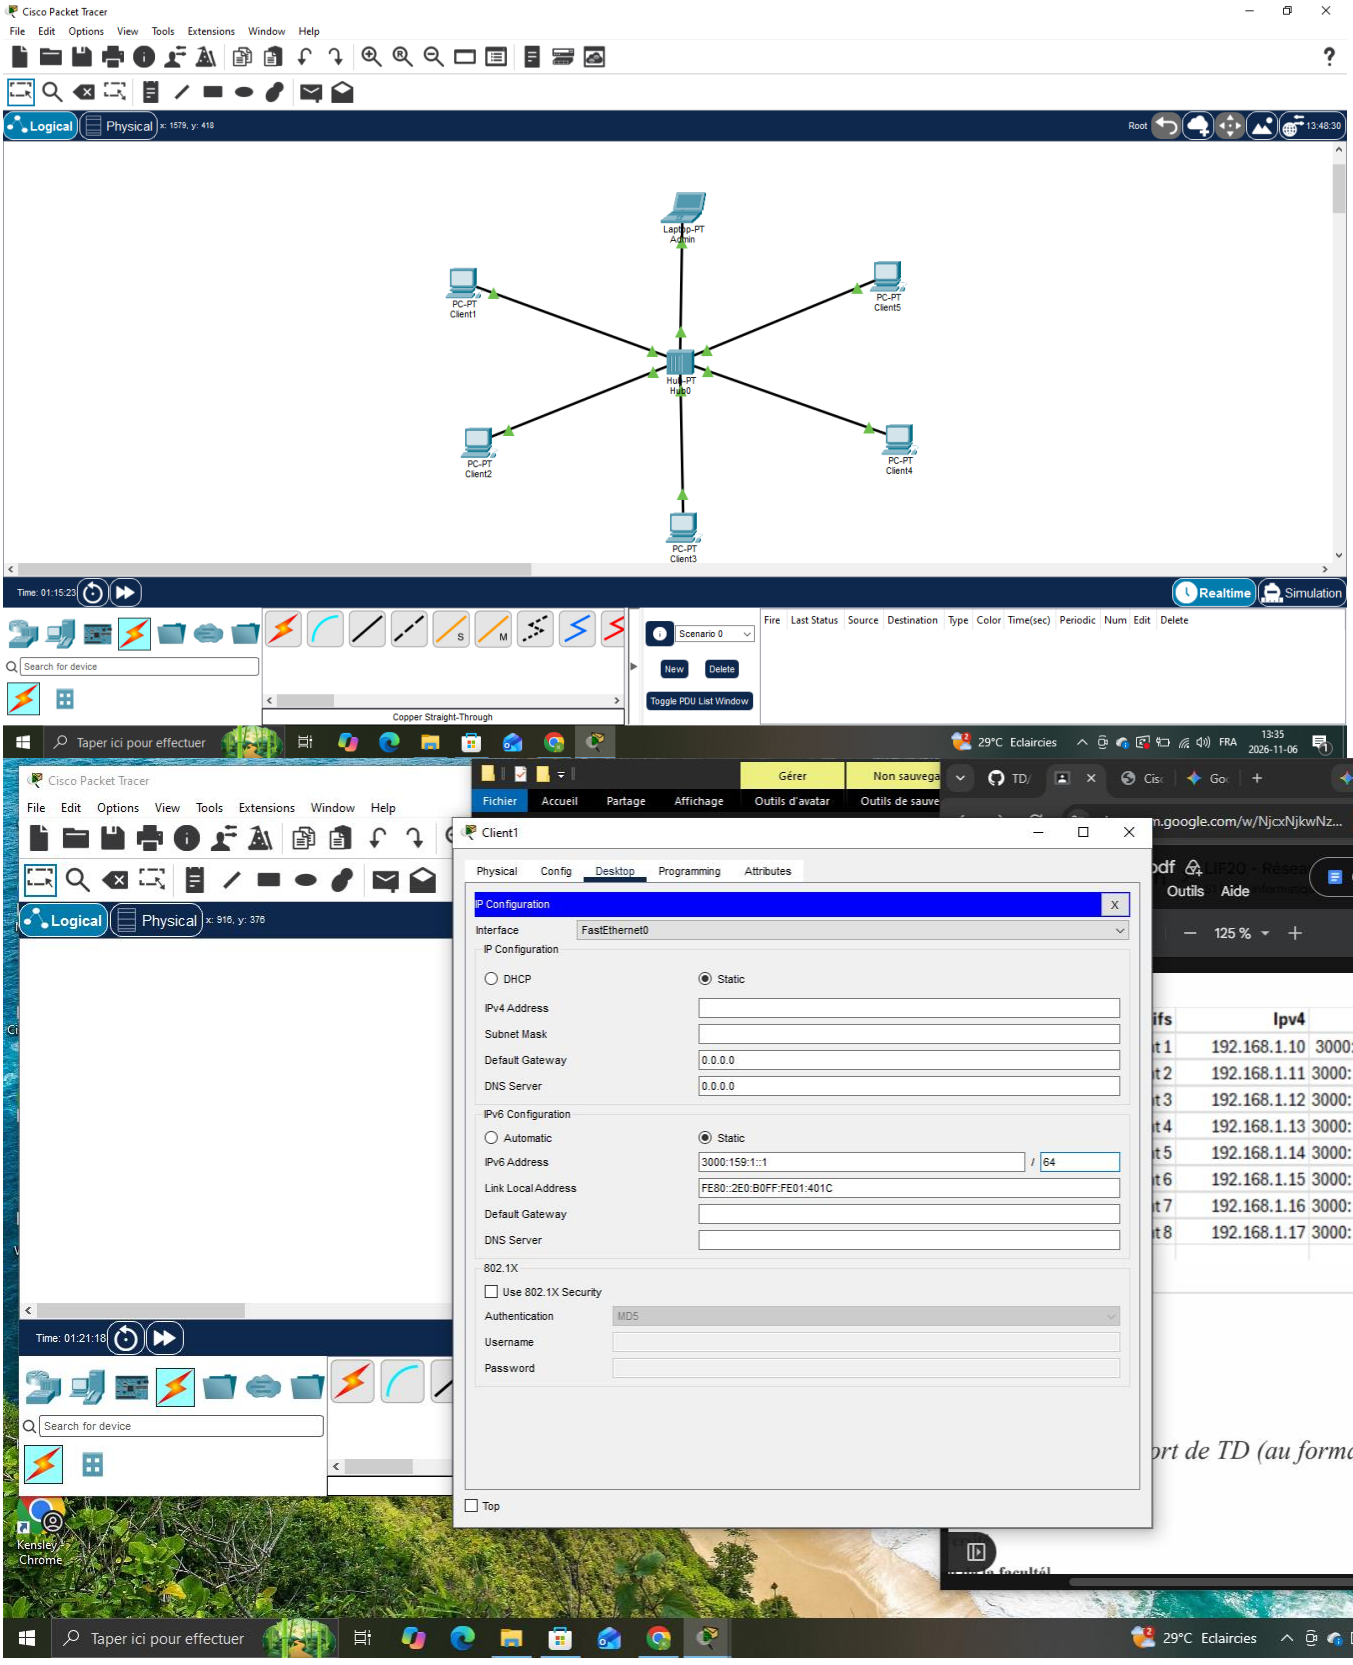

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client4
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP Static
IPv4 Address
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::4 / 64
Link Local Address FE80::230:A3FF:FE5D:92C
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
PC-PT Client1
PC-PT Client2
Copper Straight-Through
New
Delete
Toggle PDU List Window
Ouvrir avec Google Docs
Outils Aide
125 %
Ask Gemini
Ipv4 Ipv6
192.168.1.10 3000:is9:1::1 / 64
192.168.1.11 3000:is9:1::2 / 64
192.168.1.12 3000:is9:1::3 / 64
192.168.1.13 3000:is9:1::4 / 64
192.168.1.14 3000:is9:1::5 / 64
192.168.1.15 3000:is9:1::6 / 64
192.168.1.16 3000:is9:1::7 / 64
192.168.1.17 3000:is9:1::8 / 64
Taper ici pour effectuer
29°C Gén. nuageux
ENG

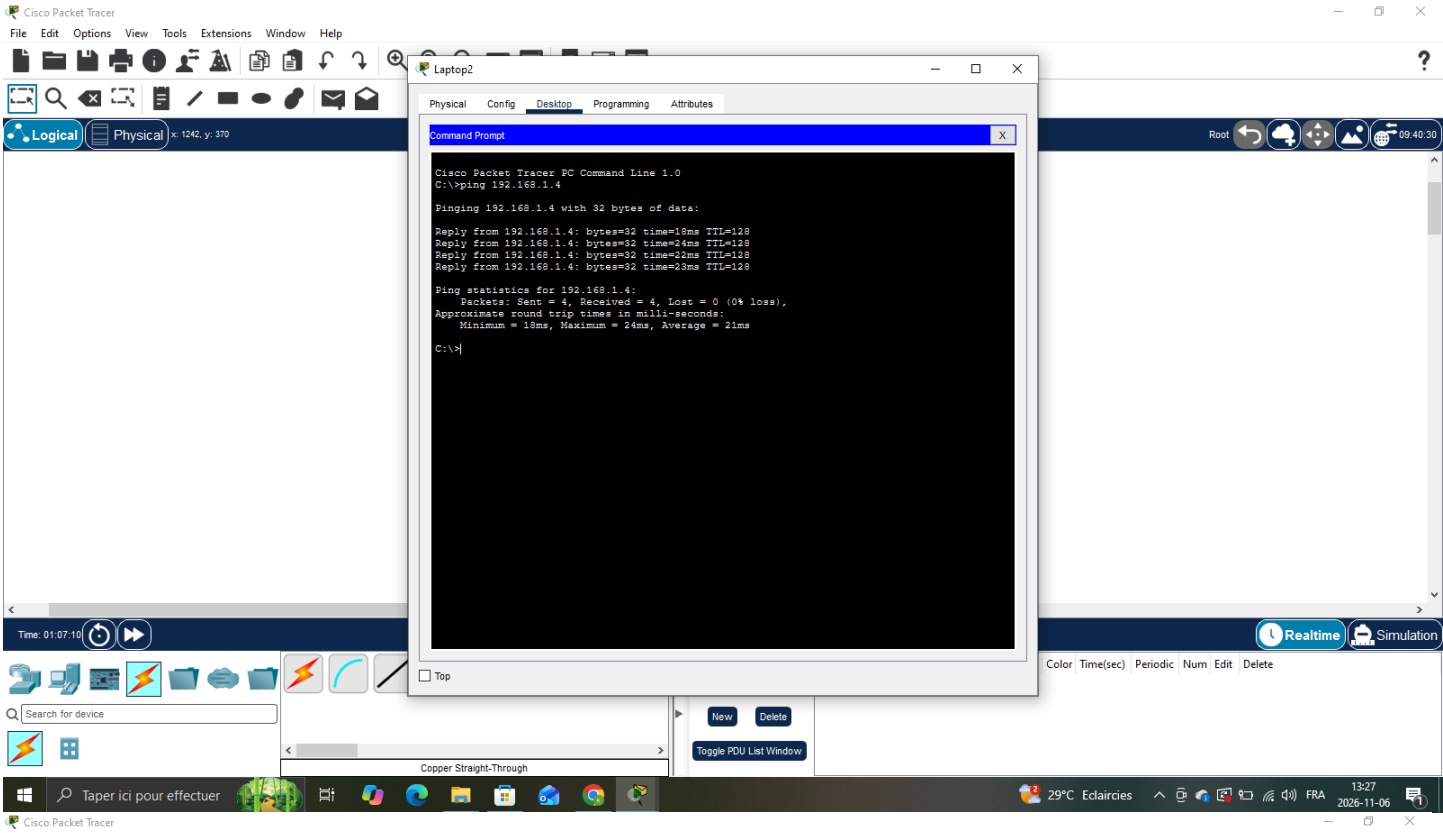

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
PC-PT Client1
PC-PT Client2
Copper Straight-Through
New
Delete
Toggle PDU List Window
Root
Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
NASDAQ +1,32%
ENG

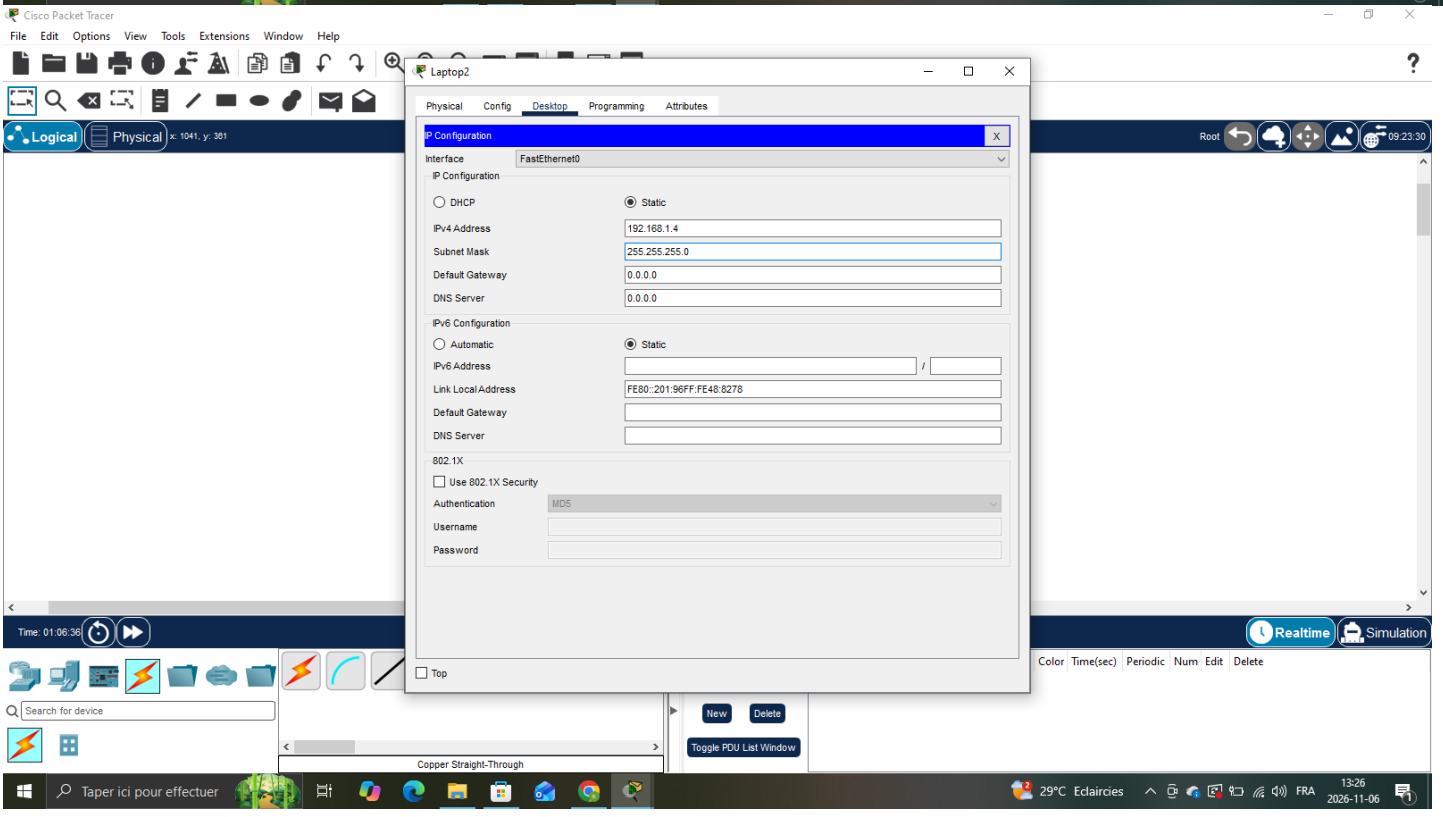

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Client3
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::201:97FF:FE00:6435
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
PC-PT Client1
PC-PT Client2
Time: 01:26:46
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
META +1,78%
Client2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=16ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time=22ms TTL=128
Reply from 192.168.1.2: bytes=32 time=21ms TTL=128
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 5ms, Maximum = 22ms, Average = 16ms
C:\>
Top
Time: 01:24:25
Search for device
Kensley Chrome
Taper ici pour effectuer
NVDA +2,82%
ENG
13:44
2026-11-06

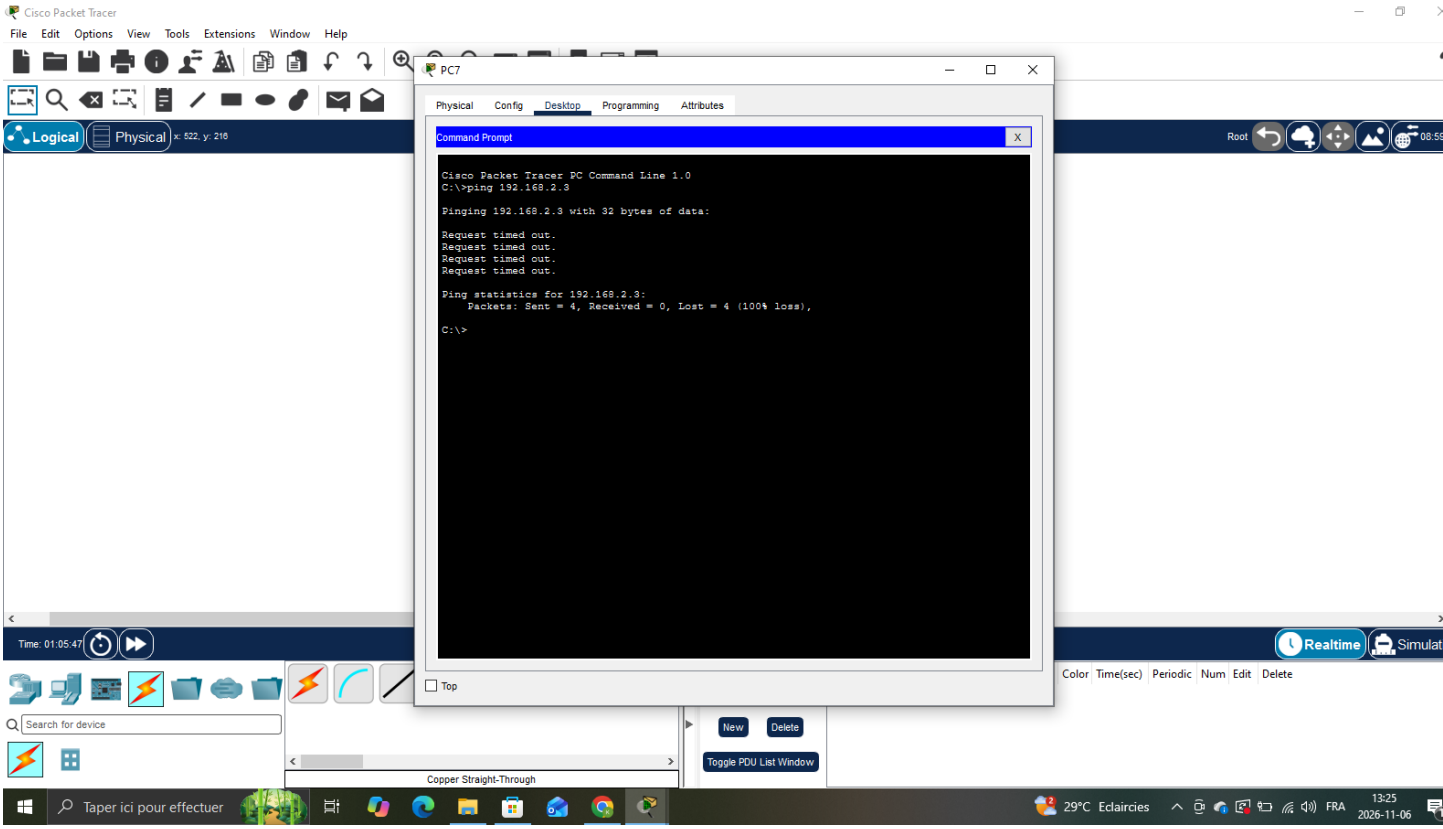

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
DHCP Static
IPv4 Address 192.168.1.2
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address 3000:159:1::2 / 64
Link Local Address FE80::260:3EFF:FE37:93B4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Ouvrir avec Google Docs
Outils Aide
125 %
ifs Ipv4 Ipv6
t1 192.168.1.10 3000:is9:1::1 / 64
t2 192.168.1.11 3000:is9:1::2 / 64
t3 192.168.1.12 3000:is9:1::3 / 64
t4 192.168.1.13 3000:is9:1::4 / 64
t5 192.168.1.14 3000:is9:1::5 / 64
t6 192.168.1.15 3000:is9:1::6 / 64
t7 192.168.1.16 3000:is9:1::7 / 64
t8 192.168.1.17 3000:is9:1::8 / 64
ucture du rapport de TD (au format PDF uniqueme
Time: 01:23:38
Search for device
Taper ici pour effectuer
NVDA +2,82%
ENG
13:44
2026-11-06

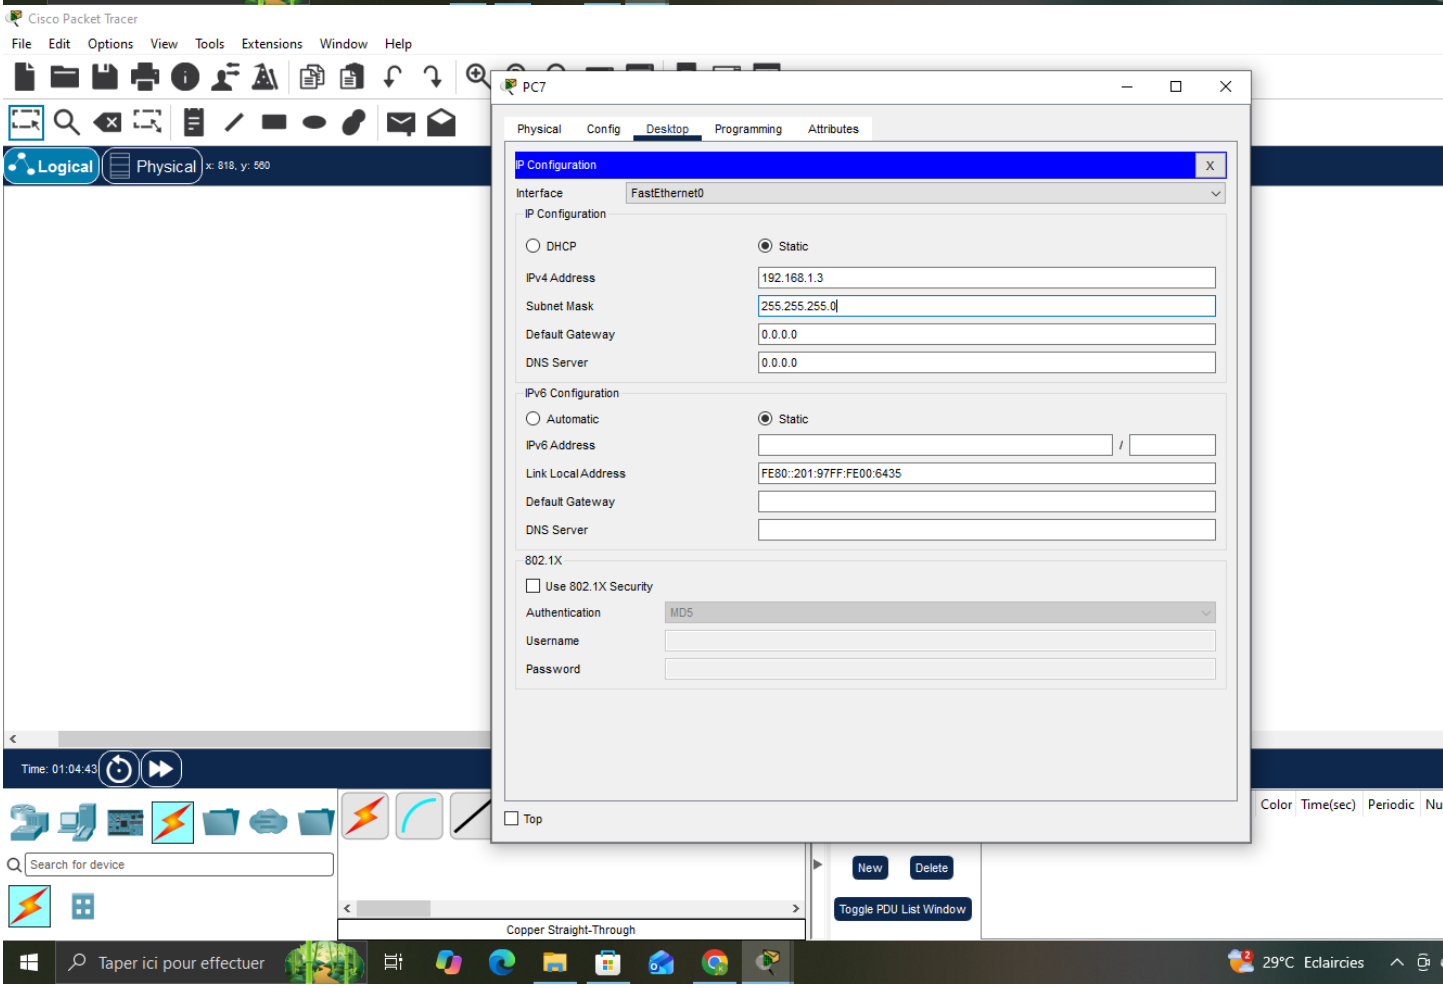

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 883, y: 503
Client1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::1
Pinging 3000:159:1::1 with 32 bytes of data:
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=17ms TTL=128
Reply from 3000:159:1::1: bytes=32 time=19ms TTL=128
Ping statistics for 3000:159:1::1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 19ms, Average = 9ms
C:\>
Top
Time: 01:22:30
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic
Taper ici pour effectuer
29°C Gén. nuageux

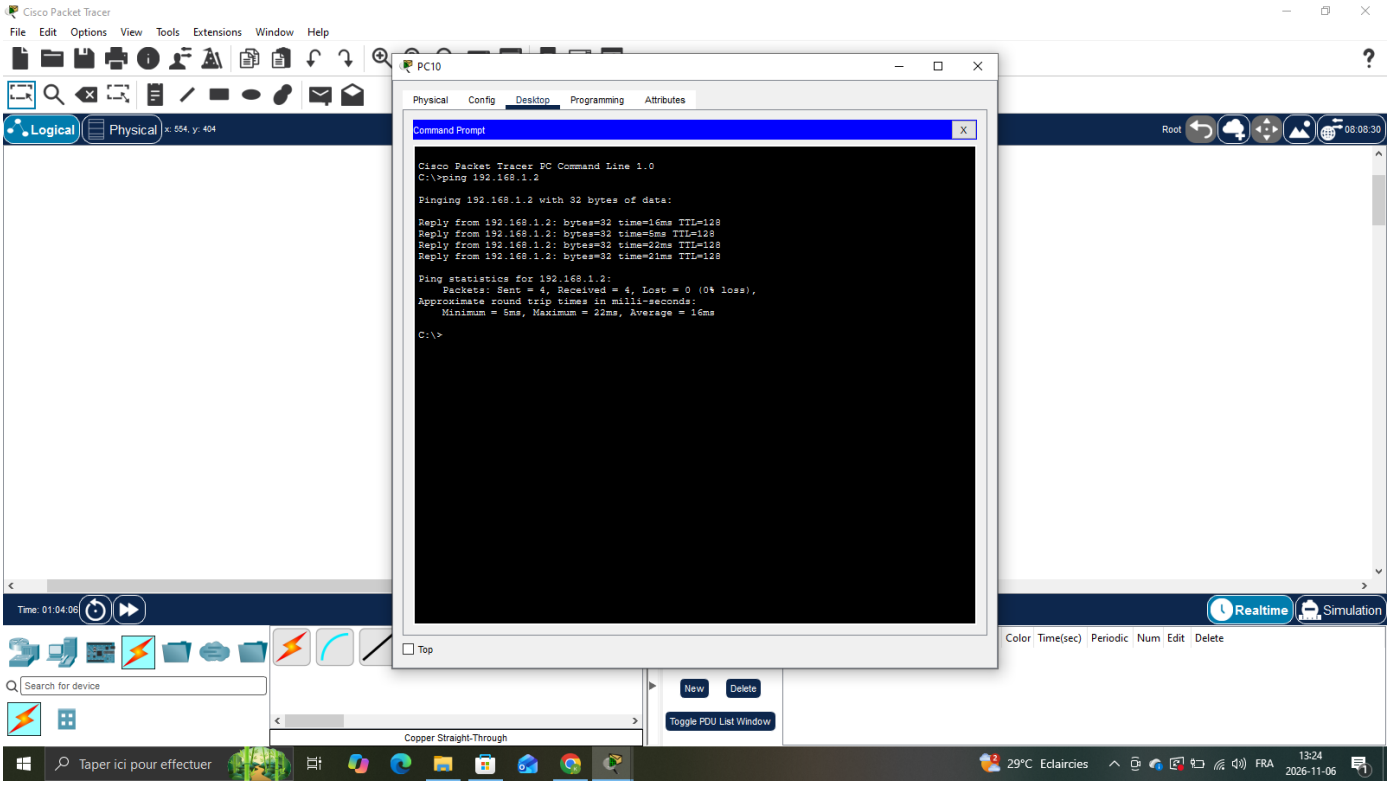

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Laptop-PT Admin
PC-PT Client1
PC-PT Client5
PC-PT Client2
PC-PT Client4
PC-PT Client3
Realtime
Simulation
Copper Straight-Through
Scenario 0
New
Delete
Toggle PDU List Window
Client1
Physical
Config
Desktop
Programming
Attributes
IP Configuration
Interface
FastEthernet0
DHCP
Static
IPv4 Address
Subnet Mask
Default Gateway
0.0.0.0
DNS Server
IPv6 Configuration
Automatic
IPv6 Address
3000:159:1::1
64
Link Local Address
FE80::2E0:B0FF:FE01:401C
802.1X
Use 802.1X Security
Authentication
MD5
Username
Password
Top
Ask Gemini
Ouvrir avec
Outils
Aide
125 %
Ipv4
Ipv6
192.168.1.10
3000:is9:1::1 / 64
192.168.1.11
3000:is9:1::2 / 64
192.168.1.12
3000:is9:1::3 / 64
192.168.1.13
3000:is9:1::4 / 64
192.168.1.14
3000:is9:1::5 / 64
192.168.1.15
3000:is9:1::6 / 64
192.168.1.16
3000:is9:1::7 / 64
192.168.1.17
3000:is9:1::8 / 64
Taper ici pour effectuer
29°C Eclaircies
FRA
13:35
2026-11-06

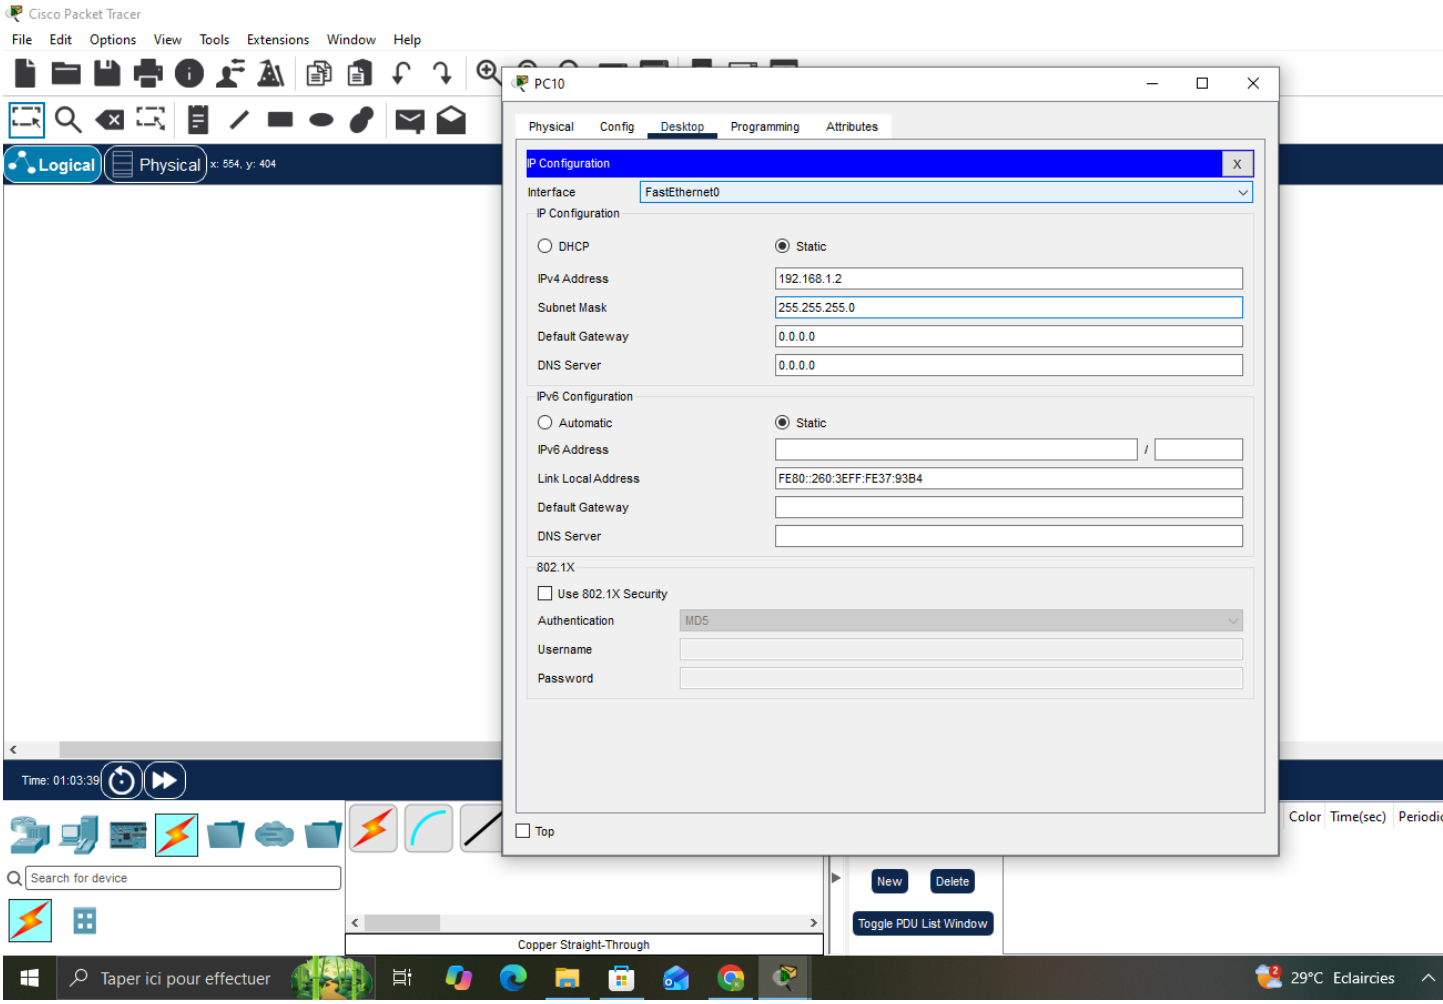

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop2
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.4
Pinging 192.168.1.4 with 32 bytes of data:
Reply from 192.168.1.4: bytes=32 time=18ms TTL=128
Reply from 192.168.1.4: bytes=32 time=24ms TTL=128
Reply from 192.168.1.4: bytes=32 time=22ms TTL=128
Reply from 192.168.1.4: bytes=32 time=23ms TTL=128
Ping statistics for 192.168.1.4:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 18ms, Maximum = 24ms, Average = 21ms
C:\>
Top
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window

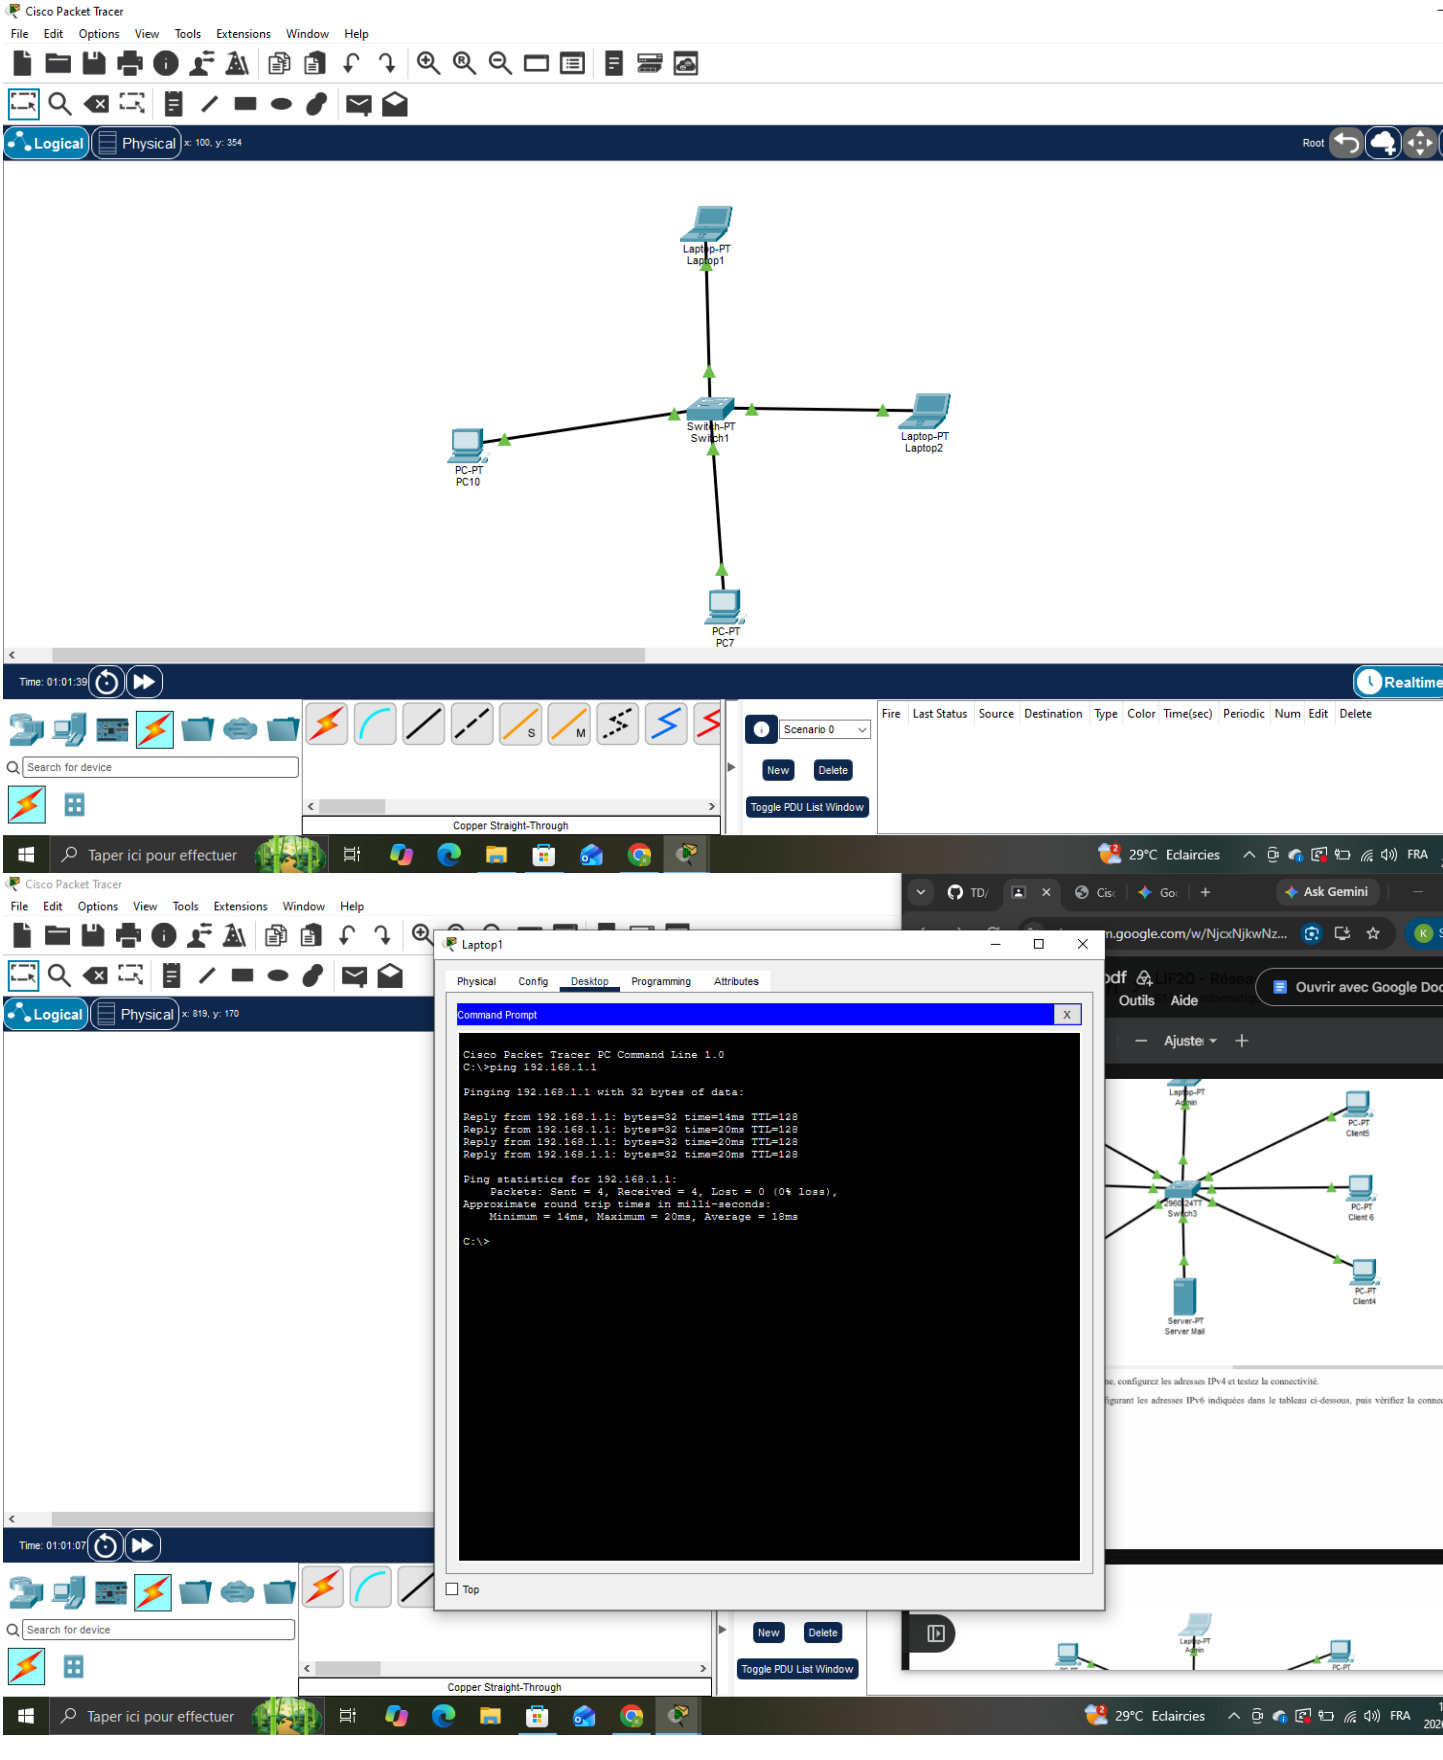

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop2
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.4
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::201:96FF:FE48:8278
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window

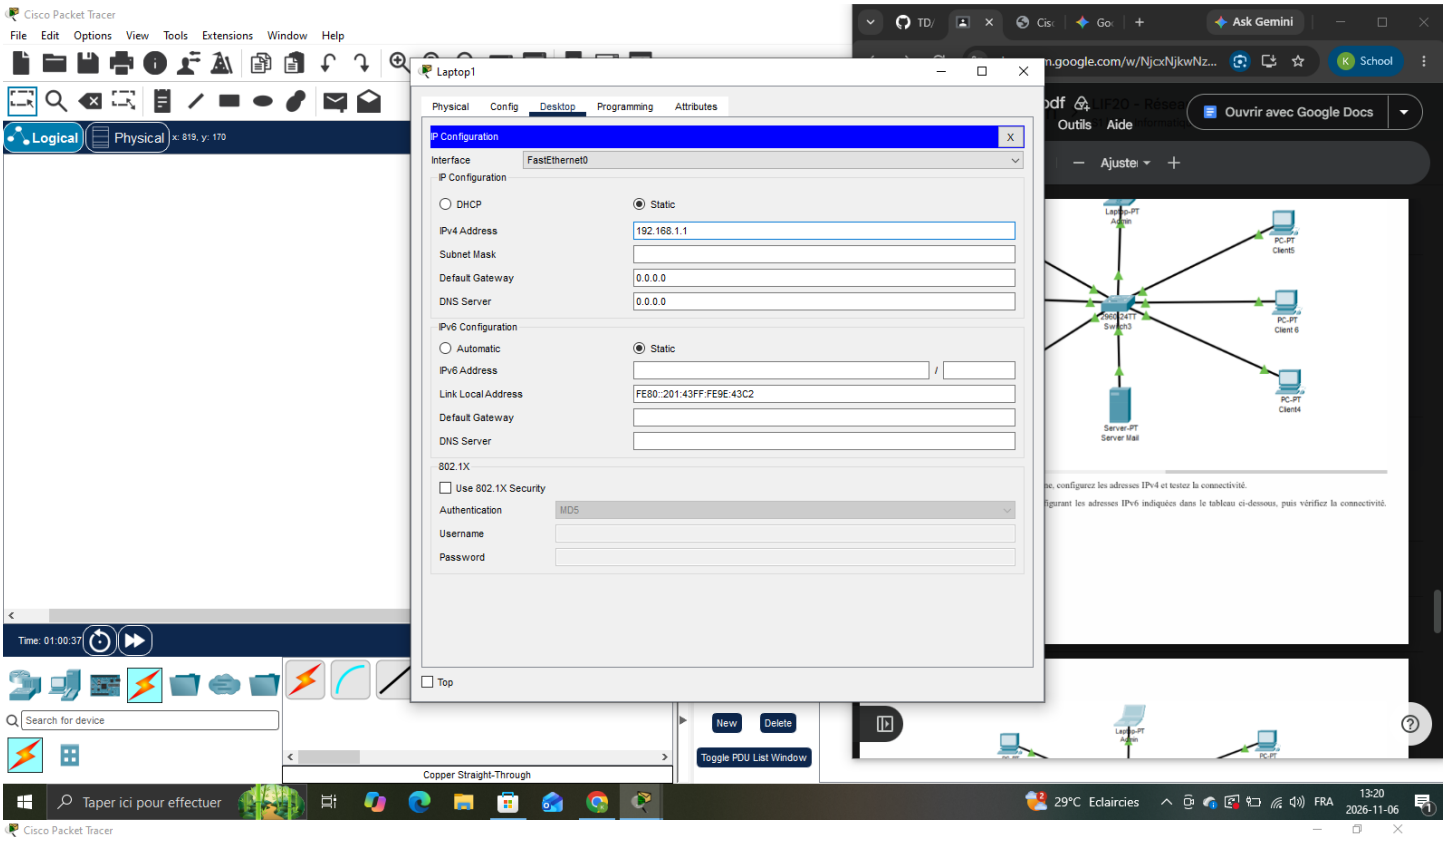

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 522, y: 216
PC7
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.3
Pinging 192.168.2.3 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.3:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Time: 01:05:47
Realtime
Color Time(sec) Periodic Num Edit Delete
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies
FRA
13:25
2026-11-06

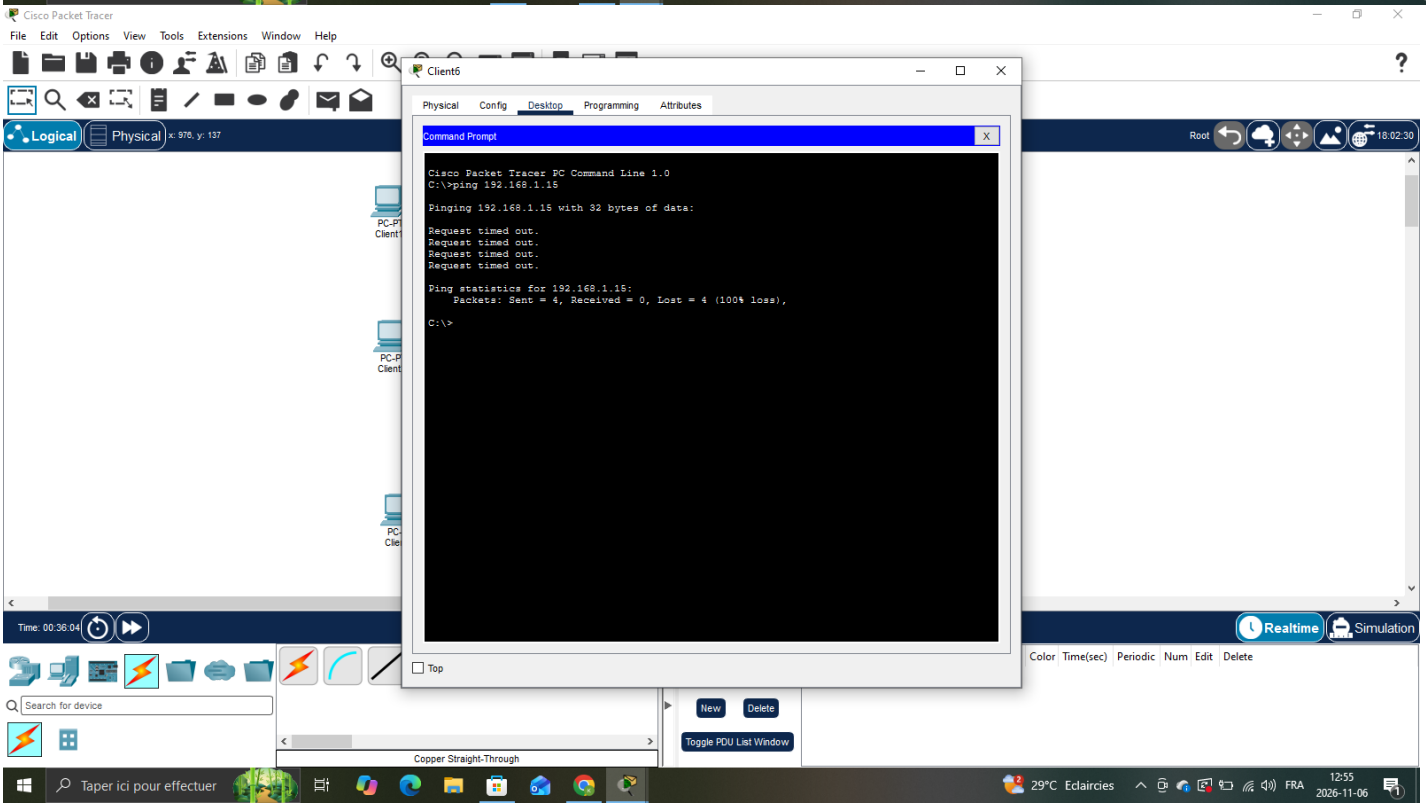

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical x: 818, y: 560
PC7
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.3
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::201:97FF:FE00:6435
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Time: 01:04:43
Color Time(sec) Periodic Nu
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies

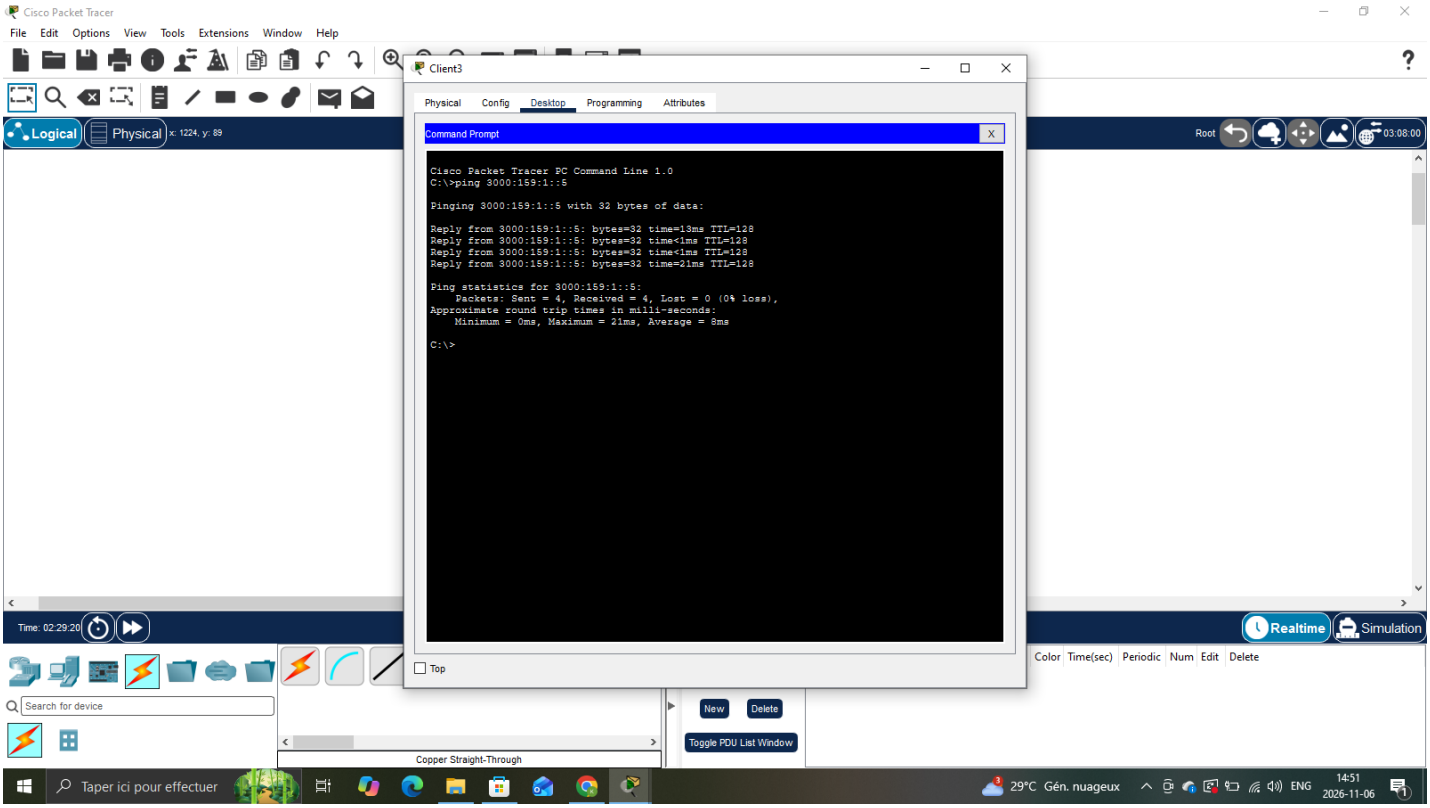

Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
PC10
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2
Pinging 192.168.1.2 with 32 bytes of data:
Reply from 192.168.1.2: bytes=32 time=16ms TTL=128
Reply from 192.168.1.2: bytes=32 time=5ms TTL=128
Reply from 192.168.1.2: bytes=32 time=22ms TTL=128
Reply from 192.168.1.2: bytes=32 time=21ms TTL=128
Ping statistics for 192.168.1.2:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 5ms, Maximum = 22ms, Average = 16ms
C:\>
Top
Logical Physical
Realtime Simulation
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies
FRA
13:24
2026-11-06


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
PC10
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address 192.168.1.2
Subnet Mask 255.255.255.0
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic
Static
IPv6 Address
Link Local Address FE80::260:3EFF:FE37:93B4
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Logical Physical
Time: 01:03:39
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop-PT Laptop1
Switch-PT Switch1
Laptop-PT Laptop2
PC-PT PC10
PC-PT PC7
Time: 01:01:39
Realtime
Copper Straight-Through
Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete
Scenario 0
New
Delete
Toggle PDU List Window
Search for device
Taper ici pour effectuer
29°C Eclaircies
FRA
Laptop1
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.1
Pinging 192.168.1.1 with 32 bytes of data:
Reply from 192.168.1.1: bytes=32 time=14ms TTL=128
Reply from 192.168.1.1: bytes=32 time=20ms TTL=128
Reply from 192.168.1.1: bytes=32 time=20ms TTL=128
Reply from 192.168.1.1: bytes=32 time=20ms TTL=128
Ping statistics for 192.168.1.1:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 14ms, Maximum = 20ms, Average = 18ms
C:\>
Top
Logical Physical
Time: 01:01:07
Ask Gemini
Ouvrir avec Google Doc
Outils Aide
Ajuste
Switch3
Server-PT Server Mail
PC-PT Client5
PC-PT Client 6
PC-PT Client4


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Laptop1
Physical Config Desktop Programming Attributes
IP Configuration
Interface FastEthernet0
IP Configuration
DHCP Static
IPv4 Address 192.168.1.1
Subnet Mask
Default Gateway 0.0.0.0
DNS Server 0.0.0.0
IPv6 Configuration
Automatic Static
IPv6 Address
Link Local Address FE80::201:43FF:FE9E:43C2
Default Gateway
DNS Server
802.1X
Use 802.1X Security
Authentication MD5
Username
Password
Top
Ouvrir avec Google Docs
Outils Aide
Time: 01:00:37
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies
FRA
13:20
2026-11-06


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical Physical
Client6
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.15
Pinging 192.168.1.15 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.1.15:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>
Top
Root
Time: 00:36:04
Realtime Simulation
Color Time(sec) Periodic Num Edit Delete
Search for device
Copper Straight-Through
New Delete
Toggle PDU List Window
Taper ici pour effectuer
29°C Eclaircies
FRA
12:55
2026-11-06


Cisco Packet Tracer
File Edit Options View Tools Extensions Window Help
Logical
Physical
Client3
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 3000:159:1::5
Pinging 3000:159:1::5 with 32 bytes of data:
Reply from 3000:159:1::5: bytes=32 time=13ms TTL=128
Reply from 3000:159:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::5: bytes=32 time<1ms TTL=128
Reply from 3000:159:1::5: bytes=32 time=21ms TTL=128
Ping statistics for 3000:159:1::5:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 21ms, Average = 8ms
C:\>
Top
Realtime
Simulation
Search for device
Copper Straight-Through
New
Delete
Toggle PDU List Window
Color Time(sec) Periodic Num Edit Delete
Taper ici pour effectuer
29°C Gén. nuageux
ENG
14:51
2026-11-06

Conclusion rédigée
Ce travail a permis de consolider l'apprentissage des concepts fondamentaux des réseaux informatiques, tant sur le plan conceptuel que pratique. La modélisation des différentes topologies physiques et logiques, combinée à la mise en œuvre d'un plan d'adressage statique IPv4 (192.168.1.0/24) et IPv6 (3000:159:1::/64) sous Cisco Packet Tracer, a confirmé la bonne compréhension du rôle des équipements d'interconnexion (Hubs, Switchs, Routeurs et Pare-feu). Les tests d'accessibilité réalisés avec la commande ping ont validé le bon acheminement des paquets à travers le réseau local et la cohérence globale de l'architecture.

Synthèse des acquis : Maîtrise de la configuration d'interfaces IPv4/IPv6 sur hôtes et serveurs, différenciation du comportement entre la diffusion d'un Hub et la commutation ciblée d'un Switch.

Difficultés rencontrées : Délais de convergence des ports de commutateur (Switch 2960) lors du premier raccordement des câbles.
Solutions apportées : Utilisation du mode Fast Forward Time sous Cisco Packet Tracer pour forcer la commutation rapide des ports au vert.