Calibration of Air Quality Sensors with Ensemble Stacking Random Forest, SVR, and Multiple Linear Regression

---

A Design / Capstone Project

Presented to the Department of Electronics Engineering

Cebu Institute of Technology University

Cebu City, Philippines

In Partial Fulfillment

of the Requirements for the Degree

Bachelor of Science in Electronics Engineering

---

by

Mighty Breadboard

Kenneth Zachary B. Agot

Fortune Glester C. Leyson

June 202X

Approval Sheet

This thesis entitled, “TITLE OF THE STUDY”, prepared and submitted by Complete Name of Member A, Complete Name of Member B, Complete Name of Member C, and Complete Name of Member D in partial fulfillment of the requirements for the degree BACHELOR OF SCIENCE IN ELECTRONICS ENGINEERING is hereby recommended for approval.

Dr. Rachel M. Chong, ECE
Adviser
Date: _____

Engr. Panelist A Complete Name
Member
Date: _____

Engr. Panelist B Complete Name
Member
Date: _____

Engr. Panelist C Complete Name
Member
Date: _____

This thesis is approved in partial fulfillment of the requirements for the degree of BACHELOR OF SCIENCE IN ELECTRONICS ENGINEERING.

Dr. Rachel M. Chong, ECE
Instructor
Date: _____

Engr. Susana A. Tan, PECE, MSManE
Chair, Department of Electronics Engineering
Date: _____

Dr. Evangeline C. Evangelista
Dean, College of Engineering and Architecture
Date: _____

Abstract

Acknowledgment

Table of Contents

		Page
Abstract		**iii**
Acknowledgment		**iv**
List of Tables		**viii**
List of Figures		**ix**
List of Figures		**1**
Chapter 1	**INTRODUCTION**	**1**
1.1	Background of the Study	1
1.2	Problem Statement	3
1.3	Objectives	3
1.4	Purpose of the Study	3
1.4.1	The Public	4
1.4.2	Government and Regulatory Bodies	4
1.4.3	Academe and Future Researchers	4
1.4.4	ECE Field	4
1.4.5	SDG 3: Good Health	5
1.4.6	SDG 9: Innovation	5
1.4.7	SDG 11: Cities	5
1.4.8	SDG 13: Climate	5
1.4.9	SDG 17: Partners	5
1.5	Definition of Terms	6
Chapter 2	**THEORETICAL BACKGROUND**	**7**
2.1	Theories	7

2.1.1 Statistical Process Control 7
2.1.2 Two-point Calibration 8
2.1.3 Machine Learning 9
2.1.4 Stack Ensemble 16
2.1.5 Validation 17
2.2 Literature Review 19
2.2.1 Comparing different calibration method 19
2.2.2 Calibration using random forest 21
2.2.3 Stacked ensemble and hybrid approaches 23
Chapter 3 RESEARCH METHODOLOGY 25
3.1 Proposed Methods 25
3.1.1 System Components 25
3.1.2 Circuit Configuration 33
3.1.3 Design 35
3.1.4 Collocation 36
3.1.5 Algorithm 39
3.2 Description of Experiments 45
3.2.1 Collocation 45
3.2.2 Hourly reading synchronization 46
3.2.3 Model Training 47
Chapter 4 RESULTS AND DISCUSSIONS 49
4.1 Title of Experiment of 1 49
4.2 Title of Experiment of 2 49
Chapter 5 CONCLUSIONS AND RECOMMENDATIONS 50
5.1 Conclusions 50
5.2 Recommendations 50
BIBLIOGRAPHY 51

Appendix A PRIOR ART SEARCH and ANALYSIS REPORT 56

Appendix A PATENT DRAFT 63

Appendix B TIMETABLE OF ACTIVITIES 75

Appendix C RESEARCH BUDGET 78

Appendix D ADDITIONAL FLOWCHARTS 79

Appendix E PSEUDO-CODES 80

Appendix F ELECTRICAL CIRCUITS 81

Appendix G SUPPLEMENTAL DATA 82

Appendix H PLAGIARISM CHECK REPORT 83

Appendix I ETHICS CLEARANCE 91

Appendix J CURRICULUM VITAE 93

List of Tables

Page

3.1 Table 3.1a: PM10 Dataset 45

3.2 Table 3.1b: PM2.5 Dataset 46

3.3 Table 3.2a: PM10 Dataset 46

3.4 Table 3.2b: PM2.5 Dataset 47

3.5 Table 3.3a: PM10 Meta Learner 48

3.6 Table 3.3b: PM2.5 Meta Learner 48

List of Figures

Page

2.1 Nodesplit 12

2.2 Support Vector Regression 13

2.3 Ensemble Stacking 17

2.4 Three-way holdout split 17

3.1 Simplified Air Monitoring System diagram 26

3.2 RRH62000 27

3.3 MPU6500 27

3.4 9V Adapter 28

3.5 Switch 29

3.6 ESP32 WROOM 32E 29

3.7 ThingSpeak 30

3.8 TP-Link TL-MR100 31

3.9 Clear RGB LED 32

3.10 FAN 32

3.11 Relay Module 33

3.12 Air Monitoring System Circuit Diagram 34

3.13 Air Monitoring System 36

3.14 Collocation 37

3.15 Live ThingSpeak Readings 38

3.16 Stack Ensemble Architecture - Operation 39

3.17 Data Gathering 40

3.18 Stack Ensemble Architecture - Training 41
3.19 Model training 41
3.20 RFR Training 42
3.21 SVR Training 43
3.22 MLR Training 44

Chapter 1

INTRODUCTION

Urban air monitoring must capture pollution changes over time and across various locations to help identify pollution problems and mitigate adverse health effects. While government monitoring stations are highly accurate, they are expensive and cannot be universally deployed. Low-cost smart sensors can be distributed more widely, but their readings fluctuate due to temperature, humidity, and sensor aging. Machine learning models, such as Random Forest and Support Vector Regression, are frequently used to correct these inaccuracies. However, these models struggle to predict extreme pollution levels that exceed their training data. This study addresses this limitation by developing a system that utilizes sensors alongside a novel ensemble modeling approach. This new approach enables the system to account for environmental factors while accurately predicting high pollution levels.

1.1 Background of the Study

Ambient air pollution is known around the world as an environmental danger and a serious health problem. Being around pollutants like fine particles (PM2.5, PM10) and harmful gases such as nitrogen dioxide (NO2) ozone (O3) carbon monoxide (CO) and sulfur dioxide (SO2) leads to many early deaths each year and creates big financial problems globally [0, 0]. Officials use fixed air quality monitoring stations with methods to check if rules are followed and to look at health risks [0, 0]. These proper tools are very accurate. Cost a lot to buy and keep running. This means there are not stations and each one covers a large area, sometimes several square kilometers [0, 0]. Because of that these systems miss areas where

pollution is very high and also miss the small changes in pollution levels that happen in busy cities [0, 0]

To fix the problem of not covering areas low-cost sensors have become a good choice. These sensors are cheaper and smaller making it possible to have more of them for coverage and to track personal exposure [0]. Even though they can cover places they measure air directly and have big errors [0, 0]. When measuring particles optical sensors guess the weight from how light bounces off them. This guess is wrong if the particles are not all the size or shape [0]. High humidity makes the particles bigger which tricks the sensors into thinking there is pollution than there really is [0, 0]. When measuring gases the sensors use reactions that change with temperature. This causes them to mix up signals from gases especially between NO2 and O3 [0]. Also as the sensors age and are used more their readings change over time [0, 0].

Since the numbers from the sensors are not close to the values they must be checked against the proper instruments in the same place [0, 0]. Simple models like linear regression are often used because they are easy. They can't handle the complicated and changing relationships between the sensor data, the weather and other air chemicals [0]. Some advanced models like Random Forest, Support Vector Regression and Artificial Neural Networks have been used to better deal with these issues but each has its own problems [0, 0]. Random Forest can't predict when pollution is higher, than what it was trained on. It gives wrong numbers when pollution is very bad [0]. Support Vector Regression needs the settings and doesn't work well with time-based data [0, 0]. Artificial Neural Networks need a lot of data. Use too much power [0, 0]. Studies show that no one model works best for all types of pollution and different weather [0, 0].

1.2 Problem Statement

Although non linear models like Random Forest and Artificial Neural Networks are widely used to calibrate low cost air quality sensors, they struggle to extrapolate. Decision tree models like Random Forest cannot predict values outside their training limits because their predictions rely on averaging values at the leaf nodes. Similarly, Neural Networks focus on the most common baseline readings, causing them to under predict rare peak concentrations. Because these models cannot extrapolate beyond historical data, they flatten or cut off high concentration spikes, making them unreliable for real time health warnings during severe pollution events.

1.3 Objectives

To design and develop an air quality monitoring system with stacked ensemble to fix extrapolation issue. The specific objectives are as follows:

- To design and assemble an IoT-based air quality monitoring system focused strictly on the real-time data acquisition of Particulate Matter (PM1, PM2.5, and PM10), temperature, and relative humidity.
- To develop and train the Stacked ensemble Random Forest + SVR + MLR algorithm to correct environmental biases and extrapolate boundary limits.
- To evaluate the algorithmic accuracy using statistical metrics like RMSE, R2

The items here should be sub-systems that will be made to solve the problem stated above.

1.4 Purpose of the Study

The purpose of this study seeks to benefit the following:

1.4.1 The Public

Empowers communities by providing accessible, street-scale air quality information that captures the spatial and temporal variations of pollutants across urban areas. Access to this real-time data raises public awareness of localized pollution hotspots and personal exposure, aiding individuals in making informed decisions to protect themselves from respiratory health risks.

1.4.2 Government and Regulatory Bodies

Assists environmental agencies by providing a scalable, cost-effective method to supplement expensive, sparse traditional monitoring stations. The integration of dense sensor networks allows for high-resolution mapping of urban air quality, helping policymakers target specific emission sources and rapidly assess the impact of local emission control interventions.

1.4.3 Academe and Future Researchers

Offers high-resolution, long-term datasets necessary for advanced modeling and analysis, particularly in resource-constrained or under-monitored settings. It provides a robust foundation for future environmental research by demonstrating the real-world application of machine learning techniques for in-field sensor calibration and drift compensation.

1.4.4 ECE Field

Advances the development of physical hardware reliability by implementing real-time drift correction and machine learning models directly on edge devices. This research contributes to optimizing memory footprints and computational efficiency for microcontrollers, reducing reliance on cloud-based processing for autonomous sensor nodes.

1.4.5 SDG 3: Good Health

Supports public health initiatives by delivering accurate data on human exposure to harmful particulate matter (PM1, PM2.5, and PM10), which is linked to millions of premature deaths globally due to respiratory and cardiovascular diseases. Accurate monitoring helps mitigate these risks by enabling timely health advisories.

1.4.6 SDG 9: Innovation

Fosters technological innovation by developing and refining cost-effective IoT sensing platforms paired with robust machine learning calibration models. This enhances the global capability to deploy intelligent, autonomous environmental monitoring infrastructure.

1.4.7 SDG 11: Cities

Enables the creation of pervasive, high-density wireless sensor networks that are essential for smart city development. By providing ubiquitous monitoring capabilities, urban planners can better identify industrial pollution clusters and protect residential areas, fostering healthier urban environments.

1.4.8 SDG 13: Climate

Strengthens resilience and adaptive capacity to climate-related hazards by continuously monitoring environmental parameters and establishing a localized evidence base for pollution management.

1.4.9 SDG 17: Partners

Encourages collaborative frameworks between academic institutions, government bodies, and local communities. By incorporating citizen science and open

data sharing, the project helps democratize environmental data and overcome resource constraints in global air quality monitoring.

1.5 Definition of Terms

In the context of this project, the following are the operational definition of terms:

- **Calibration** - the process of adjusting and verifying the accuracy of an instrument to ensure that it provides the correct readings within the specified tolerance levels
- **Drift** - every physical sensor experience performance degradation over time due to continuous material aging, environmental exposure, and chemical depletion.
- **Ensemble** – refers to the methods of combining multiple machine learning models
- **Out-of-Distribution (OOD)** - refers to the data that is inserted to the model that is not within the range of the training data
- **Overfitting** - happens when a model learns the training data too well, memorizing its random noise and minor quirks instead of the real patterns
- **Statistical Process Control (SPC)** – A method that uses math and control charts to monitor and stabilize a process
- **Supervised Machine learning** – a type of machine learning that undergoes training using datasets to create models capable of performing tasks using learned patterns
- **Underfitting** – happens when a model is too simple to capture the underlying patterns in the data

Chapter 2

THEORETICAL BACKGROUND

This chapter explores into a comprehensive review of theories and literature, including principles, concepts, and ideas applicable in the study. The first part of this chapter includes the discussion of the concept of Calibration theory, Statistical Process Control and Machine learning. The second part of this chapter includes the review of related literature. The Literature Review section synthesizes recent applied research in environmental monitoring. This discussion is organized into targeted subsections evaluating different machine learning methodologies ranging from standalone regression techniques to advanced stacked ensembles and their efficacy in mitigating non-linear cross-sensitivities and hardware drift. Ultimately, this chapter equips the reader with a comprehensive understanding of the physical vulnerabilities inherent in low-cost sensors and the data-driven algorithms necessary to correct them.

2.1 Theories

2.1.1 Statistical Process Control

Statistical process control is used for controlling a process using statistical methods to detect the need for calibration [0]. Cumulative Sum (CUSUM) is a statistical process control method specifically designed to identify subtle, continuous sensor drift over extended deployment periods. When the accumulated penalty tally crosses a predefined decision limit of the baseline variance, the system mathematically confirms permanent hardware degradation and triggers a recalibration

routine [0]. The CUSUM equation is defined as [0]

$$S = \max(0, S_{t-1} + (\mu - E) - c) \tag{2.1}$$

where:

S = current CUSUM;

S_{t-1} = previous CUSUM;

c = input; and

E = error margin.

A drift is detected when $S > 5\sigma$

where:

σ = standard deviation.

2.1.2 Two-point Calibration

The foundational method used in all calibration is known as Zero and Span Adjustment (Two-point Calibration) which measure two known reference conditions typically a low point near zero and a high point near maximum range. This assumes a linear change in the measured device creating a slope in its error. The Slope for the adjustment is defined as [0]

$$M = \left(\frac{A_2 - A_1}{B_2 - B_1}\right) \tag{2.2}$$

where:

M = slope;

A = true Value; and

B = measured value.

2.1.3 Machine Learning

Machine learning is a subfield of artificial intelligence that uses algorithms trained on data sets to create models capable of performing tasks that would otherwise only be possible for humans [0]. A machine learning model receives a dataset.

$$D = \begin{bmatrix} x_{11} & x_{12} & \cdots & x_{1m} & y_1 \\ x_{21} & x_{22} & \cdots & x_{2m} & y_2 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ x_{n1} & x_{n2} & \cdots & x_{nm} & y_n \end{bmatrix} \tag{2.3}$$

where:

x = input features;

y = target;

m = number of features; and

n = number of entries.

Random forest

Random forest is an ensemble of tree predictors such that each tree depends on the values of a random vector sampled independently and with the same distribution for all trees in the forest [0].

Hyperparameter

Random Forest has three standard hyperparameters that is set to configure how the model behaves.

Trees (k) = The number of trees within the forest, more trees increase accuracy at the cost of more computational power. The default value is set to 100.

Depth (p) = Number of times each node can split, bigger depth increases accuracy, but it can also lead to overfitting. The default value is set to 10.

max_Features (f) = Number of input features that are sampled per node. The default value is set to 1/3 of the number of input features.

$$y(x) = \sum_{i=1}^{k} \hat{Y}_i(x) \tag{2.4}$$

where:

$\hat{Y}$ = leaf node;

Bootstrapping randomly selects entry values for each tree

$$d_k \subset D \tag{2.5}$$

where:

d = randomly selected dataset.

After each tree is assigned with a randomly selected dataset d a node is created to split the data into two classes, left(L) and right(R). Node splitting divides the d based on the feature with the lowest MSE until depth (p) is reached

$$MSE_g = \frac{|L_g|}{|g|} \sum_{i \in L_g} (i - \overline{L_g})^2 + \frac{|R_g|}{|g|} \sum_{i \in R_g} (i - \overline{R_g})^2 \tag{2.6}$$

where:

R = right node;

$\bar{R}$ = right node mean;

L = left node;

$\bar{L}$ = left node mean; and

g = input feature columns.

The values of the nodes are calculated per feature, such that every value of the features that are more than the threshold are placed in R while the remaining are assigned to L.

$$s_g = \frac{\max(d_g) + \min(d_g)}{2} \tag{2.7}$$

where:

s = feature threshold;

$$R_g = \{a \in x_g \mid a > s_g\} \tag{2.8}$$

$$L_g = \{a \in x_g \mid a \leq s_g\} \tag{2.9}$$

When max depth is reached a leaf is created

$$\hat{Y}_N = \sum_{i \in y} i \tag{2.10}$$

where:

N = node.

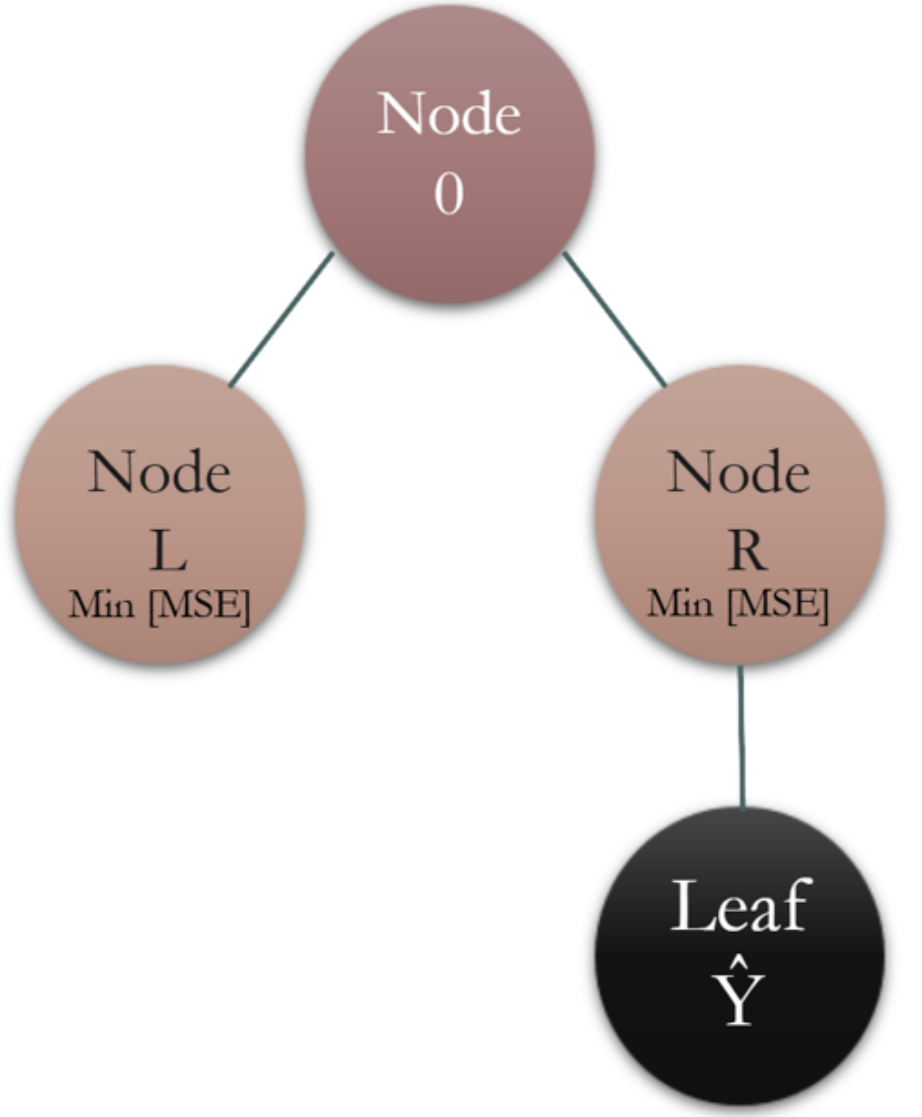


Figure 2.1: Nodesplit

Support Vector Regression (SVR)

Support Vector Regression is a margin-based regression method that ignores small errors intentionally, it handles nonlinear relationships through kernels and holds up on noisy real-world data where standard regression comes up short [0].

Hyperparameters

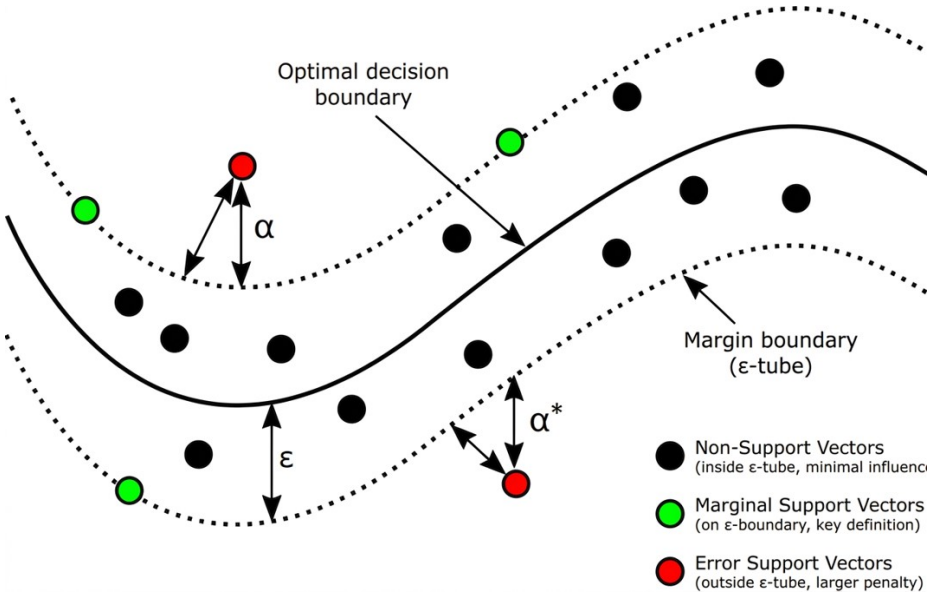


Figure 2.2: Support Vector Regression

SVR has four standard hyperparameters that is set to configure how the model behaves.

Kernel ($\underline{K}$) = The kernel determines how SVR handles patterns in the dataset with 5 types which are Linear, Polynomial, Gaussian, Radial Basis Function (RBF), and Sigmoid.

Regularization (C) = Controls how much SVR penalizes errors on points outside the tube. High C means the model takes those errors seriously and fits more tightly. Low C means the model accepts more violations in exchange for a simpler, flatter function.

Epsilon (ε) = Epsilon defines the width of the tolerance margin around the fitted function. A larger ε means a wider tube.

Gamma (γ) = a hyperparameter that only exist when the kernel is set to RBF. it defines how far the influence of a single training example reaches, a lower γ treats distant points as similar, creating a smoother, more generalized, and linear-like curve.

The SVR equation is defined as

$$y(x) = \sum_{h \in SV} (W_h K(x_h, x)) + b \tag{2.11}$$

where:

SV = support vectors;

W = weighted Vector;

b = bias.

The Radial Basis Function (**RBF**) kernel measures the similarity between all entries, it is defined as

$$K(x_h, x_j) = e^{-\gamma ||x_h - x_j||^2} \tag{2.12}$$

where:

h, j = input feature row indices;

Weighted vectors measures how much an entry influences the output

$$W_h = \alpha_h - \alpha_h^* \tag{2.13}$$

where:

α = upper weight;

α^* = lower weight;

The α are calculated using

$$\max_{\alpha_h,\alpha_h^*}\left[\sum_{h=1}^{n} y_h(\alpha_h-\alpha_h^*)-\varepsilon\sum_{h=1}^{n}(\alpha_h+\alpha_h^*)-\frac{1}{2}\sum_{h=1}^{n}\left(\sum_{j=1}^{n}(\alpha_h-\alpha_h^*)(\alpha_j-\alpha_j^*)K(x_h,x_j)\right)\right] \tag{2.14}$$

With constraints such that

$$-C \leq W_h \leq C \tag{2.15}$$

$$\sum_{h=1}^{n} w_h = 0 \tag{2.16}$$

Support Vectors are picked from the weighted vectors that meets the condition

$$SV = \{0 < W_h \leq C\} \tag{2.17}$$

By picking a single sample from the dataset the bias is calculated as

$$b = y_I - \varepsilon - \sum_{h=1}^{n} W_h K(x_h, x_I) \tag{2.18}$$

where:

I = chosen index;

Multiple Linear Regression

Multiple regression is an ensemble of linear regressions which models the relationship between a dependent variable and one or more independent variables by fitting a linear equation to the data [0].

The general equation for MLR is defined as

$$y(x) = \beta_0 + \beta_1 x_1 + \beta_2 x_2 + \ldots \beta_n x_m \tag{2.19}$$

where:

β = slope;

Beta is defined as

$$\beta = (X^T X)^{-1} X^T Y \tag{2.20}$$

where:

$$\beta = \begin{bmatrix} \beta_0 \\ \beta_1 \\ \vdots \\ \beta_n \end{bmatrix} \quad X = \begin{bmatrix} 1 & x_{11} & x_{12} & \cdots & x_{1m} \\ 1 & x_{21} & x_{22} & \cdots & x_{2m} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & x_{n1} & x_{n2} & \cdots & x_{nm} \end{bmatrix} \quad Y = \begin{bmatrix} y_1 \\ y_2 \\ \vdots \\ y_n \end{bmatrix} \tag{2.21}$$

2.1.4 Stack Ensemble

Stack Ensemble is a machine learning technique that builds a new model by combining the predictions of several previously trained models. Stack ensemble takes advantage of mutual complementarity among the base models to improve performance and enhance generalization ability [0]. Stack ensemble works by training multiple models as the basic learner and a second layer of model to serve as the meta learner. The meta learner combines the prediction of the basic learners to create its own prediction as shown in figure 2.3

In stack ensemble Three-way holdout split is used to divide the dataset for training and validation [0]. For a dataset with less than 100,000 entries a split of 50% basic learner, 25% meta learner and 25% validation is a standard. However,

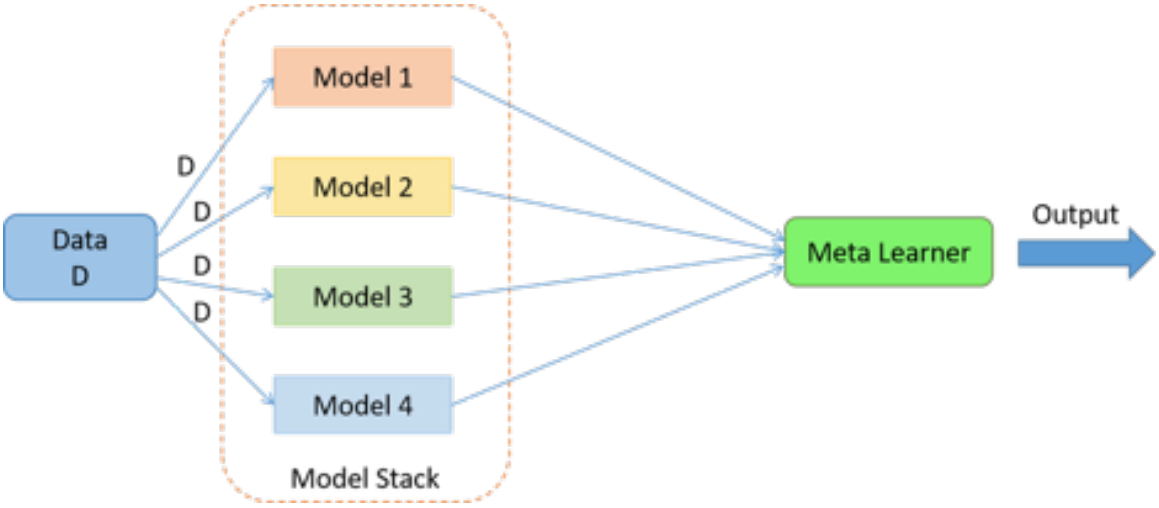


Figure 2.3: Ensemble Stacking

for datasets with more than 100,000 entries a split of 98% basic learner, 1% meta learner and 1% validation is used as shown in figure 2.1.3.1.

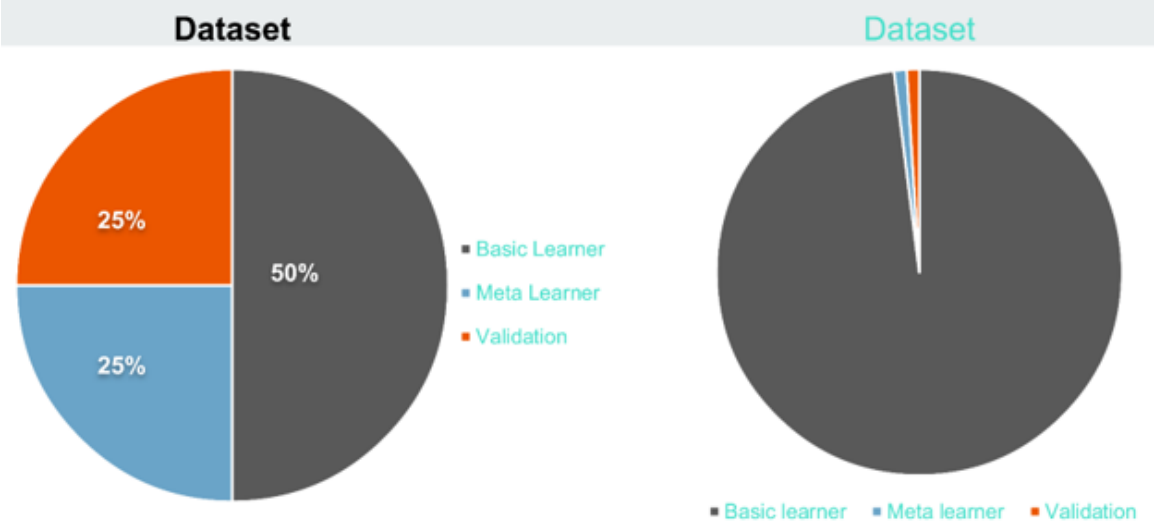


Figure 2.4: Three-way holdout split

2.1.5 Validation

Validating the machine learning model performance is a necessary step in machine learning to confirm that the model achieves its intended purpose. Validation is done right after a model is trained and exposed to unseen data [0, 0]. Countless

validation methods exist for machine learning, however the two methods which are considered as standards for regression models are RMSE, R^2 and MAE

Coefficient of Determination (R^2)

Coefficient of Determination (R^2) is used to measure how well a model fits data and how well it can predict. R^2 determines how much the variation is in the data. The closer the R^2 value is to 1, the better the model fits in the data [16]. The R^2 is calculated as

$$R^2 = 1 - \frac{\sum_{i=1}^{n}(y_i - \hat{y}_i)^2}{\sum_{i=1}^{n}(y_i - \bar{y})^2} \tag{2.22}$$

where:

$\bar{y}$ = mean of target values

$\hat{y}$ = predicted target value

The root mean square error (RMSE)

The root mean square error has been used as a standard statistical metric to measure model performance [0]. RMSE measures the average amount of error per prediction, meaning it is in the same unit as the output. RMSE is calculated as

$$RMSE = \sqrt{\frac{1}{n}\sum_{i=1}^{n}(y_i - \hat{y}_i)^2} \tag{2.23}$$

Mean Absolute Error (MAE):

Measures absolute difference between prediction and reference

$$MAE = \frac{1}{n}\sum_{i=1}^{n}|y_i - \hat{y}_i| \tag{2.24}$$

2.2 Literature Review

This section investigates the application of machine learning (ML) algorithms for the in-field calibration of low-cost air quality sensors monitoring particulate matter (PM), sulfur dioxide (SO2), nitrogen dioxide (NO2), ozone (O3), and carbon monoxide (CO). While low-cost sensors present a scalable solution to achieve high spatial and temporal resolution in air quality monitoring, their raw measurements often exhibit poor correspondence with professional-grade reference stations. The reliability of these devices is heavily compromised by internal hardware errors and external environmental interferences. Specifically, their performance is notoriously sensitive to non-linear factors such as temperature variations, relative humidity, cross-gas sensitivities, and progressive sensor drift. To bridge this accuracy gap, recent research highlights machine learning as an essential calibration tool. By effectively modelling the complex, non-linear dependencies between environmental confounders and target pollutant signals, ML techniques can dynamically correct sensor data and significantly enhance overall measurement reliability.

2.2.1 Comparing different calibration method

Various studies have evaluated the efficacy of different machine learning (ML) algorithms in calibrating low-cost environmental sensors. For example, [0] assessed the performance of multiple ML models in calibrating a low-cost PMS7003 particulate matter (PM2.5) sensor. By integrating temperature and humidity data from an AHT10 sensor and referencing a Dienmern DM72b monitor, the study demonstrated high predictive accuracy across all tested algorithms. Specifically, tree-based ensemble methods such as AdaBoost (R2 = 0.991, RMSE = 2.541) and Random Forest (R2 = 0.987, RMSE = 2.212) slightly outperformed traditional approaches like Support Vector Machines (R2 = 0.977, RMSE = 2.647). The

researchers concluded that integrating meteorological variables significantly improves the accuracy of PM2.5 predictions.

Similarly, [0] investigated the calibration of Alphasense sensors for both PM2.5 and nitrogen dioxide (NO2) against Teledyne T640 and Thermo Environmental 42C reference instruments. The authors tested a suite of algorithms, including Random Forest, Support Vector Regression, Artificial Neural Networks, and LightGBM. They found that the Generalized Additive Model exhibited the weakest performance (lowest R^2 and highest RMSE). The researchers attributed this lower accuracy to the mobile nature of the deployment and the relatively low pollution levels in the tested areas.

Expanding on the application of ML across broad geographic areas, [0] utilized PurpleAir PM2.5 sensors referenced against federal state monitors to evaluate calibration models across multiple states. The researchers compared Random Forest, Linear Regression, Gradient Boosting Regressor, K-Nearest Neighbors, and Neural Networks over a four-year period. Their results indicated that Neural Networks yielded the highest predictive accuracy (R2 = 0.88, RMSE = 1.75 μg/m^3), while traditional Linear Regression and K-Nearest Neighbors demonstrated the weakest performance (both achieving an R2 = 0.83). Notably, the study found that simply adding temperature as a linear correction factor did not significantly improve model performance; instead, non-linear ML models were required to successfully capture the complex interdependencies between environmental features across widespread datasets.

Recent research has also explored the calibration of agricultural sensors over extended temporal periods. [0] investigated nitrous oxide (N2O), pH, and temperature measurements using an LI-8250 Multiplexer and LI-780 Trace Gas Analyzer, referenced against automated gas chambers over a four-year period. The study compared traditional ML models (Random Forest, Linear Regression, Multi-

layer Perceptron, Support Vector Machine) with tensor-based time-series models (1D-CNN, LSTM). The authors found that LSTM emerged as the most robust and consistent model for both interpolation and multi-year extrapolation tasks (achieving an R2 of 3.30 and RMSE of 3.30 for short-term predictions). Crucially, these non-linear models successfully captured complex agro-environmental interactions without the need for site-specific, process-based parameters.

However, the long-term stability of these calibration models remains a significant challenge. [0] evaluated the calibration of a Winsen MH-Z19C NDIR CO2 sensor against a Picarro G2401 gas analyzer using models such as Random Forest Regression (RFR), Support Vector Regression (SVR), 1D-CNN, and a hybrid CNN-LSTM. Utilizing holdout validation and forward-in-time cross-dataset testing, the study revealed that while calibration accuracy was maintained over a two-month gap between training and testing, performance degraded severely when extrapolated over a 7-month unseen dataset (with all architectures exhibiting weak to negative correlation). Ultimately, the authors found that SVR was the best overall performing model due to its ability to preserve the statistical distribution profile of the reference data while maintaining low error rates. Furthermore, the study noted that training on shorter, contiguous time segments generated lower prediction errors than training on broader time spans, highlighting a major limitation of highly computational, data-heavy models like Neural Networks.

2.2.2 Calibration using random forest

The Random Forest (RF) algorithm is widely utilized in air quality monitoring due to its robust ability to reduce model overfitting [0]. Several studies have demonstrated its efficacy in calibrating low-cost sensors when they are co-located with reference stations. For instance, [0] successfully mitigated cross-sensitivities for CO2 measurements by integrating relative humidity and temperature data, achiev-

ing an R2 of 0.93 and an RMSE of 10.93. Their work highlights that in RF training, data diversity is often more critical than dataset size. Similarly, [0] utilized RF to manage cross-sensitivities in Alphasense gas sensors, reporting high correlations for CO (R2 = 0.98) and O3 (R2 = 0.92), although they noted that the sensors struggled at lower pollution detection limits. Supporting these findings, Bush et al. (2022) calibrated multi-pollutant sensors (PM2.5, PM10, and NO2) against reference stations, demonstrating that RF models offer multivariable efficiency, require minimal preprocessing, and are robust to collinearity, yielding strong R2 values ranging from 0.79 to 0.91.

Conversely, other studies have highlighted the challenges of applying Random Forest in less ideal environmental conditions. While their earlier work was highly successful, a subsequent study by [0] demonstrated that RF models struggle when gas concentrations fall near the sensor's lower detection limits. In measuring SO2, NO, and particulate matter (PM) using Alphasense and Plantower sensors, they achieved strong correlations for PM (R2 = 0.94). However, the models yielded significantly lower accuracy for gases like NO (R2 = 0.20) and SO2 (R2 = 0.61) due to the low ambient concentrations in the co-located testing areas. Furthermore, [0] illustrated the critical importance of calibration protocols for RF training. In their measurement of CO, NO2, O3, and SO2, the absence of direct co-location with a reference station resulted in notably poor model performance, yielding low R2 values (e.g., SO2 = 0.012, NO2 = 0.45) and high RMSE readings. Together, these studies suggest that while RF is a powerful calibration tool, its efficacy is highly dependent on sufficient pollution levels and strict co-location procedures.

Despite these successful implementations, Random Forest models exhibit significant limitations in long-term field deployments. A primary constraint is their inability to extrapolate readings beyond the numerical boundaries of their training data, which can lead to severe inaccuracies during unexpected pollution spikes.

Furthermore, RF models struggle with generalizability; their predictive accuracy often degrades when seasonal weather patterns shift outside the parameters observed during their initial training phase. Finally, these models face inherent scalability challenges; because they are heavily reliant on the specific environmental conditions of their co-location site, transferring a trained RF model to a new geographical location typically requires a complete recalibration.

2.2.3 Stacked ensemble and hybrid approaches

Several studies have explored the efficacy of stacked, ensemble, and hybrid machine learning algorithms across various predictive modeling domains. For instance, [0] investigated the use of a stacked ensemble machine learning model to predict the n-octanol/air partition coefficient (KOA) of Polybrominated Diphenyl Ethers (PBDEs). Their study utilized a super learner framework that integrated Random Forest (RF) and Support Vector Regression (SVR) as base learners in the first layer, with Multiple Linear Regression (MLR) functioning as the meta-learner in the second layer. By leveraging existing chemical databases and density functional theory (DFT) simulations, the researchers demonstrated that this hybrid approach reduced extrapolation errors by 32% to 48% compared to individual algorithms. The resulting RF-SVR ensemble model achieved high predictive accuracy, yielding an R2 of 0.981 and a Root Mean Square Error (RMSE) of 0.230.

Similarly, [0] applied a hybrid modeling approach to estimate high-resolution PM2.5 mass concentrations over large geographical areas. By combining satellite remote sensing data with observations from meteorological stations, they developed a hybrid model integrating RF and Extreme Gradient Boosting (XGBoost). This RF-XGBoost ensemble yielded an improved RMSE of 7.25 μg/m3, outperforming a standalone RF model, which produced an RMSE of 9.51 μg/m3. This highlights the effectiveness of combining robust tree-based models to capture com-

plex spatial and environmental variables for reliable air quality prediction.

Recent research has also extended these hybrid methodologies to real-time state-of-charge (SOC) estimation in battery management systems (BMS). [0] developed a Hybrid Ensemble Dual-State Kalman Filter (HEAD-KF) deployed on an edge computing node (Raspberry Pi 4 Model B). The experimental setup utilized a 20S1P lithium-ion pack with NCA chemistry cells, managed by a BMS with an analog front-end, and evaluated using a 3 kW electronic load cycler. The estimation framework fused XGBoost and RF regressors through non-negative ridge stacking. The output of this ensemble was then refined by a dual-state Kalman Filter, where the process and measurement noise covariances were adaptively auto-tuned in real-time based on residual variance analysis. This methodology perfectly bridges the gap between accuracy and computational cost by combining lightweight, data-driven machine learning with a physics-based, statistical smoother. The approach effectively rejected both high-frequency measurement noise and low-frequency sensor drift, demonstrating the viability of hybrid edge-AI solutions for precise embedded battery management.

Chapter 3

RESEARCH METHODOLOGY

This chapter covers the development of both the hardware and software components of this study, detailing the methods of execution. Additionally, this chapter highlights the application of these proposed methods through experiments.

3.1 Proposed Methods

This project is about a calibration method using stacked ensemble. Figure 3.1 shows the block diagram of the air monitoring system. The proposed system uses an RRH62000 sensor to read PM, temperature and Humidity, then its readings are sent to the ESP32. The ESP32 then executes the stack ensembled algorithm to calibrate the readings into a more accurate one. Upon undergoing the stack ensemble, the calibrated data is now sent to the thingspeak and users can now display and view such data through their device using thingspeak.

To gather data necessary for the machine training, the proposed project uses the Air Monitoring System built and collocates it besides the DENR standard PM monitoring system to serve as the calibration reference. The proposed model can read PM every 3 minutes and display it to the web and store it in a csv.

3.1.1 System Components

The following are the components used in the air monitoring system.

Input Devices

1. **Particulate Matter Sensor**

   Figure 3.2 shows an image of RRH62000, it is used in the study to measure

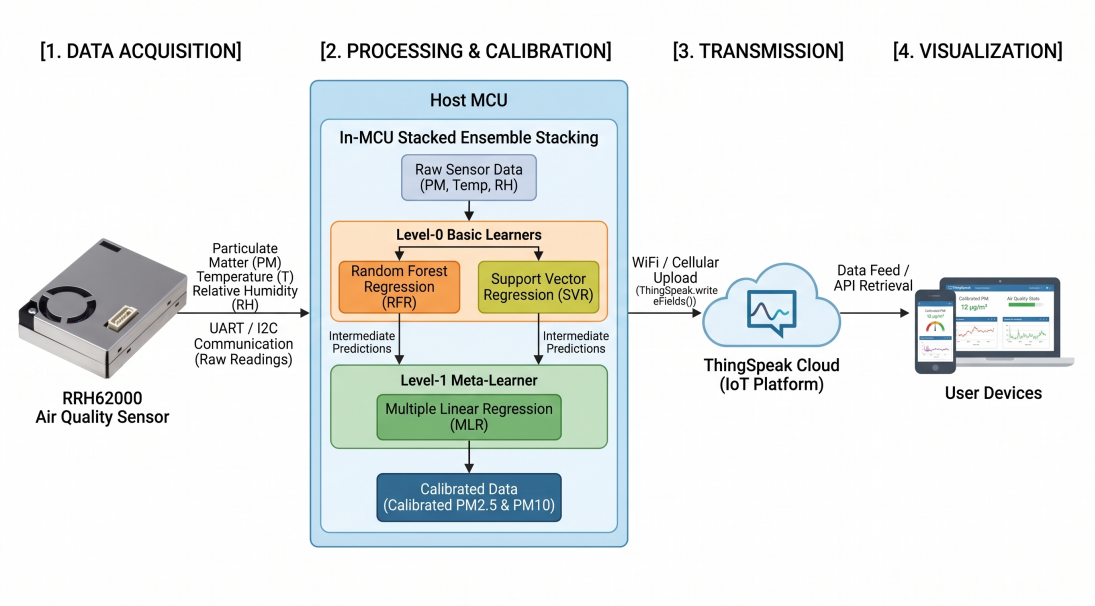


Figure 3.1: Simplified Air Monitoring System diagram

PM10, PM2.5, Temperature and Humidity. The particulate matter sensor has a built-in temperature and humidity sensor. It operates at 4.5V–5.5V and can measure PM10, PM2.5 and PM1 with $\pm 10\%$ relative accuracy error at $0.1\ \mu$g/m^3 resolution. Since the PM sensor uses Laser Scattering Technology it has two different PM reading, PM(KCl) for PM with reference to KCl particle and PM(Smoke) for PM with reference to smoke particles. For its Temperature sensor, it can measure $-40°$C–$125°$C with $\pm 0.4°$C relative accuracy error at $0.01°$C resolution. For its humidity sensor, it can measure 0%–100%RH with $\pm 5\%$RH relative accuracy error at 0.04%RH resolution. It has a customizable sampling time of 3–180 seconds. It uses both UART and I^{2}C protocol to communicate with the MCU.

2. **IMU Sensor**

Figure 3.3 shows an image of MPU6500, it is used in the study to detect if the Air Monitoring System has capsized during deployment. The 6-axis motion tracking sensor has a built-in 3-axis accelerometer and 3-axis gyroscope. It

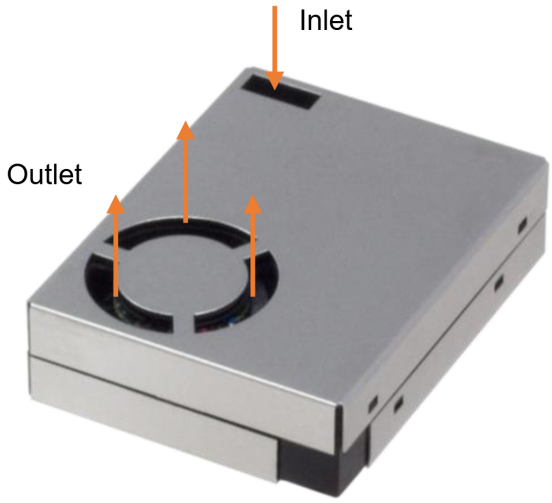


Figure 3.2: RRH62000

operates at 2.4V–3.6V and can measure acceleration across user-selectable full-scale ranges of $\pm 2, 4, 8, 16g$ at 16-bit resolution. For its gyroscope sensor, it can measure angular velocity across user-selectable full-scale ranges of $\pm 250, 500, 1000, 2000°$/s at 16-bit resolution. It has programmable output data rates up to 4 kHz for the accelerometer and 8 kHz for the gyroscope. It uses both I^2C and SPI protocols to communicate with the MCU.

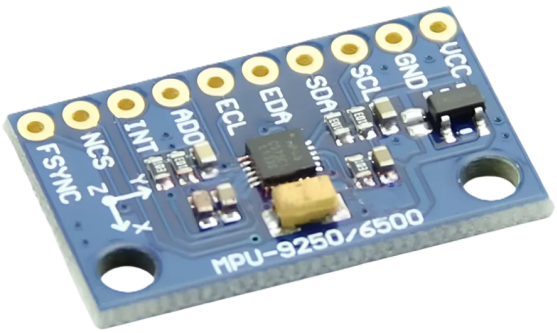


Figure 3.3: MPU6500

3. **Power Supply**

   Figure 3.4 shows an image of a 9V adapter, it is used in the study as its main power source. The adapter takes an input of 220V and outputs a steady 9V at a max current of 3A.



Figure 3.4: 9V Adapter

4. **Switch**

   Figure 3.5 shows an image of a switch used in the study to turn ON/OFF the WiFi and the ESP32.

Processor

Figure 3.6 shows an image of an ESP32 WROOM 32E microcontroller, it is a dual-core 32-bit LX6 microprocessor with up to 240 MHz and a storage of 448 KB ROM and 520 KB SRAM. Additionally, it has a built-in Wi-Fi with up to 150Mbps. It has 26 total GPIOs with two I^2Cs. The ESP32 is used by this study to read the PM readings of the RRH62000 and implement the machine learning model.

Output Devices



Figure 3.5: Switch

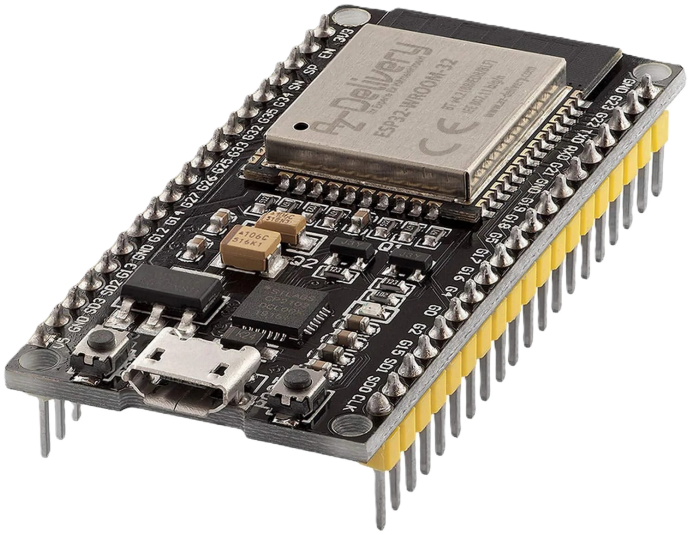


Figure 3.6: ESP32 WROOM 32E

1. **Cloud Platform**

Figure 3.7 shows an image of ThingSpeak by MathWorks, it is an IoT cloud platform used in this study for storage and real-time data visualization. The platform communicates via standard HTTP protocols, supports CSV data export, and provides configurable public and private channel visibility. The study uses the free-tier service configuration, which has 4 channels, a yearly limit of 3 million messages, and a minimum update interval of 15 seconds. Additionally, it has email notifications capped at 800 messages per year with a rate limit of 2 emails per 30 minutes.

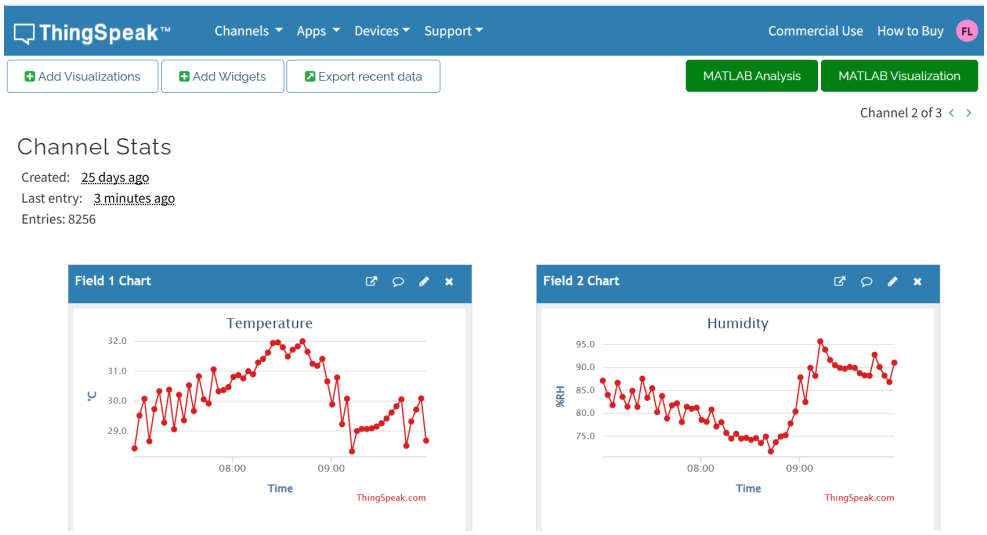


Figure 3.7: ThingSpeak

2. **Wi-Fi**

Figure 3.8 shows an image of a TP-Link TL-MR100 Wi-Fi router used in the study to enable the ESP32 to connect to the internet. It features a micro sim slot with speeds up to 300Mbps. It is a 4G Wi-Fi that runs in 9V at 0.85A.

3. **LED**

Figure 3.9 shows an image of a clear RGB LED, it is used in the study to output current states of the Air Monitoring System where certain color pertains



Figure 3.8: TP-Link TL-MR100

to different statuses. A single LED can display red, green and blue colors and has working voltage of 2.2V–5.5V with a current of 20mA.



Figure 3.9: Clear RGB LED

4. **Fan**

Figure 3.10 shows an image of a fan which is used for the study to keep the Air Monitoring System cooled when under the intense heat of the sun. It is rated to have a working condition of 5–12V.



Figure 3.10: FAN

5. **Relay**

   Figure 3.11 shows an image of a relay module which is used for this study to control the state of the FAN. It has an input supply voltage of 4.5–5V with a logic voltage of 3.3V. On its contacts, it can handle up to 250V at 10A.

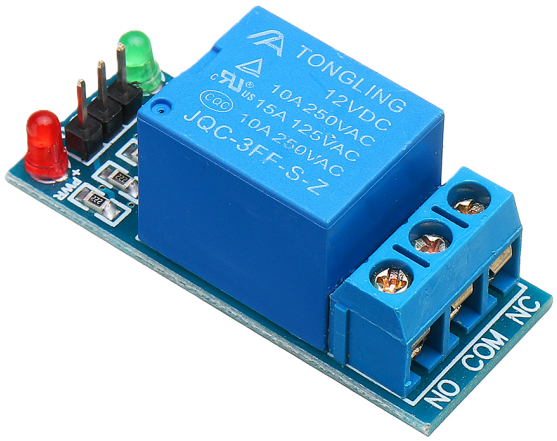


Figure 3.11: Relay Module

3.1.2 Circuit Configuration

Figure 3.12 shows the circuit configuration of the Air Monitoring System. The RRH62000 sensor is configured to I^2C mode by connecting the Sel pin to Gnd and is connected to the ESP32 via I^2C. The MCU and the Wi-Fi is powered by a 9V adapter. The circuit has two switches, S1 controls the state of the Wi-Fi while S2 controls the state of the ESP32. There is also an MPU6500 connected to the ESP32 via I^2C to monitor the orientation and tilt of the system. Additionally, there is a fan connected to the main power supply which is controlled by the ESP32 via a relay. Lastly there are three RGB LED connected to the ESP32 to visualize the current state of the system.


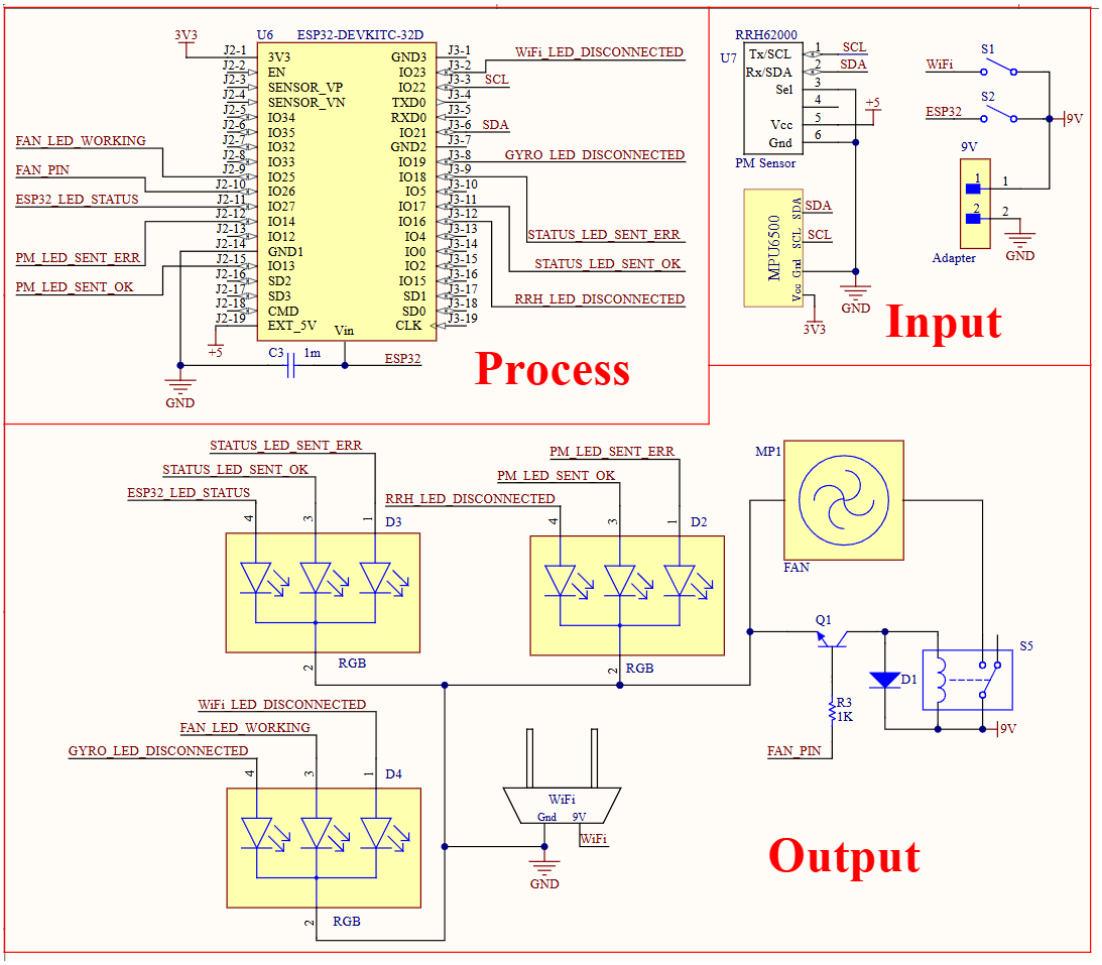



Figure 3.12: Air Monitoring System Circuit Diagram

3.1.3 Design


Figure 3.13 shows images of the real-time design of the Air Monitoring System, the system is equipped with ventilation openings to make sure that the internal components do not heat up. These ventilation openings are covered by a PVC elbow with a wire mesh to prevent rain and insects from entering the system. Additionally, the RRH62000 is put directly outside so that it is exposed directly to the open air to measure the ambient conditions. It is covered by a DIY louvered stevenson screen to prevent rain showers from getting inside the sensor.

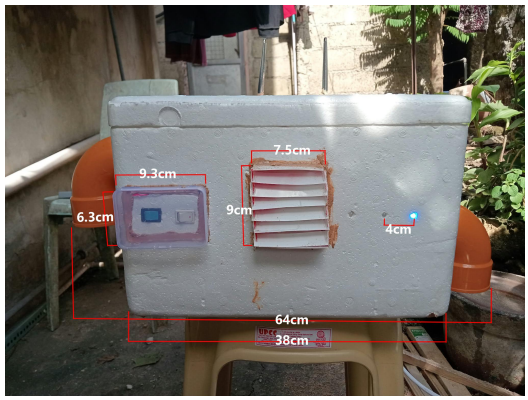


a.) Front Dimensions

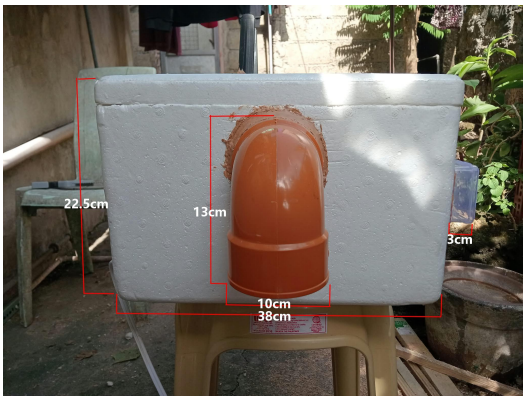


b.) Side Dimensions

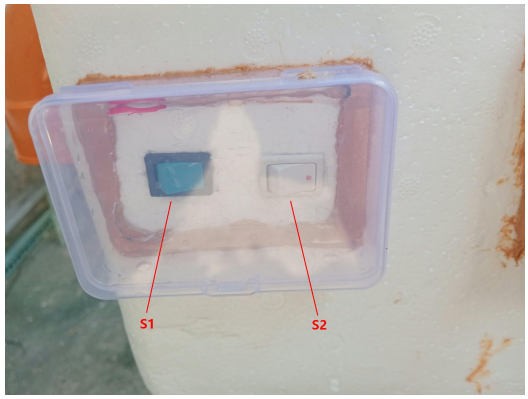


c.) Switch Designation

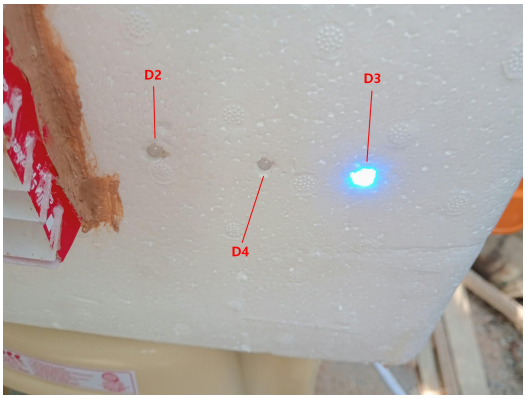


d.) LED Designation

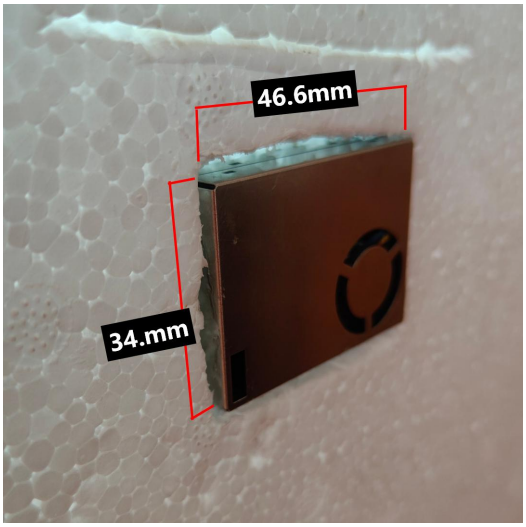

e.) RRH62000 Dimensions

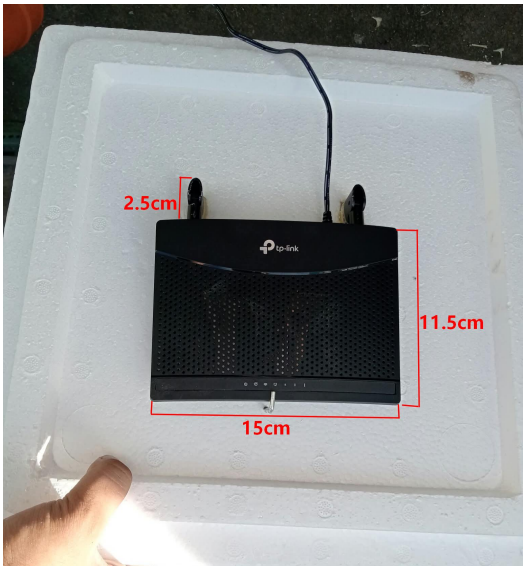

f.) Wi-Fi Dimensions

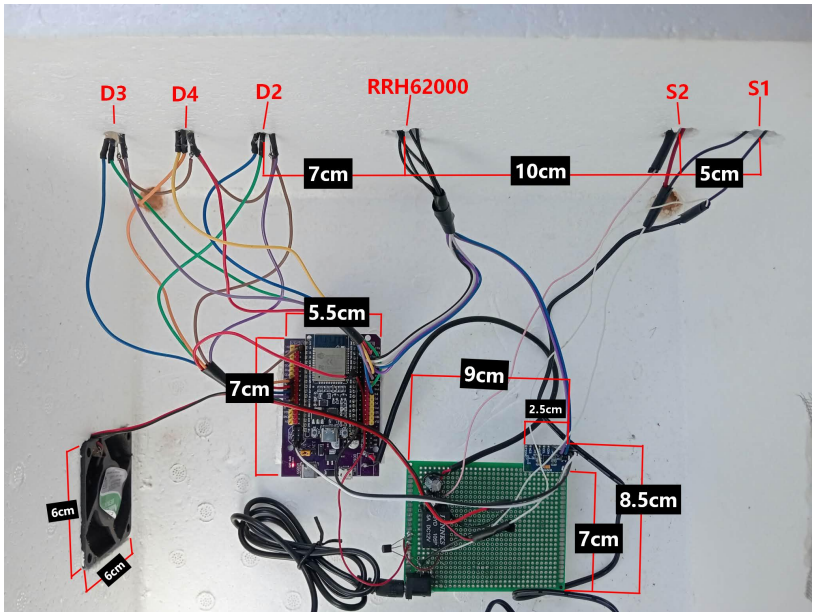

g.) Internal Dimensions

Figure 3.13: Air Monitoring System

3.1.4 Collocation

To gather the dataset, the Air monitoring System is collocated with the DENR BAM-1020 for a span of six months from October 23, 2026, to April 30, 2027.

Figure 3.14 shows images of the Air Monitoring System collocating with the DENR BAM-1020.



Figure 3.14: Collocation

During collocation the readings are monitored using the Thingspeak website. Figure 3.15 shows the UI of ThingSpeak with live readings that updates every three minutes.

After 6 months of collocation the data readings stored on the ThingSpeak are exported and the raw readings from the BAM-1020 are received from the DENR.

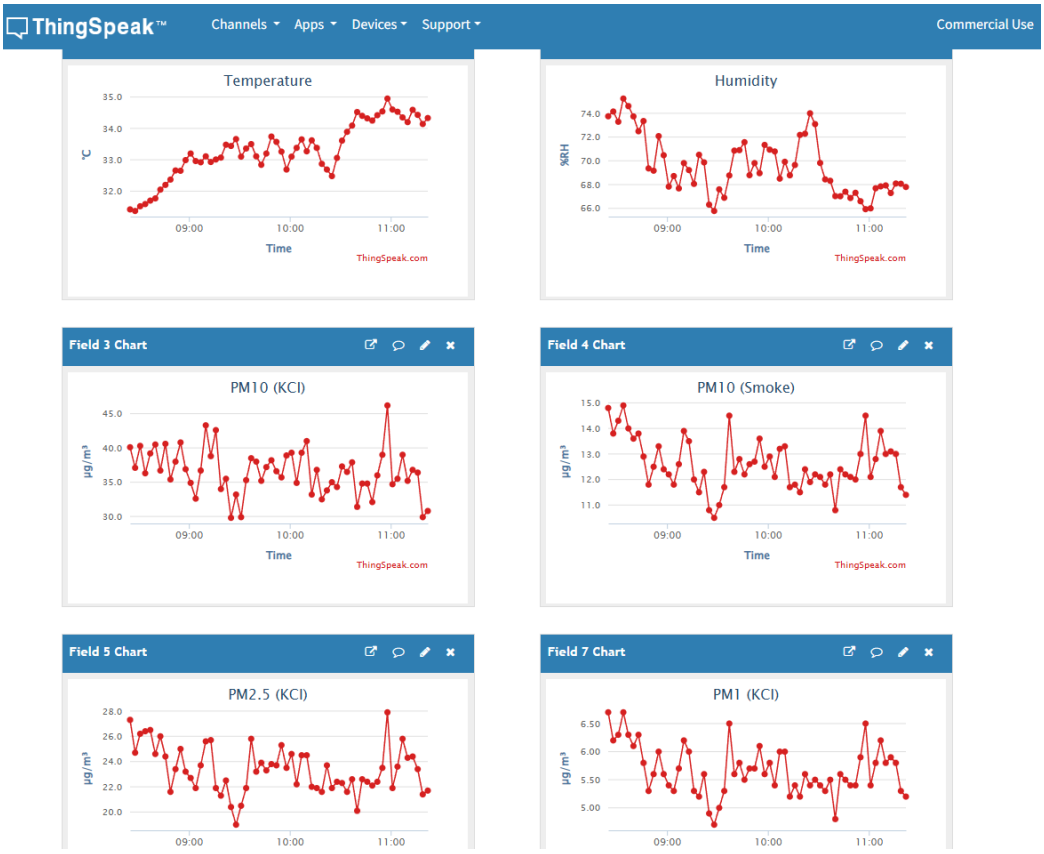


Figure 3.15: Live ThingSpeak Readings

3.1.5 Algorithm

Figure 3.16 shows the architecture of the stack ensemble in operation. During real-time prediction, the sensor inputs are simultaneously fed into the basic learners (RFR and SVR). Each base model generates a prediction based on the raw environmental and particulate readings. These predictions are then passed as inputs to the meta learner (MLR). The MLR model applies its learned regression weights and intercept to create its own predictions which is considered as the calibrated final output.

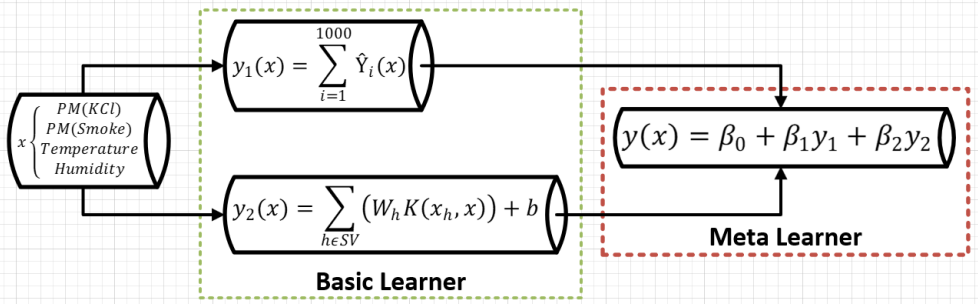


Figure 3.16: Stack Ensemble Architecture - Operation

Data Gathering

To gather the dataset for the training, an air monitoring system is designed to gather and log data to the ThingSpeak. Figure 3.17 shows the flowchart of the data gathering, it starts with setting the channel id and write API of the ThingSpeak channels. Then it reads the gyro sensor and tests if 0.02 seconds has passed since the last tilt calculation. If this condition is true, the MCU computes the tilt angles of the system using complementary filter. Then the MCU tests if the tilt is > 50 degrees. When the condition is true it sets the variable “capsize” to “1”, then it tests another condition if 15 seconds has passed since the last tilt was sent to the ThingSpeak. If the condition is true, it sends the value of variable “capsize” to the ThingSpeak. After sending it tests a condition if three minutes have passed since

the last PM sensor was read, if the condition is met it takes the sensor readings of RRH62000 and sends it to the ThingSpeak.

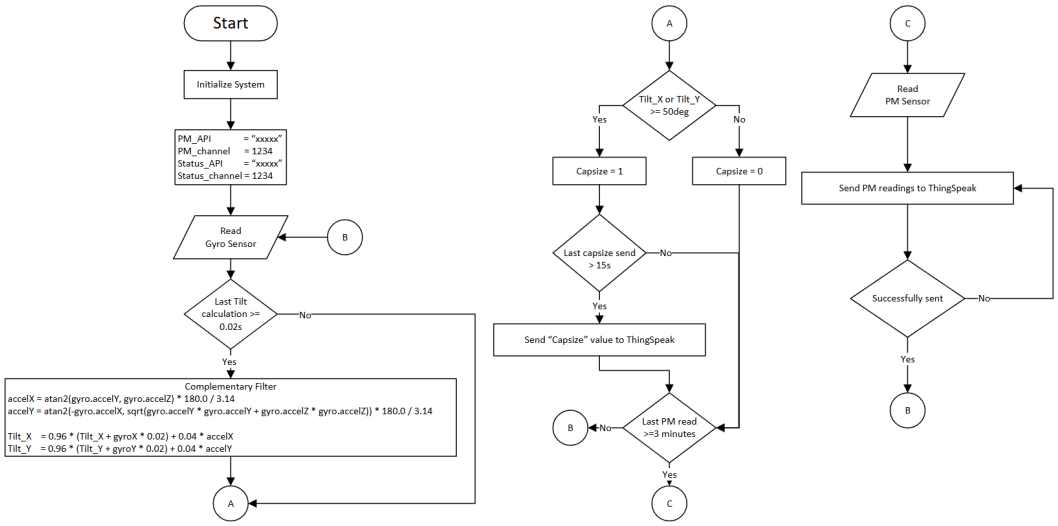


Figure 3.17: Data Gathering

Training

Figure 3.18 shows the architecture of the proposed stacked ensemble training model. The training process adopts a two-level configuration. The primary dataset is used to train the Random Forest Regression (RFR) and Support Vector Regression (SVR) as the Basic learners. Once trained, these base models are tested with another dataset, the prediction of these base models are paired with the reference values and are then used to train the Meta learner. After the Multiple Linear Regression (MLR) is trained, another dataset is passed to validate the performance of the stack ensemble.

Figure 3.19 shows the program flowchart of how the stack ensemble is trained. It starts with importing necessary libraries such as Matplotlib, numpy, pandas and sklearn. Then it imports the three dataset for the basic learner, meta learner and validation. Then the input features and targets are separated. Then the RFR, SVR, MLR are trained using the imported dataset.

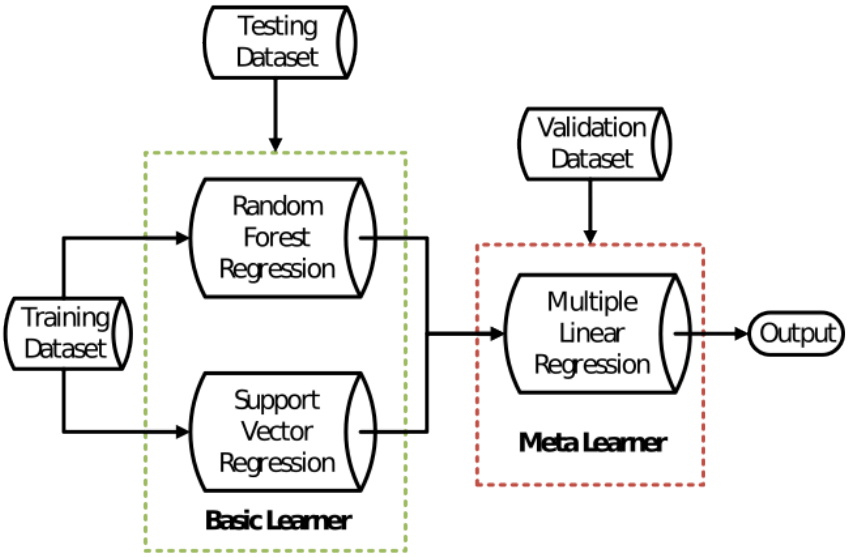


Figure 3.18: Stack Ensemble Architecture - Training

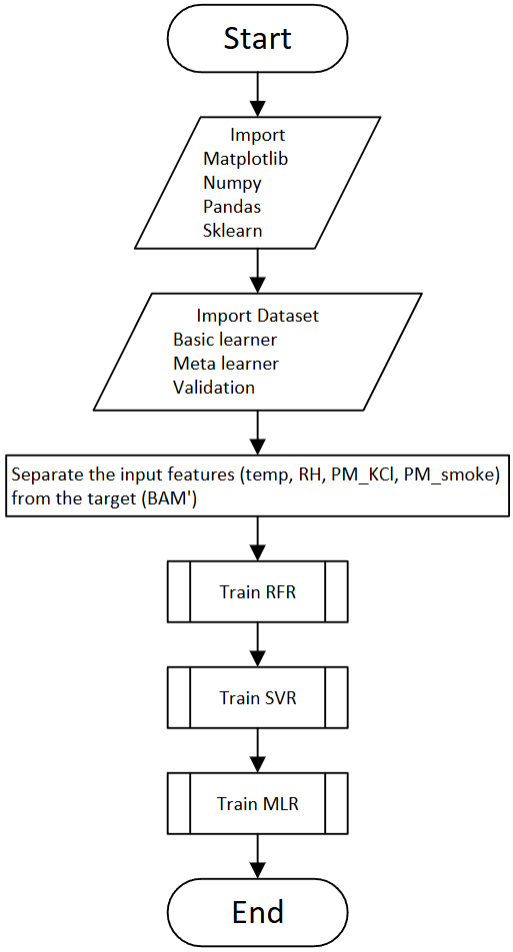


Figure 3.19: Model training

Figure 3.20 shows the subprocess of how the RFR is trained. It starts by creating an empty and untrained RFR model with sklearn. Then the model is trained using the segregated basic learner dataset. After training the model is exported using the joblib and it is tested with the meta learner dataset. The test results are then measured with MAE, R^2 and RMSE using the built-in metrics of sklearn. After that the results are plotted using matplotlib.

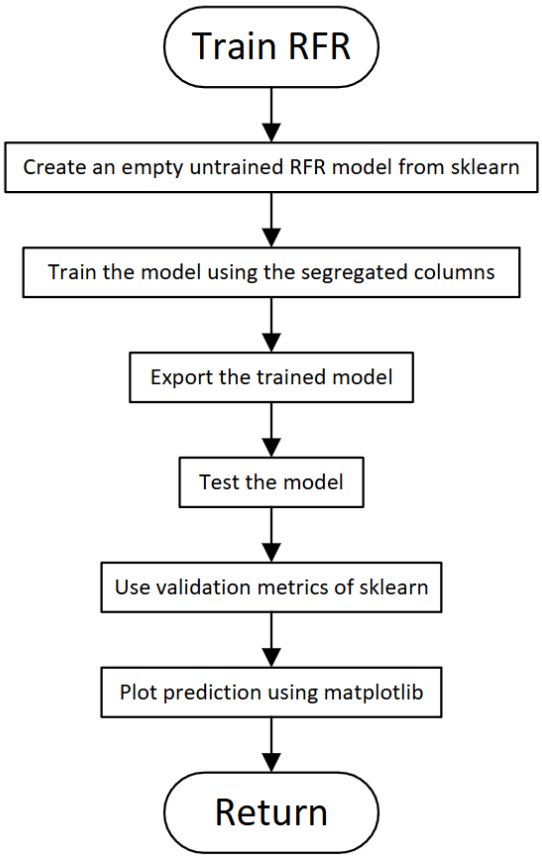


Figure 3.20: RFR Training

Figure 3.21 shows the subprocess of how the SVR is trained. It starts by creating an empty and untrained SVR model with sklearn. Then the model is trained using the segregated basic learner dataset. After training the model is exported using the joblib and it is tested with the meta learner dataset. The test results are then measured with MAE, R^2 and RMSE using the built-in metrics of sklearn. After

that the results are plotted using matplotlib.

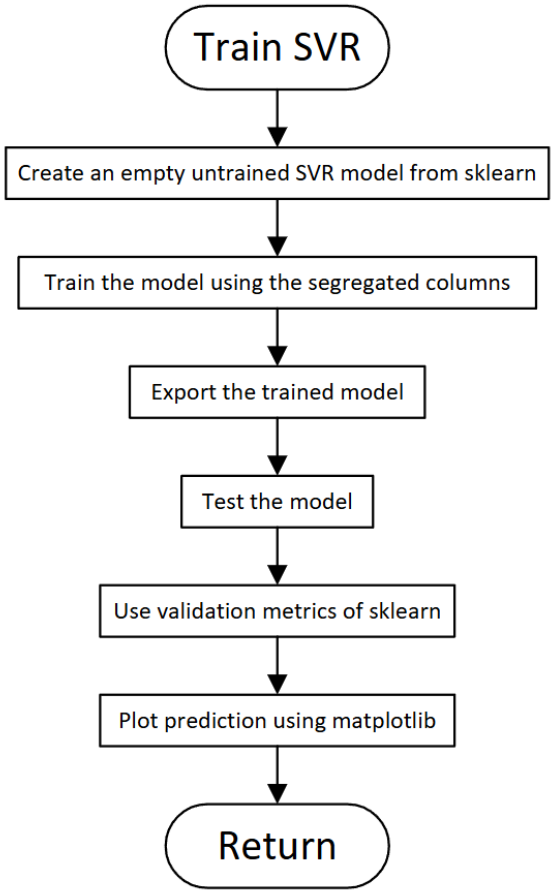


Figure 3.21: SVR Training

Figure 3.22 shows the subprocess of how the MLR is trained. It starts by creating an empty and untrained MLR model with sklearn. Then the model is trained using the predicted output of the SVR and RFR using the meta learner dataset. After training the model is exported using the joblib and it is tested with the validation dataset. The test results are then measured with MAE, R^2 and RMSE using the built-in metrics of sklearn. After that the results are plotted using matplotlib.

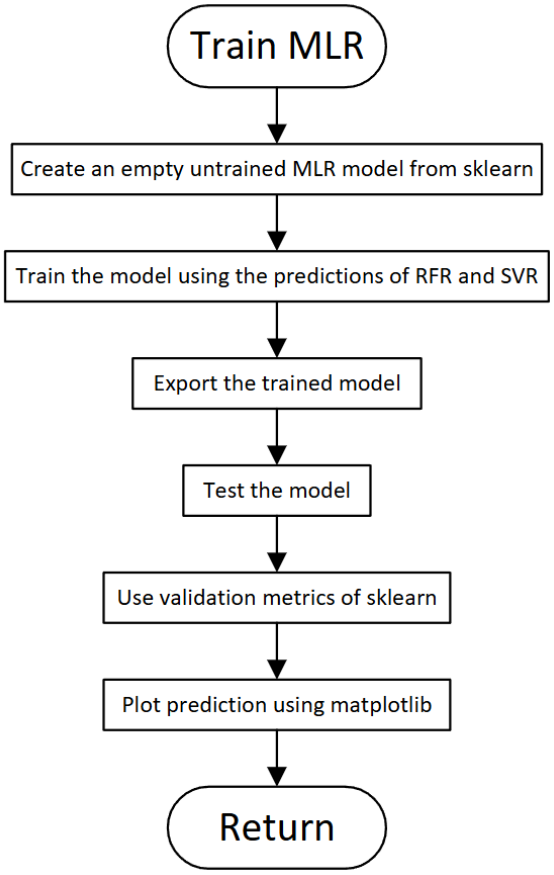


Figure 3.22: MLR Training

3.2 Description of Experiments

This section contains detailed information on the experiments essential for the study.

3.2.1 Collocation

The objective of this experiment is to gather readings of the proposed system with respect to the DENR reference for a span of 6 months.
The materials necessary for this experiment are:

1. Air Monitoring System
2. Computer
3. DENR reference station (BAM-1020)

The procedures are as follows:

1. Collocate the air monitoring system with the BAM-1020 for 6 months.
2. After 6 months, export the logged readings from the Thingspeak into a csv.
3. Request to DENR for the data gathered by BAM-1020 within 6 months.
4. Average the readings of the air monitoring system into an hourly reading that matches the BAM-1020 timestamps.
5. Fill Table 3.1 with the data gathered for 6 months collocation.

PM10				
Temperature	**Humidity**	**PM10(KCl)**	**PM10(Smoke)**	**Bam-1020**

Table 3.1: Table 3.1a: PM10 Dataset

6. Save the dataset as an xlsx.

PM2.5				
Temperature	**Humidity**	**PM2.5(KCl)**	**PM2.5(Smoke)**	**Bam-1020**

Table 3.2: Table 3.1b: PM2.5 Dataset

3.2.2 Hourly reading synchronization

The objective for this experiment is to convert the three-minute readings of the Air Monitoring System into an hourly reading to synchronize with the BAM-1020 readings.

The materials necessary for this experiment are:

1. Computer

The procedures are as follows:

1. Import the csv file of the Air Monitoring System and BAM-1020 to excel.
2. Sort the readings with the same hourly timestamp.
3. Average the readings of the Air Monitoring System into an hourly readings to match the BAM-1020.
4. Fill the table with the synchronized hourly readings.

PM10				
Temperature	**Humidity**	**PM10(KCl)**	**PM10(Smoke)**	**Bam-1020**

Table 3.3: Table 3.2a: PM10 Dataset

5. Save the excel file.

PM2.5				
Temperature	**Humidity**	**PM2.5(KCl)**	**PM2.5(Smoke)**	**Bam-1020**

Table 3.4: Table 3.2b: PM2.5 Dataset

3.2.3 Model Training

The objective for this experiment is to train a stack ensemble model that can increase the accuracy of the sensor and be able to extrapolate.
The materials necessary for this experiment are:

1. Computer

The procedures are as follows:

1. Open the dataset in excel.
2. Sort the dataset descending from the highest BAM-1020 readings.
3. Separate the 10% highest in the dataset and store it as OOD dataset.
4. Randomly separate the remaining dataset into three sets as basic learner (50%), meta learner (20%) and validation (20%).
5. Train the SVR and RFR using the basic learner dataset.
6. Validate the basic learner using the meta learner dataset + 5% of the lowest in OOD dataset.
7. Plot the distribution of the validation.
8. Calculate the R^2, RMSE and MAE.
9. Fill Table 3.3 with the output of the validation corresponding with its target.

PM10 Meta Learner		
SVR	**RFR**	**Bam-1020**

Table 3.5: Table 3.3a: PM10 Meta Learner

PM2.5 Meta Learner		
SVR	**RFR**	**Bam-1020**

Table 3.6: Table 3.3b: PM2.5 Meta Learner

10. Train the MLR using the dataset tabulated in Table 3.3.

11. Validate the Stack ensemble using the validation dataset + 5% of the highest in OOD dataset.

12. Plot the distribution of the validation.

13. Calculate the R^2, RMSE and MAE.

Chapter 4

RESULTS AND DISCUSSIONS

Describe the organization or flow of the contents in this chapter before the start of the first section. What can your readers learn from this chapter? How did you organize your discussions and sections? Each section in this chapter will be your experiment, which were discussed in the previous chapter. The title of the experiment in the previous chapter should also be the same here. Discuss, in detail, your data and interpretation of the results since these will be used as basis of your conclusion and recommendation.

4.1 Title of Experiment of 1

Show your tables, plots, and figures here. Discuss the contents in detail and the meaning of the data. For tables and plots, discuss first what is shown then its meaning and/or significance. Any problems encountered in the experiment should also be mentioned here.

4.2 Title of Experiment of 2

Show your tables, plots, and figures here. Discuss the contents in detail and the meaning of the data. The number of experiments described in Chapter 3 should be the same here. Positions of tables and figures SHOULD BE FIXED when finalizing the document in PROJECT 2 or AFTER THE FINAL DEFENSE.

NOTE: The number of subsections or experiments in Section **??** should be equal to the number of sections in this chapter.

Chapter 5

CONCLUSIONS AND RECOMMENDATIONS

Describe the organization or flow of the contents in this chapter before the start of the first section. What can your readers learn from this chapter? How did you organize your discussions sections? Section names should not be changed and subsections should not be added. Cross-references are also prohibited here. Your statements must be generalizations.

5.1 Conclusions

The first sentence should state what this thesis has accomplished. Make sure to connect or relate your objectives with your proposed method and the collected data. Statements should be based on the data, findings, and observations in the experiments. Conclusions that have no basis in previous chapters are **not acceptable**.

5.2 Recommendations

This section can include recommendations on how to improve your method. Improvement refers to technical aspects of the research and should not be about merely changing components or its aesthetic aspects. You can also discuss the problems or issues encountered or future works related to your research topic. Others identify the inherent limitations of their method then discuss how to overcome them.

NOTE: Before a recommendation, explain first the situation or its basis.

BIBLIOGRAPHY

Books

[0] J. Fraden, *Handbook of Modern Sensors*, Second. NJ: Springer Nature, 2016.

[0] L. Breiman, *Random Forests. Machine Learning*, Second. NJ: Springer Nature, 2001.

[0] A. Smola and B. Schölkopf, *A tutorial on support vector regression. Statistics and Computing*, Second. NJ: Springer Nature, 2004.

[0] T. Hastie, R. Tibshirani, and J. Friedman, *The Elements of Statistical Learning*, Second. NJ: Springer Nature, 2009.

Published

[0] F. Concas et al., "Low-cost outdoor air quality monitoring and sensor calibration: A survey and critical analysis," *Association for Computing Machinery*, vol. 17, no. 2, 2021. [Online]. Available: `https://doi.org/10.1145/3446005`

[0] M. R. Giordano et al., "From low-cost sensors to high-quality data: A summary of challenges and best practices for effectively calibrating low-cost particulate matter mass sensors," *Journal of Aerosol Science*, 2021. [Online]. Available: `https://doi.org/10.1016/j.jaerosci.2021.105833`

[0] I. Hayward, N. A. Martin, V. Ferracci, M. Kazemimanesh, and P. Kumar, "Low-cost air quality sensors: Biases, corrections and challenges in their comparability," *Atmosphere*, vol. 15, no. 12, 2024. [Online]. Available: `https://www.mdpi.com/2073-4433/15/12/1523`

[0] N. U. Okafor, Y. Alghorani, and D. T. Delaney, “Improving data quality of low-cost iot sensors in environmental monitoring networks using data fusion and machine learning approach,” *ICT Express*, vol. 6, no. 3, pp. 220–228, 2020. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S2405959520300862

[0] M. Benková, D. Bednárová, G. Bogdanovská, and M. Pavlíčková, “Use of statistical process control for coking time monitoring,” *Mathematics*, vol. 11, no. 16, 2023. [Online]. Available: https://www.mdpi.com/2227-7390/11/16/3444

[0] A. Estaji, M. Götzinger, B. Tutzer, S. Kollmann, T. Sauter, and A. Jantsch, “Evaluation of drift detection algorithms in the condition monitoring domain,” *IEEE Transactions on Industrial Informatics*, vol. 21, pp. 317–326, Jan. 2024. [Online]. Available: https://doi.org/10.1109/TII.2024.3452208

[0] J. Alzubi, A. Nayyar, and A. Kumar, “Machine learning from theory to algorithms: An overview,” *Journal of Physics: Conference Series*, vol. 1142, no. 1, p. 012 012, Nov. 2018. [Online]. Available: https://doi.org/10.1088/1742-6596/1142/1/012012

[0] M. Lu et al., “A stacking ensemble model of various machine learning models for daily runoff forecasting,” *Water*, vol. 15, no. 7, 2023. [Online]. Available: https://www.mdpi.com/2073-4441/15/7/1265

[0] T. O. Hodson, “Root-mean-square error (rmse) or mean absolute error (mae): When to use them or not,” *Geoscientific Model Development*, vol. 15, no. 14, pp. 5481–5487, 2022. [Online]. Available: https://gmd.copernicus.org/articles/15/5481/2022/

[0] T. Chai and R. R. Draxler, “Root mean square error (rmse) or mean absolute error (mae)? – arguments against avoiding rmse in the literature,” *Geo-*

scientific Model Development, vol. 7, no. 3, pp. 1247–1250, 2014. [Online]. Available: https://gmd.copernicus.org/articles/7/1247/2014/

[0] M. Taştan, "Machine learning–based calibration and performance evaluation of low-cost internet of things air quality sensors," *Sensors*, vol. 25, no. 10, 2025. [Online]. Available: https://www.mdpi.com/1424-8220/25/10/3183

[0] A. Wang et al., "Leveraging machine learning algorithms to advance low-cost air sensor calibration in stationary and mobile settings," *Atmospheric Environment*, vol. 301, p. 119 692, 2023. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S1352231023001188

[0] I. Yaqoob, V. Kumar, and S. Chaudhry, "Machine learning calibration of low-cost sensor pm 2.5 data," Oct. 2024, pp. 1–8. [Online]. Available: https://doi.org/10.1109/ISSE63315.2024.10741149

[0] P. Killeen, C. Lin, F. Li, I. Kiringa, and T. Yeap, "Nitrous oxide emission prediction using iot soil and weather sensor data," *ACM J. Comput. Sustain. Soc.*, vol. 4, no. 1, p. 35, Mar. 2026. [Online]. Available: https://doi.org/10.1145/3776747

[0] T. Barrett and A. Mishra, *Statistical study of sensor data and investigation of ml-based calibration algorithms for inexpensive sensor modules: Experiments from cape point*, https://doi.org/10.48550/arXiv.2503.13487, Mar. 2025.

[0] T. Araújo, L. Silva, A. Aguiar, and A. Moreira, "Calibration assessment of low-cost carbon dioxide sensors using the extremely randomized trees algorithm," *Sensors*, vol. 23, no. 13, 2023. [Online]. Available: https://www.mdpi.com/1424-8220/23/13/6153

[0] M.-E. Ionascu, N. Castell, O. Boncalo, P. Schneider, M. Darie, and M. Marcu, "Calibration of co, no2, and o3 using airify: A low-cost sensor cluster for air

quality monitoring," *Sensors*, vol. 21, no. 23, 2021. [Online]. Available: https://www.mdpi.com/1424-8220/21/23/7977

[0] M.-E. Ionascu, M. Marcu, R. Bogdan, and M. Darie, "Calibration of no, so2, and pm using airify: A low-cost sensor cluster for air quality monitoring," *Atmospheric Environment*, vol. 339, p. 120 841, 2024. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S1352231024005168

[0] P. Han et al., "Calibrations of low-cost air pollution monitoring sensors for co, no2, o3, and so2," *Sensors*, vol. 21, no. 1, 2021. [Online]. Available: https://www.mdpi.com/1424-8220/21/1/256

[0] W. Wu et al., "Machine learning-based qspr modeling for predicting the n-octanol/air partition coefficient of polybrominated diphenyl ethers," *iScience*, 2026. [Online]. Available: https://doi.org/10.1016/j.isci.2026.115393

[0] Y. Tang et al., "High-resolution spatial prediction of daily average pm2.5 concentrations in jiangxi province via a hybrid model integrating random forest and xgboost," *Atmosphere*, vol. 16, no. 12, 2025. [Online]. Available: https://www.mdpi.com/2073-4433/16/12/1317

[0] R. K. Tau, A. Yahya, M. Mangwala, and N. M. Ditshego, "Xgboost–random forest stacking with dual-state kalman filtering for real-time battery soc estimation," *Results in Engineering*, vol. 27, p. 106 428, 2025. [Online]. Available: https://www.sciencedirect.com/science/article/pii/S2590123025024971

Electronic Sources

[0] World Health Organization, *Air pollution*, https://www.who.int/health-topics/air-pollution#tab=tab_1, 2026.

[0] World Health Organization, *Air pollution*, https://www.who.int/health-topics/air-pollution#tab=tab_2, 2026.

[0] S. Raschka, *Model evaluation, model selection, and algorithm selection in machine learning*, https://arxiv.org/abs/1811.12808, 2020.

[0] GeeksforGeeks, *What is model validation and why is it important?* https://www.geeksforgeeks.org/machine-learning/what-is-model-validation-and-why-is-it-important/, 2013.

Appendix A

PRIOR ART SEARCH and ANALYSIS REPORT

Innovation and Technology Support Office
Cebu Institute of Technology - University
ITSO_IPPF002av01

ABSTRACT and KEYWORD TABLE

Name	
Program and Yr.	
Working Title	

Abstract
What does it do? Essential function of invention What is it made of? Physical structure of the invention What is the end result? Essential effect or basic product resulting from the invention What is it used for? Intended use for the invention

Keyword Table

SS01	SS02	SS03	SS04	SS05	SS06	SS07	SS08	SS08	SS10

CONFIDENTIAL

ABSTRACT and KEYWORD TABLE

Name	
Program and Yr.	
Working Title	

Abstract
What does it do? Essential function of invention What is it made of? Physical structure of the invention What is the end result? Essential effect or basic product resulting from the invention What is it used for? Intended use for the invention

Keyword Table

SS01	SS02	SS03	SS04	SS05	SS06	SS07	SS08	SS08	SS10

CONFIDENTIAL

IPC SEARCH REPORT

TITLE

SEARCH STRING	IPC	IPC DESCRIPTION	REMARKS
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard
			☐ utilize ☐ disregard

CONFIDENTIAL

CERTIFICATION

SEARCH CONDUCTED BY	SEARCH REVIEWED BY
Signature and Date:	Signature and Date:
Complete Name:	Complete Name:
Department:	Department:
Institutional Research Code:	

PATENT SEARCH REPORT

TITLE	FILING DATE

ABSTRACT
What does it do? Essential function of invention What is it made of? Physical structure of the invention What is the end result? Essential effect or basic product resulting from the invention What is it used for? Intended use for the invention

CLASSIFICATION	KEYWORDS

CONFIDENTIAL

SEARCH STRINGS AND DATABASES

DATABASE	SEARCH STRING	NUMBER OF HITS

RELEVANT DOCUMENTS

CATEGORY	PATENT NO	TITLE/ABSTRACT	PUBLICATION DATE	RELEVANT TO CLAIM

* **Special Categories of Cited Documents:**

"A" document defining the general state of the art which is not considered to be of particular relevance

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Note: Further references not indicated in this search report may be cited during substantive examination.

NON PATENT LITERATURE

CATEGORY	REFERENCE	RELEVANT TO CLAIM

PRIOR ART SUMMARY

PATENT NO. / REFERENCE TITLE	SIMILARITIES	DISSIMILARITIES	UNIQUE FEATURE

CONFIDENTIAL

CERTIFICATION

SEARCH CONDUCTED BY	SEARCH REVIEWED BY
Signature and Date:	Signature and Date:
Complete Name:	Complete Name:
Department:	Department:
Institutional Research Code:	

CONFIDENTIAL

Appendix A

PATENT DRAFT

Innovation and Technology Support Office
Cebu Institute of Technology - University
ITSO_IPPF005v01

SUBJECT MATTER ELIGIBILITY DETERMINATION FOR ICT AND CII

TITLE
ABSTRACT
What does it do? Essential function of invention What is it made of? Physical structure of the invention What is the end result? Essential effect or basic product resulting from the invention What is it used for? Intended use for the invention
PRIOR ART
STEP 1: Is the claim involving the field of ICT/CII?
STEP 2: Is the claim directed to a product or process within the meaning of the IP Code?
STEP 3: Does the claim involved an abstract idea?
STEP 4: Does the claim constitutes technical character wherein a technical solution to a problem is evident after weighing all the factors?

SEARCH CONDUCTED BY	
Signature and Date:	Signature and Date:
Complete Name:	Complete Name:
Department:	Department:

CONFIDENTIAL

INVENTION SPOTTING: INVENTIVE STEP SPOTTING

Claim	Your Invention:		CPA1: (number)	CPA2: (number)	CPA3: (number)
	(Title)		(Title)	(Title)	(Title)
TF1: TE:					
TF2: TE:					
TF3: TE:					
TF4: TE:					
TF5: TE:					
TP:					
TS:					

TF - Technical Feature TE - Technical Effect TP - Technical Problem TS - Technical Solution

A. 1. Find Novelty CPA (Y / N) 2. TFD - Technical Feature Difference (Y / N) 3. TED - TE Difference (Y / N) 4. Obvious? (Y / N)
5. Decision:

B. Modify TP? (Y / N):
Unexpected TE?:

CONFIDENTIAL

[insert figure, if more than one can fit in this page, merge this with the next]

Fig. 1

CONFIDENTIAL

APPLICANT'S NAME
Applicant

By:

YOUR NAME AND SIGNATURE
Agent

[insert figure, if more than one can fit in this page, merge this with the next]

Fig. 2

CONFIDENTIAL

APPLICANT'S NAME
Applicant

By:

YOUR NAME AND SIGNATURE
Agent

[insert figure, if more than one can fit in this page, merge this with the next]

Fig. 3

CONFIDENTIAL

APPLICANT'S NAME
Applicant

By:

YOUR NAME AND SIGNATURE
Agent

[insert figure, if more than one can fit in this page, merge this with the next]

Fig. 4

CONFIDENTIAL

APPLICANT'S NAME
Applicant

By:

YOUR NAME AND SIGNATURE
Agent

[insert figure, if more than one can fit in this page, merge this with the next]

Fig. 5

CONFIDENTIAL

APPLICANT'S NAME
Applicant

By:

YOUR NAME AND SIGNATURE
Agent

(TITLE)

(short and specific, if possible, not more than 10 words)

TECHNICAL FIELD OF THE INVENTION

(Statement of the field of the art to which the invention pertains, should be directed to the subject matter, starts with "BROAD" statement [broad field of technology] e.g. Computers, Electronics & Communications, and ends with "SPECIFIC" statement [specific field or goal] e.g. improving light sensor detection, usually one sentence only.

BACKGROUND OF THE INVENTION

(Cite Closest Prior Art Reference [CPAR] and state technical problems with [CPAR] that the invention wants to solve)

SUMMARY OF THE INVENTION

(State unexpected advantages of the invention over the CPAR)

BRIEF DESCRIPTION OF THE DRAWINGS

(Must show every feature of the invention, figures must be consecutively numbered, the elements must be designated by way of reference numerals corresponding to the elements in the description)

e.g. Figure 1 shows a top plan view of the invention.

CONFIDENTIAL

Figure 2 provides a block diagram of the invention.

DETAILED DESCRIPTION OF THE INVENTION

(State in detail the different parts or elements of the invention, how they interact, how the best embodiment can be manufactured or fabricated or replicated, and how the invention is used.)

(Broadening Clause)

The preferred embodiment of this invention is described in the above-mentioned detailed description. It is understood that those skilled in the art may conceive modifications and/or variations to the embodiment shown and described therein. Any such modifications or variations that fall within the purview of this description are intended to be included therein as well. Unless specifically noted, it is the intention of the inventors that the words and phrases in the specification and claims be given the ordinary and accustomed meanings to those of ordinary skill in the applicable art. The foregoing description of a preferred embodiment and best mode of the invention known to the applicant at the time of filing the application has been presented and is intended for the purposes of illustration and description. It is not intended to be exhaustive or to limit the present invention to the precise form disclosed, and many modifications and variations are possible in the light of the above teachings.

CONFIDENTIAL

CLAIMS (separate sheet)

1.
2.
3.
4.
5.

CONFIDENTIAL

(TITLE)


ABSTRACT OF THE DISCLOSURE (separate sheet)

(State the technical problem that your invention solves and the elements/structures/parts of your invention, in 150 words)

CONFIDENTIAL

Appendix B

TIMETABLE OF ACTIVITIES

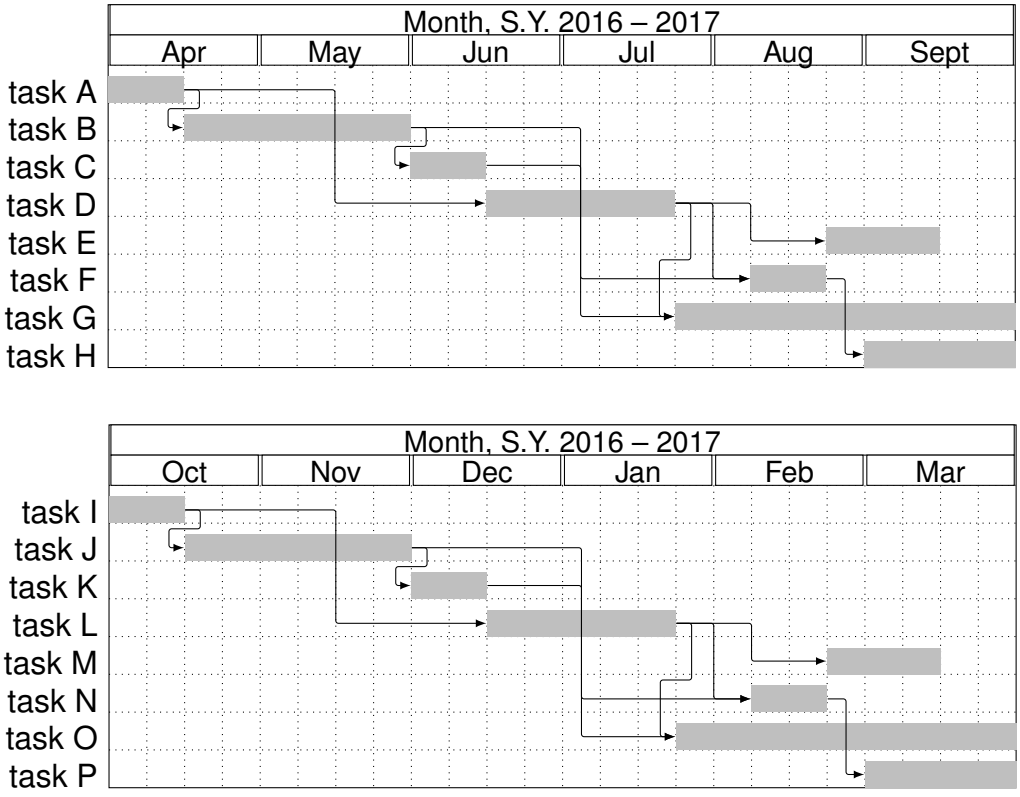

Month, S.Y. 2016 – 2017
Apr
May
Jun
Jul
Aug
Sept
Oct
Nov
Dec
Jan
Feb
Mar
task A
task B
task C
task D
task E
task F
task G
task H
task I
task J
task K
task L
task M
task N
task O
task P
task P
task Q
task R
task S
task T
task U

Task	Task Description	FamilyN1	FamilyN2	FamilyN3	FamilyN4
A	Specific activity				
B	Specific activity				
C	Specific activity				
D	Specific activity				
E	Specific activity				
F	Specific activity				
G	Specific activity				
H	Specific activity				
I	Specific activity				
J	Specific activity				
K	Specific activity				
L	Specific activity				
M	Specific activity				
N	Specific activity				
O	Specific activity				
P	Specific activity				
Q	Specific activity				
R	Specific activity				
S	Specific activity				
T	Specific activity				
U	Specific activity				

Appendix C

RESEARCH BUDGET

This is the budget of the thesis or project. During proposal, tabulate the possible expenses here. You can use a **long table** if your list of expenses spans several pages. In order to prevent your tables from floating, use the **tabular** environment only. List of expenses can be shorter by grouping them according to semester or a certain span of time. Item description and quantity should be left justified and centered, respectively. Amount should be right justified with two decimal places and comma for those that reach or exceed 1,000.00.

Appendix D

ADDITIONAL FLOWCHARTS

This appendix is for supplemental flowcharts only. Those that are for the main program or system should be inside Chapter 3. Figures here should also be cross-referenced or mentioned in other chapters.

Appendix E

PSEUDO-CODES

Insert pseudo-code of your algorithms here. Use the `algorithmic` environment. Below is an example:

Algorithm 1 Euclid's algorithm

```
1: procedure EUCLID(a, b)                    ▷ The g.c.d. of a and b
2:     r ← a mod b
3:     while r ≠ 0 do                        ▷ We have the answer if r is 0
4:         a ← b
5:         b ← r
6:         r ← a mod b
7:     end while
8:     return b                              ▷ The gcd is b
9: end procedure
```

If additional programs used in the experiment will be inserted, CHANGE the chapter title in the main tex file (line 173) to Experiment Codes. First, indicate the name of the program/code with file extension (ex. test1.sci) then enclose the commands with the verbatim environment.

Appendix F

ELECTRICAL CIRCUITS

Insert supplemental circuit diagrams here. Examples are power supply circuits (customized for the prototype) and driver circuits (not part of the main methodology). Insert the diagram as **figure** and cross-reference or mention these in other chapters.

Appendix G

SUPPLEMENTAL DATA

Insert your raw data here in tabular form (data from 100 trials). The tables MUST HAVE numbers and captions, i.e. use the **table** environment. If applicable, use long table with headers and footers. You can also cross-reference the tables here in your discussions in other chapters. Note that the data here should be summarized in a separate table or graph that is placed in Chapter 4.

Appendix H

PLAGIARISM CHECK REPORT

Final Doc

ORIGINALITY REPORT

9%	8%	4%	%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	en.wikipedia.org Internet Source	1%
2	ipindia.gov.in Internet Source	1%
3	patents.google.com Internet Source	1%
4	T.B. Asafa, T.M. Afonja, E.A. Olaniyan, H.O. Alade. "Development of a vacuum cleaner robot", Alexandria Engineering Journal, 2018 Publication	<1%
5	www.cnblogs.com Internet Source	<1%
6	repository.sustech.edu Internet Source	<1%
7	www.ebdigest.org Internet Source	<1%
8	www.worldbank.org Internet Source	<1%

9	www.makeuseof.com Internet Source	<1%
10	ijircce.com Internet Source	<1%
11	Vaibhav Palande, Adam Zaheer, Kiran George. "Fully Automated Hydroponic System for Indoor Plant Growth", Procedia Computer Science, 2018 Publication	<1%
12	N. Othman, M.I.A. Manan, Z. Othman, S.A.M. Al Junid. "Performance analysis of dual-axis solar tracking system", 2013 IEEE International Conference on Control System, Computing and Engineering, 2013 Publication	<1%
13	Rekha Chaudhary, Arun Kumar Singh. "Power system stabilization using an optimal hybrid control strategy with a PID controller", Journal of Electromagnetic Waves and Applications, 2018 Publication	<1%
14	ijesrt.com Internet Source	<1%
15	"Design and Development of an Artificial Intelligent System for Audio-Visual Cancer Breast Self-Examination", Journal of Advanced	<1%

	Computational Intelligence and Intelligent Informatics, 2016 Publication	
16	www.coursehero.com Internet Source	<1%
17	cps.kaist.ac.kr Internet Source	<1%
18	www.buydisplay.com Internet Source	<1%
19	www.ijert.org Internet Source	<1%
20	www.studymode.com Internet Source	<1%
21	infocenter.nordicsemi.com Internet Source	<1%
22	vdocuments.site Internet Source	<1%
23	Wen-long Cheng, Jia-liang Song, Yi Liu, Shuai Yuan, Wan-fan Wu, Zhi-ming Xu. "Theoretical and experimental studies on thermal control by using a novel PTC material with room temperature Curie point", International Journal of Heat and Mass Transfer, 2014 Publication	<1%
24	t-r-a-v-e-l-new-orleans.com	

	Internet Source	<1%
25	Abu-Zreig, M.M.. "The auto-regulative capability of pitcher irrigation system", Agricultural Water Management, 20061016 Publication	<1%
26	fivedots.coe.psu.ac.th Internet Source	<1%
27	"Intelligent Robotics Systems: Inspiring the NEXT", Springer Nature America, Inc, 2013 Publication	<1%
28	Ahmed Al-Timimy, Gaurang Vakil, Michele Degano, Paolo Giangrande, Chris Gerada, Michael Galea. "Considerations on the Effects that Core Material Machining has on an Electrical Machine's Performance", IEEE Transactions on Energy Conversion, 2018 Publication	<1%
29	www.omicsonline.org Internet Source	<1%
30	cdm16322.contentdm.oclc.org Internet Source	<1%
31	treeprotectionsupply.com Internet Source	<1%
32	repository.up.ac.za Internet Source	

		<1%
33	www.nxp.com Internet Source	<1%
34	www.freepatentsonline.com Internet Source	<1%
35	Sean Tagle, Rica Pena, Frances Oblea, Hans Benoza, Nadine Ledesma, Jeremias Gonzaga, Laurence A. Gan Lim. "Development of an Automated Data Acquisition System for Hydroponic Farming", 2018 IEEE 10th International Conference on Humanoid, Nanotechnology, Information Technology,Communication and Control, Environment and Management (HNICEM), 2018 Publication	<1%
36	psasir.upm.edu.my Internet Source	<1%
37	Devi, M. Jyostna, Thomas R Sinclair, Mukesh Jain, and Maria Gallo. "Leaf aquaporin transcript abundance in peanut genotypes diverging in expression of the limited-transpiration trait when subjected to differing vapor pressure deficits and aquaporin inhibitors", Physiologia Plantarum, 2015. Publication	<1%

38	tigerprints.clemson.edu Internet Source	<1%
39	H.C.H. Ho, W.L. Cheung, I. Gibson. "Effects of graphite powder on the laser sintering behaviour of polycarbonate", Rapid Prototyping Journal, 2002 Publication	<1%
40	scholarscompass.vcu.edu Internet Source	<1%
41	eprints.uthm.edu.my Internet Source	<1%
42	arxiv.org Internet Source	<1%
43	archive.org Internet Source	<1%
44	mylistahan.com Internet Source	<1%
45	spiral.imperial.ac.uk Internet Source	<1%
46	Deny Prasetia Taruma Wardana, Fatwa Ramdani, Fajar Pradana. "Real-Time Landslide Monitoring System Based on 3D WebGIS and Embedded System", 2018 4th International Symposium on Geoinformatics (ISyG), 2018 Publication	<1%

47	www.dtic.mil Internet Source	<1%
48	"Proceedings of the 10th National Technical Seminar on Underwater System Technology 2018", Springer Nature, 2019 Publication	<1%
49	Mitar Simic. "Design and development of air temperature and relative humidity monitoring system with AVR processor based web server", 2014 International Conference and Exposition on Electrical and Power Engineering (EPE), 2014 Publication	<1%
50	"Advances in Signal Processing and Intelligent Recognition Systems", Springer Nature America, Inc, 2016 Publication	<1%
51	L. Elvira, L. Sampedro, F. Montero de Espinosa, J. Matesanz, Y. Gómez-Ullate, P. Resa, F.J. Echevarría, J.R. Iglesias. "Eight-channel ultrasonic device for non-invasive quality evaluation in packed milk", Ultrasonics, 2006 Publication	<1%
52	Rahman K. Fahmidur, Hossain M. A. Munaim, Sadiq M. Tanvir, Ahmad S. Sayem. "Internet	<1%

controlled robot: A simple approach", 2016 International Conference on Electrical, Electronics, and Optimization Techniques (ICEEOT), 2016
Publication

Exclude quotes	Off	Exclude matches	Off
Exclude bibliography	On		

Appendix I

ETHICS CLEARANCE

CEBU INSTITUTE OF TECHNOLOGY – UNIVERSITY
Institutional Ethics Review Committee
ethics@cit.edu

Month DD, YYYY

COMPLETE NAME OF PROPONENT/GROUP LEADER
Designation
Institution
Address

RE: **Title of project/study**
IERC Code: **Code**

Subject: Research Ethical Clearance

Dear **Name of Proponent/Group Leader**:

This is to acknowledge receipt of your request and the following supporting documents dated Month DD, YYYY.

1. Submitted document 1
2. Submitted document 2
3. Submitted document 3
4. Submitted document 4
5. Submitted document 5

The above documents underwent FULL/EXPEDITED review (for FULL:) during the meeting on Month DD, YYYY at Venue of Meeting.

The study protocol is hereby granted APPROVAL FOR IMPLEMENTATION by CIT-U IERC. This ethical clearance is valid for one year until Month DD, YYYY.

While the study is in progress, the Proponent/s is/are requested to submit the following documents:

1. Progress report using form IERC-PF-19: Application for Continuing Review every six months from date of approval including the following: (*NOTE: In view of the active ethical clearance, this report is mandatory even if the study has not started or is still awaiting release of funds.*)

    a. Date covered by the report
    b. Protocol summary and status report on the progress of the research

c. Number of participants accrued
d. Withdrawal or termination of participants
e. Complaints on the research since the last CIT-U IERC review
f. Any relevant multi-center research reports
g. Any relevant information especially about risks associated with the research
h. A copy of the informed consent document


2. Any changes in the protocol, especially those that may adversely affffect the safety of the participants during the conduct of the study, including changes in personnel, must be submitted or reported using form IERC-PF-15: Application for Ethics Review of Amendments.
3. Revisions in the informed consent form using form IERC-PF-15: Application for Ethics Review of Amendments.
4. Reports of adverse events including from other study sites using the form IERC-PF-18: Reportable Negative Event Report.
5. Notice of early termination of the study and reasons for such using form ERC-PF-21: Early Termination Report.
6. Any event which may have ethical significance.
7. Any information which is needed by the CIT-U IERC to do ongoing review
8. Notice of time of completion of the study using IERC-PF-22: Final Report.
9. Application for renewal of ethical clearance 90 days before the expiration date of this approval through submission of form ERC-PF-19: Application for Continuing Review.

Very truly yours,

CHAIR's COMPLETE NAME
Chair

Appendix J

CURRICULUM VITAE



CONTACT INFORMATION

Name: Given Name MI. Family Name

Address: Number and Street, City or Province, Philippines, Zip Code

Telephone Number: 063 - area code - number

Cell Phone Number: 09numbers

Email: address@site.dmn

PERSONAL INFORMATION

Date of Birth: Month DD, YYYY
Place of Birth: City, Country
Citizenship: Filipino

EDUCATIONAL BACKGROUND

College
Cebu Institute of Technology University
N. Bacalso Avenue, Cebu City, Philippines
Bachelor of Science in Electronics Engineering
March 2013

High School
Name of High School attended
Address
Month YYYY

WORK EXPERIENCE

Name of Company (latest)
Address
Position
Responsibilities
Inclusive Dates

Name of Company
Address
Position
Responsibilities
Inclusive Dates

PROFESSIONAL QUALIFICATIONS

Certifications
certification 1 (latest)
certification 2

Computer Skills
skill 1
skill 2

HONORS AND AWARDS

Name of Award 1 (latest)
Institution
Month, YYYY

Name of Award 2
Institution
Month, YYYY

PROFESSIONAL AFFILIATION

Name of Organization 1 (latest)
Position
Inclusive Years

Name of Organization 2
Position
Inclusive Years


SKILLS AND INTERESTS

Skills: skill 1, skill 2, skill 3

Software: software 1, software 2, software 3, software 4, software 5

Community Extension: extension 1, extension 2

Languages: Language 1 - Native, Language 2 - Fluent, Language 3 - Advanced or Intermediate or Beginner



CONTACT INFORMATION

Name: Given Name MI. Family Name

Address: Number and Street, City or Province, Philippines, Zip Code

Telephone Number: 063 - area code - number

Cell Phone Number: 09numbers

Email: address@site.dmn

PERSONAL INFORMATION

Date of Birth: Month DD, YYYY
Place of Birth: City, Country
Citizenship: Filipino

EDUCATIONAL BACKGROUND

College
Cebu Institute of Technology University
N. Bacalso Avenue, Cebu City, Philippines
Bachelor of Science in Electronics Engineering
March 2013

High School
Name of High School attended
Address
Month YYYY

WORK EXPERIENCE

Name of Company (latest)
Address
Position
Responsibilities
Inclusive Dates

Name of Company
Address
Position
Responsibilities
Inclusive Dates

PROFESSIONAL QUALIFICATIONS

Certifications
certification 1 (latest)
certification 2

Computer Skills
skill 1
skill 2

HONORS AND AWARDS

Name of Award 1 (latest)
Institution
Month, YYYY

Name of Award 2
Institution
Month, YYYY

PROFESSIONAL AFFILIATION

Name of Organization 1 (latest)
Position
Inclusive Years

Name of Organization 2
Position
Inclusive Years

SKILLS AND INTERESTS

Skills: skill 1, skill 2, skill 3

Software: software 1, software 2, software 3, software 4, software 5

Community Extension: extension 1, extension 2

Languages: Language 1 - Native, Language 2 - Fluent, Language 3 - Advanced or Intermediate or Beginner