

# Opti

TRAILER - CAR HAULER - TWO AXLES WITH OVERRUN BRAKE



**Tilting platform trailer** – an convenient, simple and quick alternative to non-tilting trailers, answer to the problems associated with loading and unloading vehicles. Depending on the chosen option, trailer can be equipped with hydraulic cylinders or shock absorbers – both are responsible for smooth and safe tilting of the platform. Each platform is fitted with locks which prevents unwanted opening – including while driving. The trailers' frame is made of high-strength steel. Due to hot-dip galvanisation all structural components are corrosion protected. LOHR-type aluminium ramps – lightweight, easy to handle – are suitable in all conditions. Furthermore, in combination with the tilting platform even very low vehicles can be loaded. Optionally, the platform can be equipped with an aluminium corrugated sheet infill. In addition, the trailer can be equipped with a hydraulic cylinder with a single-acting or double-acting pump for manual lifting of the platform. Cylinder has also cushioning purpose for lowering the loaded platform.

Series	Cargo dimensions (cm)	PMW	Tare weight (KG)	Wheels	Load angle	Price	Infill
Opti 2745		2700	680			€ 4030	
Opti 3045	450 x 210	3000	700	195/55 R10C	8°	€ 4320	€ 395
Opti 3545		3500	780	195/50 R13C		€ 5000	
Opti 2750		2700	700			€ 4140	
Opti 3050	500 x 210	3000	720	195/50 R10C	8°	€ 4425	€ 440
Opti 3550		3500	800	195/50 R13C		€ 5125	
Opti 2755		2700	730			€ 4265	
Opti 3055	550 x 210	3000	750	195/55 R10C	8°	€ 4535	€ 490
Opti 3555		3500	840	195/50 R13C		€ 5180	

## OPTIONAL ACCESSORIES

- Powder-coated elements
- Automatic supporting wheel
- AL-KO hand winch
- Shock absorbers
- Single-acting hydraulic pump

### individual pricing

350 zł  
450 zł  
650 zł  
1200 zł

- Double-acting hydraulic pump

1600 zł

### individual pricing

- Aluminium rear gate

650 zł

- Tail lights with dynamic indicator

850 zł

- Slide-in aluminium loading ramps (retractable under the platform - 2 m)

## OptiLift

TRAILER - CAR HAULER - TWO AXLES WITH OVERRUN BRAKE



The **tilting platform trailer** equipped with an integrated ramp offers convenient and effortless operation. It is a simple and quick alternative to the problems associated with loading and unloading vehicles. Depending on the chosen option, the trailer can be equipped with hydraulic cylinders or shock absorbers for smooth and safe tilting of the platform. Each platform is fitted with locks to prevent unwanted opening - including while driving. The trailers' frame is made of high-strength steel. Due to hot-dip galvanisation all structural components are corrosion protected. The platform with integrated ramp is a convenient and practical solution. In combination with the tilting platform even very low vehicles can be loaded. Therefore, there is no need to use a portable loading ramps.

Series	Cargo dimensions (cm)	PMW	Tare weight (KG)	Wheels	Load angle	Price	Infill
OptiLift 2745		2700	660			€ 3950	
OptiLift 3045	450 x 210	3000	680	195/55 R10C	11,5°	€ 4240	€ 395
OptiLift 3545		3500	760	195/50 R13C		€ 4920	
OptiLift 2750		2700	680			€ 4050	
OptiLift 3050	500 x 210	3000	700	195/50 R10C	11,5°	€ 4340	€ 440
OptiLift 3550		3500	780	195/50 R13C		€ 5040	
OptiLift 2755		2700	710			€ 4190	
OptiLift 3055	550 x 210	3000	730	195/55 R10C	11,5°	€ 4460	€ 490
OptiLift 3555		3500	820	195/50 R13C		€ 5100	

### OPTIONAL ACCESSORIES

- Powder-coated elements
- Automatic supporting wheel
- AL-KO hand winch
- Shock absorbers
- Single-acting hydraulic pump

#### individual pricing

350 zł  
450 zł  
650 zł  
1200 zł

Double-acting hydraulic pump

1600 zł

Tail lights  
with dynamic indicator

650 zł

## TriMax

TRAILER - CAR HAULER - THREE AXLES WITH OVERRUN BRAKE



**Tilting platform trailer** - an convenient, simple and quick alternative to non-tilting trailers, answer to the problems associated with loading and unloading vehicles. Depending on the chosen option, trailer can be equipped with a hydraulic cylinder and a single-acting or double-acting pump for smooth and safe tilting of the platform. Each platform is fitted with locks which prevents unwanted opening - including while driving. The trailers' frame is made of high-strength steel. Due to hot-dip galvanisation all structural components are corrosion protected. LOHR-type aluminium ramps - lightweight, easy to handle - are suitable in all conditions. Furthermore, in combination with the tilting platform even very low vehicles can be loaded. Optionally, the platform can be equipped with an aluminium corrugated sheet infill. In addition, the trailer can be equipped with a hydraulic cylinder with a double-acting pump for manual lifting of the platform. Cylinder has also cushioning purpose for lowering the loaded platform.


Series	Cargo dimensions (cm)	PMW	Tare weight (KG)	Wheels	Load angle	Price	Infill
TriMax 3560	600 x 210	3500		195/55 R10C	8°	€ 6065	€ 395

### OPTIONAL ACCESSORIES

■ Powder-coated elements	<b>individual pricing</b>	■ Double-acting hydraulic pump	<b>1600 zł</b>
■ Automatic supporting wheel	<b>350 zł</b>	■ Aluminium rear gate	<b>individual pricing</b>
■ AL-KO hand winch	<b>450 zł</b>	■ Tail lights with dynamic indicator	<b>650 zł</b>
■ Shock absorbers	<b>650 zł</b>	■ Slide-in aluminium loading ramps (retractable under the platform - 2 m)	<b>600 zł</b>

# TriMaxLift

TRAILER - CAR HAULER - THREE AXLES WITH OVERRUN BRAKE

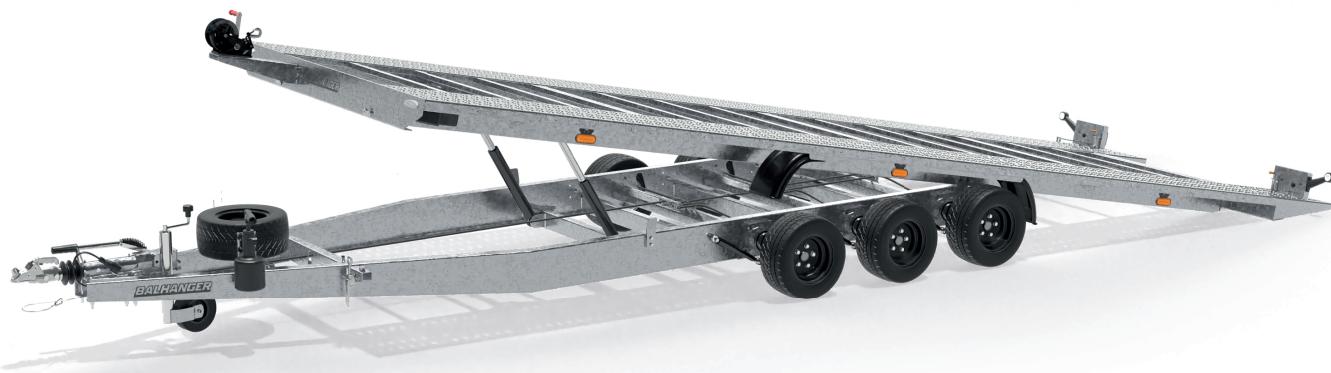

The tilting platform trailer equipped with an integrated ramp offers convenient and effortless operation. It is a simple and quick alternative to the problems associated with loading and unloading vehicles. Depending on the chosen option, the trailer can be equipped with a hydraulic cylinder and a single-acting or double-acting pump for smooth and safe tilting of the platform. Each platform is fitted with locks to prevent unwanted opening – including while driving. The trailers' frame is made of high-strength steel. Due to hot-dip galvanisation all structural components are corrosion protected. The platform with integrated ramp is a convenient and practical solution. In combination with the tilting platform, even very low vehicles can be loaded. Therefore, there is no need to use a portable loading ramps.

Series	Cargo dimensions (cm)	PMW	Tare weight (KG)	Wheels	Load angle	Price	Infill
TriMaxLift 3560	600 x 210	3500	905	195/55 R10C	11,5°	€ 5990	€ 395

## OPTIONAL ACCESSORIES

- Powder-coated elements
- Automatic supporting wheel
- AL-KO hand winch

**individual pricing****350 zł****450 zł**

- Double-acting hydraulic pump

**1600 zł****individual pricing**

- Aluminium rear gate

- Tail lights with dynamic indicator

**650 zł**