


D2: identify the junction pattern

Battery and programmer disconnected. Use diode-test mode; report volts or OL.

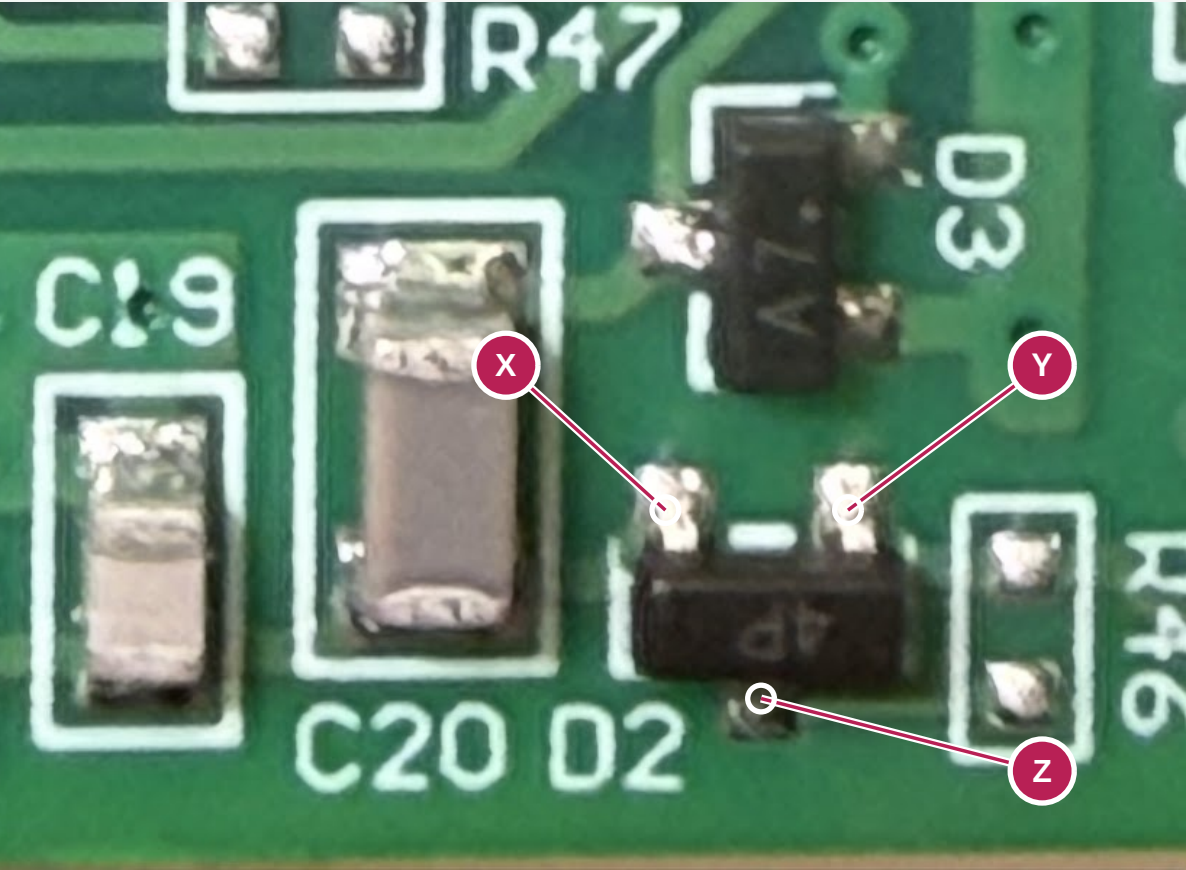

D2 is the three-terminal part below D3 in this photo. Touch the circled metal pads, not the black body. Report a changing reading too. No desoldering is requested in this round.

Two extra observations

C5: read/photo the sleeve value and voltage; report can diameter and lead-centre spacing if accessible. R8: measure body length and width, excluding solder, to check the 0805 estimate.

Record these six readings

RED probe	BLACK probe	Reading
X	Y	_____
Y	X	_____
X	Z	_____
Z	X	_____
Y	Z	_____
Z	Y	_____

X/Y/Z identify physical solder pads only. They do not assume pin numbers or internal functions.

In-circuit results can include other paths. This test narrows the candidates; it does not by itself prove a transistor versus a dual-diode package.