
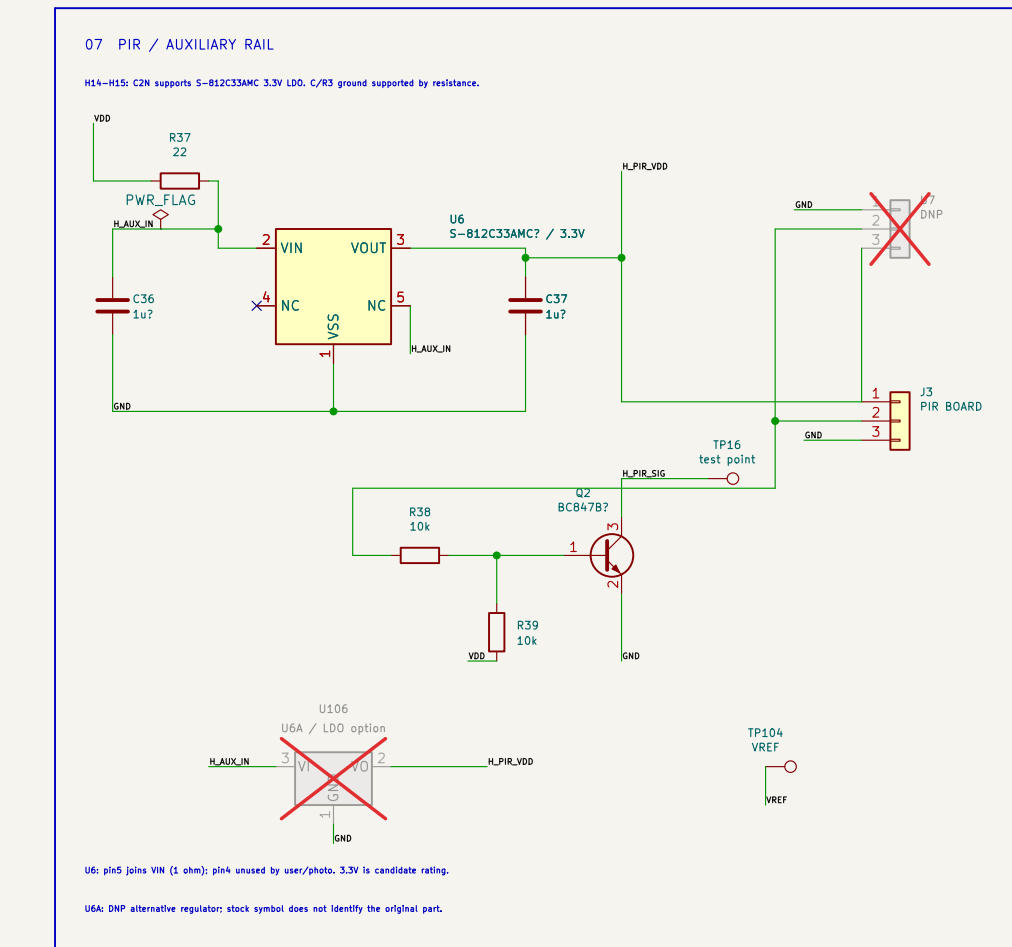
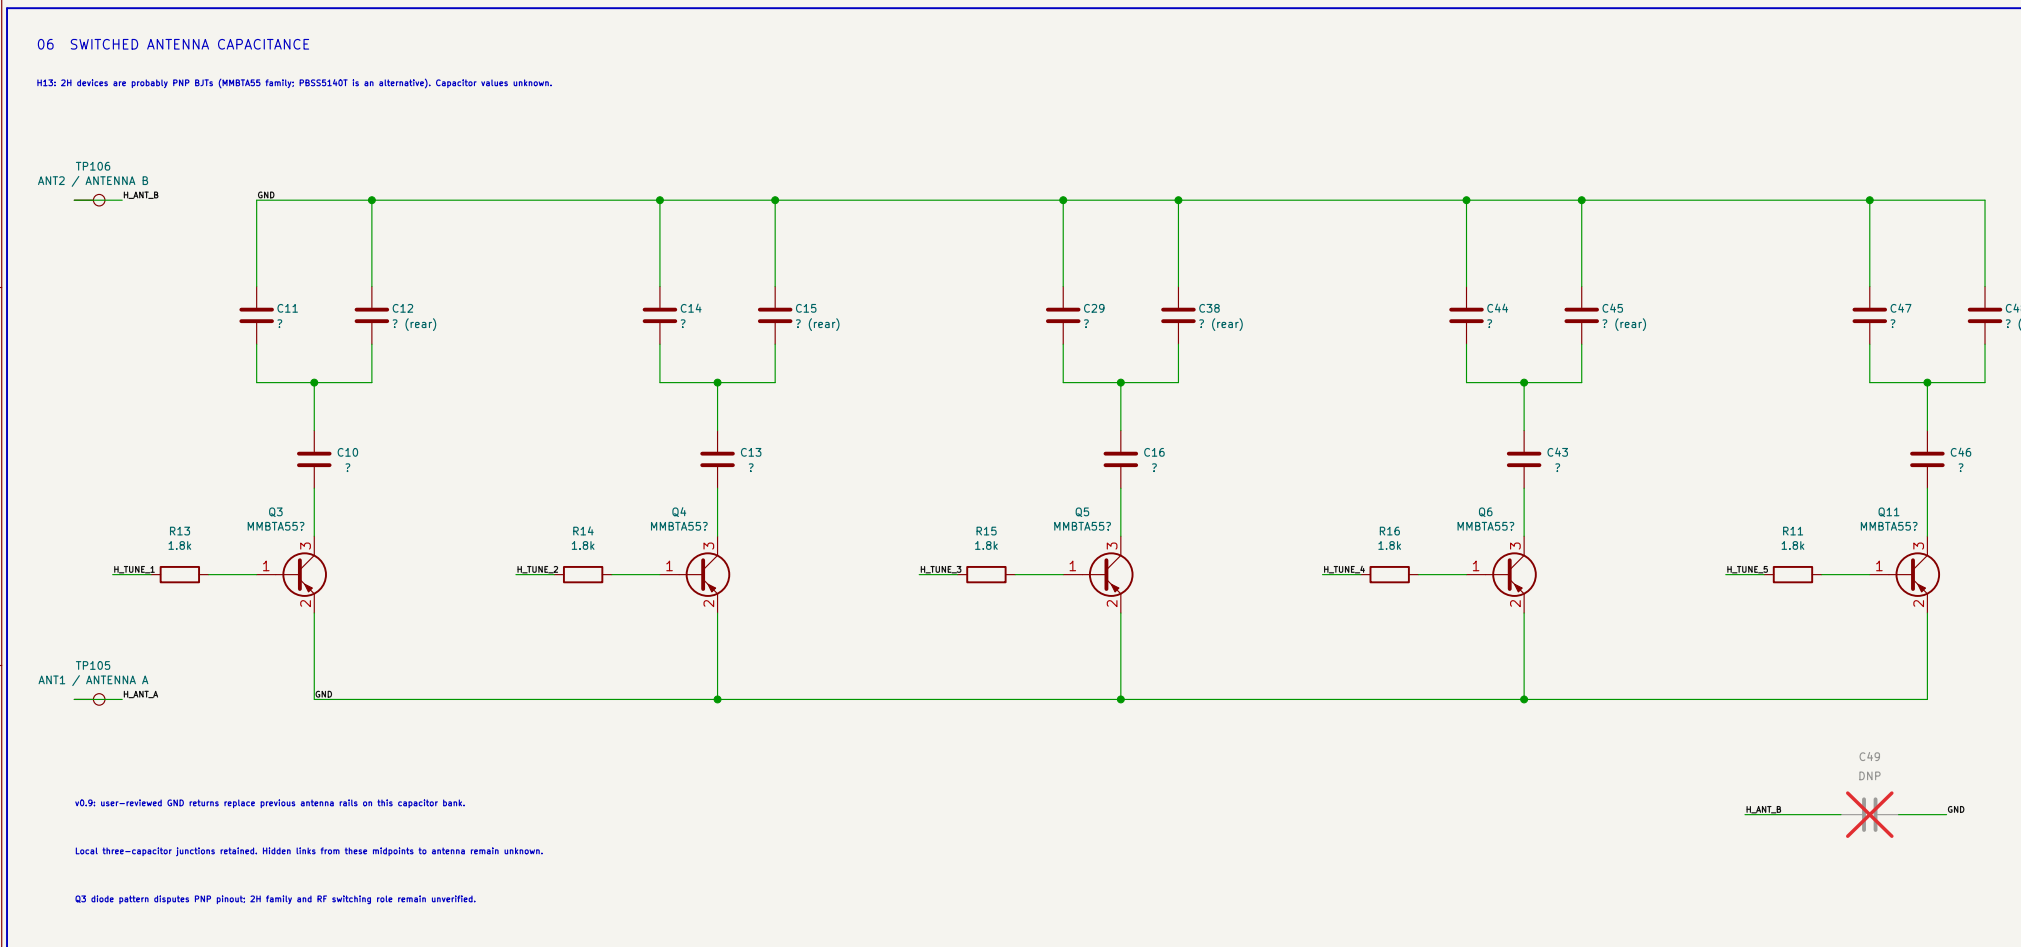
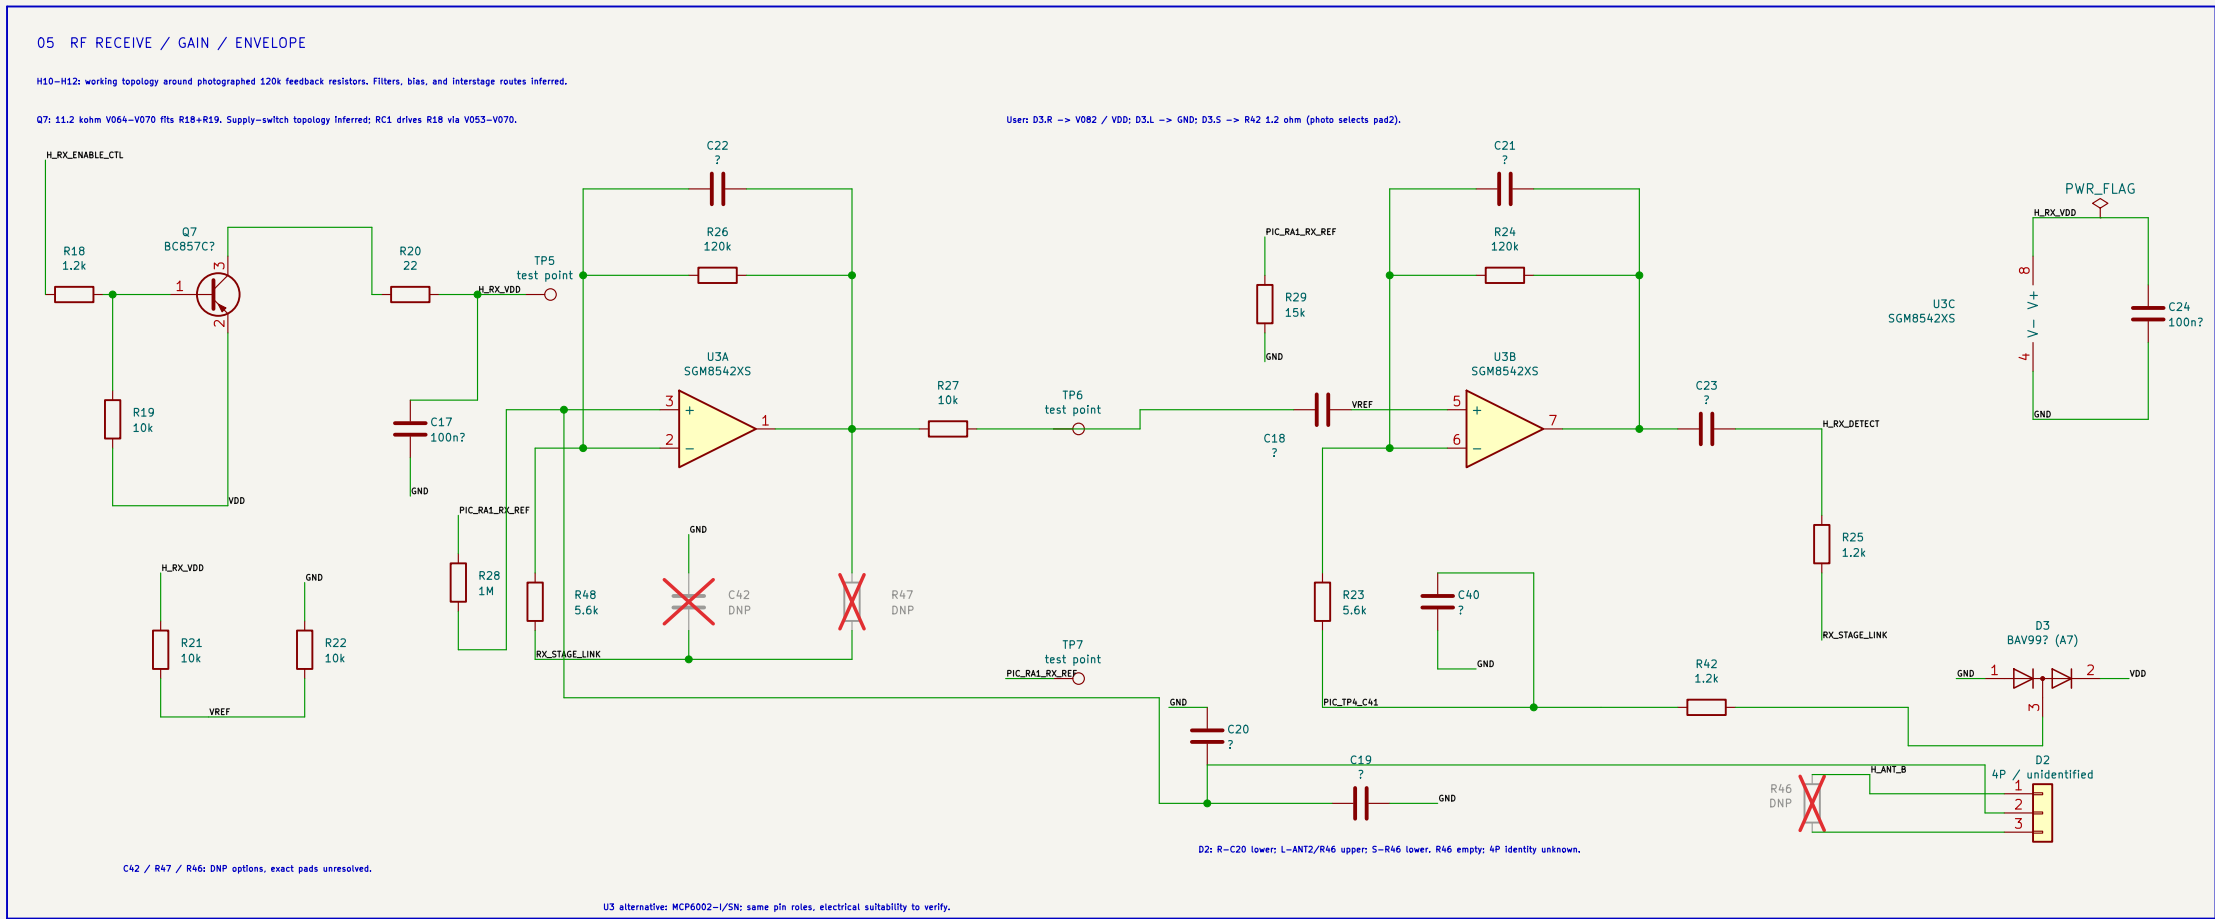
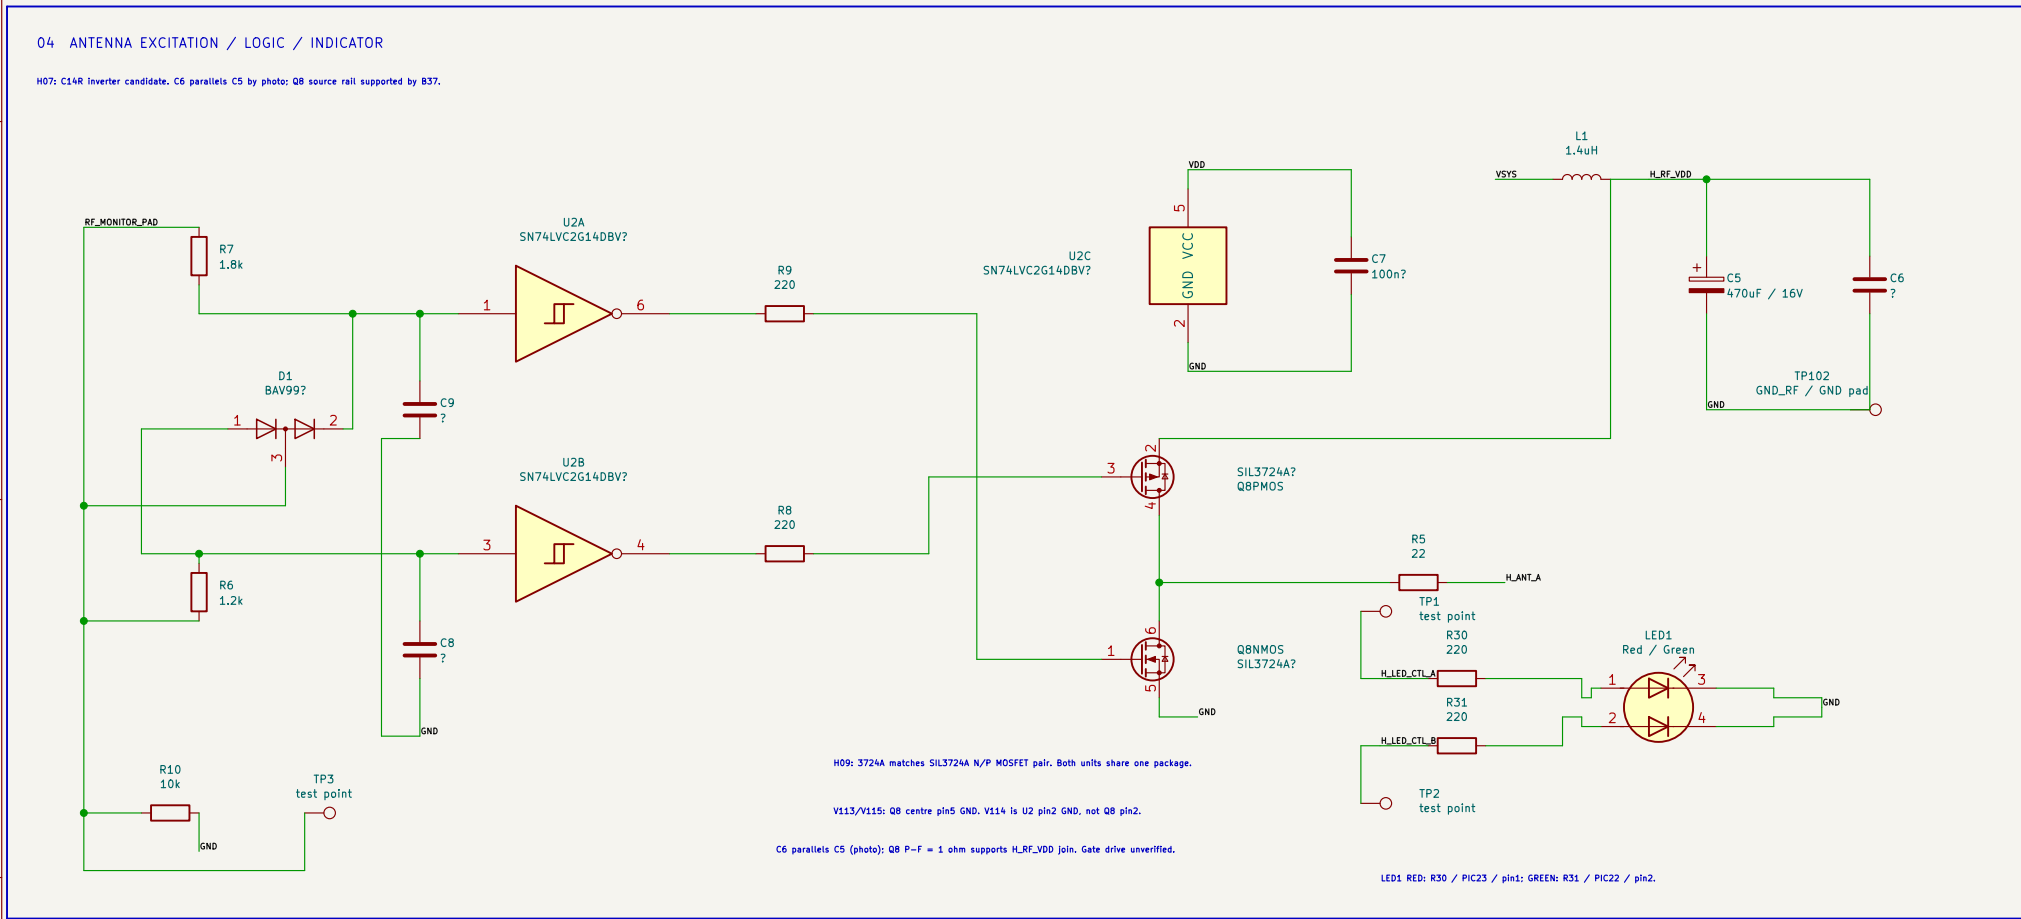
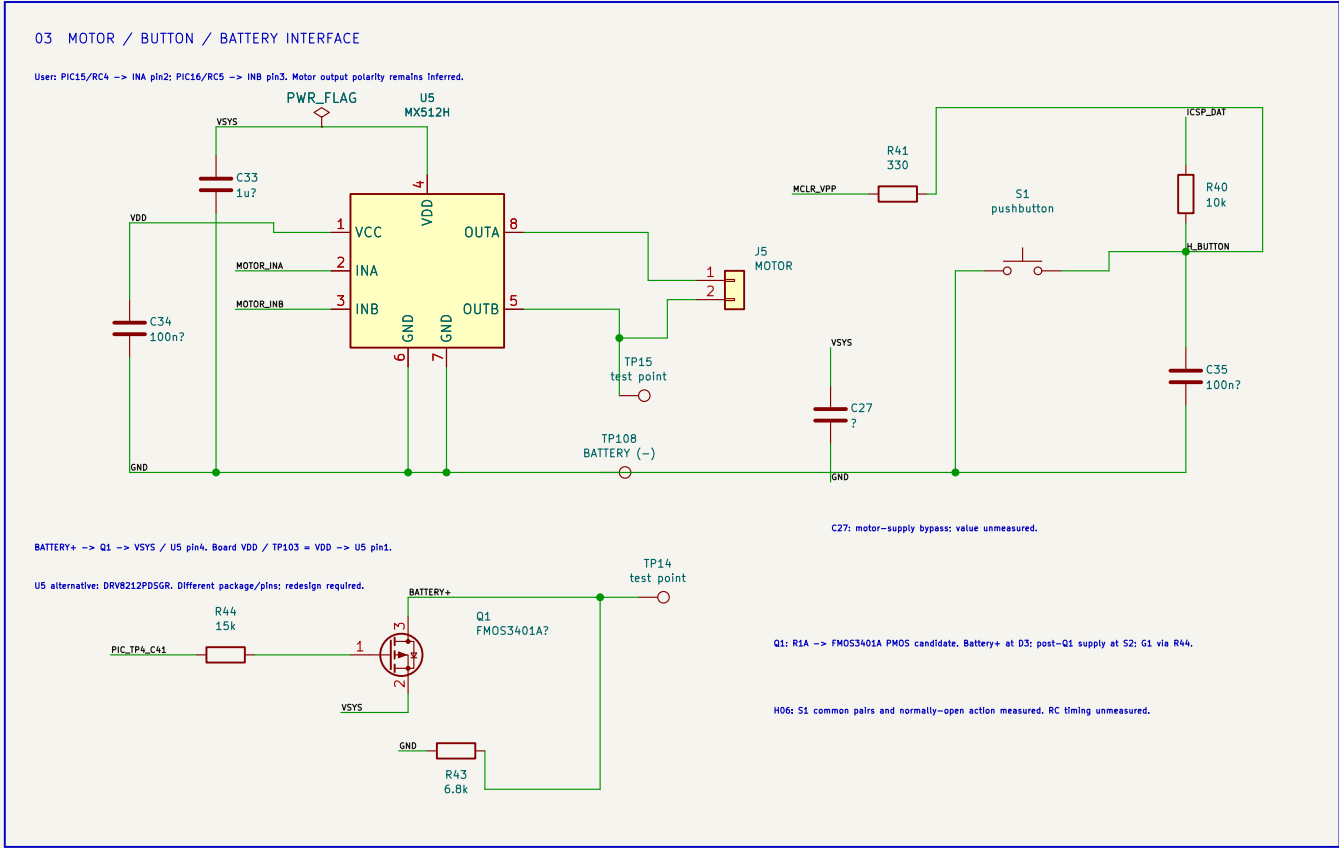
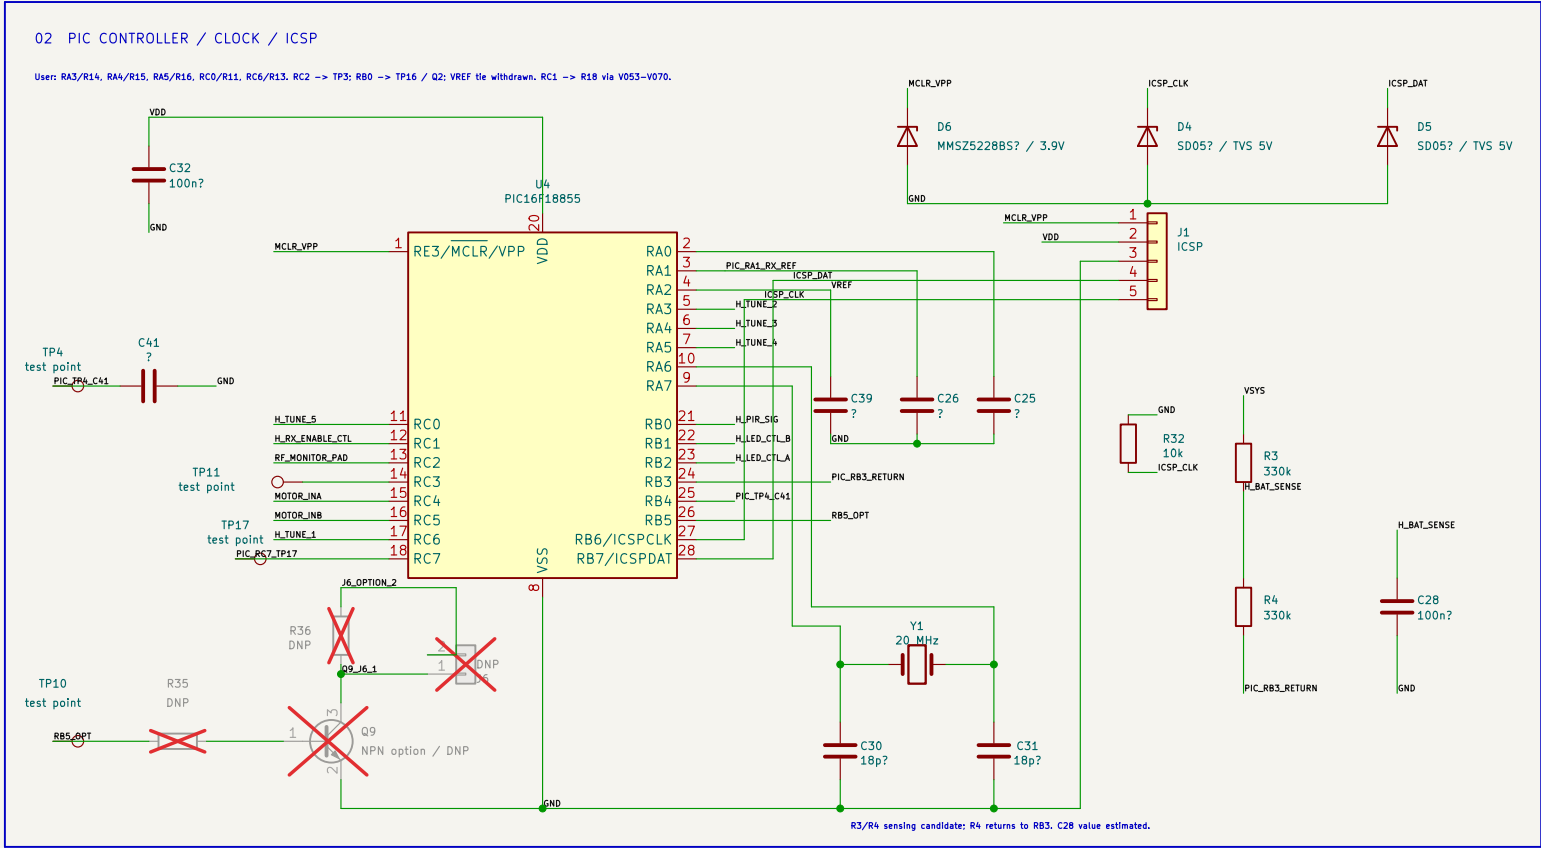


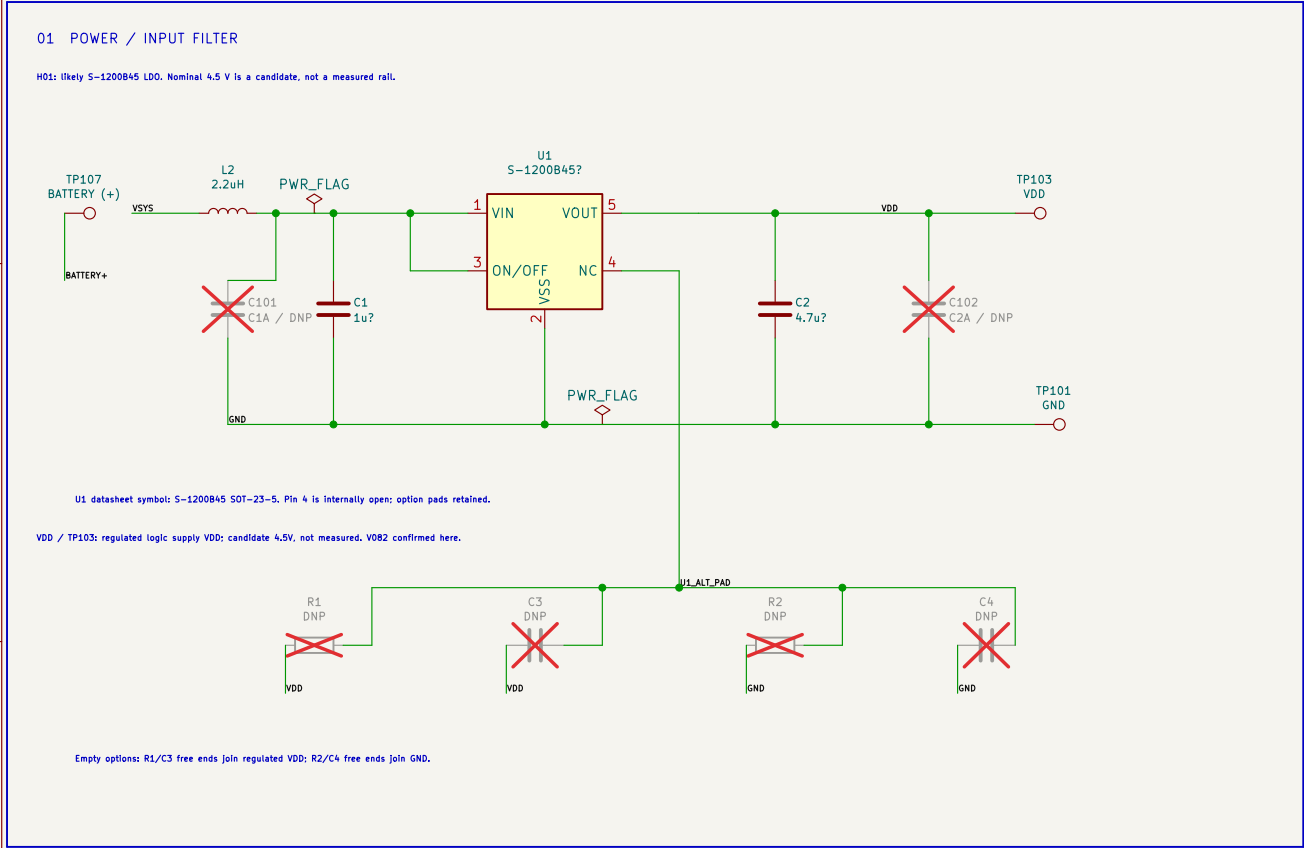

READING THIS WORKING RECONSTRUCTION

One sheet. Functional wiring is proposed; this is not a verified production circuit.

148 related catalog entries; unsupported TP9 and R33 entries withdrawn.

H1* = Inferred Inter-black net. Other net names do not imply measurement.

? on a part value or pin function means an estimate or candidate identity.

Library pin numbers are mapped to photo pads in evidence/pin_crosswalk.json.

U2 and U3 use multiple symbol units on this same sheet, including supply units.

28 original local photo fragments related: Q11-Q43.2 withdrawn by user.

PIC pads have local nets; some onward routes remain unresolved.

DNP = unpopulated. An open pin means unresolved, not a certified no-connect.

PIR daughterboard internals are not yet traced; J5 represents the interface.

No capacitor value or rail voltage in this drawing was electrically measured.

See docs/RECONSTRUCTION.pdf for evidence, alternatives, and calculations.

v0.9.35 | KiCad 10.0.5 | 2026-10-09